



California ISO

California Independent System Operator Corporation

California ISO

**Assessment of potential competitiveness
in the energy imbalance market:**

**Public Service Company of New Mexico
Balancing Area**

September 17, 2020

Department of Market Monitoring

TABLE OF CONTENTS

1 Introduction.....3

1.1 Energy imbalance market3

1.2 Demand for imbalance energy4

2 Supply and demand in the energy imbalance market5

2.1 Demand for imbalance energy5

2.2 Competitive supply of imbalance energy7

3 Structural market competitiveness8

3.1 Pivotal supplier test8

3.2 Energy bid mitigation.....9

4 Conclusion11

1 Introduction

This report provides an analysis of potential market power in the energy imbalance market (EIM) within the Public Service Company of New Mexico (PNM) balancing authority area (BAA). The analysis uses data provided by PNM for the 24 month period August 2018 to July 2020. The report assesses the potential competitiveness of the PNM area in EIM based on the expected amount of competitive supply that may be transferred into the PNM area from the broader EIM footprint, compared to an approximation of imbalance demand that is expected to be served by the EIM in the PNM BAA.¹

This analysis indicates that the PNM area will likely be structurally competitive in most intervals in EIM when EIM transfer capacity is available in the range of the estimated levels provided by PNM.² The analysis further indicates that during the likely limited number of intervals when the PNM area may be structurally non-competitive, the CAISO's market power mitigation processes provide highly effective mitigation of the potential to exercise market power.

1.1 Energy imbalance market

In the California ISO area, the majority of demand is met by supply procured or scheduled in the day ahead market. The CAISO's real time markets serve primarily to adjust and optimize unit commitments and dispatches in response to changes in system and market conditions and information.

In the EIM, however, almost all system load is served by resources identified in the base schedules of the EIM entities in each BAA. These base schedules are not determined by the automated market systems of the ISO and are not settled by the ISO or paid the EIM prices. The EIM is a real time market which starts from the base schedules for these BAAs and then adjusts and optimizes to best meet the imbalance needs of the aggregate EIM area.

In all EIM areas, only a small portion of total energy produced and consumed is settled by the ISO and paid based on EIM prices. Generating resources that receive or pay the EIM price are scheduled by the EIM entity. The only generation settled on EIM prices is the incremental amount scheduled in the EIM relative to each resource's base schedule. If market power is exercised in EIM, it is exercised on those EIM imbalance quantities. Any measure of competition or market power should be centered on those quantities as the measures of supply and demand.

For a seller to have structural market power in the EIM, some kind of barrier must limit supply from new or outside (third-party) entities. The limited nature of electric transmission can create potential market power in some regions. Any area that can be isolated by limited transmission can be subject to high

¹ The report uses hourly forecasted and actual data provided by PNM for total BAA load and losses to estimate hourly imbalance demand for the BAA. These data approximate the 15-minute and 5-minute imbalance demand that will be served by EIM.

² Before participation in EIM begins, only an estimate of EIM transfer limits is known. Actual transfer capacity available to PNM in the EIM will vary by hour and interval, based on available ATC on the applicable transmission paths. However, findings of this analysis are likely robust to some degree of interhour variation in EIM transfer capacity, due to the amount by which the estimate of EIM transfer capacity exceeds estimated imbalance demand.

prices and the effects of uncompetitive behavior if a single seller controls enough generation in the area behind the constraint.

Transfers in the 15-minute and 5-minute EIM processes allow competitively priced sources of power to flow between BAAs, providing access to the BAA for competitive resources from outside areas. The limits of the transfers cap the amount of competitive supply that can be supplied from outside the BAA. In the EIM's 15-minute market and 5-minute market, competitive supply available to meet incremental demand is the transfer capacity that is incremental to the quantity of transfers occurring the prior market. If the imbalance demand in a given market is greater than the incrementally available import transfer capability, some supply from within the BAA is necessary to meet imbalance demand.

A market is not structurally competitive if a single producer can determine market outcomes. In a structurally competitive market, demand could be met without supply from that single producer. If demand cannot be met without that key producer, that producer is said to be *pivotal*. They can effectively dictate the market price. A *pivotal supplier* test compares demand to competitive supply in order to determine if the key supplier is pivotal. Competitive supply used in the pivotal supplier test consists of supply that can reach the market but is not controlled by the key supplier.

In most EIM areas, the additional imbalance needs that cannot be met by transfers from other areas would have to be met by the EIM entity's generation. In an interval where the imbalance demand is greater than the incremental transfer limits, the EIM entity could theoretically set prices up to the \$1,000/MWh bid cap, knowing that they are pivotal and at least one of their resources would need to be dispatched to meet imbalance energy demand. In such intervals, the EIM entity could determine market outcomes and set market prices at extremely high levels in the absence of any special market power mitigation provisions.

1.2 Demand for imbalance energy

The relevant demand for each portion of the CAISO's multi settlement markets involves the sum of *changes* between two market solutions. In the CAISO, the 15-minute market demand is equal to (1) the sum of all generation in the 15-minute market *minus* (2) the sum of all generation in the day-ahead market. This represents the incremental energy dispatched by the 15-minute market. Using the changes to generation to quantify imbalance energy demand accurately captures the quantity of imbalance energy dispatched by the market. This approach is preferable to comparing load forecasts across markets, as the load forecast in each market can underestimate or overestimate the actual market demand due to possible changes in self-schedules, renewable output, resource outages, and other factors.

In the EIM, entities do not participate in the day-ahead market, but instead submit base schedules that are treated very much like day-ahead market schedules in the CAISO. For each EIM BAA, the imbalance quantity demanded in the 15-minute EIM market is equal to changes made by the market between base schedules and the final 15-minute schedules. Similarly, the imbalance quantity demanded in the 5-minute EIM market is equal to changes made by the market between the 15-minute and 5-minute schedules.

For an entity that has not yet begun participation in the EIM, there are no historical data of EIM base schedules, 15-minute EIM generation dispatches, or 5-minute EIM generation dispatches from which to estimate imbalance demand. In lieu of actual EIM market data, we can approximate the imbalance

demand expected to be served by EIM through the use of historical hourly imbalance demand data provided by the incoming EIM entity. Where generation schedule data are not available, deriving imbalance demand from data on forecasted and actual load and losses may be used as a reasonable approximation. Supply is scheduled and produced in these quantities to maintain control area balance.

2 Supply and demand in the energy imbalance market

For this report, DMM analyzed historical imbalance demand derived from data provided by PNM, expected EIM transfer limits, and generation ownership in the PNM BAA.³ These data are compiled for the 24 month period from July 2018 through June 2020.

2.1 Demand for imbalance energy

Figure 1 shows the distribution of the hourly demand for imbalance energy in the PNM BAA for this 24 month period (in MW). Figure 2 highlights the distribution of hourly imbalance energy demand over this period as a percentage of total load in the PNM BAA. Actual EIM imbalance demand will occur at 15-minute and 5-minute granularity, and the amount of intrahour variation is unknown. However, assessing the best available hourly data is likely to provide a reasonable approximation of what may materialize in EIM. Table 1 and Table 2 provide summary statistics for these data.

As seen in Figure 1, historical hourly demand for imbalance energy in the PNM BAA is roughly normally distributed. Hourly imbalance demand averaged -26 MW with a median value of -25 MW (see Table 1). The close values for the average and median suggest a symmetric distribution.

As shown in Table 1, the demand for imbalance energy was positive during about 28 percent of hours. During hours with positive imbalance demand, the average imbalance demand was about 34 MW. Table 2 shows that the median hourly imbalance demand a percent of total demand was about 2.3 percent.

Table 1. Hourly imbalance demand (MW)


Average	Median	Intervals demand positive	Average positive demand	Percentiles		
				90th	95th	97th
-26	-25	28%	34	36	57	75

Table 2: Hourly imbalance demand as share of total load (absolute value)


Median	90th	95th	97th
2.3%	5.8%	7.2%	8.4%

³ For this analysis, hourly demand for imbalance energy in the PNM BAA is calculated as the difference between actual and hourly forecasted control area load and losses. Data were provide directly to DMM by PNM.

**Figure 1. Hourly demand for imbalance energy for the PNM BAA
August 2018 to July 2020**

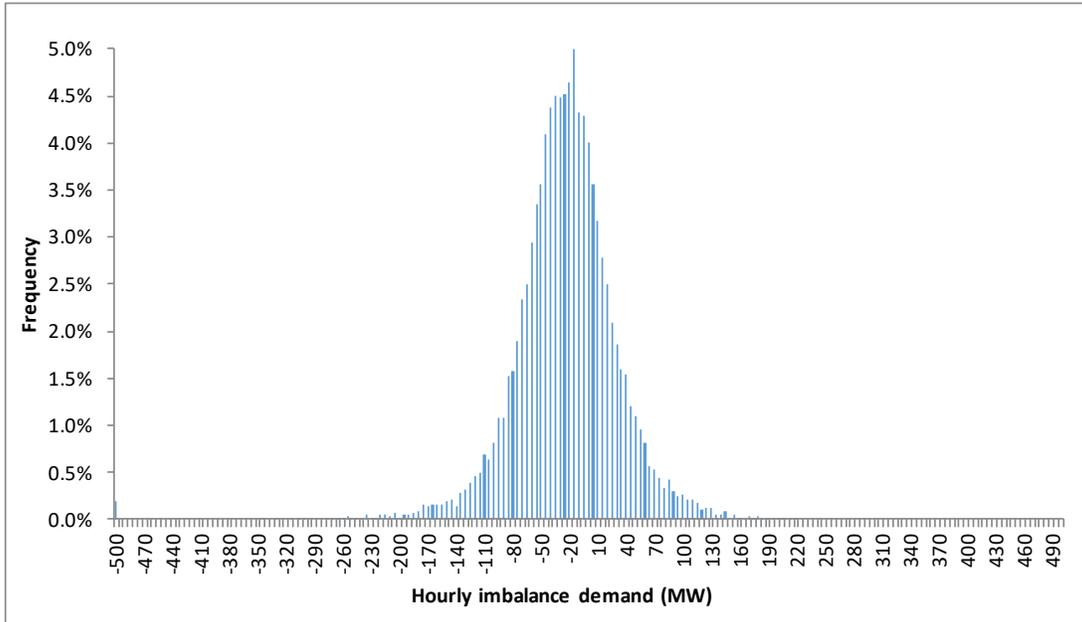

**Figure 2. Hourly imbalance energy demand compared to total load for the PNM BAA
August 2018 to July 2020**

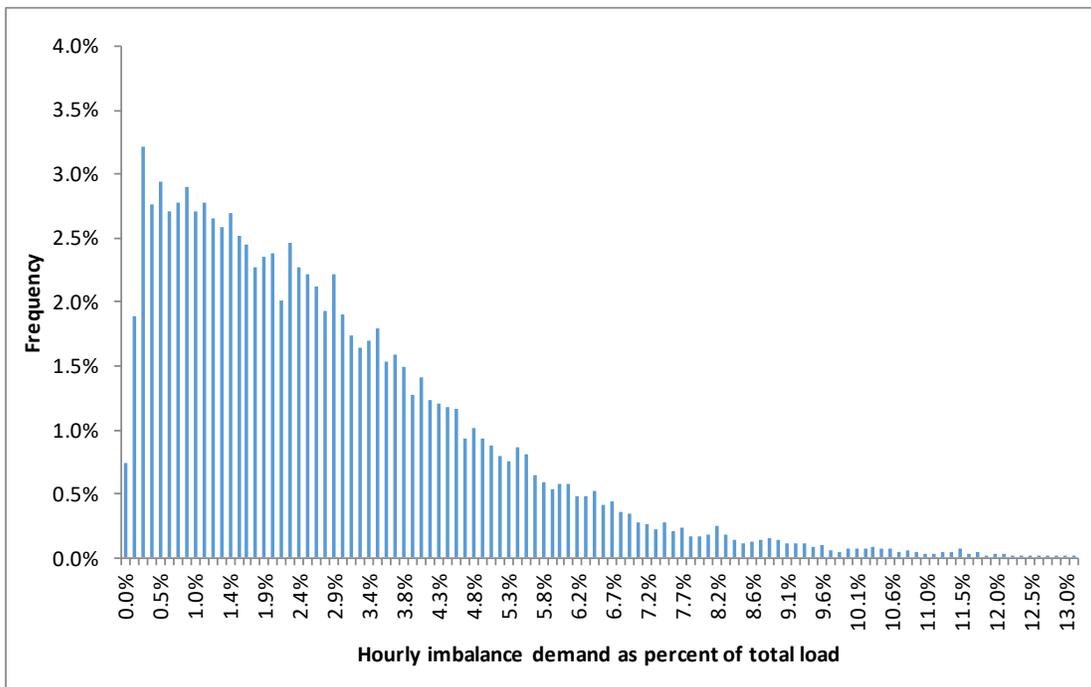

2.2 Competitive supply of imbalance energy

The competitive supply available to meet EIM internal demand consists of supply that is not controlled by the generation arm of the EIM entity for that BAA or one of its affiliates. In many EIM areas, most or all of the available competitive supply is from outside the EIM BAA in the form of EIM transfers. EIM import transfer capacity represents supply that is incremental to base schedules and available to meet imbalance demand.

To determine the competitive supply that will potentially be available to the PNM BAA in EIM, we consider the EIM import transfer capacity that PNM expects to be available in EIM. These data provided by PNM represent an estimate of expected import transfer capacity for study purposes. Actual EIM transfer capacity will vary by hour and interval, based upon available ATC on the relevant transmission paths. Table 3 shows the estimated EIM import transfer capacity expected by PNM, by source BAA.

Table 3. Potential competitive supply from EIM into PNM (MW)

Source	Limit
AZPS	800
SRP	100
Total	900

In the PNM area, additional competitive supply may be available from another entity with significant quantities of EIM participating generation. The presence of EIM-participating third party generation could further increase the competitiveness of the PNM BAA in EIM. EIM participating generation that could be incrementally dispatched to serve imbalance demand is of particular interest. Table 4 summarizes the ownership of incrementally dispatchable generation expected to participate in EIM in the PNM BAA.⁴

Table 4. Ownership of dispatchable generation in PNM BAA expected to participate in EIM

Fuel Type	EIM participating capacity (MW)	
	PNM	Non-PNM
Natural gas	1001	160
Coal	697	317
Total	1698	477

⁴ Capacity from EIM participating resources that are not expected to be available for incremental dispatch is not reflected here. This includes solar and other renewable resources, as well as resources that are registered as participating but are not likely to be available for incremental dispatch in EIM.

As shown in Table 3, total estimated competitive supply through EIM import transfer capability is expected to significantly exceed historical hourly imbalance demand for the PNM BAA. The majority of EIM import transfer capability is expected to come from the Arizona Public Service (AZPS) BAA.

Additionally, as shown in Table 4, the PNM BAA is expected to have significant quantities of generation participating in EIM that is not controlled by PNM. While it is not known how much of this capacity will typically be available to serve imbalance demand in EIM, expected EIM import transfer capability alone suggests ample access to non-PNM supply to meet imbalance demand. Any additional access to competitive supply within the PNM BAA will only increase the competitiveness of the PNM BAA.

3 Structural market competitiveness

3.1 Pivotal supplier test

The pivotal supplier test for structural market power in EIM asks this question: could imbalance demand within the EIM BAA have been met by transfers of competitive supply from other unaffiliated BAAs? If so, then the EIM entity was not pivotal in that interval and could not have successfully raised prices at that time. In a structurally competitive market the exercise of market power would be difficult and opportunities to do so would be rare.

The pivotal supplier test can be performed using historical data for individual intervals in EIM by calculating how often competitive supply was able to meet imbalance demand in the PNM BAA. When the level of competitive supply is below imbalance demand, PNM would be pivotal.

In the absence of EIM market data for the PNM BAA, we estimate the expected outcome of this test for the PNM area using currently available data. This estimation compares the historical hourly imbalance demand data for the PNM BAA to the EIM import transfer limits PNM estimates will be available in the EIM.

This analysis shows that over the 24 month period examined in this report, there were no hours where the estimated hourly imbalance demand was greater than the expected EIM import transfer supply. This suggests that PNM may be reasonably expected to have access to competitive supply in EIM that significantly exceeds typical imbalance demand.

As noted above, EIM import transfer limits can change hourly and across intervals, based on available ATC on the relevant transmission paths. This calculation also assumes that no other competitive supply is available within the PNM BAA to potentially serve imbalance demand, and as such, could underestimate the competitiveness of the PNM BAA in a given hour when such supply is available. Further, imbalance demand may vary intrahour by an unknown amount. Despite these caveats, the estimate based on available data should provide a reasonable expectation of overall competitiveness of the PNM area in EIM.


The expected structural competitiveness of the PNM BAA in the EIM can also be estimated based on statistical values of supply and demand. Figure 3 provides a comparison between estimated EIM import

transfer capacity, representing competitive supply, and the 95th and 99th percentile of historical hourly imbalance demand.⁵

Estimated competitive supply exceeded both the 95th and 99th percentile of imbalance demand during each month of the study period. In the closest months, expected competitive supply is about five times the volume of the 99th percentile of imbalance demand.

These results show that estimated EIM supply and demand conditions were competitive during the study period for the PNM BAA. Import transfer capacity at the estimated level, and values significantly below the estimated level, would have allowed resources from other parts of EIM to compete with resources controlled by PNM in all hours.

Figure 3: PNM hourly imbalance demand and expected EIM import transfer capacity

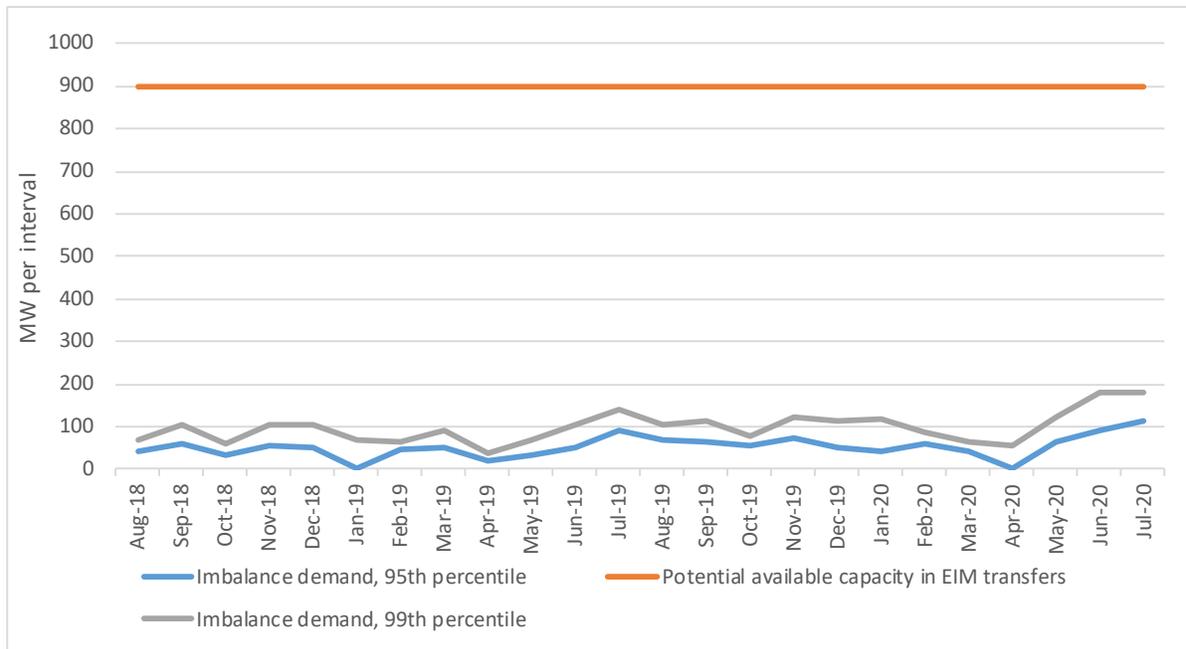

3.2 Energy bid mitigation

This analysis based on estimated historical hourly imbalance demand and expected EIM transfer capability suggests that the PNM BAA is likely to be generally competitive in EIM. However, there still exists the possibility in EIM that during some intervals, PNM may become a pivotal supplier and competitive supply from the broader EIM into the PNM BAA may be limited by congestion. When this

⁵ If we use the average demand over some period of time to compare to average transfer capacity, we will include the negative intervals and may provide an underestimate of the size of the market. Therefore, instead of comparing average competitive supply to average demand, we compare average competitive supply to imbalance demand during intervals with particularly tight supply conditions.

occurs, this potential structural market power would be mitigated by the CAISO’s real-time market power mitigation procedures. These bid mitigation procedures are triggered when congestion is projected in the real-time market.

When bid mitigation is triggered, bids of all supply within a BAA that is separated from the ISO are automatically subject to bid limits based on each resource’s marginal cost and competitive system prices. Thus, even when access to competitive supply is limited by congestion, effective market power mitigation ensures that the resulting price is typically still competitive.

The CAISO implemented enhancements to its real-time bid mitigation procedures in the 15-minute market in Q3 2016 and in the 5-minute market in Q2 2017. DMM analysis shows that with these enhancements, CAISO’s market power mitigation processes have a high degree of accuracy of congestion estimation for all existing EIM transfer constraints. This reduces the possibilities of missed mitigation to a very low level for each of the existing EIM BAAs in both the 15-minute and 5-minute market, as shown in Table 6 and Table 7.

**Table 6: Accuracy of congestion prediction by region on EIM transfers, 15-minute market
August 2018 – July 2020⁶**

	Accurately predicted	Predicted but resolved	Under predicted
PACE	93%	5%	2%
PACW	91%	5%	3%
PGE	90%	5%	4%
BCHA	90%	6%	4%
PSEI	90%	5%	5%
IPCO	91%	6%	3%
SCL	93%	4%	3%
NEVP	95%	2%	2%
SRP	96%	2%	3%
AZPS	94%	4%	2%
BANC	91%	5%	4%

⁶ Data for BANC begin in April 2019, and data for SCL and SRP begin in April 2020, corresponding with the dates that these entities began participation in EIM.

Table 7: Accuracy of congestion prediction by region on EIM transfers, 5-minute market August 2018 – July 2020⁷

	Accurately predicted	Predicted but resolved	Under predicted
PACE	62%	33%	5%
PACW	63%	28%	9%
PGE	59%	32%	9%
BCHA	68%	24%	8%
PSEI	63%	28%	8%
IPCO	64%	29%	7%
SCL	75%	18%	7%
NEVP	62%	33%	6%
SRP	78%	18%	5%
AZPS	56%	40%	4%
BANC	63%	29%	8%

4 Conclusion

This report provides analysis by DMM evaluating the potential for market power in PNM EIM area. Although PNM has not yet begun participation in EIM and no market data are yet available, we analyzed estimated hourly imbalance demand derived from data provided by PNM, generation ownership in the PNM BAA, and an estimated amount of EIM import transfer capacity that PNM anticipates will be available in EIM.

This analysis indicates that the PNM BAA is likely to be structurally competitive during almost all intervals in the EIM due to the amount of estimated competitive supply expected to be available for transfer into PNM from the rest of the EIM.

The report also shows that CAISO's real-time market power mitigation procedures provide assurance that any potential market power in the PNM BAA will be effectively mitigated when the PNM area is separated by congestion from the CAISO and other EIM areas.

⁷ Data for BANC begin in April 2019, and data for SCL and SRP begin in April 2020, corresponding with the dates that these entities began participation in EIM.