

2024 LOCAL CAPACITY TECHNICAL STUDY

DRAFT REPORT AND STUDY RESULTS



Intentionally left blank



Executive Summary

This Report documents the results and recommendations of the 2024 Long-Term Local Capacity Technical (LCT) Study. The LCT Study assumptions, processes, and criteria were discussed and recommended through the 2020 Local Capacity Technical Study Criteria, Methodology and Assumptions Stakeholder Meeting held on October 31, 2018. On balance, the assumptions, processes, and criteria used for the 2024 Long-Term LCT Study mirror those used in the 2007-2019 LCT Studies, which were previously discussed and recommended through the LCT Study Advisory Group ("LSAG")¹, an advisory group formed by the CAISO to assist the CAISO in its preparation for performing prior LCT Studies.

The load forecast used in this study is based on the final adopted California Energy Demand Updated Forecast, 2018-2030 developed by the CEC; namely the load-serving entity (LSE) and balancing authority (BA) mid baseline demand with low additional achievable energy efficiency and photo voltaic (AAEE-AAPV), posted on 2/5/2019: https://efiling.energy.ca.gov/GetDocument.aspx?tn=226462&DocumentContentId=57239.

To aide procurement, this LCT study provides load profiles and transmission capacity information that shows the effectiveness of local resources in meeting temporal local reliability needs.

Overall, the capacity needed for LCR has decreased by about 1271 MW or about 5.5% from 2023 to 2024.

The LCR needs have decreased in the following areas: Humboldt, Big Creek/Ventura and LA Basin due to downward trend for load; Sierra and Kern due to transmission projects; Bay Area due to load forecast decrease and new transmission projects; San Diego due to unavailability of solar at 8:00 PM and a combination of mitigation measures evaluated.

The LCR needs have increased in Stockton and Fresno due to load increase; North Coast/North Bay due to load forecast increase and decrease in requirements in the Bay Area (Pittsburg-Ames-Oakland sub-area).

The narrative for each Local Capacity Area lists important new projects included in the base cases as well as a description of reason for changes between the 2023 and 2024 LCT study results.

¹ The LSAG consists of a representative cross-section of stakeholders, technically qualified to assess the issues related to the study assumptions, process and criteria of the existing LCT Study methodology and to recommend changes, where needed.



The 2023 and 2024 total LCR needs are provided below for comparison:

2024 Local Capacity Needs

| | | Qualifying Capacity | | | | 2024 LCR Need Category B | 2024 LCR Need Category C |
|----------------------------|---------------------|---------------------|---------------|---------------|---------------|-----------------------------|-----------------------------|
| Local Area Name | QF/ Muni (MW) | Non-Solar (MW) | Solar (MW) | Total (MW) | Total (MW) | Capacity Needed | Capacity Needed |
| Humboldt | 0 | 197 | 0 | 197 | 197 | 83 | 132 |
| North Coast/ North Bay | 118 | 715 | 1 | 833 | 832 | 706 | 706 |
| Sierra | 1168 | 986 | 6 | 2160 | 2154 | 788 | 1304 |
| Stockton | 137 | 680 | 1 | 699 | 698 | 388* | 675* |
| Greater Bay | 617 | 7011 | 12 | 7640 | 7640 | 3494 | 4395 |
| Greater Fresno | 222 | 2733 | 393 | 3348 | 2920 | 1711 | 1711* |
| Kern | 8 | 354 | 103 | 465 | 362 | 0 | 152* |
| Big Creek/ Ventura | 402 | 2821 | 305 | 3528 | 3528 | 2083* | 2577* |
| LA Basin | 1344 | 7038 | 17 | 8399 | 8399 | 6224 | 6260 |
| San Diego/ Imperial Valley | 4 | 4032 | 523 | 4559 | 4036 | 4025 | 4025 |
| Total | 4020 | 26567 | 1361 | 31828 | 30766 | 19502 | 21937 |

2023 Local Capacity Needs

| | Qual | ifying Cap | pacity | 2023 LCR Need Based on Category B | | | 2023 LCR Need Based on Category C with operating procedure | | |
|----------------------------|---------------------|----------------|---------------|--------------------------------------|----------------|---------------|--|------------|---------------|
| Local Area Name | QF/ Muni (MW) | Market (MW) | Total (MW) | Existing Capacity Needed | Deficien cy | Total (MW) | Existing Capacity Needed** | Deficiency | Total (MW) |
| Humboldt | 0 | 202 | 202 | 111 | 0 | 111 | 169 | 0 | 169 |
| North Coast/ North Bay | 119 | 771 | 890 | 553 | 0 | 553 | 553 | 0 | 553 |
| Sierra | 1146 | 1004 | 2150 | 1268 | 0 | 1268 | 1924 | 0 | 1924 |
| Stockton | 144 | 540 | 684 | 225 | 20* | 245 | 333 | 106* | 439 |
| Greater Bay | 627 | 6427 | 7054 | 3676 | 0 | 3676 | 4752 | 0 | 4752 |
| Greater Fresno | 340 | 3169 | 3509 | 1688 | 0 | 1688 | 1688 | 0 | 1688 |
| Kern | 13 | 462 | 475 | 152 | 6* | 158 | 174 | 8* | 182 |
| LA Basin | 1443 | 6868 | 8311 | 6793 | 0 | 6793 | 6793 | 0 | 6793 |
| Big Creek/Ventura | 424 | 3083 | 3507 | 2212 | 0 | 2212 | 2690 | 102* | 2792 |
| San Diego/ Imperial Valley | 106 | 4381 | 4487 | 4132 | 0 | 4132 | 4132 | 0 | 4132 |
| Total | 4362 | 26907 | 31269 | 20810 | 26 | 20836 | 23208 | 216 | 23424 |

^{*} No local area is "overall deficient". Details about magnitude of deficiencies can be found in the applicable section bellow. Resource deficient sub-area implies that in order to comply with the criteria, at summer peak, load may be shed immediately after the first contingency.

^{**} Since "deficiency" cannot be mitigated by any available resource, the "Existing Capacity Needed" will be split among LSEs on a load share ratio during the assignment of local area resource responsibility.



Intentionally left blank



Table of Contents

| Exec 1 | | naryv of the Study: Inputs, Outputs and Options | |
|-----------|--------------------------------|---|----------|
| | 1.1 | Objectives | 6 |
| | 1.2 1.2.1 | Key Study AssumptionsInputs, Assumptions and Methodology | |
| | 1.3 | Grid Reliability | 8 |
| | 1.4 | Application of N-1, N-1-1, and N-2 Criteria | 8 |
| | 1.5 1.5.1 1.5.2 1.5.3 | Performance Criteria Performance Criteria- Category B. Performance Criteria- Category C CAISO Statutory Obligation Regarding Safe Operation | 9 9 |
| 0 | 1.6 1.6.1 1.6.2 | The Two Options Presented In This LCT Study Report Option 1 - Meet Performance Criteria Category B Option 2 - Meet Performance Criteria Category C and Incorporate Suitable Operational Solutions | 13 14 |
| 2 | • | tion Details: How the Study was Conducted | |
| | 2.1 2.1.1 2.1.2 2.1.3 | System Planning Criteria | 16 17 |
| | 2.2 2.2.1 2.2.2 | Load Forecast System Forecast Base Case Load Development Method | 17 |
| 3 | 2.3 Location | Power Flow Program Used in the LCR analysisal Capacity Requirement Study Results | |
| | 3.1 | Summary of Study Results | 20 |
| | 3.2 3.2.1 | Summary of Results by Local Area | 22 |
| | 3.2.2 3.2.3 | North Coast / North Bay AreaSierra Area | 36 |
| | 3.2.4 3.2.5 | Stockton AreaGreater Bay Area | 65 |
| | 3.2.6 3.2.7 | Greater Fresno AreaKern Area | |
| | 3.2.8 | Big Creek/Ventura Area | |
| | 3.2.9 | LA Basin Area | |
| | 3.2.10 | San Diego-Imperial Valley Area | |
| ۸ttoo | 3.2.11 | Valley Electric AreaList of physical resources by PTO, local area and market ID | |
| | | Effectiveness factors for procurement guidance | |



Intentionally left blank



1 Overview of the Study: Inputs, Outputs and Options

1.1 Objectives

The intent of the 2024 Long-Term LCT Study is to identify specific areas within the CAISO Balancing Authority Area that have limited import capability and determine the minimum generation capacity (MW) necessary to mitigate the local reliability problems in those areas, as was the objective of all previous Local Capacity Technical Studies.

To aide procurement, this LCT study provides load profiles and transmission capacity information that shows the effectiveness of local resources in meeting temporal local reliability needs.

1.2 Key Study Assumptions

1.2.1 Inputs, Assumptions and Methodology

The inputs, assumptions and methodology were discussed and agreed to by stakeholders at the 2020 LCT Study Criteria, Methodology and Assumptions Stakeholder Meeting held on October 31, 2018. They are similar to those used and incorporated in previous LCT studies. The following table sets forth a summary of the approved inputs and methodology that have been used in this 2024 Long-Term LCT Study:

Table 1.2-1 Summary Table of Inputs and Methodology Used in this LCT Study:

| Issue | How Incorporated into this LCT Study: |
|-----------------------------------|--|
| Input Assumptions: | |
| Transmission System Configuration | The existing transmission system has been modeled, including all projects operational on or before June 1, of the study year and all other feasible operational solutions brought forth by the PTOs and as agreed to by the CAISO. |
| Generation Modeled | The existing generation resources has been modeled and also includes all projects that will be on-line and commercial on or before June 1, of the study year |
| Load Forecast | Uses a 1-in-10 year summer peak load forecast |
| Methodology: | |



| Maximize Import Capability | Import capability into the load pocket has been maximized, thus minimizing the generation required in the load pocket to meet applicable reliability requirements. |
|--|---|
| QF/Nuclear/State/Federal Units | Regulatory Must-take and similarly situated units like QF/Nuclear/State/Federal resources have been modeled on-line at qualifying capacity output values for purposes of this LCT Study. |
| Maintaining Path Flows | Path flows have been maintained below all established path ratings into the load pockets, including the 500 kV. For clarification, given the existing transmission system configuration, the only 500 kV path that flows directly into a load pocket and will, therefore, be considered in this LCT Study is the South of Lugo transfer path flowing into the LA Basin. |
| Performance Criteria: | |
| Performance Level B & C, including incorporation of PTO operational solutions | This LCT Study is being published based on Performance Level B and Performance Level C criterion, yielding the low and high range LCR scenarios. In addition, the CAISO will incorporate all new projects and other feasible and CAISO-approved operational solutions brought forth by the PTOs that can be operational on or before June 1, of the study year. Any such solutions that can reduce the need for procurement to meet the Performance Level C criteria will be incorporated into the LCT Study. |
| Load Pocket: | |
| Fixed Boundary, including limited reference to published effectiveness factors | This LCT Study has been produced based on load pockets defined by a fixed boundary. The CAISO only publishes effectiveness factors where they are useful in facilitating procurement where excess capacity exists within a load pocket. |

Further details regarding the 2024 Long-Term LCT Study methodology and assumptions are provided in Section III, below.



1.3 Grid Reliability

Service reliability builds from grid reliability because grid reliability is reflected in the Reliability Standards of the North American Electric Reliability Council (NERC) and the Western Electricity Coordinating Council ("WECC") Regional Criteria (collectively "Reliability Standards"). The Reliability Standards apply to the interconnected electric system in the United States and are intended to address the reality that within an integrated network, whatever one Balancing Authority Area does can affect the reliability of other Balancing Authority Areas. Consistent with the mandatory nature of the Reliability Standards, the CAISO is under a statutory obligation to ensure efficient use and reliable operation of the transmission grid consistent with achievement of the Reliability Standards.² The CAISO is further under an obligation, pursuant to its FERC-approved Transmission Control Agreement, to secure compliance with all "Applicable Reliability Criteria." Applicable Reliability Criteria consists of the Reliability Standards as well as reliability criteria adopted by the CAISO (Grid Planning Standards).

The Reliability Standards define reliability on interconnected electric systems using the terms "adequacy" and "security." "Adequacy" is the ability of the electric systems to supply the aggregate electrical demand and energy requirements of their customers at all times, taking into account physical characteristics of the transmission system such as transmission ratings and scheduled and reasonably expected unscheduled outages of system elements. "Security" is the ability of the electric systems to withstand sudden disturbances such as electric short circuits or unanticipated loss of system elements. The Reliability Standards are organized by Performance Categories. Certain categories require that the grid operator not only ensure that grid integrity is maintained under certain adverse system conditions (e.g., security), but also that all customers continue to receive electric supply to meet demand (e.g., adequacy). In that case, grid reliability and service reliability would overlap. But there are other levels of performance where security can be maintained without ensuring adequacy.

1.4 Application of N-1, N-1-1, and N-2 Criteria

The CAISO will maintain the system in a safe operating mode at all times. This obligation translates into respecting the Reliability Criteria at all times, for example during normal operating conditions (N-0) the CAISO must protect for all single contingencies (N-1) and common mode (N-2) double line outages. Also, after a single contingency, the CAISO must re-adjust the system to support the loss of the next most stringent contingency. This is referred to as the N-1-1 condition.

The N-1-1 vs N-2 terminology was introduced only as a temporal differentiation between two existing³ NERC Category C events. N-1-1 represents NERC Category C3 ("category B contingency, manual system adjustment, followed by another category B contingency"). The N-2 represents NERC Category C5 ("any two circuits of a multiple circuit tower line") as well as WECC-

² Pub. Utilities Code § 345

³ NERC Category B and C terminology no longer alignes with the current NERC standards. It is used in this report since the ISO Tariff still uses this terminology that was in effect at the time when the ISO Tariff section was writen.



S2 (for 500 kV only) ("any two circuits in the same right-of-way") with no manual system adjustment between the two contingencies.

1.5 Performance Criteria

As set forth on the Summary Table of Inputs and Methodology, this LCR Report is based on NERC Performance Level B and Performance Level C criterion. The NERC Standards refer mainly to thermal overloads. However, the CAISO also tests the electric system in regards to the dynamic and reactive margin compliance with the existing WECC standards for the same NERC performance levels. These Performance Levels can be described as follows:

1.5.1 Performance Criteria- Category B

Category B describes the system performance that is expected immediately following the loss of a single transmission element, such as a transmission circuit, a generator, or a transformer.

Category B system performance requires that all thermal and voltage limits must be within their "Applicable Rating," which, in this case, are the emergency ratings as generally determined by the PTO or facility owner. Applicable Rating includes a temporal element such that emergency ratings can only be maintained for certain duration. Under this category, load cannot be shed in order to assure the Applicable Ratings are met however there is no guarantee that facilities are returned to within normal ratings or to a state where it is safe to continue to operate the system in a reliable manner such that the next element out will not cause a violation of the Applicable Ratings.

1.5.2 Performance Criteria- Category C

The NERC Planning Standards require system operators to "look forward" to make sure they safely prepare for the "next" N-1 following the loss of the "first" N-1 (stay within Applicable Ratings after the "next" N-1). This is commonly referred to as N-1-1. Because it is assumed that some time exists between the "first" and "next" element losses, operating personnel may make any reasonable and feasible adjustments to the system to prepare for the loss of the second element, including, operating procedures, dispatching generation, moving load from one substation to another to reduce equipment loading, dispatching operating personnel to specific station locations to manually adjust load from the substation site, or installing a "Special Protection Scheme" that would remove pre-identified load from service upon the loss of the "next" element.⁴ All Category C requirements in this report refer to situations when in real time (N-0) or after the first contingency

⁴ A Special Protection Scheme is typically proposed as an operational solution that does not require additional generation and permits operators to effectively prepare for the next event as well as ensure security should the next event occur. However, these systems have their own risks, which limit the extent to which they could be deployed as a solution for grid reliability augmentation. While they provide the value of protecting against the next event without the need for pre-contingency load shedding, they add points of potential failure to the transmission network. This increases the potential for load interruptions because sometimes these systems will operate when not required and other times they will not operate when needed.




(N-1) the system requires additional readjustment in order to prepare for the next worst contingency. In this time frame, load drop is not allowed per existing planning criteria.

Generally, Category C describes system performance that is expected following the loss of two or more system elements. This loss of two elements is generally expected to happen simultaneously, referred to as N-2. It should be noted that once the "next" element is lost after the first contingency, as discussed above under the Performance Criteria B, N-1-1 scenario, the event is effectively a Category C. As noted above, depending on system design and expected system impacts, the **planned and controlled** interruption of supply to customers (load shedding), the removal from service of certain generators and curtailment of exports may be utilized to maintain grid "security."

1.5.3 CAISO Statutory Obligation Regarding Safe Operation

The CAISO will maintain the system in a safe operating mode at all times. This obligation translates into respecting the Reliability Criteria at all times, for example during normal operating conditions A (N-0) the CAISO must protect for all single contingencies B (N-1) and common mode C5 (N-2) double line outages. As a further example, after a single contingency the CAISO must readjust the system in order to be able to support the loss of the next most stringent contingency C3 (N-1-1).

Figure 1.5-1 Temporal graph of LCR Category B vs. LCR Category C

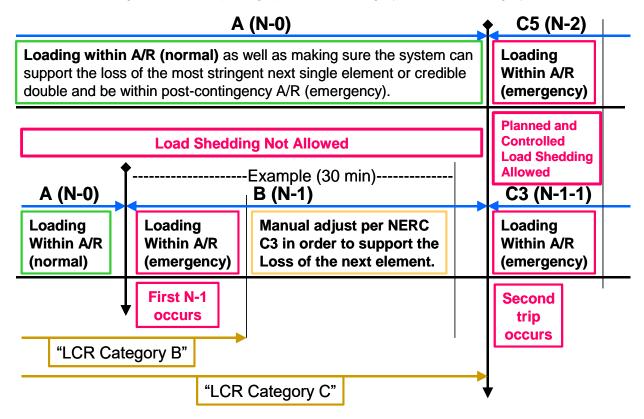



The following definitions guide the CAISO's interpretation of the Reliability Criteria governing safe mode operation and are used in this LCT Study:

Applicable Rating:

This represents the equipment rating that will be used under certain contingency conditions.

Normal rating is to be used under normal conditions.

<u>Long-term emergency ratings</u>, if available, will be used in all emergency conditions as long as "system readjustment" is provided in the amount of time given (specific to each element) to reduce the flow to within the normal ratings. If not available, the normal rating is to be used.

<u>Short-term emergency ratings</u>, if available, can be used as long as "system readjustment" is provided in the "short-time" available in order to reduce the flow to within the long-term emergency ratings where the element can be kept for another length of time (specific to each element) before the flow needs to be reduced the below the normal ratings. If not available long-term emergency rating should be used.

<u>Temperature-adjusted ratings</u> shall not be used because this is a year-ahead study, not a real-time tool, and as such the worst-case scenario must be covered. In case temperature-adjusted ratings are the only ratings available then the minimum rating (highest temperature) given the study conditions shall be used.

<u>CAISO Transmission Register</u> is the only official keeper of all existing ratings mentioned above.

Ratings for future projects provided by PTO and agreed upon by the CAISO shall be used.

<u>Other short-term ratings</u> not included in the CAISO Transmission Register may be used as long as they are engineered, studied and enforced through clear operating procedures that can be followed by real-time operators.

<u>Path Ratings</u> need to be maintained within their limits in order to assure that proper capacity is available in order to operate the system in real-time in a safe operating zone.

Controlled load drop:

This is achieved with the use of a Special Protection Scheme.

Planned load drop:

This is achieved when the most limiting equipment has short-term emergency ratings AND the operators have an operating procedure that clearly describes the actions that need to be taken in order to shed load.

Special Protection Scheme:

All known SPS shall be assumed. New SPS must be verified and approved by the CAISO and must comply with the new SPS guideline described in the CAISO Planning Standards.

System Readjustment:



This represents the actions taken by operators in order to bring the system within a safe operating zone after any given contingency in the system.

Actions that can be taken as system readjustment after a single contingency (Category B):

- 1. System configuration change based on validated and approved operating procedures
- 2. Generation re-dispatch
 - a. Decrease generation (up to 1150 MW) limit given by single contingency SPS as part of the CAISO Grid Planning standards (ISO G4)
 - b. Increase generation this generation will become part of the LCR need

Actions, which shall not be taken as system readjustment after a single contingency (Category B):

Load drop – based on the intent of the CAISO/WECC and NERC criteria for category B contingencies.

The NERC Transmission Planning Standards footnote mentions that load shedding can be done after a category B event in certain local areas in order to maintain compliance with performance criteria. However, the main body of the criteria spells out that no dropping of load should be done following a single contingency. All stakeholders and the CAISO agree that no involuntary interruption of load should be done immediately after a single contingency. Further, the CAISO and stakeholders now agree on the viability of dropping load as part of the system readjustment period – in order to protect for the next most limiting contingency. After a single contingency, it is understood that the system is in a Category B condition and the system should be planned based on the body of the criteria with no shedding of load regardless of whether it is done immediately or in 15-30 minute after the original contingency. Category C conditions only arrive after the second contingency has happened; at that point in time, shedding load is allowed in a planned and controlled manner.

A robust California transmission system should be, and under the LCT Study is being, planned based on the main body of the criteria, not the footnote regarding Category B contingencies. Therefore, if there are available resources in the area, they are looked to meet reliability needs (and included in the LCR requirement) before resorting to involuntary load curtailment. The footnote may be applied for criteria compliance issues only where there are no resources available in the area.

Time allowed for manual readjustment:

Tariff Section 40.3.1.1, requires the CAISO, in performing the Local Capacity Technical Study, to apply the following reliability criterion:



Time Allowed for Manual Adjustment: This is the amount of time required for the Operator to take all actions necessary to prepare the system for the next Contingency. The time should not be more than thirty (30) minutes.

The CAISO Planning Standards also impose this manual readjustment requirement. As a parameter of the Local Capacity Technical Study, the CAISO must assume that as the system operator the CAISO will have sufficient time to:

- (1) make an informed assessment of system conditions after a contingency has occurred;
- (2) identify available resources and make prudent decisions about the most effective system redispatch;
- (3) manually readjust the system within safe operating limits after a first contingency to be prepared for the next contingency; and
- (4) allow sufficient time for resources to ramp and respond according to the operator's redispatch instructions. This all must be accomplished within 30 minutes.

Local capacity resources can meet this requirement by either (1) responding with sufficient speed, allowing the operator the necessary time to assess and redispatch resources to effectively reposition the system within 30 minutes after the first contingency, or (2) have sufficient energy available for frequent dispatch on a pre-contingency basis to ensure the operator can meet minimum online commitment constraints or reposition the system within 30 minutes after the first contingency occurs. Accordingly, when evaluating resources that satisfy the requirements of the CAISO Local Capacity Technical Study, the CAISO assumes that local capacity resources need to be available in no longer than 20 minutes so the CAISO and demand response providers have a reasonable opportunity to perform their respective and necessary tasks and enable the CAISO to reposition the system within the 30 minutes in accordance with applicable reliability criteria.

1.6 The Two Options Presented In This LCT Study Report

This LCT Study sets forth different solution "options" with varying ranges of potential service reliability consistent with CAISO's Reliability Criteria. The CAISO applies Option 2 for its purposes of identifying necessary local capacity needs and the corresponding potential scope of its backstop authority. Nevertheless, the CAISO continues to provide Option 1 as a point of reference for the CPUC and Local Regulatory Authorities in considering procurement targets for their jurisdictional LSEs.

1.6.1 Option 1 - Meet Performance Criteria Category B

Option 1 is a service reliability level that reflects generation capacity that must be available to comply with reliability standards immediately after a NERC Category B given that load cannot be removed to meet this performance standard under Reliability Criteria. However, this capacity amount implicitly relies on load interruption as the **only means** of meeting any Reliability Criteria



that is beyond the loss of a single transmission element (N-1). These situations will likely require substantial load interruptions in order to maintain system continuity and alleviate equipment overloads prior to the actual occurrence of the second contingency.⁵

1.6.2 Option 2 - Meet Performance Criteria Category C and Incorporate Suitable Operational Solutions

Option 2 is a service reliability level that reflects generation capacity that is needed to readjust the system to prepare for the loss of a second transmission element (N-1-1) using generation capacity *after* considering all reasonable and feasible operating solutions (including those involving customer load interruption) developed and approved by the CAISO, in consultation with the PTOs. Under this option, there is no expected load interruption to end-use customers under normal or single contingency conditions as the CAISO operators prepare for the second contingency. However, the customer load may be interrupted in the event the second contingency occurs.

As noted, Option 2 is the local capacity level that the CAISO requires to reliably operate the grid per NERC, WECC and CAISO standards. As such, the CAISO recommends continuing the adoption of this Option to guide resource adequacy procurement.

⁵ This potential for pre-contingency load shedding also occurs because real time operators must prepare for the loss of a common mode N-2 at all times.

14



2 Assumption Details: How the Study was Conducted

2.1 System Planning Criteria

The following table provides a comparison of system planning criteria, based on the NERC performance standards, used in the study:

Table 2.1-1: Criteria Comparison

| Contingency Component(s) | ISO Grid Planning Criteria | Old RMR Criteria | Local Capacity Criteria | |
|--|-------------------------------|---------------------|----------------------------|--|
| A – No Contingencies | Х | Х | | |
| B – Loss of a single element | | | | |
| 1. Generator (G-1) | X | X1 | X ¹ | |
| 2. Transmission Circuit (L-1) | X | Χ | X ¹ | |
| 3. Transformer (T-1) | X | X^2 | X ^{1,2} | |
| 4. Single Pole (dc) Line | X | Χ | X1 | |
| 5. G-1 system readjusted L-1 | X | Χ | X | |
| C – Loss of two or more elements | | | | |
| 1. Bus Section | X | | | |
| 2. Breaker (failure or internal fault) | X | | X | |
| 3. L-1 system readjusted G-1 | X | | X | |
| 3. G-1 system readjusted T-1 or T-1 system readjusted G-1 | X | | X | |
| 3. L-1 system readjusted T-1 or T-1 system readjusted L-1 | X | | X | |
| 3. G-1 system readjusted G-1 | X | | X | |
| 3. L-1 system readjusted L-1 | X | | X | |
| 3. T-1 system readjusted T-1 | X | | X | |
| 4. Bipolar (dc) Line | X | | | |
| 5. Two circuits (Common Mode) L-2 | X | | | |
| 6. SLG fault (stuck breaker or protection failure) for G-1 | X | | | |
| 7. SLG fault (stuck breaker or protection failure) for L-1 | X | | | |
| 8. SLG fault (stuck breaker or protection failure) for T-1 | X | | X | |
| 9. SLG fault (stuck breaker or protection failure) for Bus section | X | | | |
| WECC-S3. Two generators (Common Mode) G-2 | X ³ | | | |
| D – Extreme event – loss of two or more elements | | | | |
| Any B1-4 system readjusted (Common Mode) L-2 | X ⁴ | | X^3 | |
| All other extreme combinations D1-14. | X ⁴ | | | |

System must be able to readjust to a safe operating zone in order to be able to support the loss of the next contingency.

A thermal or voltage criterion violation resulting from a transformer outage may not be cause for a local area reliability requirement if the violation is considered marginal (e.g. acceptable loss of facility life or low voltage), otherwise, such a violation will necessitate creation of a requirement.

Evaluate for risks and consequence, per NERC standards. No voltage collapse or dynamic instability allowed.

Evaluate for risks and consequence, per NERC standards.



A significant number of simulations were run to determine the most critical contingencies within each Local Capacity Area. Using power flow, post-transient load flow, and stability assessment tools, the system performance results of all the contingencies that were studied were measured against the system performance requirements defined by the criteria shown below. Where the specific system performance requirements were not met, generation was adjusted such that the minimum amount of generation required to meet the criteria was determined in the Local Capacity Area. The following describes how the criteria were tested for the specific type of analysis performed.

2.1.1 Power Flow Assessment:

| Contingencies | Thermal Criteria ³ | Voltage Criteria⁴ |
|-----------------------------|--------------------------------|--------------------------------|
| Generating unit 1,6 | Applicable Rating | Applicable Rating |
| Transmission line 1,6 | Applicable Rating | Applicable Rating |
| Transformer 1,6 | Applicable Rating ⁵ | Applicable Rating ⁵ |
| (G-1)(L-1) ^{2, 6} | Applicable Rating | Applicable Rating |
| Overlapping ^{6, 7} | Applicable Rating | Applicable Rating |

Table 2.1-2 Power flow criteria

- All single contingency outages (i.e. generating unit, transmission line or transformer) will be simulated on Participating Transmission Owners' local area systems.
- ² Key generating unit out, system readjusted, followed by a line outage. This over-lapping outage is considered a single contingency within the ISO Grid Planning Criteria. Therefore, load dropping for an overlapping G-1, L-1 scenario is not permitted.
- Applicable Rating Based on CAISO Transmission Register or facility upgrade plans including established Path ratings.
- ⁴ Applicable Rating CAISO Grid Planning Criteria or facility owner criteria as appropriate including established Path ratings.
- A thermal or voltage criterion violation resulting from a transformer outage may not be cause for a local area reliability requirement if the violation is considered marginal (e.g. acceptable loss of facility life or low voltage), otherwise, such a violation will necessitate creation of a requirement.
- ⁶ Following the first contingency (N-1), the generation must be sufficient to allow the operators to bring the system back to within acceptable (normal) operating range (voltage and loading) and/or appropriate OTC following the studied outage conditions.
- During normal operation or following the first contingency (N-1), the generation must be sufficient to allow the operators to prepare for the next worst N-1 or common mode N-2



without pre-contingency interruptible or firm load shedding. SPS/RAS/Safety Nets may be utilized to satisfy the criteria after the second N-1 or common mode N-2 except if the problem is of a thermal nature such that short-term ratings could be utilized to provide the operators time to shed either interruptible or firm load. T-2s (two transformer bank outages) would be excluded from the criteria.

2.1.2 Post Transient Load Flow Assessment:

Table 2.1-3 Post transient load flow criteria

| Contingencies | Reactive Margin Criteria ² |
|-----------------------|---------------------------------------|
| Selected ¹ | Applicable Rating |

- If power flow results indicate significant low voltages for a given power flow contingency, simulate that outage using the post transient load flow program. The post-transient assessment will develop appropriate Q/V and/or P/V curves.
- ² Applicable Rating positive margin based on the higher of imports or load increase by 5% for N-1 contingencies, and 2.5% for N-2 contingencies.

2.1.3 Stability Assessment:

Table 2.1-4 Stability criteria

| Contingencies | Stability Criteria ² |
|-----------------------|---------------------------------|
| Selected ¹ | Applicable Rating |

- Base on historical information, engineering judgment and/or if power flow or post transient study results indicate significant low voltages or marginal reactive margin for a given contingency.
- ² Applicable Rating CAISO Grid Planning Criteria or facility owner criteria as appropriate.

2.2 Load Forecast

2.2.1 System Forecast

The California Energy Commission (CEC) derives the load forecast at the system and Participating Transmission Owner (PTO) levels. This relevant CEC forecast is then distributed across the entire system, down to the local area, division and substation level. The PTOs use an econometric equation to forecast the system load. The predominant parameters affecting the system load are (1) number of households, (2) economic activity (gross metropolitan products, GMP), (3) temperature and (4) increased energy efficiency and distributed generation programs.



2.2.2 Base Case Load Development Method

The method used to develop the load in the base case is a melding process that extracts, adjusts and modifies the information from the system, distribution and municipal utility forecasts. The melding process consists of two parts: Part 1 deals with the PTO load and Part 2 deals with the municipal utility load. There may be small differences between the methodologies used by each PTO to disaggregate the CEC load forecast to their level of local area as well as bar-bus model.

2.2.2.1 PTO Loads in Base Case

The methods used to determine the PTO loads are, for the most part, similar. One part of the method deals with the determination of the division⁶ loads that would meet the requirements of 1-in-5 or 1-in-10 system or area base cases and the other part deals with the allocation of the division load to the transmission buses.

a. Determination of division loads

The annual division load is determined by summing the previous year division load and the current division load growth. Thus, the key steps are the determination of the initial year division load and the annual load growth. The initial year for the base case development method is based heavily on recorded data. The division load growth in the system base case is determined in two steps. First, the total PTO load growth for the year is determined, as the product of the PTO load and the load growth rate from the system load forecast. Then this total PTO load growth is allocated to the division, based on the relative magnitude of the load growth projected for the divisions by the distribution planners. For example, for the 1-in-10 area base case, the division load growth determined for the system base case is adjusted to the 1-in-10 temperature using the load temperature relation determined from the latest peak load and temperature data of the division.

b. Allocation of division load to transmission bus level

Since the loads in the base case are modeled at the various transmission buses, the division loads developed must be allocated to those buses. The allocation process is different depending on the load types. For the most part, each PTO classifies its loads into four types: conforming, non-conforming, self-generation and generation-plant loads. Since the non-conforming and self-generation loads are assumed to not vary with temperature, their magnitude would be the same in the system or area base cases of the same year. The remaining load (the total division load developed above, less the quantity of non-conforming and self-generation load) is the conforming load. The remaining load is allocated to the transmission buses based on the relative magnitude of the distribution forecast. The summation of all base case loads is generally higher than the load forecast because some load, i.e., self-generation and generation-plant, are behind the meter and must be modeled in the base cases. However, for the most part, metered or aggregated data with telemetry is used to come up with the load forecast.

⁶ Each PTO divides its territory in a number of smaller area named divisions. These are usually smaller and compact areas that have the same temperature profile.



2.2.2.2 Municipal Loads in Base Case

The municipal utility forecasts that have been provided to the CEC and PTOs for the purposes of their base cases were also used for this study.

2.3 Power Flow Program Used in the LCR analysis

The technical studies were conducted using General Electric's Power System Load Flow (GE PSLF) program version 21.0_05 and PowerGem's Transmission Adequacy and Reliability Assessment (TARA) program version 1702. This GE PSLF program is available directly from GE or through the Western System Electricity Council (WECC) to any member and TARA program is commercially available.

To evaluate Local Capacity Areas, the starting base case was adjusted to reflect the latest generation and transmission projects as well as the one-in-ten-year peak load forecast for each Local Capacity Area as provided to the CAISO by the PTOs.

Electronic contingency files provided by the PTOs were utilized to perform the numerous contingencies required to identify the LCR. These contingency files include remedial action and special protection schemes that are expected to be in operation during the year of study. A CAISO created EPCL (a GE programming language contained within the GE PSLF package) routine and/or TARA software were used to run the combination of contingencies; however, other routines are available from WECC with the GE PSFL package or can be developed by third parties to identify the most limiting combination of contingencies requiring the highest amount of generation within the local area to maintain power flows within applicable ratings.



3 Locational Capacity Requirement Study Results

3.1 Summary of Study Results

LCR is defined as the amount of resource capacity that is needed within a Local Capacity Area to reliably serve the load located within this area. The results of the CAISO's analysis are summarized in the Executive Summary Tables.

Table 3.1-1 2024 Local Capacity Needs vs. Peak Load and Local Area Resources

| | 2024 Total LCR (MW) | Peak Load (1 in10) (MW) | 2024 LCR as % of Peak Load | Total NQC Local Area Resources (MW) | 2024 LCR as % of Total NQC |
|---------------------------|------------------------|-------------------------------|----------------------------------|--|-------------------------------|
| Humboldt | 132 | 153 | 86% | 197 | 67% |
| North Coast/North Bay | 706 | 1537 | 46% | 833 | 85% |
| Sierra | 1304 | 1864 | 70% | 2160 | 60% |
| Stockton | 675 | 1329 | 51% | 699 | 97% |
| Greater Bay | 4395 | 10427 | 42% | 7640 | 58% |
| Greater Fresno | 1711 | 3336 | 51% | 3348 | 51% |
| Kern | 152 | 903 | 17% | 465 | 33% |
| Big Creek/Ventura | 2577 | 4958 | 52% | 3528 | 73% |
| LA Basin | 6260 | 19295 | 32% | 8399 | 75% |
| San Diego/Imperial Valley | 4025 | 4834 | 83% | 4559 | 88% |
| Total | 21937 | 48636 | 45% | 31828 | 69% |

Table 3.1-2 2023 Local Capacity Needs vs. Peak Load and Local Area Resources

| | 2023 Total LCR (MW) | Peak Load (1 in10) (MW) | 2023 LCR as % of Peak Load | Total Dependable Local Area Resources (MW) | 2023 LCR as % of Total Area Resources |
|---------------------------|------------------------|-------------------------------|----------------------------------|--|---|
| Humboldt | 169 | 188 | 90% | 202 | 84% |
| North Coast/North Bay | 553 | 1524 | 36% | 890 | 62% |
| Sierra | 1924 | 1822 | 106% | 2150 | 89% |
| Stockton | 439 | 1227 | 36% | 684 | 64%** |
| Greater Bay | 4752 | 10441 | 46% | 7054 | 67% |
| Greater Fresno | 1688 | 3231 | 52% | 3509 | 48% |
| Kern | 182 | 1140 | 16% | 475 | 38%** |
| LA Basin | 6793 | 20072 | 34% | 8311 | 82% |
| Big Creek/Ventura | 2792 | 5169 | 54% | 3507 | 80%** |
| San Diego/Imperial Valley | 4132 | 4554 | 91% | 4487 | 92% |
| Total | 23424 | 49368* | 47%* | 31269 | 75% |

^{*} Value shown only illustrative, since each local area peaks at a different time.



** Resource deficient LCA (or with sub-area that are deficient) – deficiency included in LCR. Resource deficient area implies that in order to comply with the criteria, at summer peak, load must be shed immediately after the first contingency.

Table 3.1-1 and Table 3.1-2 shows how much of the Local Capacity Area load is dependent on local resources and how many local resources must be available in order to serve the load in those Local Capacity Areas in a manner consistent with the Reliability Criteria. These tables also indicate where new transmission projects, new resource additions or demand side management programs would be most useful in order to reduce the dependency on existing, generally older and less efficient local area resources.

The term "Qualifying Capacity" used in this report is the "Net Qualifying Capacity" ("NQC") posted on the CAISO web site at:

http://www.caiso.com/planning/Pages/ReliabilityRequirements/Default.aspx

The NQC list includes the area (if applicable) where each resource is located for units already operational. Neither the NQC list nor this report incorporates Demand Side Management programs and their related NQC. Units scheduled to become operational before June 1 of 2024 have been included in this 2024 Long-Term LCT Study Report and added to the total NQC values for those respective areas (see detail write-up for each area).

Regarding the main tables up front (page 2), the first column, "Qualifying Capacity," reflects two sets of resources. The first set is comprised of resources that would normally be expected to be on-line such as Municipal and Regulatory Must-take resources (state, federal, QFs, wind and nuclear units). The second set is "market" resources. The second column, "YEAR LCR Requirement Based on Category B" identifies the local capacity requirements, and deficiencies that must be addressed, in order to achieve a service reliability level based on Performance Criteria- Category B. The third column, "YEAR LCR Requirement Based on Category C with Operating Procedure", sets forth the local capacity requirements, and deficiencies that must be addressed, necessary to attain a service reliability level based on Performance Criteria-Category C with operational solutions.



3.2 Summary of Results by Local Area

Each Local Capacity Area's overall requirement is determined by also achieving each sub-area requirement. Because these areas are a part of the interconnected electric system, the total for each Local Capacity Area is not simply a summation of the sub-area needs. For example, some sub-areas may overlap and therefore the same units may count for meeting the needs in both sub-areas.

3.2.1 Humboldt Area

3.2.1.1 Area Definition

The transmission tie lines into the area include:


- Bridgeville-Cottonwood 115 kV line #1
- Humboldt-Trinity 115 kV line #1
- Laytonville-Garberville 60 kV line #1
- Trinity-Maple Creek 60 kV line #1

The substations that delineate the Humboldt Area are:

- Bridgeville is in, Low Gap, Wildwood and Cottonwood are out
- Humboldt is in, Trinity is out
- Kekawaka and Garberville are in, Laytonville is out
- Maple Creek is in, Trinity and Ridge Cabin are out

3.2.1.1.1 Humboldt LCR Area Diagram

Figure 3.2-1 Humboldt LCR Area

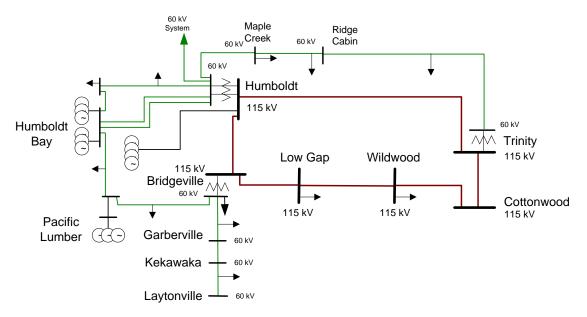



3.2.1.1.2 Humboldt LCR Area Load and Resources

Table 3.2-1 provides the forecasted load and resources. The list of generators within the LCR area are provided in Attachment A.

In year 2024 the estimated time of local area peak is 18:40 PM.

At the local area peak time the estimated, behind the meter, solar output is 0.00%.

This area does not contain models of solar resources capable of providing resource adequacy.

If required, all non-solar technology type resources are dispatched at NQC.

Table 3.2-1 Humboldt LCR Area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 151 | Market | 197 | 0 |
| AAEE | -8 | MUNI | 0 | 0 |
| Behind the meter DG | 0 | QF | 0 | 0 |
| Net Load | 143 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 10 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 153 | Total | 197 | 0 |

3.2.1.1.3 Humboldt LCR Area Hourly Profiles

Figure 3.2-2 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Humboldt LCR area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-3 illustrates the forecast 2024 hourly profile for Humboldt LCR area with the Category C (Multiple Contingency) transmission capability without resources.



Figure 3.2-2 Humboldt 2024 Peak Day Forecast Profiles

Humboldt LCR Area: 2024 projected daily profiles & approx. no gen N-1-1 trans. capability


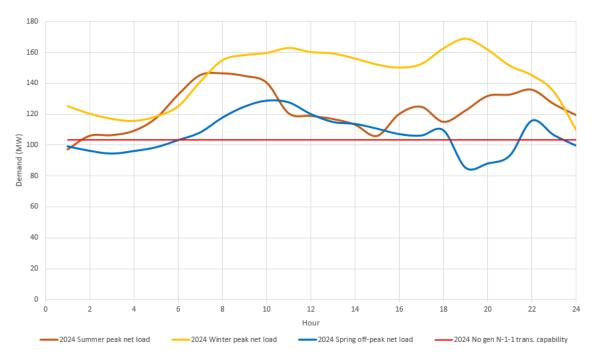


Figure 3.2-3 Humboldt 2024 Forecast Hourly Profile



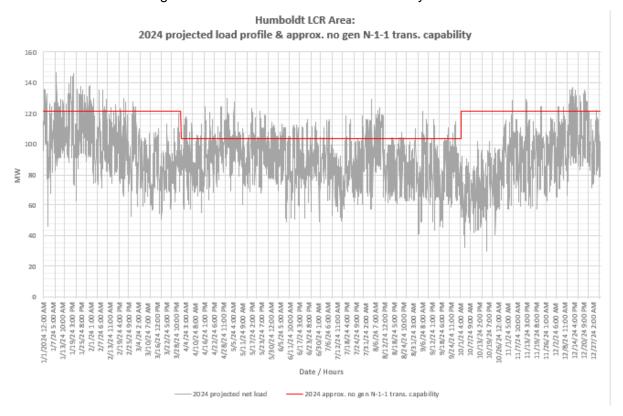

3.2.1.1.4 Approved transmission projects included in base cases

None

3.2.1.2 Humboldt Overall LCR Requirement

Table 3.2-2 identifies the area LCR requirements. The LCR requirement for Category B (Single Contingency) is 116 MW and for Category C (Multiple Contingency) is 169 MW.

Table 3.2-2 Humboldt LCR Area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------------|-------------------------|---|-----------------------|
| 2024 | First Limit | B ⁷ | Humboldt-Trinity 115 kV | Cottonwood-Bridgeville 11 5kV line with one of the Humboldt Bay units | 83 |
| 2024 | First Limit | C ₈ | Humboldt-Trinity 115 kV | Cottonwood-Bridgeville 115 kV & Humboldt - Humboldt Bay 115 kV | 132 |

3.2.1.2.1 Effectiveness factors

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.1.2.2 Changes compared to last year's results

Compared with 2023 the load forecast decreased by 35 MW and the total LCR has decreased by 37 MW.

3.2.2 North Coast / North Bay Area

3.2.2.1 Area Definition

The transmission tie facilities coming into the North Coast/North Bay area are:

⁷ LCR requirement for a single contingency means that there wouldn't be any criteria violations following the loss of a single element, however the operators will not have any means (other than load drop) in order to bring the system within a safe operating zone and get prepared for the next contingency as required by NERC transmission operations standards.

⁸ LCR requirement for multiple contingencies means that not only there wouldn't be any criteria violations following the loss of a single element, but also the operators will have enough generation (other operating procedures) in order to bring the system within a safe operating zone and get prepared for the next contingency as required by NERC transmission operations standards.



- Cortina-Mendocino 115 kV Line
- Cortina-Eagle Rock 115 kV Line
- Willits-Garberville 60 kV line #1
- Vaca Dixon-Lakeville 230 kV line #1
- Tulucay-Vaca Dixon 230 kV line #1
- Lakeville-Sobrante 230 kV line #1
- Ignacio-Sobrante 230 kV line #1

The substations that delineate the North Coast/North Bay area are:

- Cortina is out, Mendocino and Indian Valley are in
- Cortina is out, Eagle Rock, Highlands and Homestake are in
- Willits and Lytonville are in, Kekawaka and Garberville are out
- Vaca Dixon is out, Lakeville is in
- Tulucay is in, Vaca Dixon is out
- Lakeville is in, Sobrante is out
- Ignacio is in, Sobrante and Crocket are out

3.2.2.1.1 North Coast and North Bay LCR Area Diagram



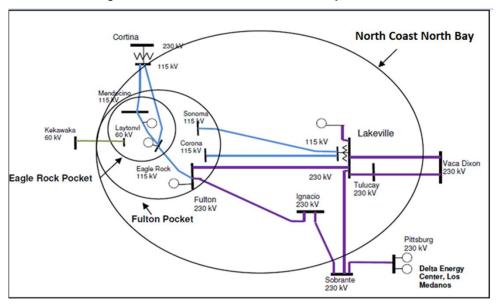


Figure 3.2-4 North Coast and North Bay LCR Area

3.2.2.1.2 North Coast and North Bay LCR Area Load and Resources

Table 3.2-3 provides the forecasted load and resources. The list of generators within the LCR area are provided in Attachment A.

In year 2024 the estimated time of local area peak is 18:20 PM.

At the local area peak time the estimated, behind the meter, solar output is 1.12%.

This area does not contain models of solar resources capable of providing resource adequacy. If required, all non-solar technology type resources are dispatched at NQC.

Table 3.2-3 North Coast and North Bay LCR Area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|------|------------------------------------|-----|---------|
| Gross Load | 1550 | Market, Net Seller | 715 | 715 |
| AAEE | -50 | MUNI | 113 | 113 |
| Behind the meter DG | -7 | QF | 4 | 4 |
| Net Load | 1493 | Solar | 1 | 0 |
| Transmission Losses | 44 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 1537 | Total | 833 | 832 |



3.2.2.1.3 North Coast and North Bay LCR Area Hourly Profiles

Figure 3.2-5 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the North Coast and North Coast LCR area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-6 illustrates the forecast 2024 hourly profile for North Coast and North Bay LCR area with the Category C (Multiple Contingency) transmission capability without resources.


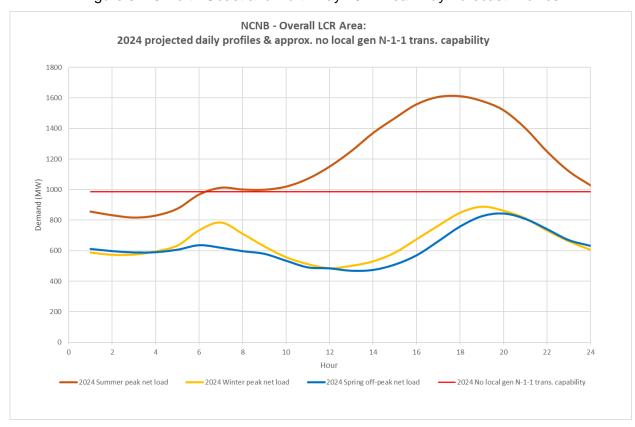


Figure 3.2-5 North Coast and North Bay 2024 Peak Day Forecast Profiles

Figure 3.2-6 North Coast and North Bay 2024 Forecast Hourly Profile



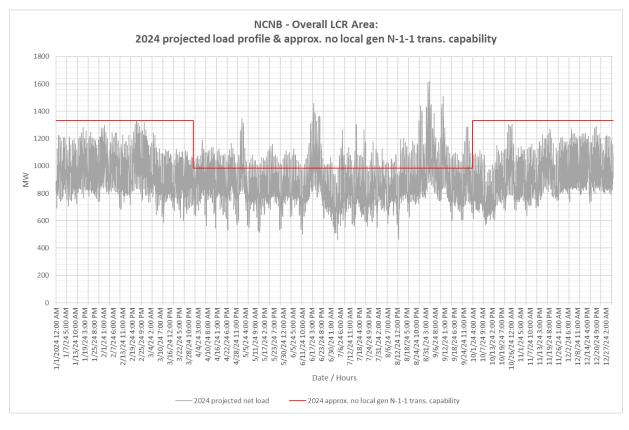

3.2.2.1.4 Approved transmission projects modeled in base cases

- Vaca Dixon-Lakeville 230 kV Corridor Series Compensation
- Fulton-Fitch Mountain 60 kV Line Reconductor
- Clear Lake 60 kV System Reinforcement
- Ignacio-Alta 60 kV Line Conversion
- Lakeville 60 kV Area Reinforcement


3.2.2.2 Eagle Rock LCR Sub-area

Eagle Rock is a Sub-area of the North Coast and North Bay LCR Area.

3.2.2.2.1 Eagle Rock LCR Sub-area Diagram

Figure 3.2-7 Eagle Rock LCR Sub-area



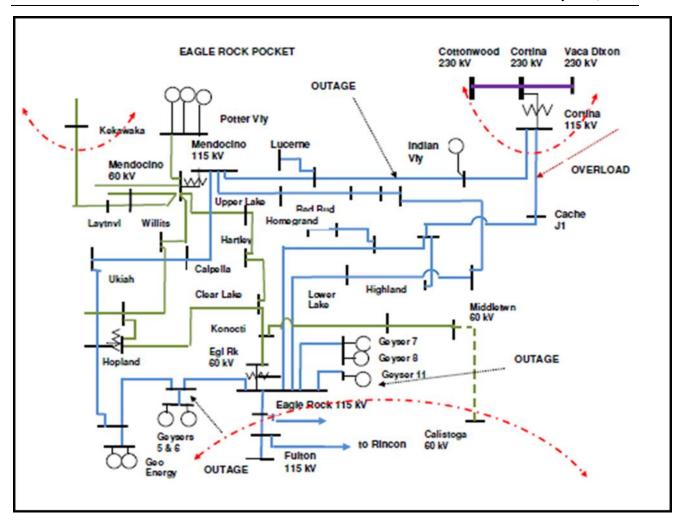

3.2.2.2.2 Eagle Rock LCR sub-area Load and Resources

Table 3.2-4 provides the forecasted load and resources. The list of generators within the LCR sub-area are provided in Attachment A.

Table 3.2-4 Eagle Rock LCR Area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|---------------------|-----|------------------------------------|-----|---------|
| Gross Load | 261 | Market, Net Seller | 248 | 248 |
| AAEE | -10 | MUNI | 2 | 2 |
| Behind the meter DG | -1 | QF | 0 | 0 |
| Net Load | 250 | Solar | 1 | 0 |
| Transmission Losses | 13 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |



| Load + Losses + Pumps | 263 | Total | 251 | 250 |
|-----------------------|-----|-------|-----|-----|
|-----------------------|-----|-------|-----|-----|

3.2.2.2.3 Eagle Rock LCR Sub-area Hourly Profiles

Figure 3.2-5 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Eagle Rock LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-6 illustrates the forecast 2024 hourly profile for Eagle Rock LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.


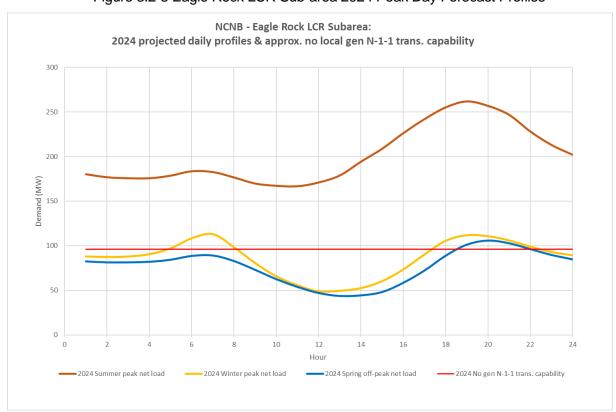


Figure 3.2-8 Eagle Rock LCR Sub-area 2024 Peak Day Forecast Profiles

Figure 3.2-9 Eagle Rock LCR Sub-area 2024 Forecast Hourly Profiles



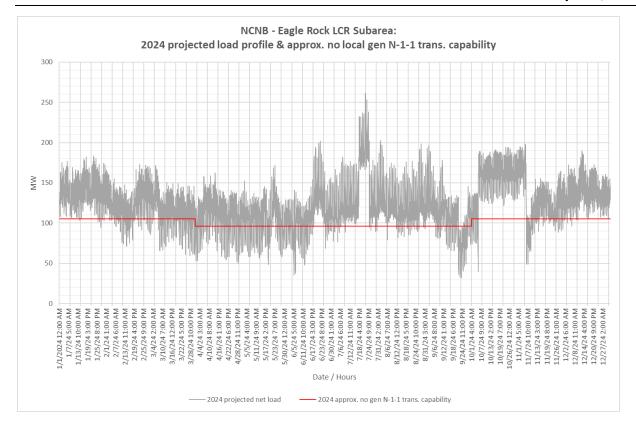

3.2.2.2.4 Eagle Rock LCR Sub-area Requirement

Table 3.2-5 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) is 223 MW and for Category C (Multiple Contingency) is 240 MW.

Table 3.2-5 Eagle Rock LCR Sub-area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|--------------------------------|--|--------------------------|
| 2024 | First Limit | В | Eagle Rock-Cortina 115 kV line | Cortina-Mendocino 115 kV with Geyser #11 unit out | 223 |
| 2024 | First Limit | С | Eagle Rock-Cortina 115 kV line | Cortina-Mendocino 115 kV & Geysers #3-Geysers #5 115 kV | 240 |

3.2.2.2.5 Effectiveness factors

Effectiveness factors for generators in the Eagle Rock LCR Sub-area are in Attachment B table titled Eagle Rock.




For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.2.3 Fulton Sub-area

Fulton is a Sub-area of the North Coast and North Bay LCR Area.

3.2.2.3.1 Fulton LCR Sub-area Diagram

Figure 3.2-10 Fulton LCR Sub-area

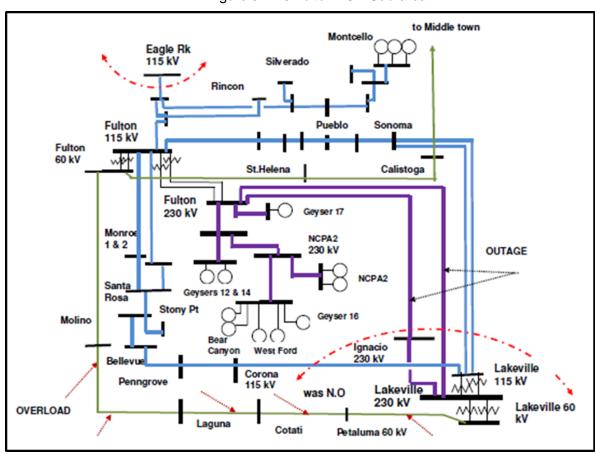

3.2.2.3.2 Fulton LCR Sub-area Load and Resources

Table 3.2-6 provides the forecasted load and resources. The list of generators within the LCR sub-area are provided in Attachment A.

Table 3.2-6 Fulton LCR Area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|------------|-----|--------------------|-----|---------|
| Gross Load | 908 | Market, Net Seller | 460 | 460 |
| AAEE | -31 | MUNI | 54 | 54 |



| Behind the meter DG | -4 | QF | 5 | 5 |
|-----------------------|-----|------------------------------------|-----|-----|
| Net Load | 873 | Solar | 1 | 0 |
| Transmission Losses | 25 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 898 | Total | 520 | 519 |

3.2.2.3.3 Fulton LCR Sub-area Hourly Profiles

Figure 3.2-11 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Fulton LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-12 illustrates the forecast 2024 hourly profile for Fulton LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.


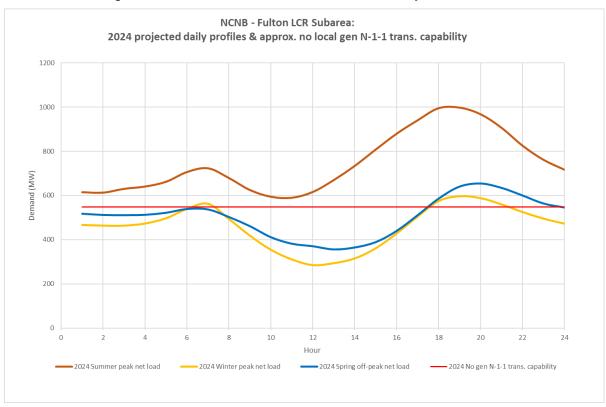


Figure 3.2-11 Fulton LCR Sub-area 2024 Peak Day Forecast Profiles

Figure 3.2-12 Fulton LCR Sub-area 2024 Forecast Hourly Profiles



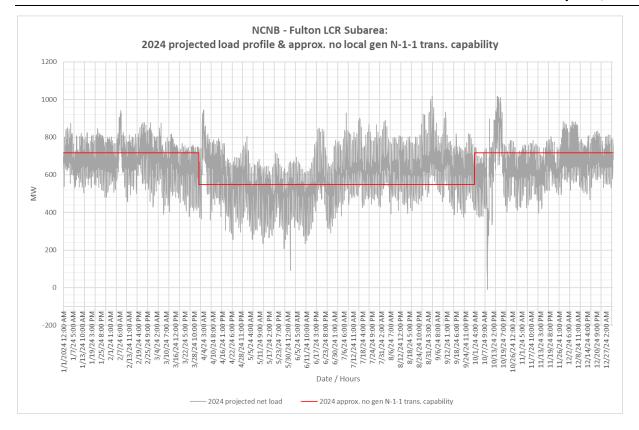

3.2.2.3.4 Fulton LCR Sub-area Requirement

Table 3.2-7 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) is non-binding and for Category C (Multiple Contingency) is 415 MW.

LCR (MW) Year Limit Category **Limiting Facility** Contingency (Deficiency) 2024 First Limit В Non-binding Lakeville #2 (Lakeville-Fulton-Lakeville #1 230 kV & 2024 First Limit С 415 Petaluma-Cotati) 60 kV line Fulton-Ignacio #1 230 kV

Table 3.2-7 Fulton LCR Sub-area Requirements

3.2.2.3.5 Effectiveness factors

Effectiveness factors for generators in the Fulton LCR Sub-area are in Attachment B table titled Fulton.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors



under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.2.4 North Coast and North Bay Overall

Lakeville Sub-area represents the North Coast and North Bay LCR overall requirement.

3.2.2.4.1 North Coast and North Bay Overall Requirement

Table 3.2-8 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) and for Category C (Multiple Contingency) is the same 706 MW.

Table 3.2-8 Lakeville LCR Sub-area and North Coast and North Bay LCR area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|-----------------------------|---|--------------------------|
| 2024 | First Limit | B/C | Vaca Dixon-Lakeville 230 kV | Vaca Dixon-Tulucay 230 kV with DEC power plant out of service | 706 |

3.2.2.4.2 Effectiveness factors

Effectiveness factors for generators in the Lakeville LCR Sub-area and North Coast and North Bay LCR area are in Attachment B table titled <u>Lakeville</u>.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.2.4.3 Changes compared to last year's results

Compared to 2023 load forecast went up by 13 MW and total LCR need went up by 153 MW mainly due to the decrease in the associated Ames/Pittsburg/Oakland sub-area requirements.

3.2.3 Sierra Area

3.2.3.1 Area Definition

The transmission tie lines into the Sierra Area are:

- Table Mountain-Rio Oso 230 kV line
- Table Mountain-Palermo 230 kV line
- Table Mt-Pease 60 kV line
- Caribou-Palermo 115 kV line



- Drum-Summit 115 kV line #1
- Drum-Summit 115 kV line #2
- Spaulding-Summit 60 kV line
- Brighton-Bellota 230 kV line
- Rio Oso-Lockeford 230 kV line
- Gold Hill-Eight Mile Road 230 kV line
- Lodi-Eight Mile Road 230 kV line
- Gold Hill-Lake 230 kV line


The substations that delineate the Sierra Area are:

- Table Mountain is out Rio Oso is in
- Table Mountain is out Palermo is in
- Table Mt is out Pease is in
- · Caribou is out Palermo is in
- Drum is in Summit is out
- Drum is in Summit is out
- Spaulding is in Summit is out
- Brighton is in Bellota is out
- · Rio Oso is in Lockeford is out
- Gold Hill is in Eight Mile is out
- Lodi is in Eight Mile is out
- Gold Hill is in Lake is out

3.2.3.1.1 Sierra LCR Area Diagram

Figure 3.2-13 Sierra LCR Area



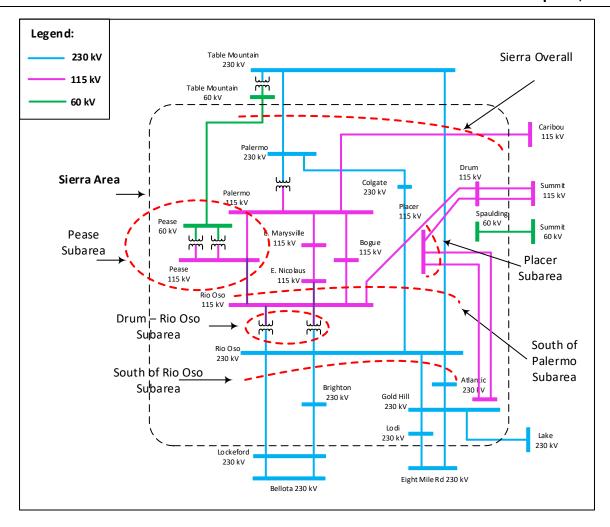

3.2.3.1.2 Sierra LCR Area Load and Resources

Table 3.2-9 provides the forecasted load and resources. The list of generators within the LCR area are provided in Attachment A.

In year 2024 the estimated time of local area peak is 19:00 PM.

At the local area peak time the estimated, behind the meter, solar output is 0.00%.

At the local area peak time the estimated, ISO metered, solar output is 2.00%.

If required, all non-solar technology type resources are dispatched at NQC.

Table 3.2-9 Sierra LCR Area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|---------------------|------|--------------------|------|---------|
| Gross Load | 1847 | Market, Net Seller | 986 | 986 |
| AAEE | -66 | MUNI | 1129 | 1129 |
| Behind the meter DG | 0 | QF | 39 | 39 |



| Net Load | 1781 | Solar | 6 | 0 |
|-----------------------|------|------------------------------------|------|------|
| Transmission Losses | 83 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 1864 | Total | 2160 | 2154 |

3.2.3.1.3 Approved transmission projects modeled:

- Rio Oso #1 and #2 230/115 kV transformer replacement
- Pease 115/60 kV transformer addition
- South of Palermo 115 kV Reinforcement
- Vaca-Davis Area Reinforcement
- Rio Oso Area 230 kV Voltage Support

3.2.3.2 Placerville Sub-area


Placerville Sub-area has been eliminated due to the Missouri Flat-Gold Hill 115 kV lines reconductoring project being operational.

3.2.3.3 Placer Sub-area

Placer is Sub-area of the Sierra LCR Area.

3.2.3.3.1 Placer LCR Sub-area Diagram

Figure 3.2-14 Placer LCR Sub-area

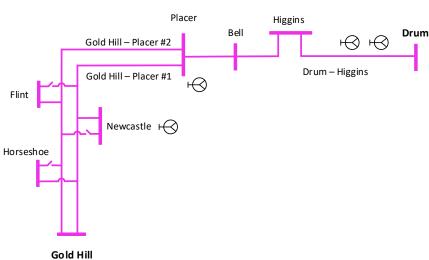

3.2.3.3.2 Placer LCR Sub-area Load and Resources

Table 3.2-12 provides the forecasted load and resources. The list of generators within the LCR sub-area are provided in Attachment A.



| T 11 00 10 DI | | 0004 = | |
|----------------------|---------------|---|--------------------|
| 1 ahla 3 7-10 Placar | I CR Sub-area | 7074 Forecast | Load and Resources |
| | | ZUZ I I UI U Uasi | Luau anu Nesuures |

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 176 | Market, Net Seller | 53 | 53 |
| AAEE | -7 | MUNI | 42 | 42 |
| Behind the meter DG | 0 | QF | 0 | 0 |
| Net Load | 169 | Solar | 0 | 0 |
| Transmission Losses | 11 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 180 | Total | 96 | 96 |


3.2.3.3.3 Placer LCR Sub-area Hourly Profiles

Figure 3.2-18 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Placer LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-19 illustrates the forecast 2024 hourly profile for Placer LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

Figure 3.2-15 Placer LCR Sub-area 2024 Peak Day Forecast Profiles

Figure 3.2-16 Placer LCR Sub-area 2024 Forecast Hourly Profiles



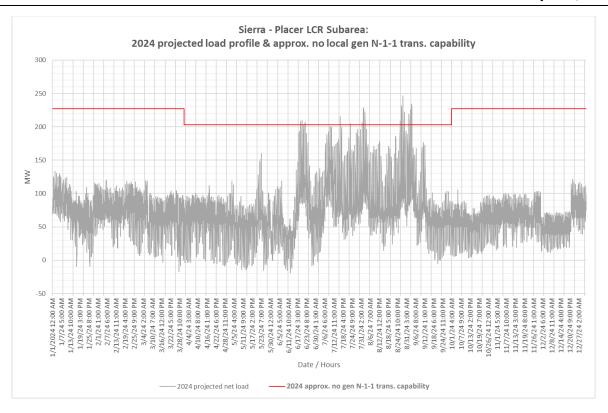

3.2.3.3.4 Placer LCR Sub-area Requirement

Table 3.2-13 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) is 67 MW and for Category C (Multiple Contingency) is 89 MW.

Table 3.2-11 Placer LCR Sub-area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|---------------------|--|--------------------------|
| 2024 | First Limit | В | Drum-Higgins 115 kV | Gold Hill-Placer 115 kV with Chicago Park out of service | 67 |
| 2024 | First Limit | С | Drum–Higgins 115 kV | Gold Hill-Placer #1 115 kV & Gold Hill-Placer #2 115 kV | 89 |

3.2.3.3.5 Effectiveness factors

All units within the Placer Sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7240 posted at: http://www.caiso.com/Documents/2210Z.pdf




3.2.3.4 Pease Sub-area

Pease is Sub-area of the Sierra LCR Area.

3.2.3.4.1 Pease LCR Sub-area Diagram

Figure 3.2-17 Pease LCR Sub-area

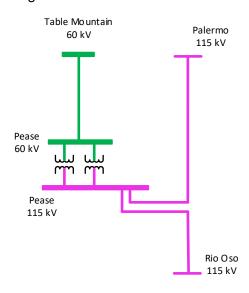

3.2.3.4.2 Pease LCR Sub-area Load and Resources

Table 3.2-12 provides the forecasted load and resources. The list of generators within the LCR sub-area are provided in Attachment A.

Table 3.2-12 Pease LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 166 | Market, Net Seller | 98 | 98 |
| AAEE | -6 | MUNI | 0 | 0 |
| Behind the meter DG | 0 | QF | 38 | 38 |
| Net Load | 160 | Solar | 1 | 0 |
| Transmission Losses | 4 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 164 | Total | 136 | 135 |

3.2.3.4.3 Pease LCR Sub-area Hourly Profiles

Figure 3.2-18 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Pease LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-19 illustrates the forecast 2024 hourly profile



for Pease LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.


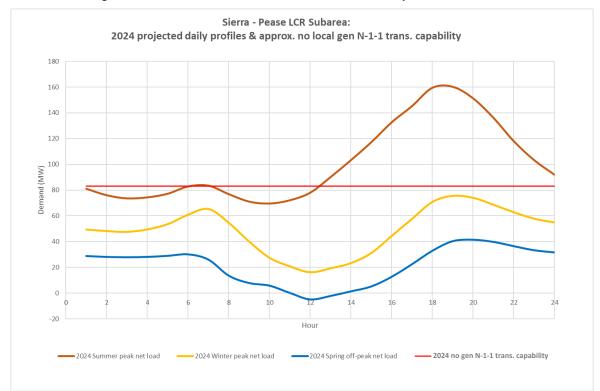


Figure 3.2-18 Pease LCR Sub-area 2024 Peak Day Forecast Profiles

Figure 3.2-19 Pease LCR Sub-area 2024 Forecast Hourly Profiles



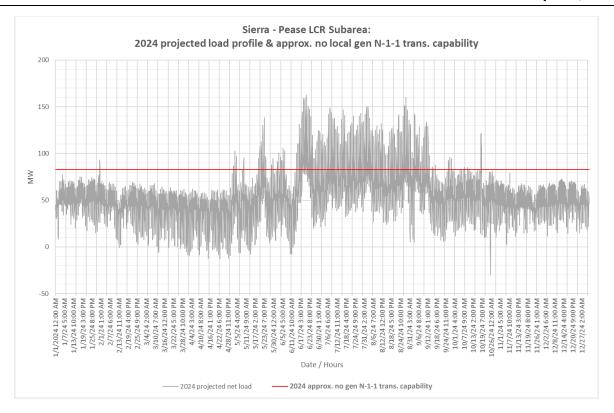

3.2.3.4.4 Pease LCR Sub-area Requirement

Table 3.2-13 identifies the sub-area LCR requirements. The Category B (Single Contingency) LCR requirement is non-binding and the LCR requirement for Category C (Multiple Contingency) is 95 MW.

LCR (MW) Year Limit **Limiting Facility** Category Contingency (Deficiency) 2024 First Limit В Non-binding Non-binding N/A Low voltage at Pease 115 kV Palermo-Pease 115 kV & 2024 First Limit С 95 Bus Pease-Rio Oso 115 kV

Table 3.2-13 Pease LCR Sub-area Requirements

3.2.3.4.5 Effectiveness factors:

All units within the Pease Sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7230 posted at: http://www.caiso.com/Documents/2210Z.pdf



3.2.3.5 Drum-Rio Oso Sub-area

Drum-Rio Oso is a Sub-area of the Sierra LCR Area.


Drum-Rio Oso Sub-area will been eliminated due to the Rio Oso 230/115 kV transformer upgrade project being operational.

3.2.3.6 South of Rio Oso Sub-area

South of Rio Oso is a Sub-area of the Sierra LCR Area.

3.2.3.6.1 South of Rio Oso LCR Sub-area Diagram

Figure 3.2-20 South of Rio Oso LCR Sub-area

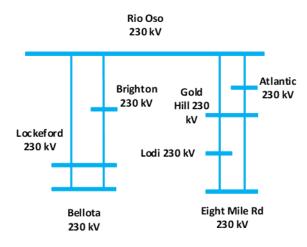

3.2.3.6.2 South of Rio Oso LCR Sub-area Load and Resources

The South of Rio Oso Sub-area does not have a defined load pocket with the limits based upon power flow through the area. Table 3.2-14 provides the forecasted resources in the sub-area. The list of generators within the LCR area are provided in Attachment A.


Table 3.2-14 South of Rio Oso LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | Generation (MW) | NQC | At Peak |
|--|------------------------------------|-----|---------|
| | Market | 122 | 122 |
| | MUNI | 621 | 621 |
| | QF | 0 | 0 |
| The South of Rio Oso Sub-area does not has a defined load pocket with the limits | LTPP Preferred Resources | 0 | 0 |
| based upon power flow through the area. | Existing 20-minute Demand Response | 0 | 0 |
| | Mothballed | 0 | 0 |
| | Total | 743 | 743 |



3.2.3.6.3 South of Rio Oso LCR Sub-area Hourly Profiles

Figure 3.2-21 illustrates the 2017 Category C (Multiple Contingency) post contingency flows on the limiting facility for the summer peak, winter peak and spring off-peak days for the South of Rio Oso Sub-area transmission capability without resources. Figure 3.2-22 illustrates the 2017 hourly profile of the Category C (Multiple Contingency) post contingency flows on the limiting facility for South of Rio Oso LCR Sub-area without resources.




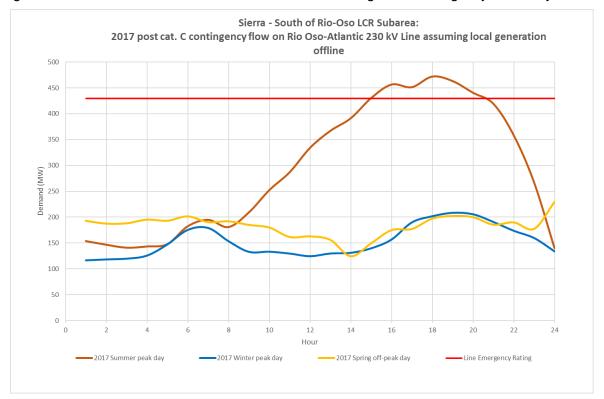


Figure 3.2-22 South of Rio Oso LCR Sub-area 2017 Limiting Post Contingency Hourly Profiles



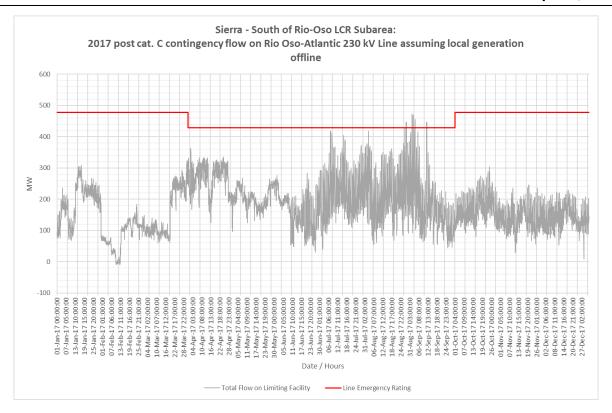

3.2.3.6.4 South of Rio Oso LCR Sub-area Requirement

Table 3.2-15 identifies the sub-area LCR requirements. The LCR requirements for Category B (Single Contingency) and for Category C (Multiple Contingency) is the same 185 MW.

LCR (MW) Year Limit Category **Limiting Facility** Contingency (Deficiency) Rio Oso - Gold Hill 230 kV & 2024 First limit В Rio Oso - Atlantic 230 kV 185 Ralston Unit Rio Oso - Gold Hill 230 kV 2024 First limit С Rio Oso - Atlantic 230 kV 185 Rio Oso - Brighton 230 kV

Table 3.2-15 South of Rio Oso LCR Sub-area Requirements

3.2.3.6.5 Effectiveness factors:

Effectiveness factors for generators in the South of Rio Oso LCR Sub-area are in Attachment B table titled Rio Oso.



For other helpful procurement information please read procedure 2210Z Effectiveness Factors under 7230 (T-165Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.3.7 South of Palermo Sub-area

South of Palermo is a Sub-area of the Sierra LCR Area.

No additional requirement beyond those established by Placer and South of Rio Oso.

3.2.3.8 Sierra Area Overall

3.2.3.8.1 Sierra LCR Area Hourly Profiles

Figure 3.2-23 illustrates the 2017 Category C (Multiple Contingency) post contingency flows on the limiting facility for the summer peak, winter peak and spring off-peak days for the Sierra LCR Area transmission capability without resources. Figure 3.2-24 illustrates the 2017 hourly profile of the Category C (Multiple Contingency) post contingency flows on the limiting facility for Sierra LCR Area without resources.


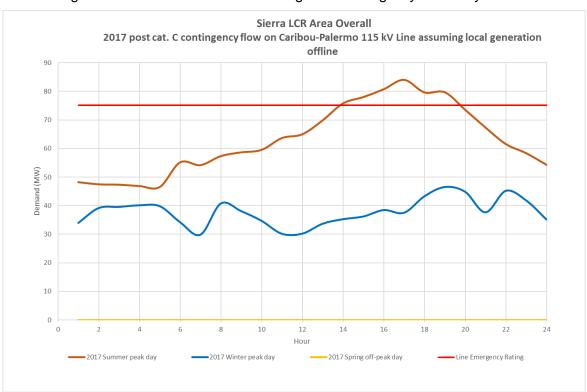


Figure 3.2-23 Sierra Area 2017 Limiting Post Contingency Peak Day Profiles

Figure 3.2-24 South of Table Mountain Sub-area 2017 Limiting Post Contingency Hourly Profiles



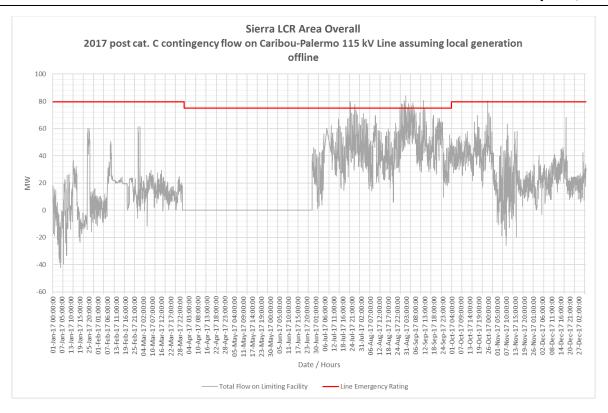

3.2.3.8.2 South of Table Mountain LCR Sub-area Requirement

Table 3.2-16 identifies the sub-area requirements. The LCR requirement for Category B (Single Contingency) is 788 MW and for Category C (Multiple Contingency) is 1304 MW.

LCR (MW) Year Limit Category **Limiting Facility** Contingency (Deficiency) Table Mountain - Rio Oso 230 kV 2024 First limit В Table Mountain - Palermo 230 kV 788 with Belden out of service Table Mountain - Palermo 230 kV 2024 First limit С Table Mountain - Pease 60 kV 1304 Table Mountain - Rio Oso 230 kV

Table 3.2-16 South of Table Mountain LCR Sub-area Requirements

3.2.3.8.3 Effectiveness factors:

Effectiveness factors for generators in the South of Table Mountain LCR Sub-area are in Attachment B table titled South of Table Mountain.

For other helpful procurement information please read procedure 2210Z Effectiveness Factors under 7230 (T-165Z) posted at: http://www.caiso.com/Documents/2210Z.pdf



3.2.3.8.4 Changes compared to last year's results:

The load forecast went up by 42 MW and the total LCR need has decreased by 620 MW due to new transmission projects implementation and generation adjustment within adjacent sub-area after the first contingency.

3.2.4 Stockton Area

The LCR requirement for the Stockton Area is driven by the sum of the requirements for the Tesla-Bellota, Lockeford and Weber sub-areas. Area Definition:

Tesla-Bellota Sub-Area Definition

The transmission facilities that establish the boundary of the Tesla-Bellota sub-area are:

- Bellota 230/115 kV Transformer #1
- Bellota 230/115 kV Transformer #2
- Tesla-Tracy 115 kV Line
- Tesla-Salado 115 kV Line
- Tesla-Salado-Manteca 115 kV line
- Tesla-Schulte #1 115 kV Line
- Tesla-Schulte #2 115kV line

The substations that delineate the Tesla-Bellota Sub-area are:

- Bellota 230 kV is out Bellota 115 kV is in
- Bellota 230 kV is out Bellota 115 kV is in
- Tesla is out Tracy is in
- Tesla is out Salado is in
- Tesla is out Salado and Manteca are in
- Tesla is out Schulte is in
- Tesla is out Schulte is in

Lockeford Sub-Area Definition

The transmission facilities that establish the boundary of the Lockeford Sub-area are:

- Lockeford-Industrial 60 kV line
- Lockeford-Lodi #1 60 kV line
- Lockeford-Lodi #2 60 kV line
- Lockeford-Lodi #3 60 kV line



The substations that delineate the Lockeford Sub-area are:

- Lockeford is out Industrial is in
- Lockeford is out Lodi is in
- Lockeford is out Lodi is in
- Lockeford is out Lodi is in

Weber Sub-Area Definition

The transmission facilities that establish the boundary of the Weber Sub-area are:

- Weber 230/60 kV Transformer #1
- Weber 230/60 kV Transformer #2

The substations that delineate the Weber Sub-area are:

- Weber 230 kV is out Weber 60 kV is in
- Weber 230 kV is out Weber 60 kV is in

3.2.4.1.1 Stockton LCR Area Diagram

The Stockton LCR Area is comprised of the individual noncontiguous Sub-areas with diagrams provided for each of the Sub-areas below.

3.2.4.1.2 Stockton LCR Area Load and Resources

Table 3.2-17 provides the forecast load and resources in the area. The list of generators within the LCR area are provided in Attachment A.

In year 2024 the estimated time of local area peak is 19:10 PM.

At the local area peak time the estimated, behind the meter, solar output is 0.00%.

At the local area peak time the estimated, ISO metered, solar output is 2.00%.

If required, all non-solar technology type resources are dispatched at NQC.

Table 3.2-17 Stockton LCR Area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|---------------------|------|------------------------------------|-----|---------|
| Gross Load | 1360 | Market, Net Seller | 543 | 543 |
| AAEE | -52 | MUNI | 137 | 137 |
| Behind the meter DG | 0 | QF | 18 | 18 |
| Net Load | 1308 | Solar | 1 | 0 |
| Transmission Losses | 21 | Existing 20-minute Demand Response | 0 | 0 |



| Pumps | 0 | Mothballed | 0 | 0 |
|-----------------------|------|------------|-----|-----|
| Load + Losses + Pumps | 1329 | Total | 699 | 698 |

3.2.4.1.3 Stockton LCR Area Hourly Profiles

The Stockton LCR Area is comprised of the individual noncontiguous Sub-areas with profiles provided for each of the Sub-areas below.

3.2.4.1.4 Approved transmission projects modeled

- Weber-Stockton "A" #1 and #2 60 kV Reconductoring
- Ripon 115 kV line
- Vierra 115 kV Looping Project

3.2.4.2 Weber Sub-area

Weber is a Sub-area of the Stockton LCR Area.



3.2.4.2.1 Weber LCR Sub-area Diagram

Legend: Bellota Weber 230 kV 230 kV LCR Sub-Area 60 kV Stockton A Weber 60 kV Santa Fe 60 kV 60 kV Weher 230 kV Santa Fe Hazelto n JCT 60 kV Teda 230 kV

Figure 3.2-25 Weber LCR Sub-area

3.2.4.2.2 Weber LCR Sub-area Load and Resources

Table 3.2-18 provides the forecasted load and resources. The list of generators within the LCR Sub-area are provided in Attachment A.

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 245 | Market | 49 | 49 |
| AAEE | -9 | MUNI | 0 | 0 |
| Behind the meter DG | 0 | QF | 1 | 1 |
| Net Load | 236 | Solar | 0 | 0 |
| Transmission Losses | 2 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 238 | Total | 50 | 50 |

Table 3.2-18 Weber LCR Sub-area 2024 Forecast Load and Resources


3.2.4.2.3 Weber LCR Sub-area Hourly Profiles

Figure 3.2-26 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Weber LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-27 illustrates the forecast 2024 hourly profile



for Weber LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

Figure 3.2-26 Weber LCR Sub-area 2024 Peak Day Forecast Profiles

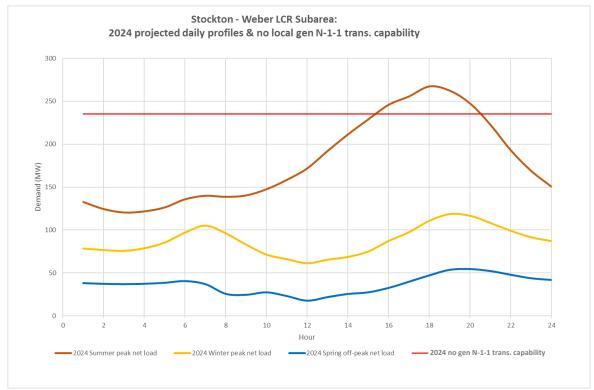



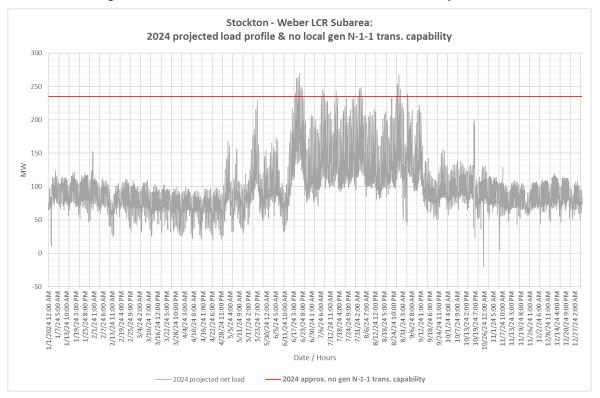


Figure 3.2-27 Weber LCR Sub-area 2024 Forecast Hourly Profiles

3.2.4.2.4 Weber LCR Sub-area Requirement

Table 3.2-19 identifies the sub-area requirements. There is no LCR requirement for Category B (Single Contingency) and the LCR Requirement for a Category C (Multiple Contingency) is 26 MW.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|---------------------------|--------------------------------|--------------------------|
| 2024 | First Limit | В | None | None | 0 |
| 2024 | First Limit | С | Stockton A-Weber #3 60 kV | Stockton A-Weber #1 & #2 60 kV | 26 |

Table 3.2-19 Weber LCR Sub-area Requirements

3.2.4.2.5 Effectiveness factors:

All units within this sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf




3.2.4.3 Lockeford Sub-area

Lockeford is a Sub-area of the Stockton LCR Area.

3.2.4.3.1 Lockeford LCR Sub-area Diagram

Figure 3.2-28 Lockeford LCR Sub-area

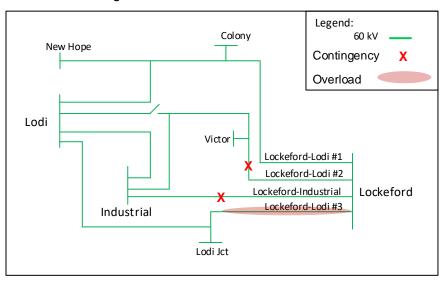

3.2.4.3.2 Lockeford LCR Sub-area Load and Resources

Table 3.2-20 provides the forecasted load and resources. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-20 Lockeford LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 203 | Market | 0 | 0 |
| AAEE | -11 | MUNI | 24 | 24 |
| Behind the meter DG | 0 | QF | 0 | 0 |
| Net Load | 192 | Solar | 0 | 0 |
| Transmission Losses | 1 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 193 | Total | 0 | 0 |


3.2.4.3.3 Lockeford LCR Sub-area Hourly Profiles

Figure 3.2-29 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Lockeford LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-30 illustrates the forecast 2024 hourly profile



for Lockeford LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

Figure 3.2-29 Lockeford LCR Sub-area 2024 Peak Day Forecast Profiles

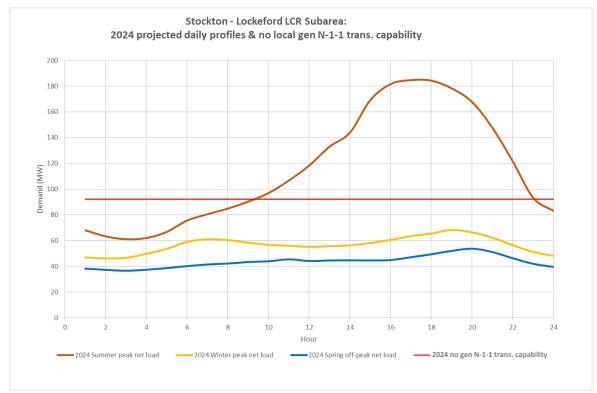



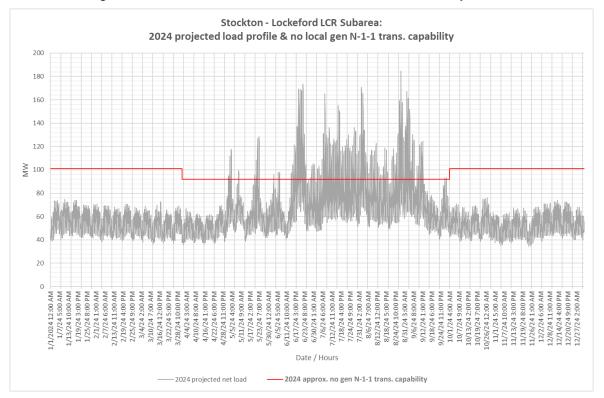


Figure 3.2-30 Lockeford LCR Sub-area 2024 Forecast Hourly Profiles

3.2.4.3.4 Lockeford LCR Sub-area Requirement

Table 3.2-21 identifies the sub-area requirements. The LCR requirement for Category B (Single Contingency) is 53 MW including 29 MW of NQC and at peak deficiency and the LCR Requirement for a Category C (Multiple Contingency) is 102 MW including 78 MW of NQC and at peak deficiency.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|-------------------------|--|-----------------------|
| 2024 | First Limit | В | Lockeford-Lodi #3 60 kV | Lockeford-Industrial 60 kV & Lodi CT | 53 (29) |
| 2024 | First Limit | С | Lockeford-Lodi #3 60 kV | Lockeford-Industrial 60 kV & Lockeford-Lodi #2 60 kV | 102 (78) |

Table 3.2-21 Lockeford LCR Sub-area Requirements

3.2.4.3.5 Effectiveness factors:

All units within this sub-area are needed therefore no effectiveness factor is required.




For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.4.4 Stanislaus Sub-area

Stanislaus is a Sub-area of the Stockton LCR Area.

3.2.4.4.1 Stanislaus LCR Sub-area Diagram

Figure 3.2-31 Stanislaus LCR Sub-area

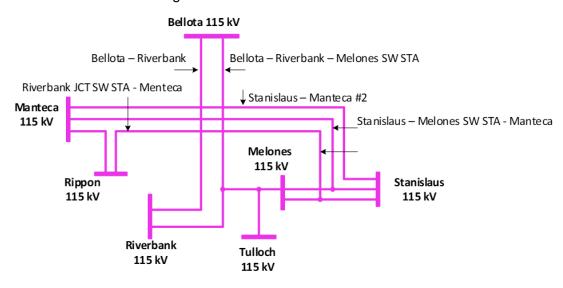

3.2.4.4.2 Stanislaus LCR Sub-area Load and Resources

The Stanislaus Sub-area does not has a defined load pocket with the limits based upon power flow through the area. Table 3.2-22 provides the forecasted resources in the sub-area. The list of generators within the LCR sub-area are provided in Attachment A.

Table 3.2-22 Stanislaus LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | Generation (MW) | NQC | At Peak |
|--|------------------------------------|-----|---------|
| | Market, Net Seller | 100 | 100 |
| | MUNI | 94 | 94 |
| | QF | 16 | 16 |
| The Stanislaus Sub-area does not has a defined load pocket with the limits based | Solar | 1 | 0 |
| upon power flow through the area. | Existing 20-minute Demand Response | 0 | 0 |
| | Mothballed | 0 | 0 |
| | Total | 211 | 210 |



3.2.4.4.3 Stanislaus LCR Sub-area Hourly Profiles

Figure 3.2-32 illustrates the 2017 Category C (Multiple Contingency) post contingency flows on the limiting facility for the summer peak, winter peak and spring off-peak days for the Stanislaus Sub-area transmission capability without resources. Figure 3.2-33 illustrates the 2017 hourly profile of the Category C (Multiple Contingency) post contingency flows on the limiting facility for Stanislaus LCR Sub-area without resources.

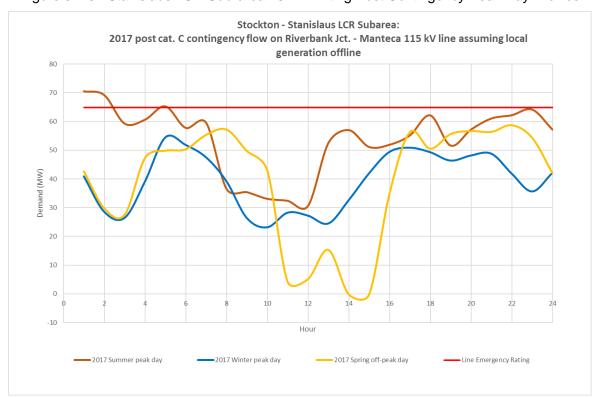


Figure 3.2-32 Stanislaus LCR Sub-area 2017 Limiting Post Contingency Peak Day Profiles



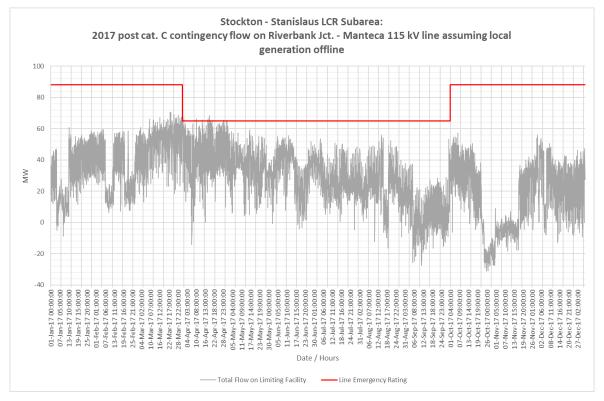


Figure 3.2-33 Stanislaus LCR Sub-area 2017 Limiting Post Contingency Hourly Profiles

3.2.4.4.4 Stanislaus LCR Sub-area Requirement

Table 3.2-23 identifies the sub-area requirements. The LCR requirement for Category B (Single Contingency) and Category C (Multiple Contingency) is the same, 185 MW.

 Year
 Limit
 Category
 Limiting Facility
 Contingency
 LCR (MW) (Deficiency)

 2024
 First limit
 B/C
 Manteca – Ripon 115 kV and Stanislaus PH
 Bellota-Riverbank-Melones 115 kV and Stanislaus PH
 185

Table 3.2-23 Stanislaus LCR Sub-area Requirements

3.2.4.4.5 Effectiveness factors:

All units within this sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.4.5 Tesla-Bellota Sub-area

Tesla-Bellota is a Sub-area of the Stockton LCR Area.



3.2.4.5.1 Tesla-Bellota LCR Sub-area Diagram

Figure 3.2-34 Tesla-Bellota LCR Sub-area

Legend: Vierra 115 kV Thermal Bellota 230 kV 115 kV Energy Tracy Bellota 115 kV Lammers Manteca 115 kV Tesla Kasson 115 kV Schulte -**(**G) 115 kV **GWF** Tracy Stanislaus Units 115 kV Riverbank Melones JCT 115 kV 115 kV Ripon Sala do 115 kV 115 kV Ingram Creek Riverbank 115 kV Tulloch 115 kV 115 kV

Tesla-Bellota LCR Sub-Area in 2024

3.2.4.5.2 Tesla Bellota LCR Sub-area Load and Resources

Table 3.2-24 provides the forecasted load and resources. The list of generators within the LCR Sub-area are provided in Attachment A.

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 912 | Market, Net Seller | 495 | 495 |
| AAEE | -31 | MUNI | 113 | 113 |
| Behind the meter DG | 0 | QF | 16 | 16 |
| Net Load | 881 | LTPP Preferred Resources | 1 | 0 |
| Transmission Losses | 18 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 899 | Total | 625 | 624 |

Table 3.2-24 Tesla-Bellota LCR Sub-area 2024 Forecast Load and Resources

All of the resources needed to meet the Stanislaus sub-area count towards the Tesla-Bellota sub-area LCR need.



3.2.4.5.3 Tesla-Bellota LCR Sub-area Hourly Profiles

Figure 3.2-35 illustrates the 2017 Category C (Multiple Contingency) post contingency flows on the limiting facility for the summer peak, winter peak and spring off-peak days for the Tesla-Bellota Sub-area transmission capability without resources. Figure 3.2-36Figure 3.2-22 illustrates the 2017 hourly profile of the Category C (Multiple Contingency) post contingency flows on the limiting facility for Tesla-Bellota LCR Sub-area without resources.

Figure 3.2-35 Tesla-Bellota LCR Sub-area 2017 Limiting Post Contingency Peak Day Profiles

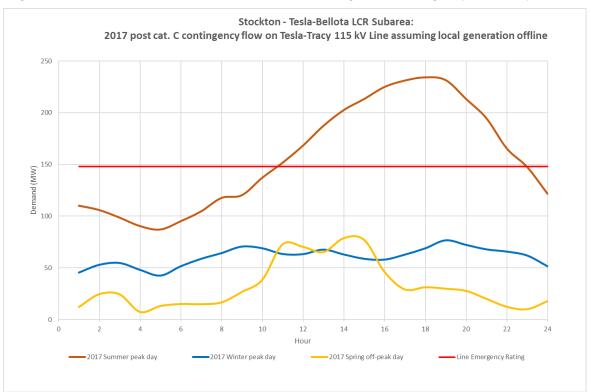




Figure 3.2-36 Tesla-Bellota LCR Sub-area 2017 Limiting Post Contingency Hourly Profiles

3.2.4.5.4 Tesla-Bellota LCR Sub-area Requirement

Table 3.2-25 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) is 364 MW and for Category C (Multiple Contingency) is 881 MW including a 256 MW of NQC deficiency or 257 MW of at peak deficiency.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-----------------|----------|-----------------------|---|----------------------------|
| 2024 | First limit | В | Tesla – Vierra 115 kV | Tesla – Tracy 115 kV & GWF Tracy #3 unit | 364 |
| 2024 | First limit | С | Tesla – Tracy 115 kV | Schulte – Lammers 115 kV & Tesla – Vierra 115 kV | 756 (131 NQC/ 132 Peak) |
| 2024 | Second limit | С | Tesla – Vierra 115 kV | Schulte – Lammers 115 kV & Schulte-Kasson-Manteca 115 kV | 552 (256 NQC/ 257 Peak) |
| 2024 | Combined | С | N/A | N/A | 881 (256 NQC/ 257 Peak) |

Table 3.2-25 Tesla-Bellota LCR Sub-area Requirements

3.2.4.5.5 Effectiveness factors:

All units within this sub-area are needed therefore no effectiveness factor is required.



For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.4.6 Stockton Overall

3.2.4.6.1 Stockton LCR Area Overall Requirement

The requirement for this area is driven by the sum of requirements for the Tesla-Bellota, Lockeford and Weber sub-areas. Table 3.2-26 identifies the area requirements. The LCR requirement for Category B (Single Contingency) is 417 MW including 29 MW of NQC and at peak deficiency and for Category C (Multiple Contingency) is 1009 MW with a 334 MW NQC deficiency or 335 MW at peak deficiency.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------|----------|-------------------|-------------|--------------------------|
| 2024 | | В | Stockton Overall | | 417 (29 NQC/ 29 Peak) |
| 2024 | | С | Stockton Overall | | 1009 (334 NQC/ 335 Peak) |

Table 3.2-26 Stockton LCR Sub-area Overall Requirements

3.2.4.6.2 Changes compared to 2023 LCT study

The load forecast went up by 104 MW and the total LCR need has increased by 232 MW due to load increase and the fact that the load has a much higher effectiveness factor than the most effective resource.

3.2.5 Greater Bay Area

3.2.5.1 Area Definition:

The transmission tie lines into the Greater Bay Area are:

- Lakeville-Sobrante 230 kV
- Ignacio-Sobrante 230 kV
- Parkway-Moraga 230 kV
- Bahia-Moraga 230 kV
- Lambie SW Sta-Vaca Dixon 230 kV
- Peabody-Contra Costa P.P. 230 kV
- Tesla-Kelso 230 kV
- Tesla-Delta Switching Yard 230 kV



- Tesla-Pittsburg #1 230 kV
- Tesla-Pittsburg #2 230 kV
- Tesla-Newark #1 230 kV
- Tesla-Newark #2 230 kV
- Tesla-Ravenswood 230 kV
- Tesla-Metcalf 500 kV
- Moss Landing-Metcalf 500 kV
- Moss Landing-Metcalf #1 230 kV
- Moss Landing-Metcalf #2 230 kV
- Oakdale TID-Newark #1 115 kV
- Oakdale TID-Newark #2 115 kV

The substations that delineate the Greater Bay Area are:


- · Lakeville is out Sobrante is in
- Ignacio is out Sobrante is in
- Parkway is out Moraga is in
- Bahia is out Moraga is in
- Lambie SW Sta is in Vaca Dixon is out
- Peabody is out Contra Costa P.P. is in
- Tesla is out Kelso is in
- Tesla is out Delta Switching Yard is in
- Tesla is out Pittsburg is in
- Tesla is out Pittsburg is in
- Tesla is out Newark is in
- Tesla is out Newark is in
- Tesla is out Ravenswood is in
- Tesla is out Metcalf is in
- Moss Landing is out Metcalf is in
- Moss Landing is out Metcalf is in
- Moss Landing is out Metcalf is in
- Oakdale TID is out Newark is in



Oakdale TID is out Newark is in

3.2.5.1.1 Greater Bay LCR Area Diagram

Figure 3.2-37 Greater Bay LCR Area

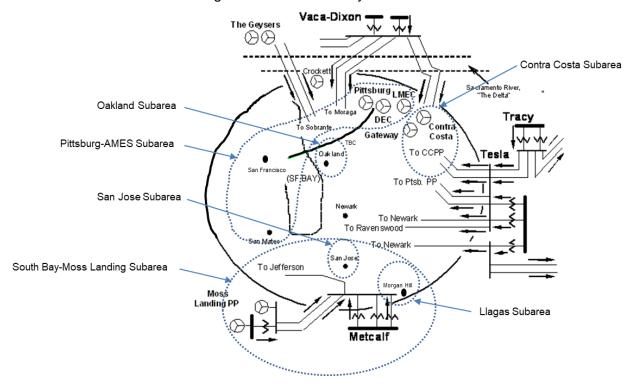

3.2.5.1.2 Greater Bay LCR Area Load and Resources

Table 3.2-27 provides the forecasted load and resources. The list of generators within the LCR area are provided in Attachment A.

In year 2024 the estimated time of local area peak is 17:50 PM.

At the local area peak time the estimated, behind the meter, solar output is 14.46%.

At the local area peak time the estimated, ISO metered, solar output is 44.00%.

If required, all technology type resources, including solar, are dispatched at NQC.

Table 3.2-27 Greater Bay Area LCR Area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|---------------------|-------|--|------|---------|
| Gross Load | 10650 | Market, Net Seller, Battery, Wind, Solar | 6450 | 6450 |
| AAEE | -366 | MUNI | 382 | 382 |
| Behind the meter DG | -362 | QF | 235 | 235 |



| Net Load | 9922 | LTPP Preferred Resources | 573 | 573 |
|-----------------------|-------|------------------------------------|------|------|
| Transmission Losses | 241 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 264 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 10427 | Total | 7640 | 7640 |

3.2.5.1.3 Approved transmission projects modeled

- Oakland Clean Energy Initiative Project (Oakland CTs are assumed retired)
- Morgan Hill Area Reinforcement (revised scope)
- Metcalf-Piercy & Swift and Newark-Dixon Landing 115 kV Upgrade
- East Shore-Oakland J 115 kV Reconductoring Project
- Vaca Dixon-Lakeville 230 kV Corridor Series Compensation
- Metcalf-Evergreen 115 kV Line Reconductoring
- Trimble-San Jose B 115 kV Line Limiting Facility Upgrade
- Trimble-San Jose B 115 kV Series Reactor
- Moss Landing-Panoche 230 kV Path Upgrade
- South of San Mateo Capacity Increase

3.2.5.2 Llagas Sub-area

Llagas is a Sub-area of the Greater Bay LCR Area.

3.2.5.2.1 Llagas LCR Sub-area Diagram

Figure 3.2-38 Llagas LCR Sub-area



3.2.5.2.2 Llagas LCR Sub-area Load and Resources

Table 3.2-28 provides the forecasted load and resources. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-28 Llagas LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 195 | Market, Net Seller, Battery, Solar | 246 | 246 |
| AAEE | -7 | MUNI | 0 | 0 |
| Behind the meter DG | -11 | QF | 0 | 0 |
| Net Load | 177 | LTPP Preferred Resources | 75 | 75 |
| Transmission Losses | 0 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 177 | Total | 321 | 321 |



3.2.5.2.3 Llagas LCR Sub-area Hourly Profiles

Figure 3.2-39 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Llagas LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-40 illustrates the forecast 2024 hourly profile for Llagas LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

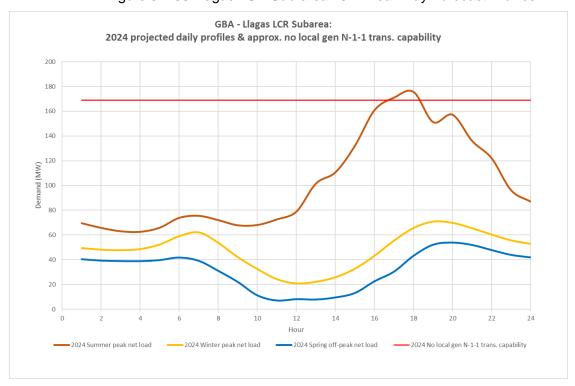


Figure 3.2-39 Llagas LCR Sub-area 2024 Peak Day Forecast Profiles



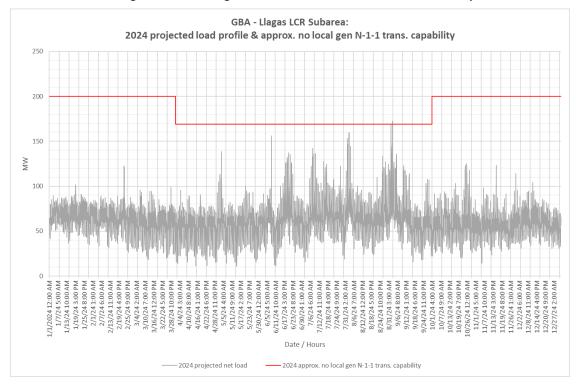


Figure 3.2-40 Llagas LCR Sub-area 2024 Forecast Hourly Profiles

3.2.5.2.4 Llagas LCR Sub-area Requirement

Table 3.2-29 identifies the sub-area LCR requirements. The is no LCR requirement for Category B (Single Contingency) and the LCR requirement for Category C (Multiple Contingency) is 16 MW.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|-----------------------|---|-----------------------|
| 2024 | First limit | В | None | None | 0 |
| 2024 | First limit | С | Metcalf-Llagas 115 kV | Metcalf-Morgan Hill 115 kV & Morgan Hill-Green Valley 115 kV | 16 |

Table 3.2-29 Llagas LCR Sub-area Requirements

3.2.5.2.5 Effectiveness factors:

All units within this sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf



3.2.5.3 San Jose Sub-area

San Jose is a Sub-area of the Greater Bay LCR Area.

3.2.5.3.1 San Jose LCR Sub-area Diagram

The San Jose LCR Sub-area is identified in Figure 3.2-37.

3.2.5.3.2 San Jose LCR Sub-area Load and Resources

Table 3.2-30 provides the forecast load and resources in San Jose LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-30 San Jose LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|------|------------------------------------|-----|---------|
| Gross Load | 2639 | Market, Net Seller, Battery, Solar | 338 | 338 |
| AAEE | -111 | MUNI | 202 | 202 |
| Behind the meter DG | -70 | QF | 0 | 0 |
| Net Load | 2458 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 69 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 2527 | Total | 540 | 540 |

3.2.5.3.3 San Jose LCR Sub-area Hourly Profiles

Figure 3.2-41 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the San Jose LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-42 illustrates the forecast 2024 hourly profile for San Jose LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.



Figure 3.2-41 San Jose LCR Sub-area 2024 Peak Day Forecast Profiles


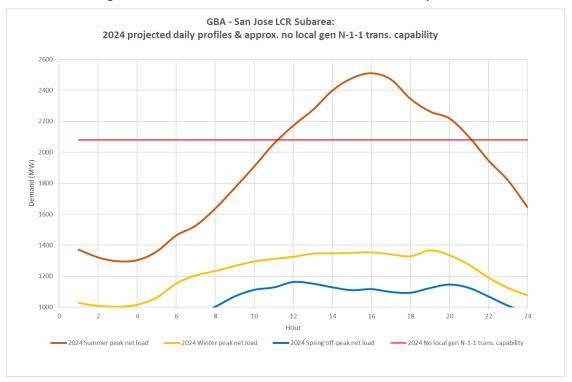


Figure 3.2-42 San Jose LCR Sub-area 2024 Forecast Hourly Profiles



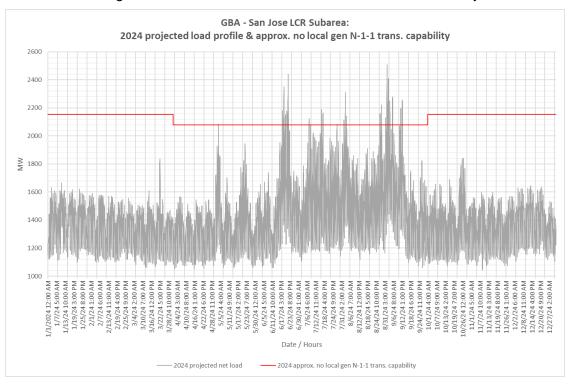

3.2.5.3.4 San Jose LCR Sub-area Requirement

Table 3.2-31 identifies the sub-area LCR requirements. There is no LCR requirement for Category B (Single Contingency) and the LCR requirement for Category C (Multiple Contingency) is 462 MW.

Table 3.2-31 San Jose LCR Sub-area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|------------------------------|--|--------------------------|
| 2024 | First limit | В | No requirement | | |
| 2024 | First limit | С | El Patio-San Jose 'A' 115 kV | Stone-Evergreen-Metcalf 115 kV & Metcalf-Evergreen 115 kV | 462 |

3.2.5.3.5 Effectiveness factors:

Effectiveness factors for generators in the San Jose LCR Sub-area are in Attachment B table titled San Jose.

For other helpful procurement information please read procedure 2210Z Effectiveness Factors under 7320 (T-165Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.5.4 South Bay-Moss Landing Sub-area

South Bay-Moss Landing is a Sub-area of the Greater Bay LCR Area.

3.2.5.4.1 South Bay-Moss Landing LCR Sub-area Diagram

The South Bay-Moss Landing LCR Sub-area is identified in Figure 3.2-38.

3.2.5.4.2 South Bay-Moss Landing LCR Sub-area Load and Resources

Table 3.2-32 provides the forecast load and resources in South Bay-Moss Landing LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-32 South Bay-Moss Landing LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|---------------------|------|------------------------------------|------|---------|
| Gross Load | 4283 | Market, Net Seller, Battery, Solar | 2175 | 2175 |
| AAEE | -165 | MUNI | 202 | 202 |
| Behind the meter DG | -139 | QF | 0 | 0 |
| Net Load | 3979 | LTPP Preferred Resources | 558 | 558 |



| Transmission Losses | 112 | Existing 20-minute Demand Response | 0 | 0 |
|-----------------------|------|------------------------------------|------|------|
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 4091 | Total | 2935 | 2935 |

3.2.5.4.3 South Bay-Moss Landing LCR Sub-area Hourly Profiles

Figure 3.2-43 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the South Bay-Moss Landing LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-44 illustrates the forecast 2024 hourly profile for South Bay-Moss Landing LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

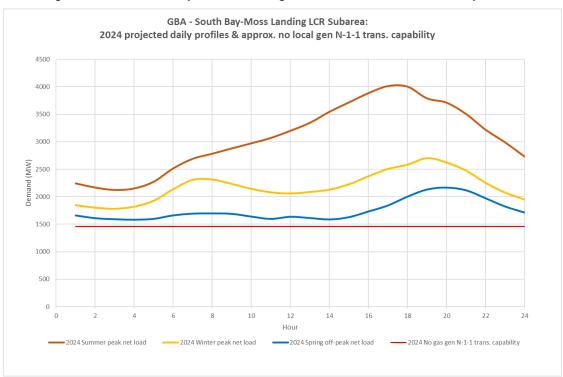


Figure 3.2-43 South Bay-Moss Landing LCR Sub-area 2024 Peak Day Forecast Profiles



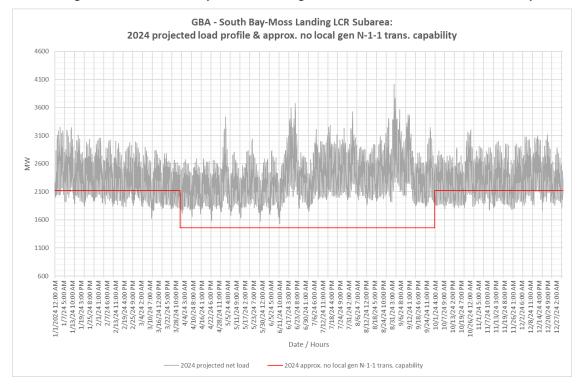


Figure 3.2-44 South Bay-Moss Landing LCR Sub-area 2024 Forecast Hourly Profiles

3.2.5.4.4 South Bay-Moss Landing LCR Sub- Requirement

Table 3.2-33 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) is non-binding and the LCR Requirement for a Category C (Multiple Contingency) is 1781 MW.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|---------------------------------|---|--------------------------|
| 2024 | First Limit | В | Non-binding | Non-binding | N/A |
| 2024 | First Limit | С | Moss Landing-Las Aguilas 230 kV | Tesla-Metcalf 500 kV and Moss Landing-Los Banos 500 kV | 1781 |

Table 3.2-33 South Bay-Moss Landing LCR Sub-area Requirements

3.2.5.4.5 Effectiveness factors:

Effectiveness factors for generators in the South Bay-Moss Landing LCR Sub-area are in Attachment B table titled <u>South Bay-Moss Landing</u>.




For other helpful procurement information please read procedure 2210Z Effectiveness Factors under 7320 (T-165Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.5.5 Oakland Sub-area

Oakland is a Sub-area of the Greater Bay LCR Area.

3.2.5.5.1 Oakland LCR Sub-area Diagram

Figure 3.2-45 Oakland LCR Sub-area

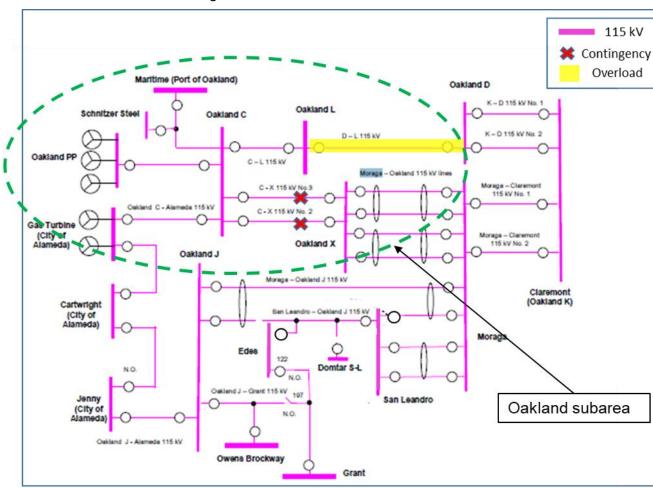

3.2.5.5.2 Oakland LCR Sub-area Load and Resources

Table 3.2-34 provides the forecast load and resources in Oakland LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-34 Oakland LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | Generation (MW) | NQC | At Peak |
|-----------|-----------------|-----|---------|
|-----------|-----------------|-----|---------|



| Gross Load | 196 | Market, Net Seller, Battery, Solar | 165 | 165 |
|-----------------------|-----|------------------------------------|-----|-----|
| AAEE | -8 | MUNI | 48 | 48 |
| Behind the meter DG | -8 | QF | 0 | 0 |
| Net Load | 180 | LTPP Preferred Resources | 15 | 15 |
| Transmission Losses | 0 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 180 | Total | 228 | 228 |

3.2.5.5.3 Oakland LCR Sub-area Hourly Profiles

Figure 3.2-46 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Oakland LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-47 illustrates the forecast 2024 hourly profile for Oakland LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

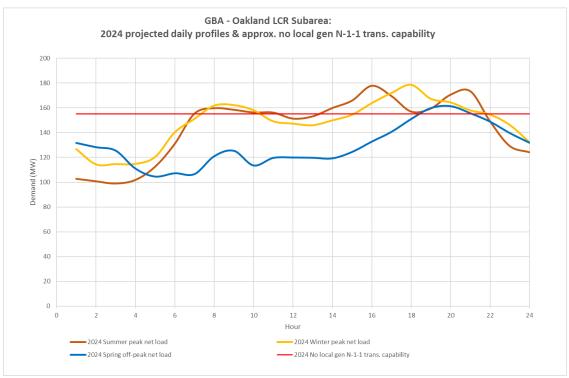


Figure 3.2-46 Oakland LCR Sub-area 2024 Peak Day Forecast Profiles



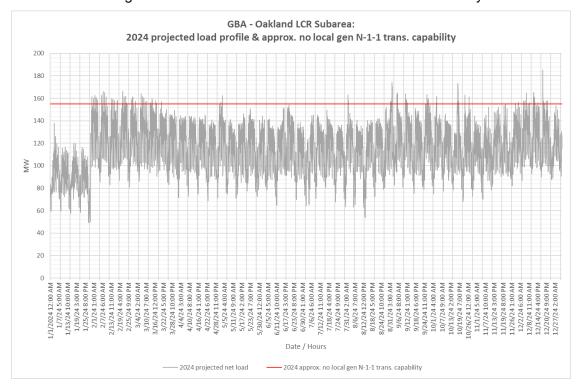


Figure 3.2-47 Oakland LCR Sub-area 2024 Forecast Hourly Profiles

3.2.5.5.4 Oakland LCR Sub-area Requirement

Table 3.2-35 identifies the sub-area requirements. There is no LCR requirement for Category B (Single Contingency) and the LCR requirement for Category C (Multiple Contingency) is 27 MW.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|----------------------------------|----------------------------|-----------------------|
| 2024 | First limit | В | None | None | 0 |
| 2024 | First limit | С | Moraga-Claremont #2 115 kV cable | Oakland C-X #2 & #3 115 kV | 27 ⁹ |

Table 3.2-35 Oakland LCR Sub-area Requirements

3.2.5.5.5 Effectiveness factors:

All units within the Oakland Sub-area have the same effectiveness factor.

⁹ This requirement doesn't reflect potential load transfer that could occur following the first contingency. An approved operating procedure including this load transfer could reduce this requirement to about 6 MW.




For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.5.6 Ames-Pittsburg-Oakland Sub-areas Combined

Ames-Pittsburg-Oakland is a Sub-area of the Greater Bay LCR Area.

3.2.5.6.1 Ames-Pittsburg-Oakland LCR Sub-area Diagram

Figure 3.2-48 Ames-Pittsburg-Oakland LCR Sub-area

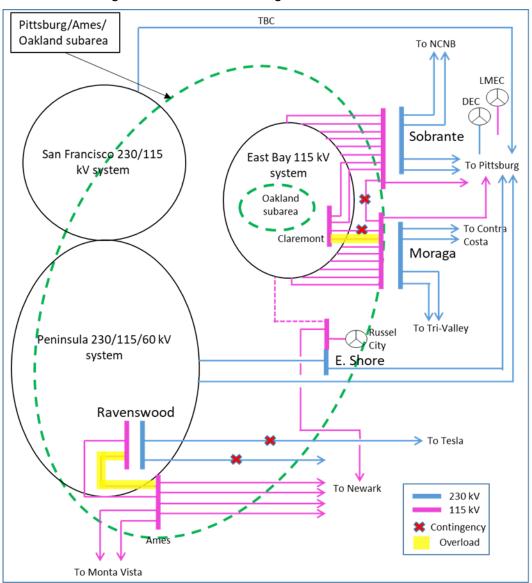

3.2.5.6.2 Ames-Pittsburg-Oakland LCR Sub-area Load and Resources

Table 3.2-36 provides the forecast load and resources in Ames-Pittsburg-Oakland LCR Subarea in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.



Table 3.2-36 Ames-Pittsburg-Oakland LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | Generation (MW) | NQC | At Peak |
|--|------------------------------------|------|---------|
| | Market, Net Seller, Battery, Solar | 2189 | 2189 |
| | MUNI | 48 | 48 |
| The Ames-Pittsburg-Oakland Sub-area | QF | 233 | 233 |
| does not has a defined load pocket with the limits based upon power flow through the | LTPP Preferred Resources | 15 | 15 |
| area. | Existing 20-minute Demand Response | 0 | 0 |
| | Mothballed | 0 | 0 |
| | Total | 2485 | 2485 |

3.2.5.6.3 Ames-Pittsburg-Oakland LCR Sub-area Hourly Profiles

The Ames-Pittsburg-Oakland Sub-area does not has a defined load pocket with the limits based upon power flow through the area. There are two limiting paths within the Ames-Pittsburg-Oakland Sub-area, Moraga-Claremont #2 115 kV line and Ames-Ravenswood #1 115 kV line.



Figure 3.2-49 illustrates the 2017 Category C (Multiple Contingency) post contingency flows on the limiting facility (Moraga-Claremont #2 115 kV line) for the summer peak, winter peak and spring off-peak days for the Ames-Pittsburg-Oakland Sub-area transmission capability without resources. Figure 3.2-50 illustrates the 2017 hourly profile of the Category C (Multiple Contingency) post contingency flows on the limiting facility (Moraga-Claremont #2 115 kV line) for Ames-Pittsburg-Oakland LCR Sub-area without resources.

Figure 3.2-51 illustrates the 2017 Category C (Multiple Contingency) post contingency flows on the limiting facility (Ames-Ravenswood #1 115 kV line) for the summer peak, winter peak and spring off-peak days for the Ames-Pittsburg-Oakland Sub-area transmission capability without resources. Figure 3.2-52 illustrates the 2017 hourly profile of the Category C (Multiple Contingency) post contingency flows on the limiting facility (Ames-Ravenswood #1 115 kV line) for Ames-Pittsburg-Oakland LCR Sub-area without resources.



Figure 3.2-49 Ames-Pittsburg-Oakland LCR Sub-area 2017 Limiting Post Contingency Peak Day Profiles (Moraga-Claremont #2 115 kV line)

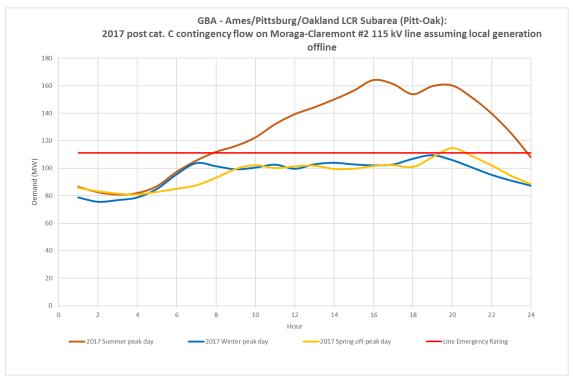


Figure 3.2-50 Ames-Pittsburg-Oakland LCR Sub-area 2017 Limiting Post Contingency Hourly Profiles (Moraga-Claremont #2 115 kV line)

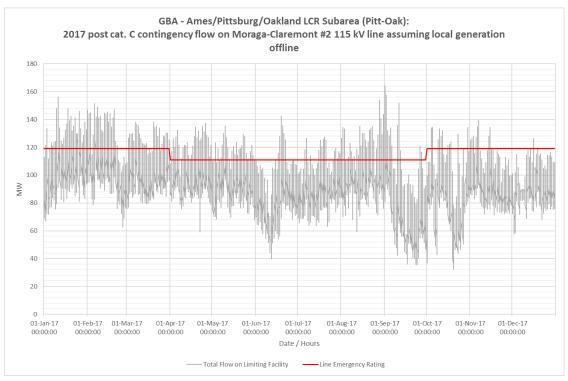




Figure 3.2-51 Ames-Pittsburg-Oakland LCR Sub-area 2017 Limiting Post Contingency Peak Day Profiles (Ames-Ravenswood #1 115 kV line)


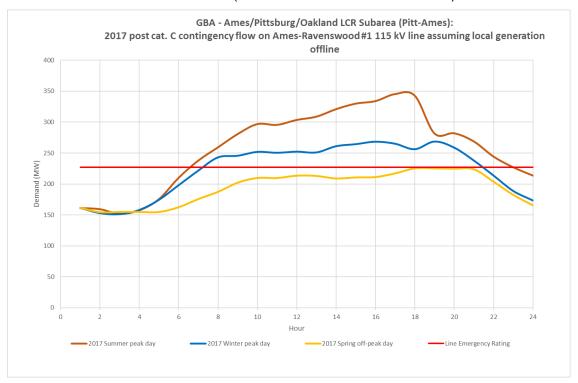


Figure 3.2-52 Ames-Pittsburg-Oakland LCR Sub-area 2017 Limiting Post Contingency Hourly Profiles (Ames-Ravenswood #1 115 kV line)



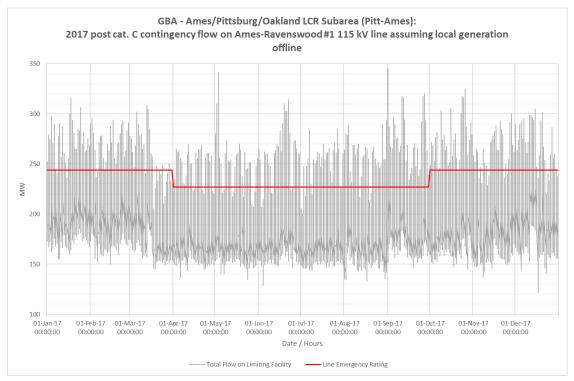

3.2.5.6.4 Ames-Pittsburg-Oakland LCR Sub-area Requirement

Table 3.2-37 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) is non-binding and the LCR Requirement for a Category C (Multiple Contingency) is 1563 MW.

Table 3.2-37 Ames-Pittsburg-Oakland LCR Sub-area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------------------|-------------|---------------------------------|--|--|--------------------------|
| 2024 | First limit | В | Non-binding | Non-binding | |
| 2024 | First limit | Firet limit | Ames-Ravenswood #1 115 kV line Tesla-Ravens | Newark-Ravenswood 230 kV & Tesla-Ravenswood 230 kV | 1563 |
| 2024 First limit | | Moraga-Claremont #2 115 kV line | Moraga-Sobrante 115 kV & Moraga-Claremont #1 115 kV | .550 | |

3.2.5.6.5 **Effectiveness factors:**

Effectiveness factors for generators in the Ames-Pittsburg-Oakland LCR Sub-area are in Attachment B table titled Ames/Pittsburg/Oakland.

For other helpful procurement information please read procedure 2210Z Effectiveness Factors under 7320 (T-165Z) posted at: http://www.caiso.com/Documents/2210Z.pdf


3.2.5.7 Contra Costa Sub-area

Contra Costa is a Sub-area of the Greater Bay LCR Area.

3.2.5.7.1 Contra Costa LCR Sub-area Diagram

Figure 3.2-53 Contra Costa LCR Sub-area



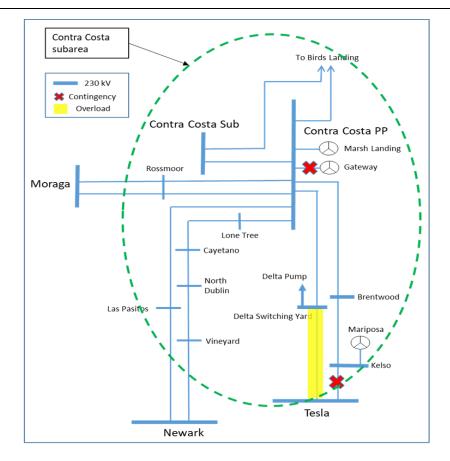

3.2.5.7.2 Contra Costa LCR Sub-area Load and Resources

Table 3.2-38 provides the forecast load and resources in Contra Costa LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-38 Contra Costa LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | Generation (MW) | NQC | At Peak |
|--|--|------|---------|
| | Market, Net Seller, Battery, Wind, Solar | 2055 | 2055 |
| | MUNI | 127 | 127 |
| | QF | 0 | 0 |
| The Contra Costa Sub-area does not has a defined load pocket with the limits based | LTPP Preferred Resources | 0 | 0 |
| upon power flow through the area. | Existing 20-minute Demand Response | 0 | 0 |
| | Mothballed | 0 | 0 |
| | Total | 2182 | 2182 |



3.2.5.7.3 Contra Costa LCR Sub-area Hourly Profiles

The Contra Costa Sub-area does not has a defined load pocket with the limits based upon power flow through the area.

Figure 3.2-54 illustrates the 2017 Category C (Multiple Contingency) post contingency flows on the limiting facility for the summer peak, winter peak and spring off-peak days for the Contra Costa Sub-area transmission capability without resources. Figure 3.2-55 illustrates the 2017 hourly profile of the Category C (Multiple Contingency) post contingency flows on the limiting facility for Contra Costa LCR Sub-area without resources.


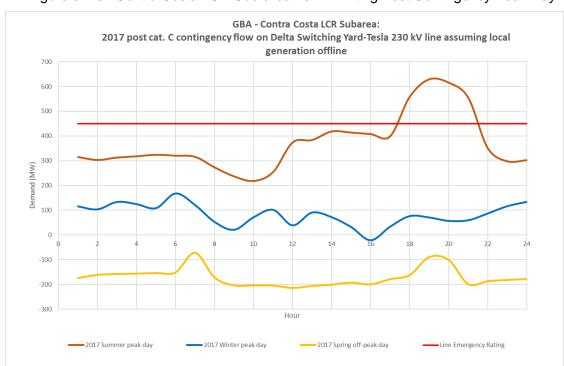


Figure 3.2-54 Contra Costa LCR Sub-area 2017 Limiting Post Contingency Peak Day Profiles

Figure 3.2-55 Contra Costa LCR Sub-area 2017 Limiting Post Contingency Hourly Profiles



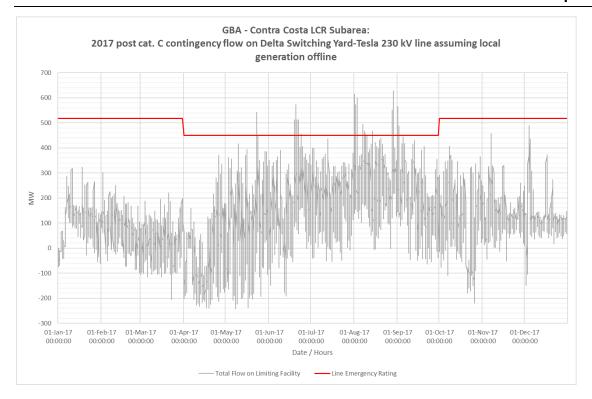

3.2.5.7.4 Contra Costa LCR Sub-area Requirement

Table 3.2-39 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) and Category C (Multiple Contingency) is the same 1051 MW.

 Year
 Limit
 Category
 Limiting Facility
 Contingency
 LCR (MW) (Deficiency)

 2024
 First limit
 B/C
 Delta Switching Yard-Tesla 230 kV
 Kelso-Tesla 230 kV line and Gateway unit
 1051

Table 3.2-39 Contra Costa LCR Sub-area Requirements

3.2.5.7.5 Effectiveness factors:

For other helpful procurement information please read procedure 2210Z Effectiveness Factors under 7230 (T-165Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.5.8 Bay Area overall

3.2.5.8.1 Greater Bay LCR Area Overall Requirement

Table 3.2-40 identifies the area LCR requirements. The LCR requirement for Category B (Single Contingency) is 3494 MW and for Category C (Multiple Contingency) is 4395 MW.

Table 3.2-40 Bay Area LCR Overall area Requirements



| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|-------------------------------------|--------------------------------------|--------------------------|
| 2024 | First limit | В | Reactive margin | Tesla-Metcalf 500 kV line & DEC unit | 3494 |
| 2024 | First Limit | С | Aggregate of Sub-area requirements. | | 4395 |

3.2.5.8.2 Changes compared to 2023 requirements

Compared to 2023 load forecast went down by 14 MW and total LCR need went down by 357 MW mainly due to new transmission projects.

3.2.6 Greater Fresno Area

3.2.6.1 Area Definition:

The transmission facilities coming into the Greater Fresno area are:

- Gates-Mustang #1 230 kV
- Gates-Mustang #2 230 kV
- Gates #5 230/70 kV Transformer Bank
- Mercy Spring 230 /70 Bank # 1
- Los Banos #3 230/70 Transformer Bank
- Los Banos #4 230/70 Transformer Bank
- Warnerville-Wilson 230kV
- Melones-North Merced 230 kV line
- Panoche-Tranquility #1 230 kV
- Panoche-Tranquility #2 230 kV
- Panoche #1 230/115 kV Transformer Bank
- Panoche #2 230/115 kV Transformer Bank
- Corcoran-Smyrna 115kV
- Coalinga #1-San Miguel 70 kV

The substations that delineate the Greater Fresno area are:

- Gates is out Mustang is in
- Gates is out Mustang is in



- Gates 230 is out Gates 70 is in
- Mercy Springs 230 is out Mercy Springs 70 is in
- Los Banos 230 is out Los Banos 70 is in
- Los Banos 230 is out Los Banos 70 is in
- Warnerville is out Wilson is in
- · Melones is out North Merced is in
- Panoche is out Tranquility #1 is in
- Panoche is out Tranquility #2 is in
- Panoche 230 is out Panoche 115 is in
- Panoche 230 is out Panoche 115 is in
- Corcoran is in Smyrna is out
- Coalinga is in San Miguel is out

3.2.6.1.2 Fresno LCR Area Diagram

Melones Warner ville Overall Fresno Sub Wilson Area Los Banos Gregg Helms Kearney Herndon Mcmullin Panoche McCall Helm Kngsbrg Gates 70 kV Coalnga San Miguel Corcoran Henrietta Alpaugh

Figure 3.2-56 Fresno LCR Area



3.2.6.1.3 Fresno LCR Area Load and Resources

In year 2024 the estimated time of local area peak is 18:40 PM.

At the local area peak time the estimated, behind the meter, solar output is 0.00%.

At the local area peak time the estimated, ISO metered, solar output is 12.00%.

If required, all non-solar technology type resources are dispatched at NQC.

Table 3.2-41 provides the forecast load and resources in Fresno LCR Area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

In year 2024 the estimated time of local area peak is 18:40 PM.

At the local area peak time the estimated, behind the meter, solar output is 0.00%.

At the local area peak time the estimated, ISO metered, solar output is 12.00%.

If required, all non-solar technology type resources are dispatched at NQC.

Table 3.2-41 Fresno LCR Area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|------|------------------------------------|------|---------|
| Gross Load | 3342 | Market, Net Seller, Battery | 2698 | 2698 |
| AAEE | -128 | MUNI | 199 | 199 |
| Behind the meter DG | -3 | QF | 23 | 23 |
| Net Load | 3211 | Solar | 393 | 0 |
| Transmission Losses | 125 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 35 | 0 |
| Load + Losses + Pumps | 3336 | Total | 3348 | 2920 |

3.2.6.1.4 Approved transmission projects modeled

- Borden 230 kV Voltage Support (Feb 2019)
- Kearney-Herndon 230 kV Line Reconductoring (May 2019)
- Gates #12 500/230 Transformer Bank addition (Dec 2019)
- Wilson 115 kV SVC (Dec 2019)
- Northern Fresno 115 kV Reinforcement (Revised scope Mar 2020)
- Wilson-Legrand 115 kV Reconductoring (Dec 2020)
- Panoche-Oro Loma 115 kV Reconductoring (Dec 2020)
- Oro Loma 70 kV Reinforcement (May 2020)




- Reedley 70 kV Reinforcement Projects (Dec 2021)
- Herndon-Bullard Reconductoring Projects (Jan 2021)
- Wilson 115 kV Area Reinforcement (Dec 2023)
- Bellota-Warnerville 230 kV Line Reconductoring (Dec 2023)

3.2.6.2 Hanford Sub-area

Hanford is a Sub-area of the Fresno LCR Area.

3.2.6.2.1 Hanford LCR Sub-area Diagram

Figure 3.2-57 Hanford LCR Sub-area

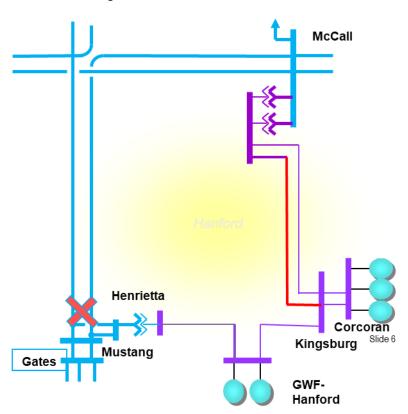

3.2.6.2.2 Hanford LCR Sub-area Load and Resources

Table 3.2-42 provides the forecast load and resources in Hanford LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-42 Hanford LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|------------|-----|-----------------------------|-----|---------|
| Gross Load | 235 | Market, Net Seller, Battery | 133 | 133 |
| AAEE | -9 | MUNI | 0 | 0 |



| Behind the meter DG | -3 | QF | 0 | 0 |
|-----------------------|-----|------------------------------------|-----|-----|
| Net Load | 223 | Solar | 37 | 0 |
| Transmission Losses | 7 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 230 | Total | 170 | 133 |

3.2.6.2.3 Hanford LCR Sub-area Hourly Profiles

Figure 3.2-58 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Hanford LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-59 illustrates the forecast 2024 hourly profile for Hanford LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.


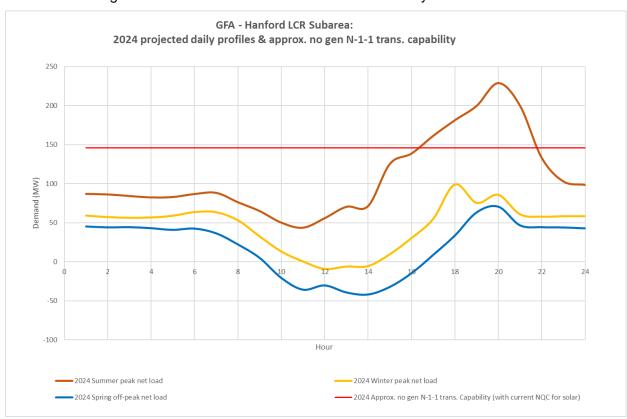


Figure 3.2-58 Hanford LCR Sub-area 2024 Peak Day Forecast Profiles

Figure 3.2-59 Hanford LCR Sub-area 2024 Forecast Hourly Profiles



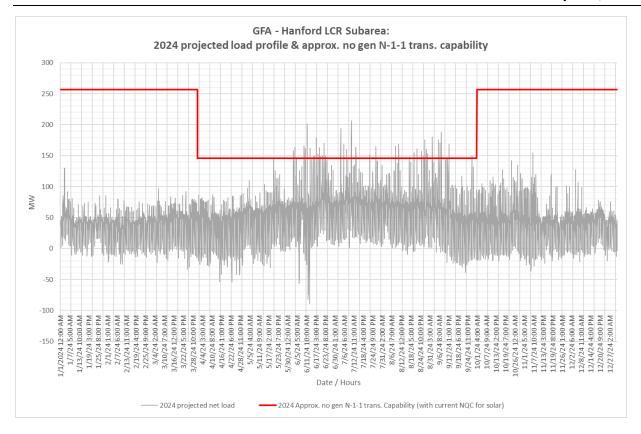

3.2.6.2.4 Hanford LCR Sub-area Requirement

Table 3.2-43 identifies the sub-area requirements. There is no LCR requirement for Category B (Single Contingency) and the LCR Requirement for a Category C (Multiple Contingency) is 93 MW.

Table 3.2-43 Hanford LCR Sub-area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|----------------------------|--------------------------------|--------------------------|
| 2024 | First limit | В | None | None | 0 |
| 2024 | First Limit | С | McCall-Kingsburg #1 115 kV | Mustang-Gates #1 and #2 230 kV | 93 |

3.2.6.2.5 Effectiveness factors:

All units within the Hanford Sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.6.3 Coalinga Sub-area

Coalinga is a Sub-area of the Fresno LCR Area.



3.2.6.3.1 Coalinga LCR Sub-area Diagram

Gates Q633 SS Huron Q532 To Paso Jacalito Robles Coalinga 1 Calfax Tornado J Coalinga Penzir Jc **Schindle** Cogen Coalinga Plesant Valley Q526 **Panoche**

Figure 3.2-60 Coalinga LCR Sub-area

3.2.6.3.2 Coalinga LCR Sub-area Load and Resources

Table 3.2-44 provides the forecast load and resources in Coalinga LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-44 Coalinga LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|----|------------------------------------|-----|---------|
| Gross Load | 92 | Market, Net Seller, Battery | 0 | 0 |
| AAEE | -4 | MUNI | 0 | 0 |
| Behind the meter DG | 0 | QF | 3 | 3 |
| Net Load | 88 | Solar | 37 | 0 |
| Transmission Losses | 1 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 35 | 0 |
| Load + Losses + Pumps | 89 | Total | 75 | 3 |



3.2.6.3.3 Coalinga LCR Sub-area Hourly Profiles

Figure 3.2-61 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Coalinga LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-62 illustrates the forecast 2024 hourly profile for Coalinga LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.


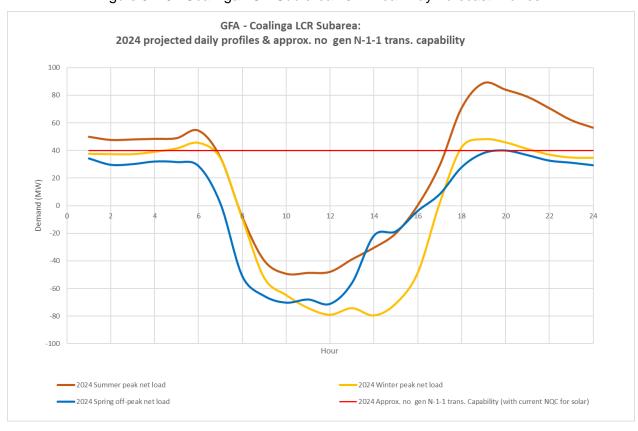


Figure 3.2-61 Coalinga LCR Sub-area 2024 Peak Day Forecast Profiles

Figure 3.2-62 Coalinga LCR Sub-area 2024 Forecast Hourly Profiles



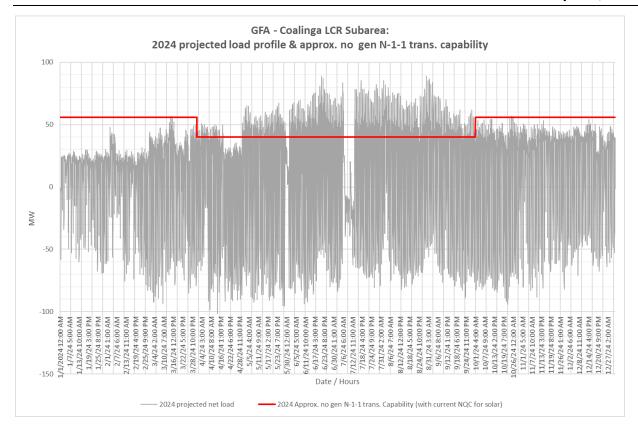

3.2.6.3.4 Coalinga LCR Sub-area Requirement

Table 3.2-45 identifies the sub-area requirements. There is no LCR requirement for Category B (Single Contingency) and the LCR Requirement for a Category C (Multiple Contingency) is 33 MW including o MW NQC deficiency or 30 MW of at peak deficiency.

LCR (MW) Year Limit Category **Limiting Facility** Contingency (Deficiency) 2024 First Limit В 0 None None Gates #5 230/70 kV Tx followed by 2024 First Limit С Voltage Instability 33 (30 Peak) Panoche-Schindler #1 & #2 115 kV DCTL

Table 3.2-45 Coalinga LCR Sub-area Requirements

3.2.6.3.5 Effectiveness factors:

All units within the Coalinga Sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.6.4 Borden Sub-area

Borden is a sub-area of the Fresno LCR Area.



3.2.6.4.1 Borden LCR Sub-area Diagram

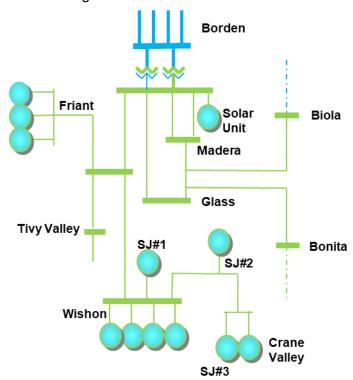


Figure 3.2-63 Borden LCR Sub-area

3.2.6.4.2 Borden LCR Sub-area Load and Resources

Table 3.2-46 provides the forecast load and resources in Borden LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-46 Borden LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 148 | Market, Net Seller, Battery | 35 | 35 |
| AAEE | -6 | MUNI | 0 | 0 |
| Behind the meter DG | 0 | QF | 0 | 0 |
| Net Load | 142 | Solar | 21 | 0 |
| Transmission Losses | 2 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 144 | Total | 56 | 35 |



3.2.6.4.3 Borden LCR Sub-area Hourly Profiles

Figure 3.2-64 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Borden LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-65 illustrates the forecast 2024 hourly profile for Borden LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

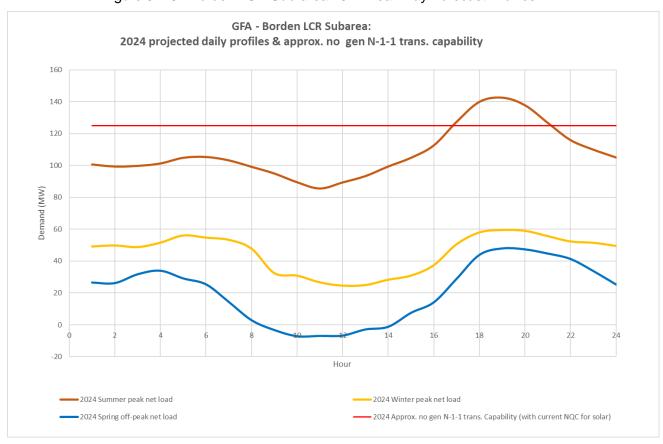


Figure 3.2-64 Borden LCR Sub-area 2024 Peak Day Forecast Profiles



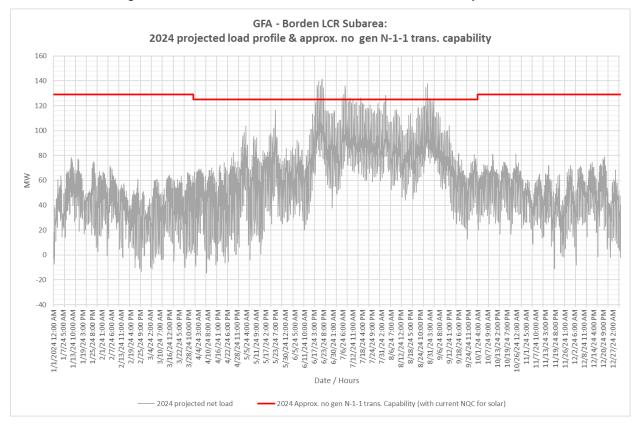


Figure 3.2-65 Borden LCR Sub-area 2024 Forecast Hourly Profiles

3.2.6.4.4 Borden LCR Sub-area Requirement

Table 3.2-47 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) is 13 MW and the LCR requirement for Category C (Multiple Contingency) is 19 MW.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|------------------------|---|--------------------------|
| 2024 | First Limit | В | Borden 230/70 kV TB #1 | Borden 230/70 kV # 4 | 13 |
| 2024 | First Limit | С | Borden #1 230/70 kV Tx | Friant - Coppermine 70 kV & Borden #2 230/70 kV Tx | 19 |

Table 3.2-47 Borden LCR Sub-area Requirements

3.2.6.4.5 Effectiveness factors:

All units within the Borden Sub-area have the same effectiveness factor.




For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.6.5 Reedley Sub-area

Reedley is a Sub-area of the Fresno LCR Area.

3.2.6.5.1 Reedley LCR Sub-area Diagram

Figure 3.2-66 Reedley LCR Sub-area

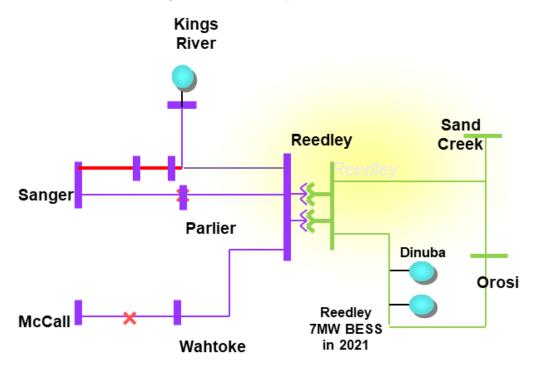

3.2.6.5.2 Reedley LCR Sub-area Load and Resources

Table 3.2-48 provides the forecast load and resources in Reedley LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-48 Reedley LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|---------------------|-----|------------------------------------|-----|---------|
| Gross Load | 223 | Market | 54 | 54 |
| AAEE | -8 | MUNI | 0 | 0 |
| Behind the meter DG | 0 | QF | 0 | 0 |
| Net Load | 215 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 50 | Existing 20-minute Demand Response | 0 | 0 |



| Pumps | 0 | Mothballed | 0 | 0 |
|-----------------------|-----|------------|----|----|
| Load + Losses + Pumps | 265 | Total | 54 | 54 |

3.2.6.5.3 Reedley LCR Sub-area Hourly Profiles

Figure 3.2-67 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Reedley LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-68 illustrates the forecast 2024 hourly profile for Reedley LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.


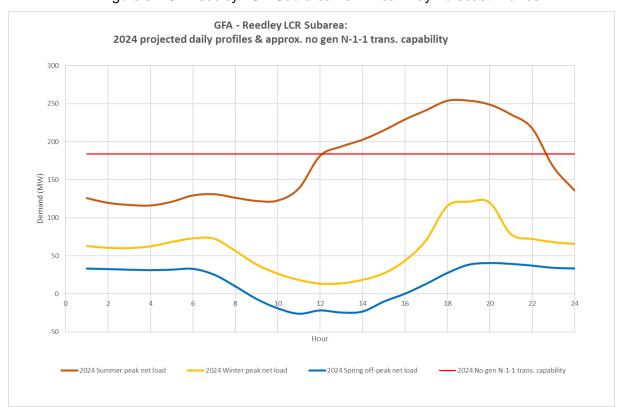


Figure 3.2-67 Reedley LCR Sub-area 2024 Peak Day Forecast Profiles

Figure 3.2-68 Reedley LCR Sub-area 2024 Forecast Hourly Profiles



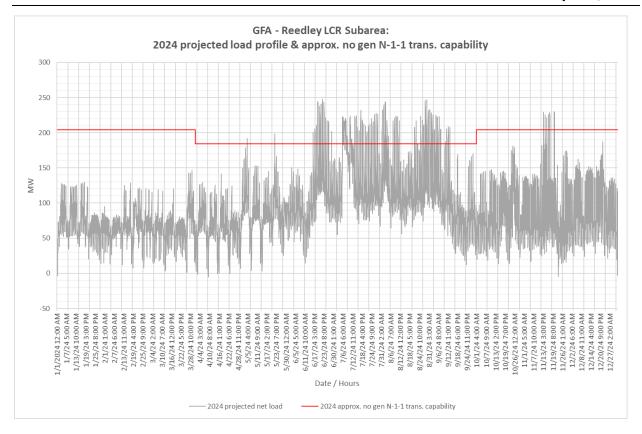

3.2.6.5.4 Reedley LCR Sub-area Requirement

Table 3.2-49 identifies the sub-area requirements. There is no LCR requirement for Category B (Single Contingency) and the LCR Requirement for a Category C (Multiple Contingency) is 31 MW.

LCR (MW) Year Limit **Limiting Facility** Contingency Category (Deficiency) 0 2024 First Limit В None None McCall-Reedley 115 kV & 2024 First Limit C Kings River-Sanger-Reedley 115 kV 31 Sanger-Reedley 115 kV

Table 3.2-49 Reedley LCR Sub-area Requirements

3.2.6.5.5 Effectiveness factors:

All units within the Reedley Sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf



3.2.6.6 Herndon Sub-area

Herndon is a Sub-area of the Fresno LCR Area.

3.2.6.6.1 Herndon LCR Sub-area Diagram

Kerckhof Borden Helm Gregg Woodward Coppermine Bullar Clovis Manchest^{el} Sanger **Barton** Herndo Ashlan McCall Rio Bravo Fresno Haas, Balch KRCD Malaga

Figure 3.2-69 Herndon LCR Sub-area

3.2.6.6.2 Herndon LCR Sub-area Load and Resources

Gates

Henrietta

Panoche

Table 3.2-50 provides the forecast load and resources in Herndon LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Hanford

Kingsburg

Kings River,

Pine Flats

| Load (MW) | | Generation (MW) | NQC | At Peak | | |
|-----------------------|------|------------------------------------|------|---------|--|--|
| Gross Load | 1623 | Market, Net Seller, Battery | 962 | 962 | | |
| AAEE | -58 | MUNI | 80 | 80 | | |
| Behind the meter DG | -3 | QF | 0 | 0 | | |
| Net Load | 1563 | Solar | 47 | 0 | | |
| Transmission Losses | 31 | Existing 20-minute Demand Response | 0 | 0 | | |
| Pumps | 0 | Mothballed | 0 | 0 | | |
| Load + Losses + Pumps | 1594 | Total | 1089 | 1042 | | |

Table 3.2-50 Herndon LCR Sub-area 2024 Forecast Load and Resources



3.2.6.6.3 Herndon LCR Sub-area Hourly Profiles

Figure 3.2-70 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Herndon LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-71 illustrates the forecast 2024 hourly profile for Herndon LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

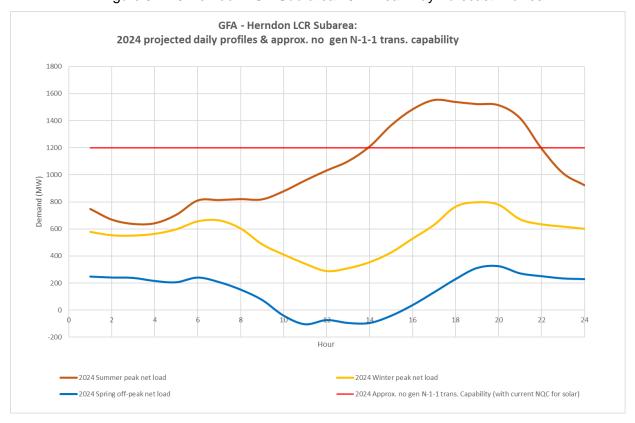


Figure 3.2-70 Herndon LCR Sub-area 2024 Peak Day Forecast Profiles



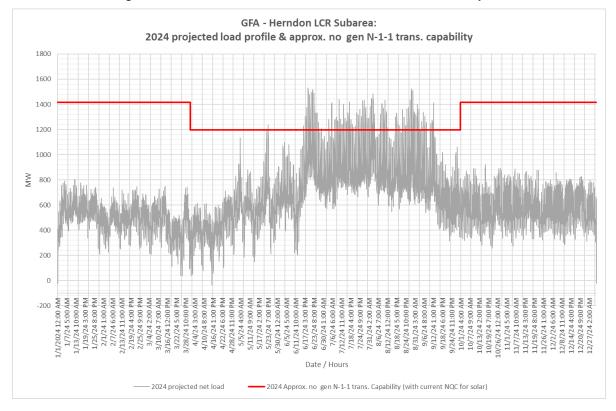


Figure 3.2-71 Herndon LCR Sub-area 2024 Forecast Hourly Profiles

3.2.6.6.4 Herndon LCR Sub-area Requirement

Table 3.2-51 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) is not binding and the LCR Requirement for a Category C (Multiple Contingency) is 465 MW.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|---------------------------|---|--------------------------|
| 2024 | First limit | В | Herndon-Manchester 115 kV | Balch Unit 1 & Herndon-Barton 115 kV | Not binding |
| 2024 | First limit | С | Herndon-Manchester 115 kV | Herndon-Woodward 115 kV line & Herndon-Barton 115 kV line | 465 |

Table 3.2-51 Herndon LCR Sub-area Requirements

3.2.6.6.5 Effectiveness factors:

Effectiveness factors for generators in the Herndon LCR Sub-area are in Attachment B table titled Herndon.



For other helpful procurement information please read procedure 2210Z Effectiveness Factors under 7430 (T-129) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.6.7 Fresno Overall area (Wilson)

3.2.6.7.1 Fresno LCR area Diagram

Melones Warnerville Wilson Borden Gregg s Banos Herndon Panoche McMullin Helm Tranquility McCall Henrietta Haas, Balch. Pine Mustang Flats Gates

Figure 3.2-72 Fresno LCR area

3.2.6.7.2 Fresno Overall LCR area Load and Resources

Table 3.2-41 provides the forecast load and resources in Fresno LCR area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

3.2.6.7.3 Fresno Overall LCR area Hourly Profiles

Figure 3.2-73 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Fresno Overall LCR area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-74 illustrates the forecast 2024 hourly profile for Wilson LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

Figure 3.2-73 Fresno LCR area 2024 Peak Day Forecast Profiles




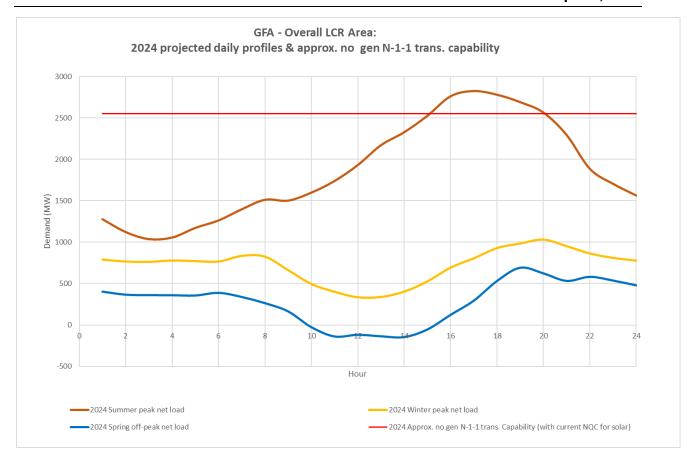


Figure 3.2-74 Fresno LCR area 2024 Forecast Hourly Profiles



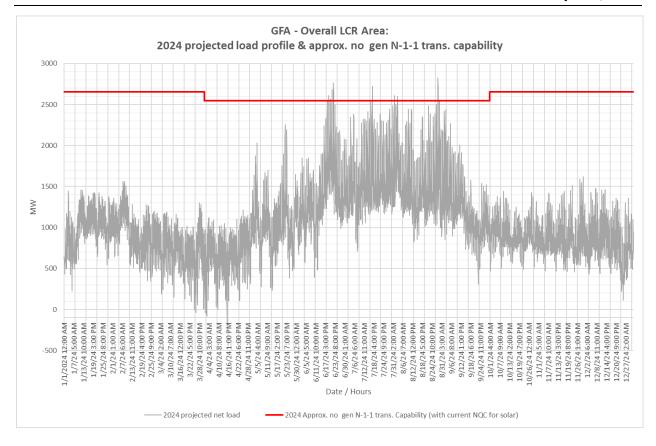

3.2.6.7.4 Fresno Overall LCR Area Requirement

Table 3.2-52 identifies the area LCR requirements. The LCR requirement for Category B (Single Contingency) and Category C (Multiple Contingency) are the same, 1711 MW.

LCR (MW) Year Limit Category **Limiting Facility** Contingency (Deficiency) Gates-Mustang #1 or #2 230 kV 2024 First limit В Remaining Gates-Mustang 230 kV 1711 with one Helms unit out Gates-Mustang #1 or #2 230 kV 2024 С First limit Remaining Gates-Mustang 230 kV 1711 & Helm-Gregg 230 kV

Table 3.2-52 Fresno Overall LCR Area Requirements

3.2.6.7.5 Effectiveness factors:

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7430 (T-129) posted at: http://www.caiso.com/Documents/2210Z.pdf



3.2.6.7.6 Changes compared to 2023 requirements

Compared with 2023 the load forecast increased by 105 MW and the LCR has increased by 23 MW, due to load increase.

3.2.7 Kern Area

3.2.7.1 Area Definition:

The transmission facilities coming into the Kern PP sub-area are:

- Kern #3, #4 & #5 230/115 kV Transformers
- Wheeler Ridge Junction #1 & #2 230/115 kV Transformers
- Famoso-Lerdo 115 kV Line (Normal Open)
- Wasco-Famoso 70 kV Line (Normal Open)
- Copus-Old River 70 kV Line (Normal Open)
- Copus-Old River 70 kV Line (Normal Open)
- Weedpatch CB 32 70 kV (Normal Open)


The substations that delineate the Kern-PP sub-area are:

- Kern PP 230 kV is out and Kern PP 115 kV is in
- Wheeler Ridge Junction 230 kV is out and Wheeler Ridge Junction 115 kV is in
- Famoso 115 kV is out Cawelo 115 kV is in
- Wasco 70 kV is out Mc Farland 70 kV is in
- Copus 70 kV is out, South Kern Solar 70 kV is in
- Lakeview 70 kV is out, San Emidio Junction 70 kV is in
- Weedpatch 70 kV is out, Wellfield 70 kV is in

3.2.7.1.1 Kern LCR Area Diagram

Figure 3.2-75 Kern LCR Area



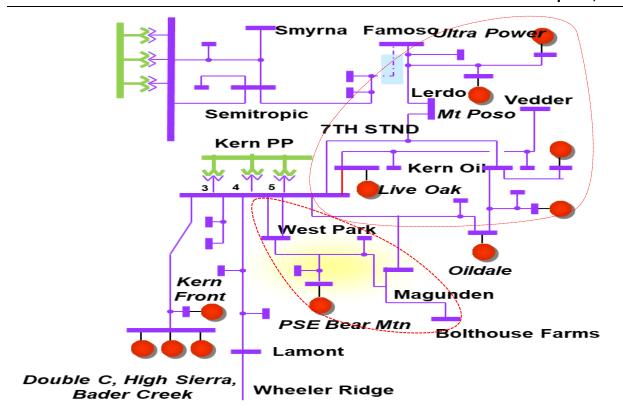

3.2.7.1.2 Kern LCR Area Load and Resources

Table 3.2-53 provides the forecast load and resources in Kern LCR Area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

In year 2024 the estimated time of local area peak is 19:20 PM.

At the local area peak time the estimated, behind the meter, solar output is 0.00%.

At the local area peak time the estimated, ISO metered, solar output is 0.00%.

If required, all non-solar technology type resources are dispatched at NQC.

Table 3.2-53 Kern LCR Area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|---------------------|-------------------|--------------------|-----|---------|
| Gross Load | 926 ¹⁰ | Market, Net Seller | 354 | 354 |
| AAEE | -34 | MUNI | 0 | 0 |
| Behind the meter DG | 0 | QF | 8 | 8 |
| Net Load | 892 | Solar | 103 | 0 |

 $^{^{}m 10}$ Kern Area LCR definition has changed due to modeling of approved transmission upgrades



| Load + Losses + Pumps | 903 | Total | 465 | 362 |
|-----------------------|-----|------------------------------------|-----|-----|
| Pumps | 0 | Mothballed | 0 | 0 |
| Transmission Losses | 11 | Existing 20-minute Demand Response | 0 | 0 |

3.2.7.1.3 Approved transmission projects modeled

- Kern PP 230 kV area reinforcement project
- Midway-Kern PP 1, 3 &4 230 kV line capacity increase project
- Kern PP 115 kV area reinforcement project
- Wheeler Ridge Junction station project


3.2.7.2 Kern 70 kV Sub-area

Kern 70 kV is a sub-area of the Kern LCR Area.

3.2.7.2.1 Kern 70 kV LCR Sub-area Diagram

Figure 3.2-76 Kern 70 kV LCR Sub-area

Kern Power

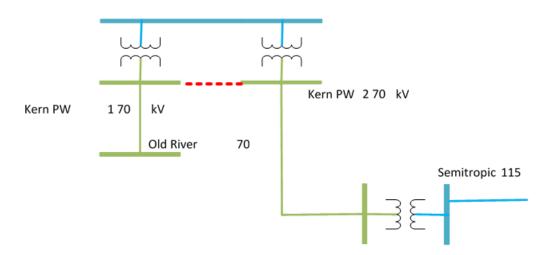

3.2.7.2.2 Kern 70 kV LCR Sub-area Load and Resources

Table 3.2-54 provides the forecast load and resources in Kern 70 kV LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-54 Kern 70 kV LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|------------|-----|--------------------|-----|---------|
| Gross Load | 157 | Market, Net Seller | 4 | 4 |
| AAEE | -5 | MUNI | 0 | 0 |



| Behind the meter DG | 0 | QF | 0 | 0 |
|-----------------------|-----|------------------------------------|----|---|
| Net Load | 152 | Solar | 20 | 0 |
| Transmission Losses | 2 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 154 | Total | 24 | 4 |

3.2.7.2.3 Kern 70 kV LCR Sub-area Hourly Profiles

Figure 3.2-79 illustrates the forecast 2020 profile for the summer peak, winter peak and spring off-peak days for the Kern 70 kV LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-80 illustrates the forecast 2020 hourly profile for Kern 70 kV LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

Figure 3.2-77 Kern 70 kV LCR Sub-area 2020 Peak Day Forecast Profiles

Kern-Kern PWR 70 kV subarea:


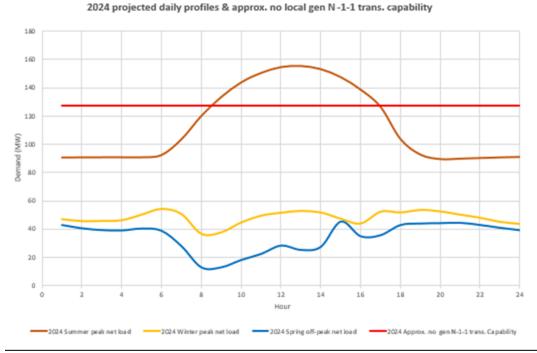


Figure 3.2-78 Kern 70 kV LCR Sub-area 2020 Forecast Hourly Profiles



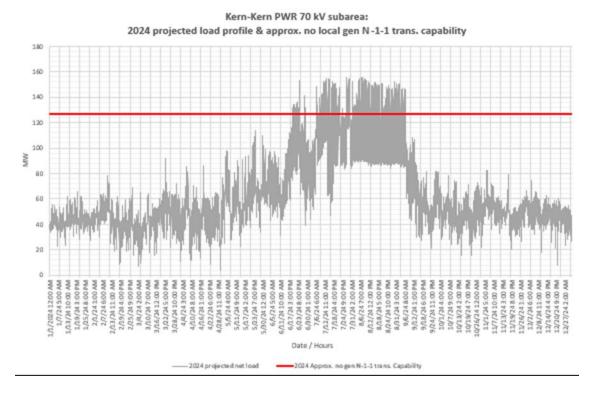

3.2.7.2.4 Kern 70 kV LCR Sub-area Requirement

Table 3.2-55 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) and Category C (Multiple Contingency) are the same 73 MW including a 49 MW NQC deficiency or 69 MW at peak deficiency.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|---------------------------------------|--|-------------------------|
| 2024 | First Limit | В | None | None | 0 |
| 2024 | First Limit | С | Kern PW2 to Kern PW1 70 kV Bus Tie | Kern PW2 #1 115/70 T/F & Midway-Smyrna-Semitropic 115 kV | 73 (49 NQC/ 69 Peak) |

Table 3.2-55 Kern 70 kV LCR Sub-area Requirements

3.2.7.2.5 Effectiveness factors:

All units within the Kern 70 kV Sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf



3.2.7.3 Westpark Sub-area

Westpark is a Sub-area of the Kern LCR Area.

3.2.7.3.1 Westpark LCR Sub-area Diagram

Please see Figure 3.2-75 for Westpark Sub-area diagram.

3.2.7.3.2 Westpark LCR Sub-area Load and Resources

Table 3.2-56 provides the forecast load and resources in Westpark LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-56 Westpark LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 170 | Market, Net Seller | 47 | 47 |
| AAEE | -6 | MUNI | 0 | 0 |
| Behind the meter DG | 0 | QF | 0 | 0 |
| Net Load | 164 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 0 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 164 | Total | 47 | 47 |

3.2.7.3.3 Westpark LCR Sub-area Hourly Profiles

Figure 3.2-79 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Westpark LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-80 illustrates the forecast 2024 hourly profile for Westpark LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

Figure 3.2-79 Westpark LCR Sub-area 2024 Peak Day Forecast Profiles






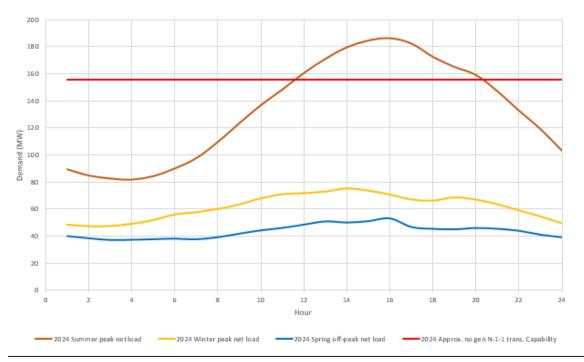


Figure 3.2-80 Westpark LCR Sub-area 2024 Forecast Hourly Profiles



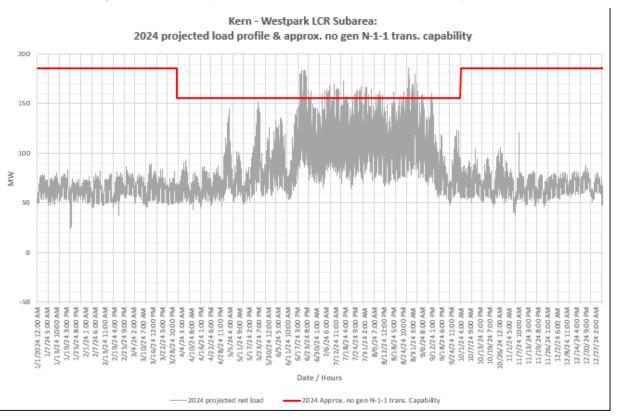

3.2.7.3.4 Westpark LCR Sub-area Requirement

Table 3.2-57 identifies the sub-area LCR requirements. There is no LCR requirement for Category B (Single Contingency) and the Category C (Multiple Contingency) is 14 MW.

Table 3.2-57 Westpark LCR Sub-area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|---|---|--------------------------|
| 2024 | First Limit | В | None | None | 0 |
| 2024 | First Limit | С | Remaining Kern-West Park #1 or #2 115 kV | Kern-West Park #1 or # 2 115 kV & Magunden-Wheeler J # 115 kV | 14 |

3.2.7.3.5 Effectiveness factors:

All units within the Westpark Sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf


3.2.7.4 Kern Oil Sub-area

Kern Oil is a Sub-area of the Kern LCR Area.

3.2.7.4.1 Kern Oil LCR Sub-area Diagram

Figure 3.2-81 Kern Oil LCR Sub-area



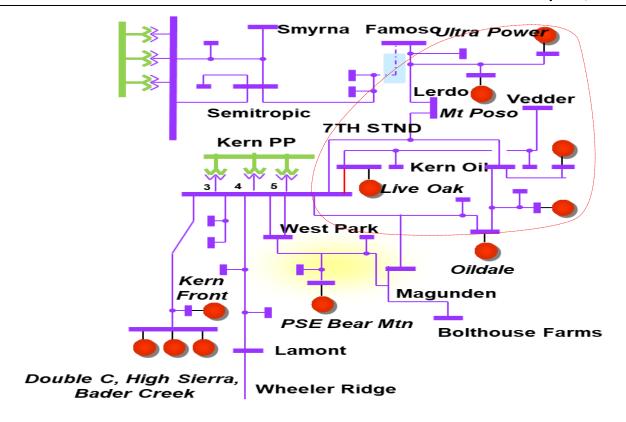

3.2.7.4.2 Kern Oil LCR Sub-area Load and Resources

Table 3.2-58 provides the forecast load and resources in Kern Oil LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

At Peak Generation (MW) NQC Load (MW) 103 294 103 Market **Gross Load** 0 0 **AAEE** -12 MUNI 8 0 QF 8 Behind the meter DG 0 282 11 Solar **Net Load** 0 1 Existing 20-minute Demand Response **Transmission Losses** 0 0 0 Mothballed Pumps 111 283 Total 122 Load + Losses + Pumps

Table 3.2-58 Kern Oil LCR Sub-area 2024 Forecast Load and Resources

3.2.7.4.3 Kern Oil LCR Sub-area Hourly Profiles

Figure 3.2-82 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Kern Oil LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-83 illustrates the forecast 2024 hourly profile



for Kern Oil LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

Figure 3.2-82 Kern Oil LCR Sub-area 2024 Peak Day Forecast Profiles

Kern - Kern Oil LCR Subarea: 2024 projected daily profiles & approx. no gen N-1-1 trans. capability


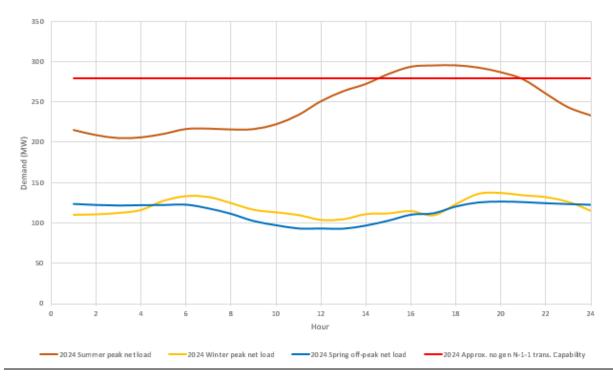


Figure 3.2-83 Kern Oil LCR Sub-area 2024 Forecast Hourly Profiles



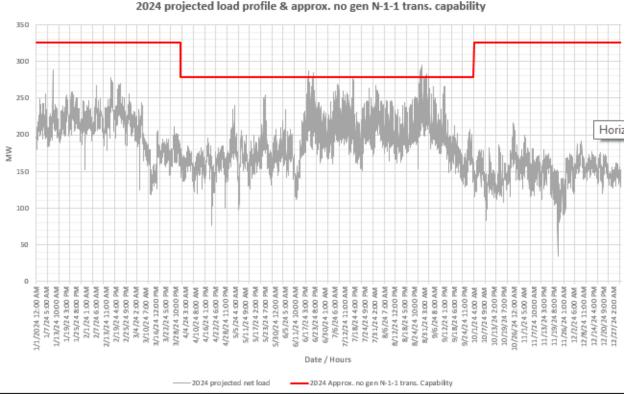

Kern - Kern Oil LCR Subarea: 2024 projected load profile & approx. no gen N-1-1 trans. capability

3.2.7.4.4 Kern Oil LCR Sub-area Requirement

Table 3.2-59 identifies the sub-area LCR requirements. There is no LCR requirement for Category B (Single Contingency and for Category C (Multiple Contingency) LCR requirement is 65 MW.

| Year | Limit | Category | Limiting Facility Contingency | | LCR (MW) (Deficiency) |
|------|-------------|----------|--|--|--------------------------|
| 2024 | First limit | В | None | None | 0 |
| 2024 | First Limit | С | Kern Oil Jn to Golden Bear 115 kV line section | Kern PP-7th Standard 115 kV & Kern PP-Live Oak 115 kV | 65 |

Table 3.2-59 Kern Oil LCR Sub-area Requirements

3.2.7.4.5 Effectiveness factors:

All units within the Kern Oil Sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7110 (T-138Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.7.5 South Kern PP Sub-area

South Kern PP will be eliminated due to new transmission projects.



3.2.7.6 Kern Area Overall Requirements

3.2.7.6.1 Kern LCR Area Overall Requirement

Table 3.2-60 identifies the limiting facility and contingency that establishes the Kern Area 2024 LCR requirements. There is no LCR requirement for Category B (Single Contingency) and for Category C (Multiple Contingency) the LCR requirement is 152 MW with a 49 MW NQC deficiency or 69 MW of at peak deficiency.

Table 3.2-60 Kern Overall LCR Sub-area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) | | |
|------|-------------|----------|-------------------------|-------------|--------------------------|--|-----------------------|
| 2024 | First limit | В | None | 0 | | | |
| 2024 | First Limit | С | Aggregate of Sub-areas. | | Aggregate of Sub-areas. | | 152 (49 NQC/ 69 Peak) |

3.2.7.6.2 Kern Overall LCR Area Hourly Profile

Figure 3.2-84 illustrates the forecast 2024 profile for the summer peak, winter peak and spring off-peak days for the Kern LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources. Figure 3.2-85 illustrates the forecast 2024 hourly profile for Kern LCR Sub-area with the Category C (Multiple Contingency) transmission capability without resources.

Figure 3.2-84 Kern Overall LCR Area 2024 Peak Day Forecast Profiles




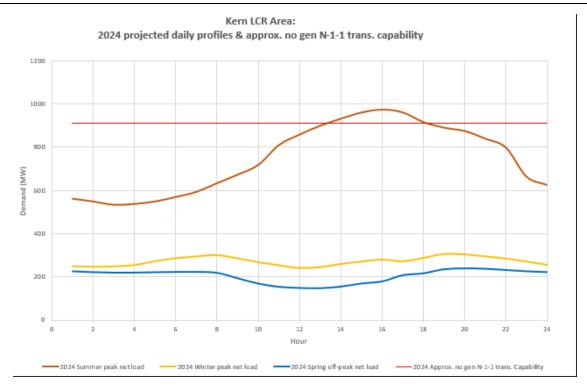


Figure 3.2-85 Kern Overall LCR Area 2024 Forecast Hourly Profiles



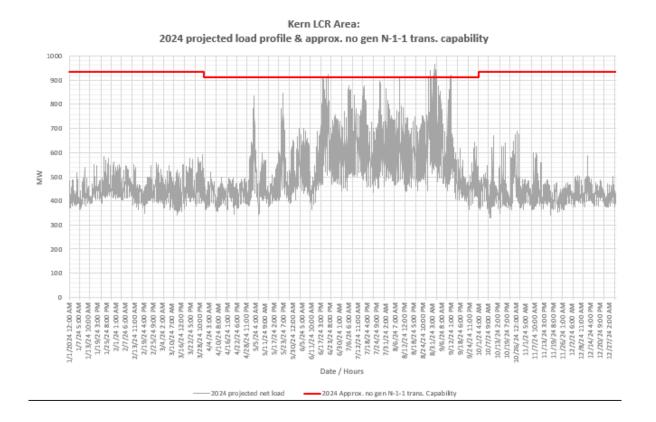

3.2.7.6.3 Changes compared to 2023 requirements

Compared with 2023, due to the definition change, the load has reduced by 237 MW. Comparing the same definition as last year, the Kern area load forecast has gone up by 14 MW. The LCR requirement has decreased by 30 MW mainly due to new transmission upgrades.

3.2.8 Big Creek/Ventura Area

3.2.8.1 Area Definition:

The transmission tie lines into the Big Creek/Ventura Area are:

- Antelope #1 500/230 kV Transformer
- Antelope #2 500/230 kV Transformer
- Sylmar Pardee 230 kV #1 and #2 Lines
- Vincent Pardee 230 kV #2 Line
- Vincent Santa Clara 230 kV Line


The substations that delineate the Big Creek/Ventura Area are:

- Antelope 500 kV is out Antelope 230 kV is in
- Antelope 500 kV is out Antelope 230 kV is in
- Sylmar is out Pardee is in
- Vincent is out Pardee is in
- Vincent is out Santa Clara is in

3.2.8.1.1 Big Creek/Ventura LCR Area Diagram

Figure 3.2-86 Big Creek/Ventura LCR Area



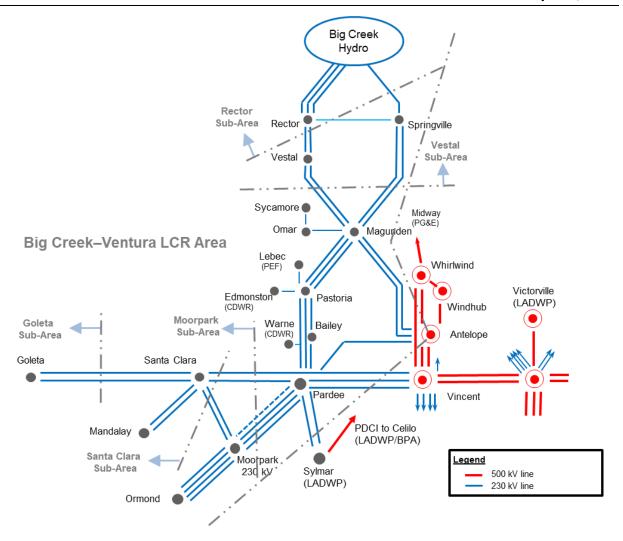

3.2.8.1.2 Big Creek/Ventura LCR Area Load and Resources

Table 3.2-61 provides the forecast load and resources in the Big Creek/Ventura LCR Area in 2024. The list of generators within the LCR area are provided in Attachment A and does not include new LTPP Preferred resources as well as existing 20-minute DR.

In year 2024 the estimated time of local area peak is 5:00 PM.

At the local area peak time the estimated, behind the meter, solar output is 57.00%.

At the local area peak time the estimated, ISO metered, solar output is 69%.

If required, all non-solar technology type resources are dispatched at NQC.

Table 3.2-61 Big Creek/Ventura LCR Area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|------------|------|--|------|---------|
| Gross Load | 5170 | Market, Net Seller, Battery, Wind, Solar | 3024 | 3024 |
| AAEE | -158 | MUNI | 342 | 342 |



| Behind the meter DG | -493 | QF | 60 | 60 |
|-----------------------|------|------------------------------------|------|------|
| Net Load | 4519 | LTPP Preferred Resources | 2 | 2 |
| Transmission Losses | 70 | Existing 20-minute Demand Response | 100 | 100 |
| Pumps | 369 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 4958 | Total | 3528 | 3528 |

3.2.8.1.3 Approved transmission projects modeled:

- Big Creek Corridor Rating Increase Project (ISD 04/01/2020).
- Pardee-Moorpark No. 4 230 kV Transmission Circuit (ISD 12/31/2020)

3.2.8.2 Rector Sub-area

LCR need is satisfied by the need in the larger Vestal sub-area.

3.2.8.3 Vestal Sub-area

Vestal is Sub-area of the Big Creek/Ventura LCR Area.

3.2.8.3.1 Vestal LCR Sub-area Diagram

Rector
Vestal
Omar
Magunden

Figure 3.2-87 Vestal LCR Sub-area

3.2.8.3.2 Vestal LCR Sub-area Load and Resources

Table 3.2-62 provides the forecast load and resources in Vestal LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.



Table 3.2-62 Vestal LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|------|--|------|---------|
| Gross Load | N/A | Market, Net Seller, Battery, Wind, Solar | 1002 | 1002 |
| AAEE | N/A | MUNI | 0 | 0 |
| Behind the meter DG | N/A | QF | 0 | 0 |
| Net Load | 1307 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 29 | Existing 20-minute Demand Response | 57 | 57 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 1336 | Total | 1059 | 1059 |

3.2.8.3.3 Vestal LCR Sub-area Hourly Profiles

Figure 3.2-88 illustrates the forecast 2024 profile for the summer peak day in the Vestal LCR Subarea.

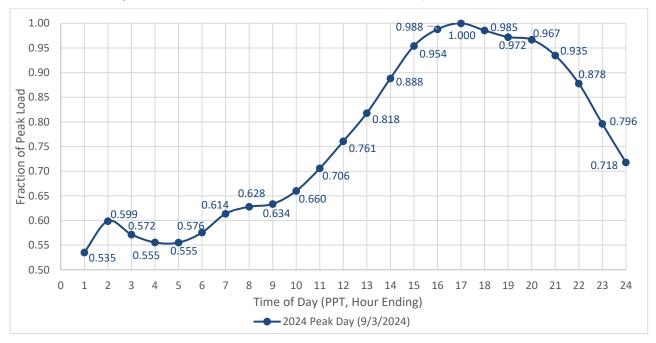


Figure 3.2-88 Vestal LCR Sub-area 2024 Peak Day Forecast Profiles

3.2.8.3.4 Vestal LCR Sub-area Requirement

Table 3.2-63 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) and Category C (Multiple Contingency) are the same, 461 MW.

Table 3.2-63 Vestal LCR Sub-area Requirements



| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|--|--|--------------------------|
| 2024 | First Limit | B/C | Magunden–Springville #2 230 kV line | Magunden–Springville #1 230 kV line with Eastwood out of service | 461 |

3.2.8.3.5 Effectiveness factors:

For helpful procurement information please read procedure 2210Z Effectiveness Factors under 7500 posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.8.4 Goleta Sub-area

Goleta is a Sub-area of the Big Creek/Ventura LCR Area.

3.2.8.4.1 Goleta LCR Sub-area Diagram

Goleta
230 KV

Santa Clara
230 kV

Solvincent
500/230 kV

Pardee 230 kV

Mandalay
230 kV

Ormond
230 kV

Figure 3.2-89 Goleta LCR Sub-area

3.2.8.4.2 Goleta LCR Sub-area Load and Resources

Table 3.2-64 provides the forecast load and resources in Goleta LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

| Table 3.2-64 Goleta LC | R Sub-area 2024 Forecast Load ar | nd Resources | |
|------------------------|----------------------------------|--------------|--|
| | | | |

| Load (MW) | | Generation (MW) | NQC | At Peak |
|---------------------|-----|--|-----|---------|
| Gross Load | N/A | Market, Net Seller, Battery, Wind, Solar | 3 | 3 |
| AAEE | N/A | MUNI | 0 | 0 |
| Behind the meter DG | N/A | QF | 0 | 0 |



| Net Load | 316 | LTPP Preferred Resources | 2 | 2 |
|-----------------------|-----|------------------------------------|---|---|
| Transmission Losses | 0 | Existing 20-minute Demand Response | 2 | 2 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 316 | Total | 7 | 7 |

3.2.8.4.3 Goleta LCR Sub-area Hourly Profiles

Figure 3.2-90 illustrates the forecast 2024 profile for the summer peak day in the Goleta LCR Sub-area.

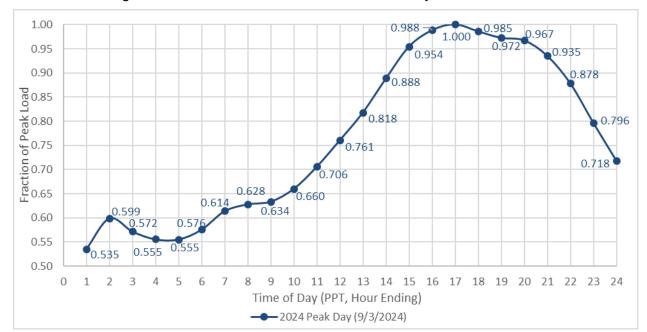


Figure 3.2-90 Goleta LCR Sub-area 2024 Peak Day Forecast Profiles

3.2.8.4.4 Goleta LCR Sub-area Requirement

Table 3.2-65 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) is 17 MW plus largest resource at Goleta and for Category C (Multiple Contingency) is 27 MW.

Table 3.2-65 Goleta LCR Sub-area Requirements



| 2024 | First Limit | В | Low voltage at Goleta substation | One of the Santa Clara–Goleta 230 kV lines with the largest Santa Clara LCR RFP resource at Goleta | 17 MW plus the largest LCR RFP unit (>10) |
|------|-------------|---|-------------------------------------|--|---|
| 2024 | First Limit | С | Low voltage at Goleta substation | One of the Santa Clara–Goleta 230 kV lines and Vincent – Santa Clara 230 kV line | 27 (20) |

3.2.8.4.5 Effectiveness factors:

For helpful procurement information please read procedure 2210Z Effectiveness Factors under 7500 posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.8.5 Santa Clara Sub-area

Santa Clara is Sub-area of the Big Creek/Ventura LCR Area.

3.2.8.5.1 Santa Clara LCR Sub-area Diagram

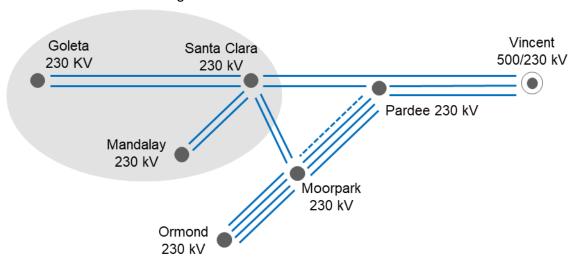


Figure 3.2-91 Santa Clara LCR Sub-area

3.2.8.5.2 Santa Clara LCR Sub-area Load and Resources

Table 3.2-66 provides the forecast load and resources in Santa Clara LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A¹¹.

Table 3.2-66 Santa Clara LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | Generation (MW) | NQC | At Peak | |
|-----------|-----------------|-----|---------|--|
|-----------|-----------------|-----|---------|--|

¹¹ Ellwood is assumed to retire when its current contract expires at the end of 2020 and the Las Flores Canyon Cogeneration Facility (EXGEN), which has been out of service since 2015, is assumed to be unavailable.



| Gross Load | N/A | Market | 148 | 148 |
|-----------------------|-----|------------------------------------|-----|-----|
| AAEE | N/A | MUNI | 0 | 0 |
| Behind the meter DG | N/A | QF | 38 | 38 |
| Net Load | 891 | LTPP Preferred Resources | 2 | 2 |
| Transmission Losses | 2 | Existing 20-minute Demand Response | 9 | 9 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 893 | Total | 197 | 197 |

3.2.8.5.3 Santa Clara LCR Sub-area Hourly Profiles

Figure 3.2-92 illustrates the forecast 2024 profile for the summer peak day in the Santa Clara LCR Sub-area.

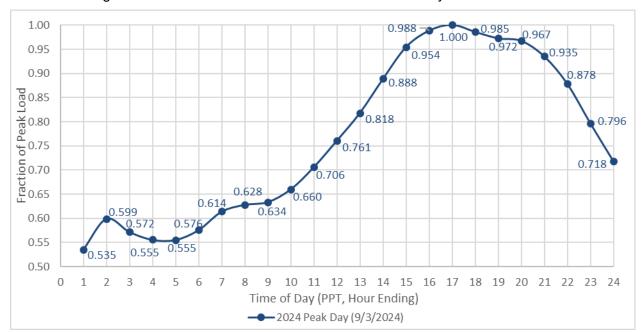


Figure 3.2-92 Santa Clara LCR Sub-area 2024 Peak Day Forecast Profiles

3.2.8.5.4 Santa Clara LCR Sub-area Requirement

Table 3.2-67 identifies the sub-area requirements. There is no Category B (Single Contingency) LCR requirement and the LCR requirement for Category C (Multiple Contingency) is 309-348 MW depending on the location of the resources that are being procured to meet the local capacity need.

Table 3.2-67 Santa Clara LCR Sub-area Requirements



| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|-------------------|--|-----------------------|
| 2024 | First Limit | В | None | None | 0 |
| 2024 | First Limit | С | Voltage collapse | Pardee - Santa Clara 230 kV followed by Moorpark - Santa Clara #1 & #2 230 kV | 309-348 (112- 151) |

3.2.8.5.5 Effectiveness factors:

For helpful procurement information please read procedure 2210Z Effectiveness Factors under 7500 posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.8.6 Moorpark Sub-area

Moorpark is a Sub-area of the Big Creek/Ventura LCR Area. No requirement due Pardee-Moorpark No. 4 230 kV Transmission Circuit.

3.2.8.7 Big Creek/Ventura Overall

3.2.8.7.1 Big Creek/Ventura LCR Sub-area Hourly Profiles

Figure 3.2-93 illustrates the forecast 2024 profile for the summer peak day in the Big Creek/Ventura LCR area.

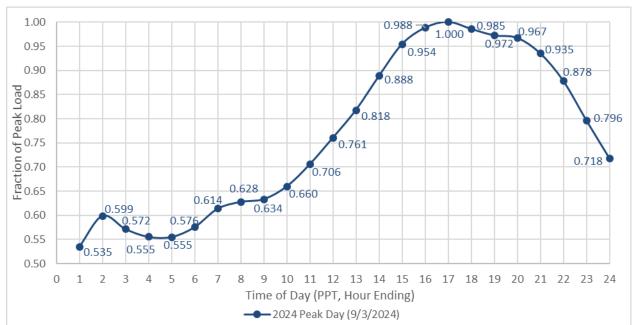


Figure 3.2-93 Big Creek/Ventura LCR area 2024 Peak Day Forecast Profiles



3.2.8.7.2 Big Creek/Ventura LCR area Requirement

Table 3.2-68 identifies the area LCR requirements. The LCR requirement for Category B (Single Contingency) is 2083 MW and for Category C (Multiple Contingency) is 2577 MW.

Table 3.2-68 Big Creek/Ventura LCR area Requirements

| Year | Limit | Category | Limiting Facility | ting Facility Contingency | |
|------|-------------|----------|----------------------------------|---|------|
| 2024 | First Limit | В | Remaining Sylmar - Pardee 230 kV | One of the Sylmar - Pardee 230 kV lines with Pastoria (CCGT) out of service | 2083 |
| 2024 | First Limit | С | Remaining Sylmar - Pardee 230 kV | Lugo - Victorville 500 kV line followed by one of the Sylmar - Pardee #1 or #2 230 kV lines | 2577 |

3.2.8.7.3 Effectiveness factors:

For helpful procurement information please read procedure 2210Z Effectiveness Factors under 7680 (T-130Z), 7510 (T-163Z), 7550 (T-159Z) and 8610 (T-131Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.8.7.4 Changes compared to 2023 LCT study

Compared with the results for 2023 the load forecast is down by 211 MW and the LCR has decreased by 113 MW due to decrease in the load forecast.

3.2.9 LA Basin Area

3.2.9.1 Area Definition:

The transmission tie lines into the LA Basin Area are:

- San Onofre San Luis Rey #1, #2, and #3 230 kV Lines
- San Onofre Talega #1 230 kV Lines
- San Onofre Capistrano #1 230 kV Lines
- Lugo Mira Loma #2 & #3 500 kV Lines
- Lugo Rancho Vista #1 500 kV Line
- Vincent Mesa 500 kV Line
- Sylmar Eagle Rock 230 kV Line
- Sylmar Gould 230 kV Line



- Vincent Mesa #1 & #2 230 kV Lines
- Vincent Rio Hondo #1 & #2 230 kV Lines
- Devers Red Bluff 500 kV #1 and #2 Lines
- Mirage Coachella Valley # 1 230 kV Line
- Mirage Ramon # 1 230 kV Line
- Mirage Julian Hinds 230 kV Line


The substations that delineate the LA Basin Area are:

- San Onofre is in San Luis Rey is out
- San Onofre is in Talega is out
- San Onofre is in Capistrano is out
- Mira Loma is in Lugo is out
- Rancho Vista is in Lugo is out
- Eagle Rock is in Sylmar is out
- Gould is in Sylmar is out
- Mira Loma is in Vincent is out
- Mesa is in Vincent is out
- Rio Hondo is in Vincent is out
- Devers is in Red Bluff is out
- Mirage is in Coachella Valley is out
- Mirage is in Ramon is out
- Mirage is in Julian Hinds is out

3.2.9.1.1 LA Basin LCR Area Diagram

Figure 3.2-94 LA Basin LCR Area



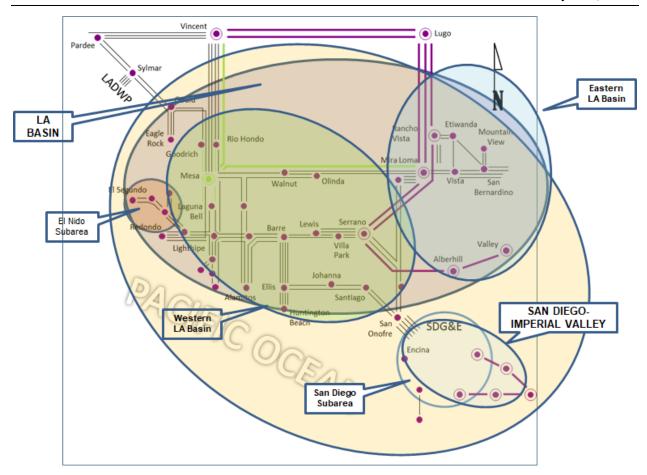

3.2.9.1.2 LA Basin LCR Area Load and Resources

Table 3.2-69 provides the forecast load and resources in the LA Basin LCR Area in 2024. The list of generators within the LCR area are provided in Attachment A and does not include new LTPP Preferred resources as well as existing 20-minute DR.

In year 2024 the estimated time of local area peak is 5:00 PM (PDT).

At the local area peak time the estimated, behind the meter, solar output is 26%.

At the local area peak time the estimated, ISO metered, solar output is 33.4%.

If required, all non-solar technology type resources are dispatched at NQC.

Table 3.2-69 LA Basin LCR Area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|---------------------|--------|--|------|---------|
| Gross Load | 21518 | Market, Net Seller, Battery, Wind, Solar | 5975 | 5975 |
| AAEE | -370 | MUNI | 1110 | 1110 |
| Behind the meter DG | -2,159 | QF | 234 | 234 |
| Net Load | 18989 | LTPP Preferred Resources | 432 | 432 |



| Transmission Losses | 285 | Existing 20-minute Demand Response | 313 | 313 |
|-----------------------|-------|------------------------------------|------|------|
| Pumps | 21 | Mothballed | 335 | 335 |
| Load + Losses + Pumps | 19295 | Total | 8399 | 8399 |

The total load plus losses and pump loads above is for the LA Basin geographic area (same area from the CEC's demand forecast for the LA Basin in the LSE/BA Table). However, the electrically defined LA Basin LCR area does not include Saugus substation load, which is 764 MW. When this is subtracted to the geographically defined LA Basin load, the total load plus losses and pump load for the electrically defined LA Basin is estimated to be 18,531 MW.

3.2.9.1.3 Approved transmission projects modeled:

- Mesa Loop-In Project and Laguna Bell Corridor 230 kV line upgrades
- Delaney Colorado River 500 kV Line
- Hassayampa North Gila #2 500 kV Line (APS)
- West of Devers 230 kV line upgrades
- CPUC-approved long-term procurement plan (431 MW) in the western LA Basin sub-area
- Retirement of 1,356 MW of the existing Redondo Beach OTC generation
- Alamitos repowering (640 MW)
- Retirement of 2,010 MW of the existing Alamitos OTC generation
- Huntington Beach repowering (644 MW)
- Retirement of 452 MW of the existing Huntington Beach OTC generation
- Stanton Energy Reliability Center (98 MW)

3.2.9.2 El Nido Sub-area

El Nido is Sub-area of the LA Basin LCR Area.

3.2.9.2.1 El Nido LCR Sub-area Diagram

Please refer to Figure 3.2-94 above.

3.2.9.2.2 El Nido LCR Sub-area Load and Resources

Table 3.2-70 provides the forecast load and resources in El Nido LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-70 El Nido LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) |
|-----------|
|-----------|



| Gross Load | 1064 | Market, Net Seller, Battery, Wind, Solar | 536 | 536 |
|-----------------------|------|--|-----|-----|
| AAEE | -34 | MUNI | 0 | 0 |
| Behind the meter DG | -47 | QF | 0 | 0 |
| Net Load | 983 | LTPP Preferred Resources | 20 | 20 |
| Transmission Losses | 2 | Existing 20-minute Demand Response | 7 | 7 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 985 | Total | 563 | 563 |

3.2.9.2.3 El Nido LCR Sub-area Hourly Profiles

Figure 3.2-95 illustrates the forecast 2024 profile for the summer peak day in the El Nido LCR Sub-area.

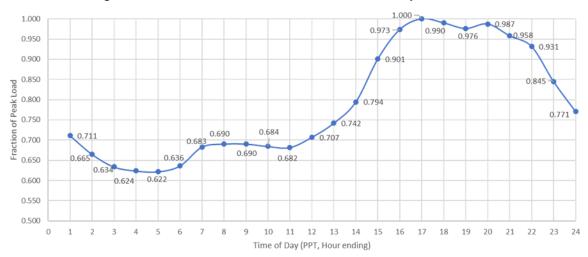


Figure 3.2-95 El Nido LCR Sub-area 2024 Peak Day Forecast Profiles

3.2.9.2.4 El Nido LCR Sub-area Requirement

Table 3.2-71 identifies the sub-area requirements. There is no Category B (Single Contingency) LCR requirement and the LCR requirement for Category C (Multiple Contingency) is 393 MW.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|-------------------|-------------|-----------------------|
| 2024 | First Limit | В | None | None | 0 |

Table 3.2-71 El Nido LCR Sub-area Requirements



| 2024 | First Limit | С | La Fresa-La Cienega 230 kV | La Fresa – El Nido #3 & #4 230 kV | 393 |
|------|-------------|---|----------------------------|-----------------------------------|-----|
|------|-------------|---|----------------------------|-----------------------------------|-----|

3.2.9.2.5 Effectiveness factors:

All units within the El Nido Sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7630 (G-219Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.9.3 Western LA Basin Sub-area

Western LA Basin is Sub-area of the LA Basin LCR Area.

3.2.9.3.1 Western LA Basin LCR Sub-area Diagram

Please refer to Figure 3.2-94 above.

3.2.9.3.2 Western LA Basin LCR Sub-area Load and Resources

Table 3.2-72 provides the forecast load and resources in Western LA Basin LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-72 Western LA Basin Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-------|--|------|---------|
| Gross Load | 12249 | Market, Net Seller, Battery, Wind, Solar | 3269 | 3269 |
| AAEE | -466 | MUNI | 581 | 581 |
| Behind the meter DG | -719 | QF | 58 | 58 |
| Net Load | 11064 | LTPP Preferred Resources | 432 | 432 |
| Transmission Losses | 166 | Existing 20-minute Demand Response | 153 | 153 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 11230 | Total | 4493 | 4493 |

3.2.9.3.3 Western LA Basin LCR Sub-area Hourly Profiles

Figure 3.2-96 illustrates the forecast 2024 profile for the summer peak day in the Western LA Basin LCR Sub-area.

Figure 3.2-96 Western LA Basin LCR Sub-area 2024 Peak Day Forecast Profiles



3.2.9.3.4 Western LA Basin LCR Sub-area Requirement

Table 3.2-73 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) is non-binding and for Category C (Multiple Contingency) is 3783 MW.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|---------------------------|---|-----------------------|
| 2024 | First Limit | В | Non-binding | Multiple combinations possible | N/A |
| 2024 | First Limit | С | Mesa - Laguna Bell 230 kV | Mesa - Redondo 230 kV & Mesa - Lighthipe 230 kV | 3783 |

Table 3.2-73 Western LA Basin LCR Sub-area Requirements

3.2.9.3.5 Effectiveness factors:

See Attachment B - Table titled LA Basin.

For other helpful procurement information please read procedure 2210Z Effectiveness Factors under 7630 (G-219Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

There are other combinations of contingencies in the area that could overload a significant number of 230 kV lines in this sub-area have less LCR need. As such, anyone of them (combination of contingencies) could become binding for any given set of procured resources. As a result, these effectiveness factors may not be the best indicator towards informed procurement.

3.2.9.4 West of Devers Sub-area

West of Devers is a Sub-area of the LA Basin LCR Area. There are no local capacity requirements due to implementation of the Mesa Loop-in as well as West of Devers reconductoring projects.



3.2.9.5 Valley-Devers Sub-area

Valley-Devers is a Sub-area of the LA Basin LCR Area. There are no local capacity requirements due to implementation of the Colorado River-Delaney 500 kV line project.

3.2.9.6 Valley Sub-area

Valley is a Sub-area of the LA Basin LCR Area. There are no local capacity requirements due to implementation of the Colorado River-Delaney 500 kV line project.

3.2.9.7 Eastern LA Basin Sub-area

Eastern LA Basin is Sub-area of the LA Basin LCR Area.

3.2.9.7.1 Eastern LA Basin LCR Sub-area Diagram

Please refer to Figure 3.2-94 above.

3.2.9.7.2 Eastern LA Basin LCR Sub-area Load and Resources

Table 3.2-74 provides the forecast load and resources in Eastern LA Basin LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-74 Eastern LA Basin Sub-area 2024 Forecast Load and Resources


| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|------|--|------|---------|
| Gross Load | 8144 | Market, Net Seller, Battery, Wind, Solar | 2706 | 2706 |
| AAEE | -273 | MUNI | 528 | 528 |
| Behind the meter DG | -683 | QF | 177 | 177 |
| Net Load | 7188 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 108 | Existing 20-minute Demand Response | 141 | 141 |
| Pumps | 17 | Mothballed | 335 | 335 |
| Load + Losses + Pumps | 7313 | Total | 3887 | 3887 |

3.2.9.7.3 Eastern LA Basin LCR Sub-area Hourly Profiles

Figure 3.2-97 illustrates the forecast 2024 profile for the summer peak day in the Eastern LA Basin LCR Sub-area.

Figure 3.2-97 Eastern LA Basin LCR Sub-area 2024 Peak Day Forecast Profiles



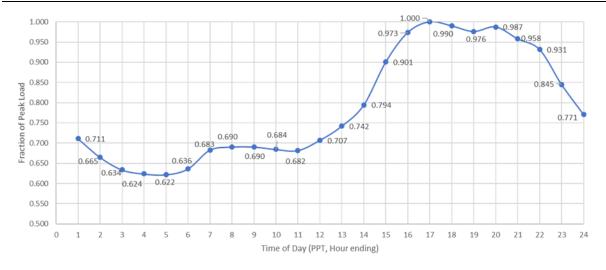

3.2.9.7.4 Eastern LA Basin LCR Sub-area Requirement

Table 3.2-75 identifies the sub-area LCR requirements. The LCR requirement for Category B (Single Contingency) is non-binding and for Category C (Multiple Contingency) is 2477 MW.

LCR (MW) Limit Category **Limiting Facility** Contingency Year (Deficiency) 2024 First Limit В Non-binding Multiple combinations possible N/A Post transient voltage Alberhill-Serrano 500 kV, followed by 2024 First Limit C 2477 Devers-Red Bluff #1 and #2 500 kV stability

Table 3.2-75 Eastern LA Basin LCR Sub-area Requirements

3.2.9.7.5 Effectiveness factors:

All units within the Eastern LA Basin Sub-area have the same effectiveness factor.

For most helpful procurement information please read procedure 2210Z Effectiveness Factors under 7630 (G-219Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.9.8 LA Basin Overall

3.2.9.8.1 LA Basin LCR Sub-area Hourly Profiles

Figure 3.2-98 illustrates the forecast 2024 profile for the summer peak day in the LA Basin LCR area.



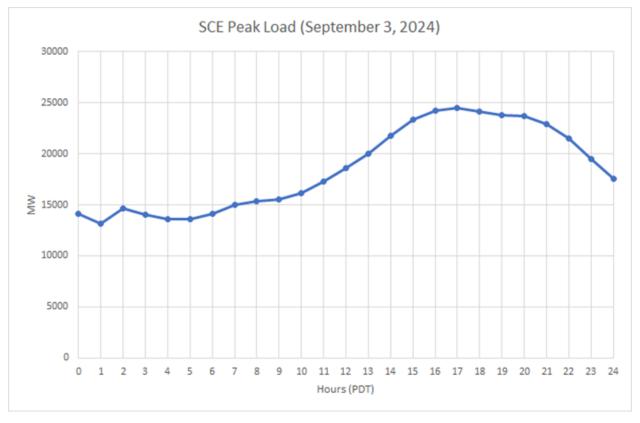


Figure 3.2-98 LA Basin LCR area 2024 Peak Day Forecast Profiles

3.2.9.8.2 LA Basin LCR area Requirement

Table 3.2-76 identifies the area requirements. The LCR requirement for Category B requirement (Single Contingency) is 6224 MW and for Category C (Multiple Contingency) is the sum of the LCR needs for the Western LA Basin and Eastern LA Basin sub-areas, which is 6260 MW.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|----------------------------|--|--------------------------|
| 2024 | First Limit | В | El Centro 230/92 kV | TDM, system readjustment and Imperial Valley–North Gila 500 kV | 6224 |
| 2024 | First Limit | С | Sum of Western and Eastern | See Western and Eastern | 6260 |

Table 3.2-76 LA Basin LCR area Requirements



3.2.9.8.3 Effectiveness factors:

See Attachment B - Table titled LA Basin.

For other helpful procurement information please read procedure 2210Z Effectiveness Factors under 7570 (T-144Z), 7580 (T-139Z), 7590 (T-137Z, 6750) and 7680 (T-130Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

There are other combinations of contingencies in the area that could overload a significant number of 230 kV lines in this sub-area have less LCR need. As such, anyone of them (combination of contingencies) could become binding for any given set of procured resources. As a result, these effectiveness factors may not be the best indicator towards informed procurement.

3.2.9.8.4 Changes compared to 2023 LCT study

Compared with 2023, the load forecast is lower by 781 MW and the LCR need has decreased by 533 MW, primarily due to lower demand forecast.

3.2.10 San Diego-Imperial Valley Area

3.2.10.1 **Area Definition:**

The transmission tie lines forming a boundary around the Greater San Diego-Imperial Valley area include:

- Imperial Valley North Gila 500 kV Line
- Otay Mesa Tijuana 230 kV Line
- San Onofre San Luis Rey #1 230 kV Line
- San Onofre San Luis Rey #2 230 kV Line
- San Onofre San Luis Rey #3 230 kV Line
- San Onofre Talega 230 kV Line
- San Onofre Capistrano 230 kV Line
- Imperial Valley El Centro 230 kV Line
- Imperial Valley La Rosita 230 kV Line

The substations that delineate the Greater San Diego-Imperial Valley area are:


- Imperial Valley is in North Gila is out
- Otay Mesa is in Tijuana is out
- San Onofre is out San Luis Rey is in
- San Onofre is out San Luis Rey is in
- San Onofre is out San Luis Rey is in



- San Onofre is out Talega is in
- San Onofre is out Capistrano is in
- Imperial Valley is in El Centro is out
- Imperial Valley is in La Rosita is out

3.2.10.1.1 San Diego-Imperial Valley LCR Area Diagram

Figure 3.2-99 San Diego-Imperial Valley LCR Area

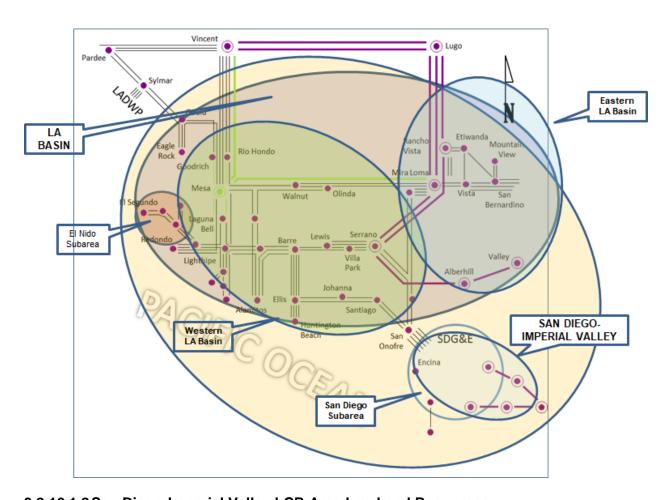

3.2.10.1.2 San Diego-Imperial Valley LCR Area Load and Resources

Table 3.2-77 provides the forecast load and resources in the San Diego-Imperial Valley LCR Area in 2024. The list of generators within the LCR area are provided in Attachment A.

In year 2024 the estimated time of local area peak is 8:00 PM.

At the local area peak time the estimated, behind the meter, solar output is 0.00%.

At the local area peak time the estimated, ISO metered, solar output is 0.00%.

If required, all non-solar technology type resources are dispatched at NQC.



Table 3.2-77 San Diego-Imperial Valley LCR Area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|------|------------------------------------|------|---------|
| Gross Load | 5532 | Market, Net Seller, Battery, Wind | 4016 | 4016 |
| AAEE | -158 | Solar | 523 | 0 |
| Behind the meter DG | -670 | QF | 4 | 4 |
| Net Load | 4704 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 101 | Existing 20-minute Demand Response | 16 | 16 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 4805 | Total | 4559 | 4036 |

3.2.10.1.3 Approved transmission projects modeled:

- Ocean Ranch 69 kV substation
- Mesa Height TL600 Loop-in
- Re-conductor of Mission-Mesa Heights 69 kV
- Re-conductor of Kearny-Mission 69 kV line
- TL6906 Mesa Rim rearrangement
- Upgrade Bernardo Rancho Carmel 69 kV line
- Re-conductor of Japanese Mesa–Baseline–Talega Tap 69 kV lines
- 2nd Miguel–Bay Boulevard 230 kV line
- 2nd Mission 230/69 kV bank
- Suncrest SVC project
- By-passing 500 kV series capacitor banks on the Southwest Powerlink and Sunrise Powerlink lines
- Generation retirements at Encina, North Island, and Division Naval Station
- Carlsbad Energy Center (Encina Repower) (5x100 MW)
- Battery energy storage projects (total of 213 MW) at various locations
- TL632 Granite loop-in and TL6914 reconfiguration
- 2nd San Marcos–Escondido 69 kV line
- Reconductor of Stuart Tap–Las Pulgas 69 kV line (TL690E)
- 2nd Poway–Pomerado 69 kV line




- Artesian 230 kV expansion with 69 kV upgrade
- South Orange County Reliability Enhancement
- Imperial Valley bank #80 replacement
- Imperial Valley-El Centro 230 kV ("S") line upgrade

3.2.10.2 El Cajon Sub-area

El Cajon is Sub-area of the San Diego-Imperial Valley LCR Area.

3.2.10.2.1 El Cajon LCR Sub-area Diagram

Figure 3.2-100 El Cajon LCR Sub-area

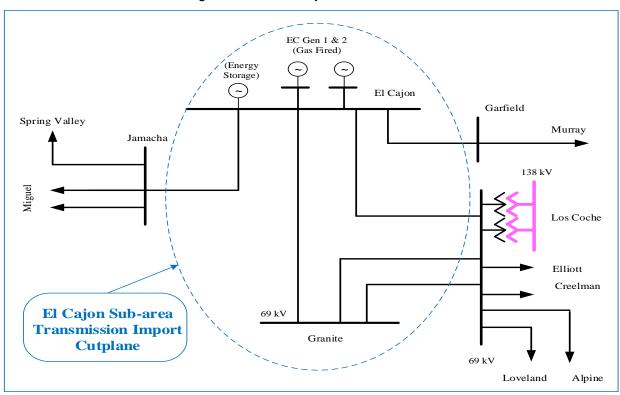

3.2.10.2.2 El Cajon LCR Sub-area Load and Resources

Table 3.2-78 provides the forecast load and resources in El Cajon LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-78 El Cajon LCR Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|------------|-----|-----------------------------|-----|---------|
| Gross Load | 180 | Market, Net Seller, Battery | 101 | 101 |
| AAEE | -5 | MUNI | 0 | 0 |



| Behind the meter DG | 0 | QF | 0 | 0 |
|---------------------------|-----|------------------------------------|-----|-----|
| Net Load | 175 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 3 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps 178 | | Total | 101 | 101 |

3.2.10.2.3 El Cajon LCR Sub-area Hourly Profiles

Figure 3.2-101 illustrates the forecast 2024 profile for the summer peak day in the El Cajon LCR Sub-area with the Category C (Multiple Contingency) transmission capability.

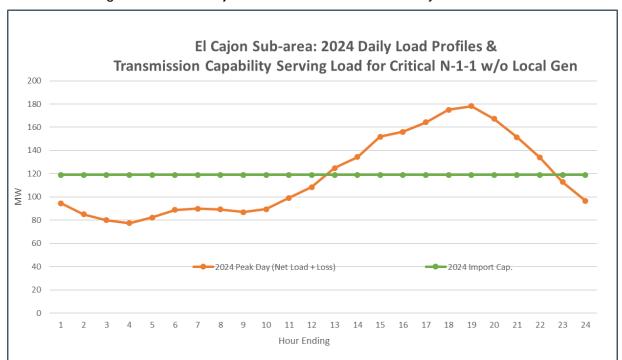


Figure 3.2-101 El Cajon LCR Sub-area 2024 Peak Day Forecast Profiles

3.2.10.2.4 El Cajon LCR Sub-area Requirement

Table 3.2-79 identifies the sub-area LCR requirements. The is no LCR requirement for Category B (Single Contingency) and LCR requirement for Category C (Multiple Contingency) is 76 MW.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------|----------|-------------------|-------------|--------------------------|
|------|-------|----------|-------------------|-------------|--------------------------|

Table 3.2-79 El Cajon LCR Sub-area Requirements



| 2024 | First Limit | В | None | None | 0 |
|------|-------------|---|--------------------------------------|----------------------------------|----|
| 2024 | First Limit | С | El Cajon–Los Coches 69 kV (TL631) | Granite-Los Coches #1 & #2 69 kV | 76 |

3.2.10.2.5 Effectiveness factors:

All units within the El Cajon Sub-area have the same effectiveness factor.

3.2.10.3 Mission Sub-area


Mission is a Sub-area of the San Diego-Imperial Valley LCR Area. The 2024 LCT study identified that the Mission Sub-area will no longer be required due to the TL600 Mesa Heights 69 kV Loopin and the TL676 Mission-Mesa Heights 69 kV Reconductoring projects being in-service.

3.2.10.4 **Esco Sub-area**

Esco is Sub-area of the San Diego-Imperial Valley LCR Area.

3.2.10.4.1 Esco LCR Sub-area Diagram

Figure 3.2-102 Esco LCR Sub-area

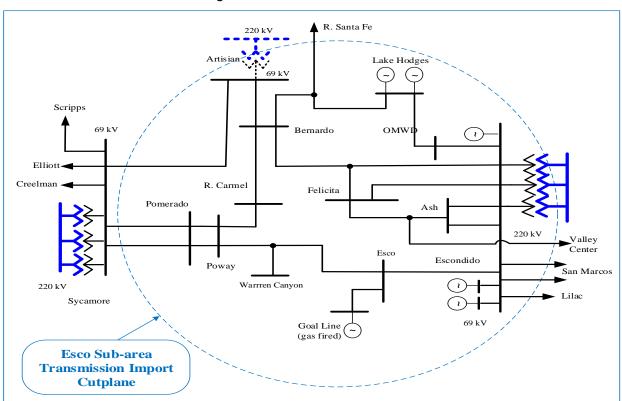



3.2.10.4.2 Esco LCR Sub-area Load and Resources

Table 3.2-80 provides the forecast load and resources in Esco LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.


Table 3.2-80 Esco Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 529 | Market | 203 | 203 |
| AAEE | -17 | Solar | 4 | 0 |
| Behind the meter DG | 0 | QF | 0 | 0 |
| Net Load | 512 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 5 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 517 | Total | 207 | 203 |

3.2.10.4.3 Esco LCR Sub-area Hourly Profiles

Figure 3.2-103 illustrates the forecast 2024 profile for the summer day for in the Esco LCR Subarea with the Category C (Multiple Contingency) transmission capability.

Figure 3.2-103 Esco LCR Sub-area 2024 Peak Day Forecast Profiles

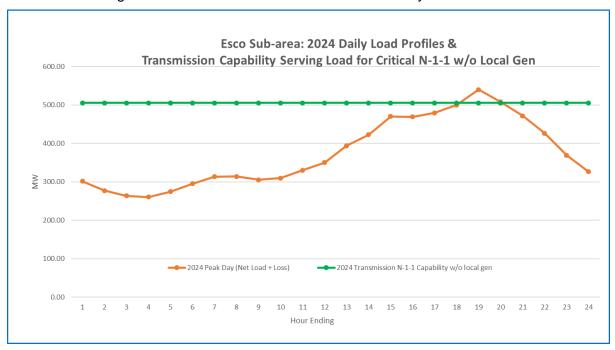



3.2.10.4.4 Esco LCR Sub-area Requirement

Table 3.2-81 identifies the sub-area requirements. There is no Category B (Single Contingency) LCR requirement and the Category C (Multiple Contingency) LCR requirement is 37 MW.

Table 3.2-81 Esco LCR Sub-area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|---------------------------------------|---|--------------------------|
| 2024 | First Limit | В | None | None | 0 |
| 2024 | First Limit | С | Remaining Sycamore- Pomerado 69 kV | Sycamore–Pomerado #1 or #2 69 kV and Artesian 230/69 kV bank | 37 |

3.2.10.4.5 Effectiveness factors:


All units within the Esco Sub-area have the same effectiveness factor.

3.2.10.5 Pala Inner Sub-area

Pala Inner is Sub-area of the San Diego-Imperial Valley LCR Area.

3.2.10.5.1 Pala Inner LCR Sub-area Diagram

Figure 3.2-104 Pala Inner LCR Sub-area

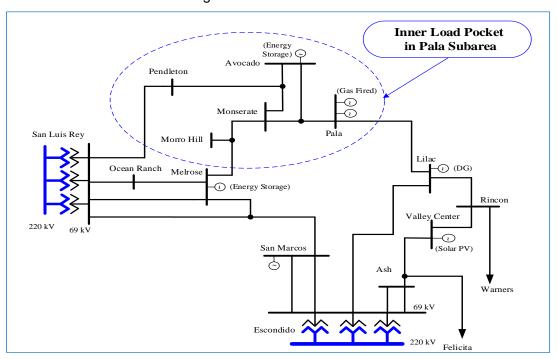



3.2.10.5.2 Pala Inner LCR Sub-area Load and Resources

Table 3.2-82 provides the forecast load and resources in Pala Inner LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.


Table 3.2-82 Pala Inner Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 151 | Market, Net Seller, Battery | 168 | 168 |
| AAEE | -6 | Solar | 0 | 0 |
| Behind the meter DG | 0 | QF | 0 | 0 |
| Net Load | 145 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 5 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 150 | Total | 168 | 168 |

3.2.10.5.3 Pala Inner LCR Sub-area Hourly Profiles

Figure 3.2-105 illustrates the forecast 2024 profile for the summer peak day for the Pala Inner LCR Sub-area with the Category C (Multiple Contingency) transmission capability.

Figure 3.2-105 Pala Inner LCR Sub-area 2024 Peak Day Forecast Profiles

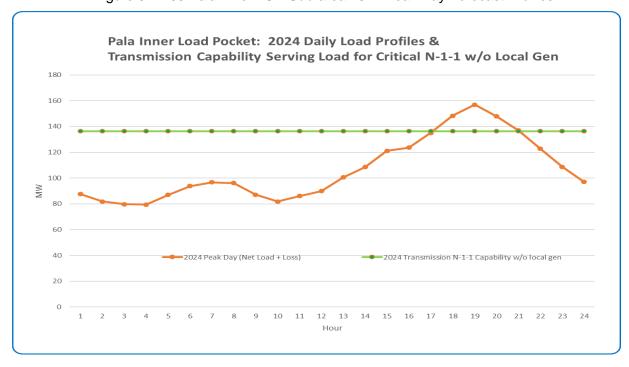



3.2.10.5.4 Pala Inner LCR Sub-area Requirement

Table 3.2-83 identifies the sub-area requirements. There is no Category B (Single Contingency) LCR requirement and the LCR requirement for Category C (Multiple Contingency) is 25 MW.

Table 3.2-83 Pala Inner LCR Sub-area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|--|--|--------------------------|
| 2024 | First Limit | В | None | None | 0 |
| 2024 | First Limit | С | Monserate-Morro Hill Tap 69 kV (TL6912) | Pendleton – San Luis Rey 69 kV (TL6912) & Lilac – Pala 69 kV (TL6932) | 25 |

3.2.10.5.5 Effectiveness factors:


All units within the Pala Inner Sub-area have the same effectiveness factor.

3.2.10.6 Pala Outer Sub-area

Pala Outer is Sub-area of the San Diego-Imperial Valley LCR Area.

3.2.10.6.1 Pala Outer LCR Sub-area Diagram

Figure 3.2-106 Pala Outer LCR Sub-area

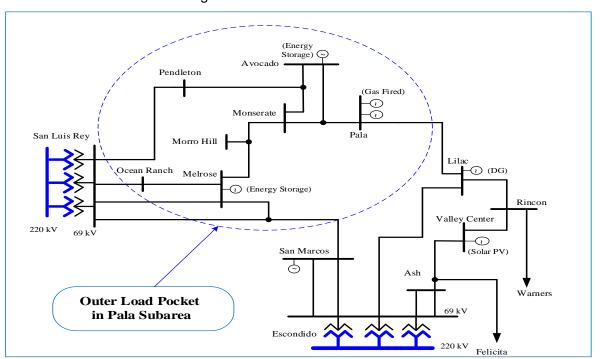



3.2.10.6.2 Pala Outer LCR Sub-area Load and Resources

Table 3.2-84 provides the forecast load and resources in Pala Outer LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.


Table 3.2-84 Pala Outer Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 263 | Market, Net Seller, Battery | 179 | 179 |
| AAEE | -10 | Solar | 0 | 0 |
| Behind the meter DG | 0 | QF | 0 | 0 |
| Net Load | 253 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 7 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 260 | Total | 179 | 179 |

3.2.10.6.3 Pala Outer LCR Sub-area Hourly Profiles

Figure 3.2-107 illustrates the forecast 2024 profile for the summer peak day for the Pala Outer LCR Sub-area with the Category C (Multiple Contingency) transmission capability.

Figure 3.2-107 Pala Outer LCR Sub-area 2024 Peak Day Forecast Profiles

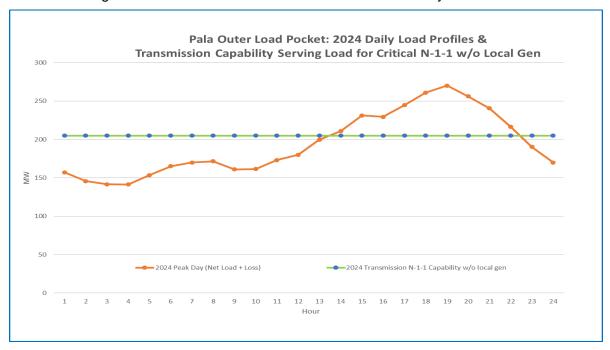



3.2.10.6.4 Pala Outer LCR Sub-area Requirement

Table 3.2-85 identifies the sub-area requirements. There is no Category B (Single Contingency) LCR requirement and the LCR requirement for Category C (Multiple Contingency) is N/A MW.

Table 3.2-85 Pala Outer LCR Sub-area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|-------------------------------------|--|--------------------------|
| 2024 | First Limit | В | None | None | 0 |
| 2024 | First Limit | С | San Luis Rey – Ocean Ranch 69 kV | San Luis Rey-Melrose (TL693) and San Luis Rey-Melrose-San Marcos 3- terminal (TL680) 69 kV lines | 90 |

3.2.10.6.5 Effectiveness factors:

All units within the Pala Outer Sub-area have the same effectiveness factor.


3.2.10.7 **Border Sub-area**

Border is Sub-area of the San Diego-Imperial Valley LCR Area.

3.2.10.7.1 Border LCR Sub-area Diagram

Figure 3.2-108 Border LCR Sub-area



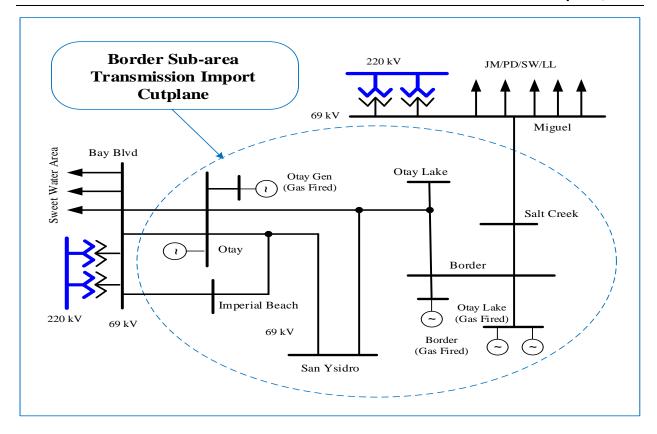

3.2.10.7.2 Border LCR Sub-area Load and Resources

Table 3.2-86 provides the forecast load and resources in Border LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-86 Border Sub-area 2024 Forecast Load and Resources

| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|-----|------------------------------------|-----|---------|
| Gross Load | 165 | Market, Net Seller, Battery | 178 | 178 |
| AAEE | -8 | Solar | 0 | 0 |
| Behind the meter DG | 0 | QF | 0 | 0 |
| Net Load | 157 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 2 | Existing 20-minute Demand Response | 0 | 0 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 159 | Total | 178 | 178 |



3.2.10.7.3 Border LCR Sub-area Hourly Profiles

Figure 3.2-109 illustrates the forecast 2024 profile for the summer peak day for the Border LCR Sub-area with the Category C (Multiple Contingency) transmission capability.

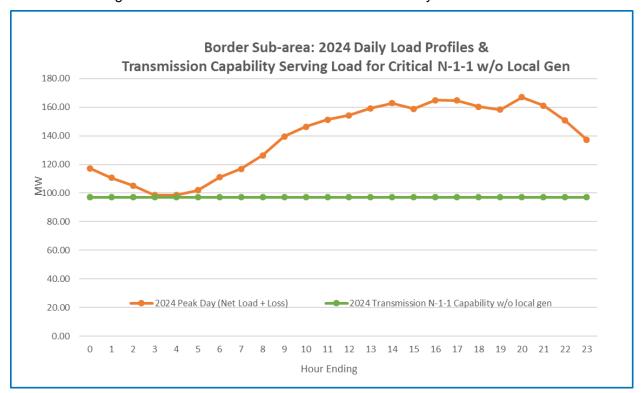


Figure 3.2-109 Border LCR Sub-area 2024 Peak Day Forecast Profiles

3.2.10.7.4 Border LCR Sub-area Requirement

Table 3.2-87 identifies the sub-area requirements. The LCR requirement for Category B (Single Contingency) is 66 MW and for Category C (Multiple Contingency) is 76 MW.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|---|---|-----------------------|
| 2024 | First Limit | В | Otay – Otay Lake Tap 69 kV (TL649) | Miguel – Salt Creek 69 kV (TL6910) with Border unit out of service | 66 |
| 2024 | First Limit | С | Imperial Beach – Bay Boulevard 69 kV (TL647) | Bay Boulevard – Otay #1 69 kV (TL645) & Bay Boulevard – Otay #2 69 kV (TL646) | 76 |

Table 3.2-87 Border LCR Sub-area Requirements



3.2.10.7.5 Effectiveness factors:

All units within the Border Sub-area have the same effectiveness factor.

3.2.10.8 *Miramar Sub-area*

Miramar is a Sub-area of the San Diego-Imperial Valley LCR Area. The study identified that the Mission Sub-area will no longer be required due to the Sycamore-Penasquitos 230 kV and second Miguel – Bay Boulevard 230 kV line projects being in-service.

3.2.10.9 San Diego Sub-area

San Diego is Sub-area of the San Diego-Imperial Valley LCR Area.

3.2.10.9.1 San Diego LCR Sub-area Diagram

Please refer to Figure 3.2-99 above.

3.2.10.9.2 San Diego LCR Sub-area Load and Resources

Table 3.2-88 provides the forecast load and resources in San Diego LCR Sub-area in 2024. The list of generators within the LCR Sub-area are provided in Attachment A.

Table 3.2-88 San Diego Sub-area 2024 Forecast Load and Resources


| Load (MW) | | Generation (MW) | NQC | At Peak |
|-----------------------|------|------------------------------------|------|---------|
| Gross Load | 5532 | Market, Net Seller, Battery, Wind | 2888 | 2888 |
| AAEE | -158 | Solar | 23 | 0 |
| Behind the meter DG | -670 | QF | 4 | 4 |
| Net Load | 4704 | LTPP Preferred Resources | 0 | 0 |
| Transmission Losses | 101 | Existing 20-minute Demand Response | 16 | 16 |
| Pumps | 0 | Mothballed | 0 | 0 |
| Load + Losses + Pumps | 4805 | Total | 2931 | 2908 |

3.2.10.9.3 San Diego LCR Sub-area Hourly Profiles

Figure 3.2-110 illustrates the forecast 2024 profile for the summer peak day for the San Diego LCR Sub-area.

Figure 3.2-110 San Diego LCR Sub-area 2024 Peak Day Forecast Profiles



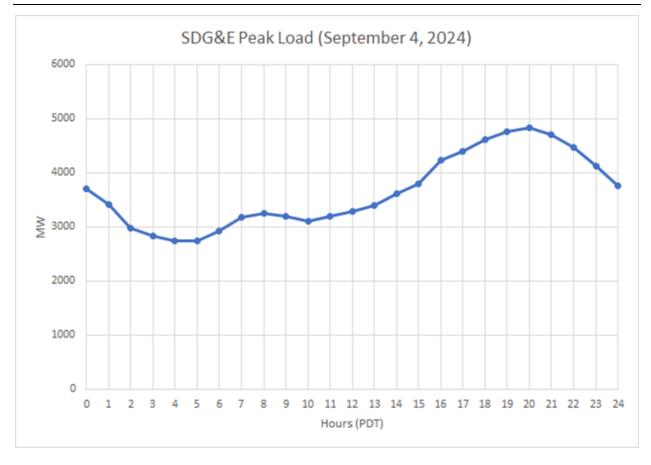

3.2.10.9.4 San Diego LCR Sub-area Requirement

Table 3.2-89 identifies the sub-area LCR requirements. The Category B (Single Contingency) LCR requirement is non-binding and the LCR requirement for Category C (Multiple Contingency) is 2898 MW.

Table 3.2-89 San Diego LCR Sub-area Requirements

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|---|--|-----------------------|
| 2024 | First Limit | В | Non-binding | Multiple combinations possible. | N/A |
| 2024 | First Limit | С | Remaining Sycamore – Suncrest 230 kV | Eco – Miguel 500 kV, system readjustment followed by one of the Sycamore – Suncrest 230 kV lines | 2898 |



3.2.10.9.5 Effectiveness factors:

See Attachment B - Table titled San Diego.

For other helpful procurement information please read procedure 2210Z Effectiveness Factors under 7820 (T-132Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.10.10 San Diego-Imperial Valley Overall

3.2.10.10.1 San Diego-Imperial Valley LCR area Hourly Profiles

Same as San Diego Sub-area see section above.

3.2.10.10.2 San Diego-Imperial Valley LCR area Requirement

Table 3.2-90 identifies the area LCR requirements. The LCR requirement for Category B (Single Contingency) and Category C (Multiple Contingency) is the same 4025 MW.

| Year | Limit | Category | Limiting Facility | Contingency | LCR (MW) (Deficiency) |
|------|-------------|----------|---------------------|---|--------------------------|
| 2024 | First Limit | B/C | El Centro 230/92 kV | TDM, system readjustment and Imperial Valley–North Gila 500 kV | 4025 |

Table 3.2-90 San Diego-Imperial Valley LCR area Requirements

3.2.10.10.3 Effectiveness factors:

See Attachment B - Table titled San Diego.

For other helpful procurement information please read procedure 2210Z Effectiveness Factors under 7820 (T-132Z) posted at: http://www.caiso.com/Documents/2210Z.pdf

3.2.10.10.4 Changes compared to 2023 LCT Study

Compared with the 2023 LCT Study results, the demand forecast is higher by 270 MW. The overall LCR need for the San Diego – Imperial Valley area has decreased by 107 MW. The reasons for the decrease in the LCR need are:

- With the peak load shifts to early evening hour, the San Diego –Imperial Valley loses the local capacity contribution from the solar generation in the area. The 4,036 MW is the total potential available local capacity for the LCR area at the 8 p.m. peak load.
- A combination of mitigation measures were evaluated, including curtailment of imports that flow on the southern 500 kV and 230 kV transmission lines into San Diego. Generation redispatch on the available resources, mainly in the SCE area, was also included. The Yucca 69 kV Overload Scheme was assumed to be an active RAS based on the Arizona Security Monitoring Manual.



3.2.11 Valley Electric Area

Valley Electric Association LCR area has been eliminated on the basis of the following:

- No generation exists in this area
- No category B issues were observed in this area
- Category C and beyond
 - o No common-mode N-2 issues were observed
 - No issues were observed for category B outage followed by a common-mode N-2 outage
 - All the N-1-1 issues that were observed can either be mitigated by the existing UVLS or by an operating procedure

| РТО | MKT/SCHED RESOURCE ID | BUS# | BUS NAME | kV | NQC | UNIT ID | LCR AREA NAME | LCR SUB-AREA NAME | NQC Comments | CAISO Tag |
|------|--------------------------|-------|-----------|------|--------|------------|------------------|-------------------------------------|-----------------|--------------|
| PG&E | ALMEGT_1_UNIT 1 | 38118 | ALMDACT1 | 13.8 | 23.40 | 1 | Bay Area | Oakland | | MUNI |
| PG&E | ALMEGT_1_UNIT 2 | 38119 | ALMDACT2 | 13.8 | 23.50 | 1 | Bay Area | Oakland | | MUNI |
| PG&E | BANKPP_2_NSPIN | 38820 | DELTA A | 13.2 | 11.55 | 1 | Bay Area | Contra Costa | Pumps | MUNI |
| PG&E | BANKPP_2_NSPIN | 38820 | DELTA A | 13.2 | 11.55 | 2 | Bay Area | Contra Costa | Pumps | MUNI |
| PG&E | BANKPP_2_NSPIN | 38820 | DELTA A | 13.2 | 11.55 | 3 | Bay Area | Contra Costa | Pumps | MUNI |
| PG&E | BANKPP_2_NSPIN | 38815 | DELTA B | 13.2 | 11.55 | 4 | Bay Area | Contra Costa | Pumps | MUNI |
| PG&E | BANKPP_2_NSPIN | 38815 | DELTA B | 13.2 | 11.55 | 5 | Bay Area | Contra Costa | Pumps | MUNI |
| PG&E | BANKPP_2_NSPIN | 38770 | DELTA C | 13.2 | 11.55 | 6 | Bay Area | Contra Costa | Pumps | MUNI |
| PG&E | BANKPP_2_NSPIN | 38770 | DELTA C | 13.2 | 11.55 | 7 | Bay Area | Contra Costa | Pumps | MUNI |
| PG&E | BANKPP_2_NSPIN | 38765 | DELTA D | 13.2 | 11.55 | 8 | Bay Area | Contra Costa | Pumps | MUNI |
| PG&E | BANKPP_2_NSPIN | 38765 | DELTA D | 13.2 | 11.55 | 9 | Bay Area | Contra Costa | Pumps | MUNI |
| PG&E | BANKPP_2_NSPIN | 38760 | DELTA E | 13.2 | 11.55 | 10 | Bay Area | Contra Costa | Pumps | MUNI |
| PG&E | BANKPP_2_NSPIN | 38760 | DELTA E | 13.2 | 11.55 | 11 | Bay Area | Contra Costa | Pumps | MUNI |
| PG&E | BRDSLD_2_HIWIND | 32172 | HIGHWINDS | 34.5 | 42.93 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | BRDSLD_2_MTZUM2 | 32179 | MNTZUMA2 | 0.69 | 20.72 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | BRDSLD_2_MTZUMA | 32188 | HIGHWND3 | 0.69 | 9.75 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | BRDSLD_2_SHILO1 | 32176 | SHILOH | 34.5 | 39.75 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | BRDSLD_2_SHILO2 | 32177 | SHILOH 2 | 34.5 | 39.75 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | BRDSLD_2_SHLO3A | 32191 | SHILOH3 | 0.58 | 27.16 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | BRDSLD_2_SHLO3B | 32194 | SHILOH4 | 0.58 | 26.50 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | CALPIN_1_AGNEW | 35860 | OLS-AGNE | 9.11 | 28.56 | 1 | Bay Area | San Jose, South Bay-Moss Landing | Aug NQC | Market |
| PG&E | CAYTNO_2_VASCO | 30531 | 0162-WD | 230 | 4.30 | FW | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | CLRMTK_1_QF | | | | 0.00 | | Bay Area | Oakland | Not modeled | QF/Selfgen |
| PG&E | COCOPP_2_CTG1 | 33188 | MARSHCT1 | 16.4 | 200.30 | 1 | Bay Area | Contra Costa | Aug NQC | Market |

| PG&E | COCOPP_2_CTG2 | 33188 | MARSHCT2 | 16.4 | 199.70 | 2 | Bay Area | Contra Costa | Aug NQC | Market |
|------|-----------------|-------|----------|------|--------|---|----------|-------------------------------------|----------------------------|------------|
| PG&E | COCOPP_2_CTG3 | 33189 | MARSHCT3 | 16.4 | 199.00 | 3 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | COCOPP_2_CTG4 | 33189 | MARSHCT4 | 16.4 | 199.70 | 4 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | COCOSB_6_SOLAR | | | | 0.00 | | Bay Area | Contra Costa | Not modeled Energy Only | Solar |
| PG&E | CROKET_7_UNIT | 32900 | CRCKTCOG | 18 | 220.00 | 1 | Bay Area | Pittsburg | Aug NQC | QF/Selfgen |
| PG&E | CSCCOG_1_UNIT 1 | 36859 | Laf300 | 12 | 3.00 | 1 | Bay Area | San Jose, South Bay-Moss Landing | | MUNI |
| PG&E | CSCCOG_1_UNIT 1 | 36859 | Laf300 | 12 | 3.00 | 2 | Bay Area | San Jose, South Bay-Moss Landing | | MUNI |
| PG&E | CSCGNR_1_UNIT 1 | 36858 | Gia100 | 13.8 | 24.00 | 1 | Bay Area | San Jose, South Bay-Moss Landing | | MUNI |
| PG&E | CSCGNR_1_UNIT 2 | 36895 | Gia200 | 13.8 | 24.00 | 2 | Bay Area | San Jose, South Bay-Moss Landing | | MUNI |
| PG&E | CUMBIA_1_SOLAR | 33102 | COLUMBIA | 0.38 | 7.79 | 1 | Bay Area | Pittsburg | Aug NQC | Solar |
| PG&E | DELTA_2_PL1X4 | 33108 | DEC CTG1 | 18 | 181.13 | 1 | Bay Area | Pittsburg | Aug NQC | Market |
| PG&E | DELTA_2_PL1X4 | 33109 | DEC CTG2 | 18 | 181.13 | 1 | Bay Area | Pittsburg | Aug NQC | Market |
| PG&E | DELTA_2_PL1X4 | 33110 | DEC CTG3 | 18 | 181.13 | 1 | Bay Area | Pittsburg | Aug NQC | Market |
| PG&E | DELTA_2_PL1X4 | 33107 | DEC STG1 | 24 | 269.60 | 1 | Bay Area | Pittsburg | Aug NQC | Market |
| PG&E | DIXNLD_1_LNDFL | | | | 1.02 | | Bay Area | | Not modeled Aug NQC | Market |
| PG&E | DUANE_1_PL1X3 | 36865 | DVRaST3 | 13.8 | 48.36 | 1 | Bay Area | San Jose, South Bay-Moss Landing | | MUNI |
| PG&E | DUANE_1_PL1X3 | 36863 | DVRaGT1 | 13.8 | 49.72 | 1 | Bay Area | San Jose, South Bay-Moss Landing | | MUNI |
| PG&E | DUANE_1_PL1X3 | 36864 | DVRbGT2 | 13.8 | 49.72 | 1 | Bay Area | San Jose, South Bay-Moss Landing | | MUNI |
| PG&E | GATWAY_2_PL1X3 | 33119 | GATEWAY2 | 18 | 181.50 | 1 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | GATWAY_2_PL1X3 | 33120 | GATEWAY3 | 18 | 181.50 | 1 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | GATWAY_2_PL1X3 | 33118 | GATEWAY1 | 18 | 191.69 | 1 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | GILROY_1_UNIT | 35850 | GLRY COG | 13.8 | 69.00 | 1 | Bay Area | Llagas, South Bay-Moss Landing | Aug NQC | Market |
| PG&E | GILROY_1_UNIT | 35850 | GLRY COG | 13.8 | 36.00 | 2 | Bay Area | Llagas, South Bay-Moss Landing | Aug NQC | Market |
| PG&E | GILRPP_1_PL1X2 | 35851 | GROYPKR1 | 13.8 | 47.60 | 1 | Bay Area | Llagas, South Bay-Moss Landing | Aug NQC | Market |
| PG&E | GILRPP_1_PL1X2 | 35852 | GROYPKR2 | 13.8 | 47.60 | 1 | Bay Area | Llagas, South Bay-Moss Landing | Aug NQC | Market |

| PG&E | GILRPP_1_PL3X4 | 35853 | GROYPKR3 | 13.8 | 46.20 | 1 | Bay Area | Llagas, South Bay-Moss Landing | Aug NQC | Market |
|------|-----------------|-------|-------------|-------|--------|---|----------|-------------------------------------|------------------------|------------|
| PG&E | GRZZLY_1_BERKLY | 32741 | HILLSIDE_12 | 12.47 | 23.47 | 1 | Bay Area | | Aug NQC | Net Seller |
| PG&E | KELSO_2_UNITS | 33813 | MARIPCT1 | 13.8 | 49.51 | 1 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | KELSO_2_UNITS | 33815 | MARIPCT2 | 13.8 | 49.51 | 2 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | KELSO_2_UNITS | 33817 | MARIPCT3 | 13.8 | 49.51 | 3 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | KELSO_2_UNITS | 33819 | MARIPCT4 | 13.8 | 49.51 | 4 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | KIRKER_7_KELCYN | | | | 3.21 | | Bay Area | Pittsburg | Not modeled | Market |
| PG&E | LAWRNC_7_SUNYVL | | | | 0.18 | | Bay Area | | Not modeled Aug NQC | Market |
| PG&E | LECEF_1_UNITS | 35854 | LECEFGT1 | 13.8 | 47.81 | 1 | Bay Area | San Jose, South Bay-Moss Landing | Aug NQC | Market |
| PG&E | LECEF_1_UNITS | 35855 | LECEFGT2 | 13.8 | 47.81 | 1 | Bay Area | San Jose, South Bay-Moss Landing | Aug NQC | Market |
| PG&E | LECEF_1_UNITS | 35856 | LECEFGT3 | 13.8 | 47.81 | 1 | Bay Area | San Jose, South Bay-Moss Landing | Aug NQC | Market |
| PG&E | LECEF_1_UNITS | 35857 | LECEFGT4 | 13.8 | 47.81 | 1 | Bay Area | San Jose, South Bay-Moss Landing | Aug NQC | Market |
| PG&E | LECEF_1_UNITS | 35858 | LECEFST1 | 13.8 | 114.75 | 1 | Bay Area | San Jose, South Bay-Moss Landing | | Market |
| PG&E | LMBEPK_2_UNITA1 | 32173 | LAMBGT1 | 13.8 | 47.50 | 1 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | LMBEPK_2_UNITA2 | 32174 | GOOSEHGT | 13.8 | 47.60 | 2 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | LMBEPK_2_UNITA3 | 32175 | CREEDGT1 | 13.8 | 47.40 | 3 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | LMEC_1_PL1X3 | 33111 | LMECCT2 | 18 | 160.07 | 1 | Bay Area | Pittsburg | Aug NQC | Market |
| PG&E | LMEC_1_PL1X3 | 33112 | LMECCT1 | 18 | 160.07 | 1 | Bay Area | Pittsburg | Aug NQC | Market |
| PG&E | LMEC_1_PL1X3 | 33113 | LMECST1 | 18 | 235.85 | 1 | Bay Area | Pittsburg | Aug NQC | Market |
| PG&E | MARTIN_1_SUNSET | | | | 1.85 | | Bay Area | | Not modeled Aug NQC | QF/Selfgen |
| PG&E | METCLF_1_QF | | | | 0.22 | | Bay Area | | Not modeled Aug NQC | QF/Selfgen |
| PG&E | METEC_2_PL1X3 | 35881 | MEC CTG1 | 18 | 178.43 | 1 | Bay Area | South Bay-Moss Landing | Aug NQC | Market |
| PG&E | METEC_2_PL1X3 | 35882 | MEC CTG2 | 18 | 178.43 | 1 | Bay Area | South Bay-Moss Landing | Aug NQC | Market |
| PG&E | METEC_2_PL1X3 | 35883 | MEC STG1 | 18 | 213.13 | 1 | Bay Area | South Bay-Moss Landing | Aug NQC | Market |
| PG&E | MISSIX_1_QF | | | | 0.01 | | Bay Area | | Not modeled Aug NQC | QF/Selfgen |

| PG&E | MLPTAS_7_QFUNTS | | | | 0.01 | | Bay Area | San Jose, South Bay-Moss Landing | Not modeled Aug NQC | QF/Selfgen |
|------|-----------------|-------|----------|------|--------|---|----------|-------------------------------------|----------------------------|------------|
| PG&E | MOSSLD_1_QF | | | | 0.00 | | Bay Area | | Not modeled Aug NQC | Market |
| PG&E | MOSSLD_2_PSP1 | 36221 | DUKMOSS1 | 18 | 163.20 | 1 | Bay Area | South Bay-Moss Landing | 78% starting 2021 | Market |
| PG&E | MOSSLD_2_PSP1 | 36222 | DUKMOSS2 | 18 | 163.20 | 1 | Bay Area | South Bay-Moss Landing | 78% starting 2021 | Market |
| PG&E | MOSSLD_2_PSP1 | 36223 | DUKMOSS3 | 18 | 183.60 | 1 | Bay Area | South Bay-Moss Landing | 78% starting 2021 | Market |
| PG&E | MOSSLD_2_PSP2 | 36224 | DUKMOSS4 | 18 | 163.20 | 1 | Bay Area | South Bay-Moss Landing | 78% starting 2021 | Market |
| PG&E | MOSSLD_2_PSP2 | 36225 | DUKMOSS5 | 18 | 163.20 | 1 | Bay Area | South Bay-Moss Landing | 78% starting 2021 | Market |
| PG&E | MOSSLD_2_PSP2 | 36226 | DUKMOSS6 | 18 | 183.60 | 1 | Bay Area | South Bay-Moss Landing | 78% starting 2021 | Market |
| PG&E | NEWARK_1_QF | | | | 0.29 | | Bay Area | | Not modeled Aug NQC | QF/Selfgen |
| PG&E | OAK C_1_EBMUD | | | | 1.50 | | Bay Area | Oakland | Not modeled Aug NQC | MUNI |
| PG&E | OAK C_7_UNIT 1 | 32901 | OAKLND 1 | 13.8 | 55.00 | 1 | Bay Area | Oakland | | Market |
| PG&E | OAK C_7_UNIT 2 | 32902 | OAKLND 2 | 13.8 | 55.00 | 1 | Bay Area | Oakland | | Market |
| PG&E | OAK C_7_UNIT 3 | 32903 | OAKLND 3 | 13.8 | 55.00 | 1 | Bay Area | Oakland | | Market |
| PG&E | OAK L_1_GTG1 | | | | 0.00 | | Bay Area | Oakland | Not modeled Energy Only | Market |
| PG&E | OXMTN_6_LNDFIL | 33469 | OX_MTN | 4.16 | 1.45 | 1 | Bay Area | Ames | | Market |
| PG&E | OXMTN_6_LNDFIL | 33469 | OX_MTN | 4.16 | 1.45 | 2 | Bay Area | Ames | | Market |
| PG&E | OXMTN_6_LNDFIL | 33469 | OX_MTN | 4.16 | 1.45 | 3 | Bay Area | Ames | | Market |
| PG&E | OXMTN_6_LNDFIL | 33469 | OX_MTN | 4.16 | 1.45 | 4 | Bay Area | Ames | | Market |
| PG&E | OXMTN_6_LNDFIL | 33469 | OX_MTN | 4.16 | 1.45 | 5 | Bay Area | Ames | | Market |
| PG&E | OXMTN_6_LNDFIL | 33469 | OX_MTN | 4.16 | 1.45 | 6 | Bay Area | Ames | | Market |
| PG&E | OXMTN_6_LNDFIL | 33469 | OX_MTN | 4.16 | 1.45 | 7 | Bay Area | Ames | | Market |
| PG&E | PALALT_7_COBUG | | | | 4.50 | | Bay Area | | Not modeled | MUNI |
| PG&E | RICHMN_1_CHVSR2 | | | | 3.48 | | Bay Area | | Not modeled Aug NQC | Solar |
| PG&E | RICHMN_1_SOLAR | | | | 0.82 | | Bay Area | | Not modeled Aug NQC | Solar |

| PG&E | RICHMN_7_BAYENV | | | | 2.00 | | Bay Area | | Not modeled Aug NQC | Market |
|------|--------------------|-------|----------|-------|--------|---|----------|-------------------------------------|------------------------|------------|
| PG&E | RUSCTY_2_UNITS | 35304 | RUSELCT1 | 15 | 187.12 | 1 | Bay Area | Ames | No NQC - Pmax | Market |
| PG&E | RUSCTY_2_UNITS | 35305 | RUSELCT2 | 15 | 187.12 | 2 | Bay Area | Ames | No NQC - Pmax | Market |
| PG&E | RUSCTY_2_UNITS | 35306 | RUSELST1 | 15 | 246.26 | 3 | Bay Area | Ames | No NQC - Pmax | Market |
| PG&E | RVRVEW_1_UNITA1 | 33178 | RVEC_GEN | 13.8 | 47.60 | 1 | Bay Area | Contra Costa | Aug NQC | Market |
| PG&E | SRINTL_6_UNIT | 33468 | SRI INTL | 9.11 | 0.81 | 1 | Bay Area | | Aug NQC | QF/Selfgen |
| PG&E | STAUFF_1_UNIT | 33139 | STAUFER | 9.11 | 0.01 | 1 | Bay Area | | Aug NQC | QF/Selfgen |
| PG&E | STOILS_1_UNITS | 32921 | CHEVGEN1 | 13.8 | 1.08 | 1 | Bay Area | Pittsburg | Aug NQC | Market |
| PG&E | STOILS_1_UNITS | 32922 | CHEVGEN2 | 13.8 | 1.08 | 1 | Bay Area | Pittsburg | Aug NQC | Market |
| PG&E | STOILS_1_UNITS | 32923 | CHEVGEN3 | 13.8 | 0.50 | 3 | Bay Area | Pittsburg | Aug NQC | Market |
| PG&E | TIDWTR_2_UNITS | 33151 | FOSTER W | 12.47 | 4.02 | 1 | Bay Area | Pittsburg | Aug NQC | Net Seller |
| PG&E | TIDWTR_2_UNITS | 33151 | FOSTER W | 12.47 | 4.02 | 2 | Bay Area | Pittsburg | Aug NQC | Net Seller |
| PG&E | TIDWTR_2_UNITS | 33151 | FOSTER W | 12.47 | 3.06 | 3 | Bay Area | Pittsburg | Aug NQC | Net Seller |
| PG&E | UNCHEM_1_UNIT | 32920 | UNION CH | 9.11 | 12.44 | 1 | Bay Area | Pittsburg | Aug NQC | QF/Selfgen |
| PG&E | UNOCAL_1_UNITS | 32910 | UNOCAL | 12 | 0.01 | 1 | Bay Area | Pittsburg | Aug NQC | QF/Selfgen |
| PG&E | UNOCAL_1_UNITS | 32910 | UNOCAL | 12 | 0.01 | 2 | Bay Area | Pittsburg | Aug NQC | QF/Selfgen |
| PG&E | UNOCAL_1_UNITS | 32910 | UNOCAL | 12 | 0.01 | 3 | Bay Area | Pittsburg | Aug NQC | QF/Selfgen |
| PG&E | USWNDR_2_SMUD | 32169 | SOLANOWP | 21 | 27.08 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | USWNDR_2_SMUD2 | 32186 | SOLANO | 34.5 | 33.87 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | USWNDR_2_UNITS | 32168 | EXNCO | 9.11 | 2.12 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | USWPJR_2_UNITS | 39233 | GRNRDG | 0.69 | 20.72 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | WNDMAS_2_UNIT 1 | 33170 | WINDMSTR | 9.11 | 10.07 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | ZOND_6_UNIT | 35316 | ZOND SYS | 9.11 | 4.53 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | ZZ_IBMCTL_1_UNIT 1 | 35637 | IBM-CTLE | 115 | 0.00 | 1 | Bay Area | San Jose, South Bay-Moss Landing | No NQC - hist. data | Market |
| PG&E | ZZ_IMHOFF_1_UNIT 1 | 33136 | CCCSD | 12.47 | 0.00 | 1 | Bay Area | Pittsburg | No NQC - hist. data | QF/Selfgen |
| PG&E | ZZ_MARKHM_1_CATLST | 35863 | CATALYST | 9.11 | 0.00 | 1 | Bay Area | San Jose, South Bay-Moss Landing | | QF/Selfgen |
| PG&E | ZZ_NA | 36209 | SLD ENRG | 12.47 | 0.00 | 1 | Bay Area | South Bay-Moss Landing | | QF/Selfgen |

| PG&E | ZZ_NA | 35861 | SJ-SCL W | 4.3 | 0.00 | 1 | Bay Area | San Jose, South Bay-Moss Landing | No NQC - hist. data | QF/Selfgen |
|------|----------------------------|-------|----------|-------|--------|----|----------|-------------------------------------|------------------------|------------|
| PG&E | ZZ_SEAWST_6_LAPOS | 35312 | FOREBAYW | 22.01 | 0.00 | 1 | Bay Area | Contra Costa | No NQC - est. data | Wind |
| PG&E | ZZ_SHELRF_1_UNITS | 33141 | SHELL 1 | 12.47 | 0.00 | 1 | Bay Area | Pittsburg | No NQC - hist. data | Net Seller |
| PG&E | ZZ_SHELRF_1_UNITS | 33142 | SHELL 2 | 12.47 | 0.00 | 1 | Bay Area | Pittsburg | No NQC - hist. data | Net Seller |
| PG&E | ZZ_SHELRF_1_UNITS | 33143 | SHELL 3 | 12.47 | 0.00 | 1 | Bay Area | Pittsburg | No NQC - hist. data | Net Seller |
| PG&E | ZZ_USWPFK_6_FRICK | 35320 | FRICKWND | 12 | 1.90 | 1 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | ZZ_USWPFK_6_FRICK | 35320 | FRICKWND | 12 | 0.00 | 2 | Bay Area | Contra Costa | Aug NQC | Wind |
| PG&E | ZZ_ZANKER_1_UNIT 1 | 35861 | SJ-SCL W | 4.3 | 0.00 | RN | Bay Area | San Jose, South Bay-Moss Landing | No NQC - hist. data | QF/Selfgen |
| PG&E | ZZZ_New Unit | 35623 | SWIFT | 21 | 4.00 | ВТ | Bay Area | San Jose, South Bay-Moss Landing | No NQC - Pmax | Battery |
| PG&E | ZZZ_New Unit | 30522 | 0354-WD | 21 | 1.83 | EW | Bay Area | Contra Costa | No NQC - Pmax | Market |
| PG&E | ZZZ_New Unit | 35302 | NUMMI-LV | 12.56 | 0.00 | RN | Bay Area | | Energy Only | Market |
| PG&E | ZZZ_New Unit | 35859 | HGST-LV | 12.41 | 0.00 | RN | Bay Area | | Energy Only | Market |
| PG&E | ZZZ_New Unit | 35307 | A100US-L | 12.56 | 0.00 | RN | Bay Area | | Energy Only | Market |
| PG&E | ZZZZ_New Unit | 32908 | OAK C12 | 12 | 2.50 | ES | Bay Area | Oakland | OCEI | Battery |
| PG&E | ZZZZ_New Unit | 32788 | STTIN L | 115 | 2.50 | ES | Bay Area | Oakland | OCEI | Battery |
| PG&E | ZZZZ_New Unit | 32786 | OAK C115 | 115 | 10.00 | ES | Bay Area | Oakland | OCEI | Battery |
| PG&E | ZZZZ_New Unit | 35646 | MRGN HIL | 115 | 75.00 | ES | Bay Area | Llagas, South Bay-Moss Landing | E-4949 | Battery |
| PG&E | ZZZZ_New Unit | 30755 | MOSSLNSW | 230 | 182.50 | ES | Bay Area | South Bay-Moss Landing | E-4949 | Battery |
| PG&E | ZZZZ_New Unit | 30045 | MOSSLAND | 500 | 300.00 | ES | Bay Area | South Bay-Moss Landing | E-4949 | Battery |
| PG&E | ZZZZZZ_COCOPP_7_UNIT 6 | 33116 | C.COS 6 | 18 | 0.00 | RT | Bay Area | Contra Costa | Retired | Market |
| PG&E | ZZZZZZ_COCOPP_7_UNIT 7 | 33117 | C.COS 7 | 18 | 0.00 | RT | Bay Area | Contra Costa | Retired | Market |
| PG&E | ZZZZZZ_CONTAN_1_UNIT | 36856 | CCA100 | 13.8 | 0.00 | 1 | Bay Area | San Jose, South Bay-Moss Landing | Retired | MUNI |
| PG&E | ZZZZZZ_FLOWD1_6_ALTP P1 | 35318 | FLOWDPTR | 9.11 | 0.00 | 1 | Bay Area | Contra Costa | Retired | Wind |

| PG&E | ZZZZZZ_LFC 51_2_UNIT 1 | 35310 | PPASSWND | 21 | 0.00 | 1 | Bay Area | | Retired | Wind |
|------|---------------------------|-------|----------|-------|-------|----|----------|---------------------------|-------------|------------|
| PG&E | ZZZZZZ_MOSSLD_7_UNIT 6 | 36405 | MOSSLND6 | 22 | 0.00 | 1 | Bay Area | South Bay-Moss Landing | Retired | Market |
| PG&E | ZZZZZZ_MOSSLD_7_UNIT 7 | 36406 | MOSSLND7 | 22 | 0.00 | 1 | Bay Area | South Bay-Moss Landing | Retired | Market |
| PG&E | ZZZZZZ_PITTSP_7_UNIT 5 | 33105 | PTSB 5 | 18 | 0.00 | RT | Bay Area | Pittsburg | Retired | Market |
| PG&E | ZZZZZZ_PITTSP_7_UNIT 6 | 33106 | PTSB 6 | 18 | 0.00 | RT | Bay Area | Pittsburg | Retired | Market |
| PG&E | ZZZZZZ_PITTSP_7_UNIT 7 | 30000 | PTSB 7 | 20 | 0.00 | RT | Bay Area | Pittsburg | Retired | Market |
| PG&E | ZZZZZZ_UNTDQF_7_UNIT S | 33466 | UNTED CO | 9.11 | 0.00 | 1 | Bay Area | | Retired | QF/Selfgen |
| PG&E | ADERA_1_SOLAR1 | 34319 | Q644 | 0.48 | 0.00 | 1 | Fresno | Herndon | Aug NQC | Solar |
| PG&E | ADMEST_6_SOLAR | 34315 | ADAMS_E | 12.47 | 0.00 | 1 | Fresno | Herndon | Energy Only | Solar |
| PG&E | AGRICO_6_PL3N5 | 34608 | AGRICO | 13.8 | 22.69 | 3 | Fresno | Herndon | | Market |
| PG&E | AGRICO_7_UNIT | 34608 | AGRICO | 13.8 | 7.47 | 2 | Fresno | Herndon | | Market |
| PG&E | AGRICO_7_UNIT | 34608 | AGRICO | 13.8 | 43.13 | 4 | Fresno | Herndon | | Market |
| PG&E | AVENAL_6_AVPARK | 34265 | AVENAL P | 12 | 2.46 | 1 | Fresno | Coalinga | Aug NQC | Solar |
| PG&E | AVENAL_6_AVSLR1 | 34691 | AVENAL_1 | 21 | 0.00 | EW | Fresno | Coalinga | Energy Only | Solar |
| PG&E | AVENAL_6_AVSLR2 | 34691 | AVENAL_1 | 21 | 0.00 | EW | Fresno | Coalinga | Energy Only | Solar |
| PG&E | AVENAL_6_SANDDG | 34263 | SANDDRAG | 12 | 6.54 | 1 | Fresno | Coalinga | Aug NQC | Solar |
| PG&E | AVENAL_6_SUNCTY | 34257 | SUNCTY D | 12 | 8.20 | 1 | Fresno | Coalinga | Aug NQC | Solar |
| PG&E | BALCHS_7_UNIT 1 | 34624 | BALCH | 13.2 | 33.00 | 1 | Fresno | Herndon | Aug NQC | Market |
| PG&E | BALCHS_7_UNIT 2 | 34612 | BLCH | 13.8 | 52.50 | 1 | Fresno | Herndon | Aug NQC | Market |
| PG&E | BALCHS_7_UNIT 3 | 34614 | BLCH | 13.8 | 54.60 | 1 | Fresno | Herndon | Aug NQC | Market |
| PG&E | CANTUA_1_SOLAR | 34349 | CANTUA_D | 12.47 | 4.10 | 1 | Fresno | | Aug NQC | Solar |
| PG&E | CANTUA_1_SOLAR | 34349 | CANTUA_D | 12.47 | 4.10 | 2 | Fresno | | Aug NQC | Solar |
| PG&E | CHEVCO_6_UNIT 1 | 34652 | CHV.COAL | 9.11 | 1.94 | 1 | Fresno | Coalinga | Aug NQC | QF/Selfgen |
| PG&E | CHEVCO_6_UNIT 2 | 34652 | CHV.COAL | 9.11 | 0.92 | 2 | Fresno | Coalinga | Aug NQC | QF/Selfgen |
| PG&E | CHWCHL_1_BIOMAS | 34305 | CHWCHLA2 | 13.8 | 9.66 | 1 | Fresno | Herndon | Aug NQC | Market |
| PG&E | CHWCHL_1_UNIT | 34301 | CHOWCOGN | 13.8 | 48.00 | 1 | Fresno | Herndon | | Market |
| PG&E | COLGA1_6_SHELLW | 34654 | COLNGAGN | 9.11 | 34.70 | 1 | Fresno | Coalinga | Mothballed | Net Seller |
| PG&E | CORCAN_1_SOLAR1 | 34690 | CORCORAN | 12.47 | 8.20 | FW | Fresno | Herndon, Hanford | Aug NQC | Solar |
| PG&E | CORCAN_1_SOLAR2 | 34692 | CORCORAN | 12.47 | 4.51 | FW | Fresno | Herndon, Hanford | Aug NQC | Solar |

| PG&E | CRESSY_1_PARKER | 34140 | CRESSEY | 115 | 0.84 | | Fresno | | Not modeled Aug NQC | MUNI |
|------|-----------------|-------|-----------------|-------|--------|---|--------|------------------|------------------------|------------|
| PG&E | CRNEVL_6_CRNVA | 34634 | CRANEVLY | 12 | 0.00 | 1 | Fresno | Borden | Aug NQC | Market |
| PG&E | CRNEVL_6_SJQN 2 | 34631 | SJ2GEN | 9.11 | 0.00 | 1 | Fresno | Borden | Aug NQC | Market |
| PG&E | CRNEVL_6_SJQN 3 | 34633 | SJ3GEN | 9.11 | 0.00 | 1 | Fresno | Borden | Aug NQC | Market |
| PG&E | CURTIS_1_CANLCK | | | | 0.00 | | Fresno | | Not modeled Aug NQC | Market |
| PG&E | CURTIS_1_FARFLD | | | | 0.29 | | Fresno | | Not modeled Aug NQC | Market |
| PG&E | DINUBA_6_UNIT | 34648 | DINUBA E | 13.8 | 2.58 | 1 | Fresno | Herndon, Reedley | | Market |
| PG&E | EEKTMN_6_SOLAR1 | 34629 | KETTLEMN | 0.8 | 0.00 | 1 | Fresno | | Energy Only | Solar |
| PG&E | ELCAP_1_SOLAR | | | | 0.62 | | Fresno | | Not Modeled Aug NQC | Solar |
| PG&E | ELNIDP_6_BIOMAS | 34330 | ELNIDO | 13.8 | 9.84 | 1 | Fresno | | Aug NQC | Market |
| PG&E | EXCHEC_7_UNIT 1 | 34306 | EXCHQUER | 13.8 | 90.72 | 1 | Fresno | | Aug NQC | MUNI |
| PG&E | EXCLSG_1_SOLAR | 34623 | Q678 | 0.5 | 24.60 | 1 | Fresno | | Aug NQC | Solar |
| PG&E | FRESHW_1_SOLAR1 | 34699 | Q529 | 0.385 | 0.00 | 1 | Fresno | Herndon | Energy Only | Solar |
| PG&E | FRIANT_6_UNITS | 34636 | FRIANTDM | 6.6 | 10.04 | 2 | Fresno | Borden | Aug NQC | Net Seller |
| PG&E | FRIANT_6_UNITS | 34636 | FRIANTDM | 6.6 | 5.36 | 3 | Fresno | Borden | Aug NQC | Net Seller |
| PG&E | FRIANT_6_UNITS | 34636 | FRIANTDM | 6.6 | 1.42 | 4 | Fresno | Borden | Aug NQC | Net Seller |
| PG&E | GIFENS_6_BUGSL1 | 34644 | Q679 | 0.55 | 8.20 | 1 | Fresno | | Aug NQC | Solar |
| PG&E | GIFFEN_6_SOLAR | 34467 | GIFFEN_DIST | 12.47 | 4.10 | 1 | Fresno | Herndon | Aug NQC | Solar |
| PG&E | GUERNS_6_SOLAR | 34463 | GUERNSEY_ D2 | 12.47 | 4.10 | 5 | Fresno | | Aug NQC | Solar |
| PG&E | GUERNS_6_SOLAR | 34461 | GUERNSEY_ D1 | 12.47 | 4.10 | 8 | Fresno | | Aug NQC | Solar |
| PG&E | GWFPWR_1_UNITS | 34431 | GWF_HEP1 | 13.8 | 49.23 | 1 | Fresno | Herndon, Hanford | | Market |
| PG&E | GWFPWR_1_UNITS | 34433 | GWF_HEP2 | 13.8 | 49.23 | 1 | Fresno | Herndon, Hanford | | Market |
| PG&E | HAASPH_7_PL1X2 | 34610 | HAAS | 13.8 | 72.00 | 1 | Fresno | Herndon | Aug NQC | Market |
| PG&E | HAASPH_7_PL1X2 | 34610 | HAAS | 13.8 | 72.00 | 2 | Fresno | Herndon | Aug NQC | Market |
| PG&E | HELMPG_7_UNIT 1 | 34600 | HELMS | 18 | 407.00 | 1 | Fresno | | Aug NQC | Market |
| PG&E | HELMPG_7_UNIT 2 | 34602 | HELMS | 18 | 407.00 | 2 | Fresno | | Aug NQC | Market |
| PG&E | HELMPG_7_UNIT 3 | 34604 | HELMS | 18 | 404.00 | 3 | Fresno | | Aug NQC | Market |
| PG&E | HENRTA_6_SOLAR1 | | | | 0.62 | | Fresno | | Not modeled Aug NQC | Solar |

| PG&E | HENRTA_6_SOLAR2 | | | | 0.00 | | Fresno | | Not modeled Energy Only | Solar |
|------|-----------------|-------|-----------|-------|--------|----|--------|------------------|----------------------------|------------|
| PG&E | HENRTA_6_UNITA1 | 34539 | GWF_GT1 | 13.8 | 49.98 | 1 | Fresno | | | Market |
| PG&E | HENRTA_6_UNITA2 | 34541 | GWF_GT2 | 13.8 | 49.42 | 1 | Fresno | | | Market |
| PG&E | HENRTS_1_SOLAR | 34617 | Q581 | 0.38 | 41.00 | 1 | Fresno | | Aug NQC | Solar |
| PG&E | HURON_6_SOLAR | 34557 | HURON_DI | 12.47 | 4.10 | 1 | Fresno | Coalinga | Aug NQC | Solar |
| PG&E | HURON_6_SOLAR | 34557 | HURON_DI | 12.47 | 4.10 | 2 | Fresno | Coalinga | Aug NQC | Solar |
| PG&E | JAYNE_6_WLSLR | 34639 | WESTLNDS | 0.48 | 0.00 | 1 | Fresno | Coalinga | Energy Only | Solar |
| PG&E | KANSAS_6_SOLAR | 34666 | KANSASS_S | 12.47 | 0.00 | F | Fresno | | Energy Only | Solar |
| PG&E | KERKH1_7_UNIT 1 | 34344 | KERCK1-1 | 6.6 | 13.00 | 1 | Fresno | Herndon | Aug NQC | Market |
| PG&E | KERKH1_7_UNIT 3 | 34345 | KERCK1-3 | 6.6 | 12.80 | 3 | Fresno | Herndon | Aug NQC | Market |
| PG&E | KERKH2_7_UNIT 1 | 34308 | KERCKHOF | 13.8 | 153.90 | 1 | Fresno | Herndon | Aug NQC | Market |
| PG&E | KERMAN_6_SOLAR1 | | | | 0.00 | | Fresno | | Not modeled Energy Only | Solar |
| PG&E | KERMAN_6_SOLAR2 | | | | 0.00 | | Fresno | | Not modeled Energy Only | Solar |
| PG&E | KINGCO_1_KINGBR | 34642 | KINGSBUR | 9.11 | 34.50 | 1 | Fresno | Herndon, Hanford | Aug NQC | Net Seller |
| PG&E | KINGRV_7_UNIT 1 | 34616 | KINGSRIV | 13.8 | 51.20 | 1 | Fresno | Herndon, Reedley | Aug NQC | Market |
| PG&E | KNGBRG_1_KBSLR1 | | | | 0.00 | | Fresno | | Not modeled Energy Only | Solar |
| PG&E | KNGBRG_1_KBSLR2 | | | | 0.00 | | Fresno | | Not modeled Energy Only | Solar |
| PG&E | KNTSTH_6_SOLAR | 34694 | KENT_S | 0.8 | 0.00 | 1 | Fresno | | Energy Only | Solar |
| PG&E | LEPRFD_1_KANSAS | 34680 | KANSAS | 12.47 | 8.20 | 1 | Fresno | Hanford | Aug NQC | Solar |
| PG&E | MALAGA_1_PL1X2 | 34671 | KRCDPCT1 | 13.8 | 48.00 | 1 | Fresno | Herndon | | Market |
| PG&E | MALAGA_1_PL1X2 | 34672 | KRCDPCT2 | 13.8 | 48.00 | 1 | Fresno | Herndon | | Market |
| PG&E | MCCALL_1_QF | 34219 | MCCALL 4 | 12.47 | 0.48 | QF | Fresno | Herndon | Aug NQC | QF/Selfgen |
| PG&E | MCSWAN_6_UNITS | 34320 | MCSWAIN | 9.11 | 9.60 | 1 | Fresno | | Aug NQC | MUNI |
| PG&E | MENBIO_6_RENEW1 | 34339 | CALRENEW | 12.5 | 2.05 | 1 | Fresno | Herndon | Aug NQC | Net Seller |
| PG&E | MENBIO_6_UNIT | 34334 | BIO PWR | 9.11 | 19.24 | 1 | Fresno | | Aug NQC | QF/Selfgen |
| PG&E | MERCED_1_SOLAR1 | | | | 0.00 | | Fresno | | Not modeled Energy Only | Solar |
| PG&E | MERCED_1_SOLAR2 | | | | 0.00 | | Fresno | | Not modeled Energy Only | Solar |
| PG&E | MERCFL_6_UNIT | 34322 | MERCEDFL | 9.11 | 3.36 | 1 | Fresno | | Aug NQC | Market |
| PG&E | MNDOTA_1_SOLAR1 | 34313 | NORTHSTAR | 0.2 | 24.60 | 1 | Fresno | | Aug NQC | Solar |

| PG&E | MNDOTA_1_SOLAR2 | | | | 0.00 | | Fresno | | Not modeled Energy Only | Solar |
|------|-----------------|-------|-----------------|-------|-------|----|--------|------------------|----------------------------|--------|
| PG&E | MSTANG_2_SOLAR | 34683 | Q643W | 0.8 | 12.30 | 1 | Fresno | | Aug NQC | Solar |
| PG&E | MSTANG_2_SOLAR3 | 34683 | Q643W | 0.8 | 16.40 | 1 | Fresno | | Aug NQC | Solar |
| PG&E | MSTANG_2_SOLAR4 | 34683 | Q643W | 0.8 | 12.30 | 1 | Fresno | | Aug NQC | Solar |
| PG&E | ONLLPP_6_UNITS | 34316 | ONEILPMP | 9.11 | 18.11 | 1 | Fresno | | Aug NQC | MUNI |
| PG&E | OROLOM_1_SOLAR1 | 34689 | ORO LOMA_3 | 12.47 | 0.00 | EW | Fresno | | Energy Only | Solar |
| PG&E | OROLOM_1_SOLAR2 | 34689 | ORO LOMA_3 | 12.47 | 0.00 | EW | Fresno | | Energy Only | Solar |
| PG&E | ORTGA_6_ME1SL1 | | | | 0.00 | | Fresno | | Not modeled Energy Only | Solar |
| PG&E | PAIGES_6_SOLAR | 34653 | Q526 | 0.55 | 0.00 | 1 | Fresno | Coalinga | Energy Only | Solar |
| PG&E | PINFLT_7_UNITS | 38720 | PINEFLAT | 13.8 | 26.55 | 1 | Fresno | Herndon | Aug NQC | MUNI |
| PG&E | PINFLT_7_UNITS | 38720 | PINEFLAT | 13.8 | 26.55 | 2 | Fresno | Herndon | Aug NQC | MUNI |
| PG&E | PINFLT_7_UNITS | 38720 | PINEFLAT | 13.8 | 26.55 | 3 | Fresno | Herndon | Aug NQC | MUNI |
| PG&E | PNCHPP_1_PL1X2 | 34328 | STARGT1 | 13.8 | 59.96 | 1 | Fresno | | | Market |
| PG&E | PNCHPP_1_PL1X2 | 34329 | STARGT2 | 13.8 | 59.96 | 2 | Fresno | | | Market |
| PG&E | PNOCHE_1_PL1X2 | 34142 | WHD_PAN2 | 13.8 | 49.97 | 1 | Fresno | Herndon | | Market |
| PG&E | PNOCHE_1_UNITA1 | 34186 | DG_PAN1 | 13.8 | 48.00 | 1 | Fresno | | | Market |
| PG&E | REEDLY_6_SOLAR | | | | 0.00 | | Fresno | Herndon, Reedley | Not modeled Energy Only | Solar |
| PG&E | S_RITA_6_SOLAR1 | | | | 0.00 | | Fresno | | Not modeled Energy Only | Solar |
| PG&E | SCHNDR_1_FIVPTS | 34353 | SCHINDLER_ D | 12.47 | 4.10 | 1 | Fresno | Coalinga | Aug NQC | Solar |
| PG&E | SCHNDR_1_FIVPTS | 34353 | SCHINDLER_ D | 12.47 | 2.05 | 2 | Fresno | Coalinga | Aug NQC | Solar |
| PG&E | SCHNDR_1_WSTSDE | 34353 | SCHINDLER_ D | 12.47 | 4.10 | 3 | Fresno | Coalinga | Aug NQC | Solar |
| PG&E | SCHNDR_1_WSTSDE | 34353 | SCHINDLER_ D | 12.47 | 2.05 | 4 | Fresno | Coalinga | Aug NQC | Solar |
| PG&E | SGREGY_6_SANGER | 34646 | SANGERCO | 13.8 | 38.77 | 1 | Fresno | | Aug NQC | Market |
| PG&E | SGREGY_6_SANGER | 34646 | SANGERCO | 13.8 | 9.31 | 2 | Fresno | | Aug NQC | Market |
| PG&E | STOREY_2_MDRCH2 | 34253 | BORDEN D | 12.47 | 0.34 | | Fresno | | Not modeled Aug NQC | Market |
| PG&E | STOREY_2_MDRCH3 | 34253 | BORDEN D | 12.47 | 0.23 | | Fresno | | Not modeled Aug NQC | Market |
| PG&E | STOREY_2_MDRCH4 | 34253 | BORDEN D | 12.47 | 0.42 | | Fresno | | Not modeled Aug NQC | Market |

| PG&E | STOREY_7_MDRCHW | 34209 | STOREY D | 12.47 | 0.66 | 1 | Fresno | | Aug NQC | Net Seller |
|------|--------------------|--------|------------------|-------|-------|----|--------|------------------|----------------------------|------------|
| PG&E | STROUD_6_SOLAR | 34563 | STROUD_D | 12.47 | 4.10 | 1 | Fresno | Herndon | Aug NQC | Solar |
| PG&E | STROUD_6_SOLAR | 34563 | STROUD_D | 12.47 | 4.10 | 2 | Fresno | Herndon | Aug NQC | Solar |
| PG&E | TRNQL8_2_AMASR1 | 365514 | Q1032G1 | 0.55 | 8.20 | 1 | Fresno | | Aug NQC | Solar |
| PG&E | TRNQL8_2_AZUSR1 | 365517 | Q1032G2 | 0.55 | 8.20 | 2 | Fresno | | Aug NQC | Solar |
| PG&E | TRNQL8_2_ROJSR1 | 365520 | Q1032G3 | 0.55 | 15.58 | 3 | Fresno | | Aug NQC | Solar |
| PG&E | TRNQL8_2_VERSR1 | 365520 | Q1032G3 | 0.55 | 0.00 | 3 | Fresno | | Aug NQC | Solar |
| PG&E | TRNQLT_2_SOLAR | 34340 | Q643X | 0.8 | 82.00 | 1 | Fresno | | Aug NQC | Solar |
| PG&E | ULTPFR_1_UNIT 1 | 34640 | ULTR.PWR | 9.11 | 24.07 | 1 | Fresno | Herndon | Aug NQC | Market |
| PG&E | VEGA_6_SOLAR1 | 34314 | VEGA | 34.5 | 0.00 | 1 | Fresno | | Energy Only | Solar |
| PG&E | WAUKNA_1_SOLAR | 34696 | CORCORANP V_S | 21 | 8.20 | 1 | Fresno | Herndon, Hanford | Aug NQC | Solar |
| PG&E | WAUKNA_1_SOLAR2 | 34677 | Q558 | 21 | 8.10 | 1 | Fresno | Herndon, Hanford | No NQC - Pmax | Solar |
| PG&E | WFRESN_1_SOLAR | | | | 0.00 | | Fresno | | Not modeled Energy Only | Solar |
| PG&E | WHITNY_6_SOLAR | 34673 | Q532 | 0.55 | 0.00 | 1 | Fresno | Coalinga | Energy Only | Solar |
| PG&E | WISHON_6_UNITS | 34658 | WISHON | 2.3 | 4.51 | 1 | Fresno | Borden | Aug NQC | Market |
| PG&E | WISHON_6_UNITS | 34658 | WISHON | 2.3 | 4.51 | 2 | Fresno | Borden | Aug NQC | Market |
| PG&E | WISHON_6_UNITS | 34658 | WISHON | 2.3 | 4.51 | 3 | Fresno | Borden | Aug NQC | Market |
| PG&E | WISHON_6_UNITS | 34658 | WISHON | 2.3 | 4.51 | 4 | Fresno | Borden | Aug NQC | Market |
| PG&E | WISHON_6_UNITS | 34658 | WISHON | 2.3 | 0.36 | SJ | Fresno | Borden | Aug NQC | Market |
| PG&E | WOODWR_1_HYDRO | | | | 0.00 | | Fresno | | Not modeled Energy Only | Market |
| PG&E | WRGHTP_7_AMENGY | 34207 | WRIGHT D | 12.47 | 0.28 | QF | Fresno | | Aug NQC | QF/Selfgen |
| PG&E | ZZ_BORDEN_2_QF | 34253 | BORDEN D | 12.47 | 1.30 | QF | Fresno | | No NQC - hist. data | Net Seller |
| PG&E | ZZ_BULLRD_7_SAGNES | 34213 | BULLD 12 | 12.47 | 0.06 | 1 | Fresno | | Aug NQC | QF/Selfgen |
| PG&E | ZZ_JRWOOD_1_UNIT 1 | 34332 | JRWCOGEN | 9.11 | 0.00 | 1 | Fresno | | | QF/Selfgen |
| PG&E | ZZ_KERKH1_7_UNIT 2 | 34343 | KERCK1-2 | 6.6 | 8.50 | 2 | Fresno | Herndon | No NQC - hist. data | Market |
| PG&E | ZZ_NA | 34485 | FRESNOWW | 12.5 | 0.00 | 1 | Fresno | | No NQC - hist. data | QF/Selfgen |
| PG&E | ZZ_NA | 34485 | FRESNOWW | 12.5 | 0.10 | 2 | Fresno | | No NQC - hist. data | QF/Selfgen |

| PG&E | ZZ_NA | 34485 | FRESNOWW | 12.5 | 0.00 | 3 | Fresno | | No NQC - hist. data | QF/Selfgen |
|------|--------------------------|--------|-------------|-------|--------|----|----------|----------|------------------------|------------|
| PG&E | ZZ_New Unit | 34651 | JACALITO-LV | 0.55 | 1.22 | RN | Fresno | | No NQC - Pmax | Market |
| PG&E | ZZZ_New Unit | 34649 | Q965 | 0.36 | 5.53 | 1 | Fresno | Herndon | No NQC - est. data | Solar |
| PG&E | ZZZ_New Unit | 365502 | Q632BC1 | 0.55 | 8.28 | 1 | Fresno | | No NQC - est. data | Solar |
| PG&E | ZZZ_New Unit | 34603 | JGBSWLT | 12.47 | 0.00 | ST | Fresno | Herndon | Energy Only | Market |
| PG&E | ZZZZ_New Unit | 365524 | Q1036S | 0.36 | 0.00 | 1 | Fresno | | No NQC - est. data | Solar |
| PG&E | ZZZZ_New Unit | 34335 | Q723 | 0.315 | 20.50 | 1 | Fresno | Borden | No NQC - est. data | Solar |
| PG&E | ZZZZ_New Unit | 365527 | Q1036B | 0.27 | 150.00 | 2 | Fresno | | No NQC - est. data | Battery |
| PG&E | ZZZZZ_CAPMAD_1_UNIT 1 | 34179 | MADERA_G | 13.8 | 0.00 | RT | Fresno | | Retired | Market |
| PG&E | ZZZZZ_GATES_6_PL1X2 | 34553 | WHD_GAT2 | 13.8 | 0.00 | RT | Fresno | Coalinga | Retired | Market |
| PG&E | ZZZZZ_INTTRB_6_UNIT | 34342 | INT.TURB | 9.11 | 0.00 | 1 | Fresno | | Aug NQC | Market |
| PG&E | BRDGVL_7_BAKER | | | | 0.00 | | Humboldt | | Not modeled Aug NQC | Net Seller |
| PG&E | FAIRHV_6_UNIT | 31150 | FAIRHAVN | 13.8 | 13.58 | 1 | Humboldt | | Aug NQC | Net Seller |
| PG&E | FTSWRD_6_TRFORK | | | | 0.16 | | Humboldt | | Not modeled Aug NQC | Market |
| PG&E | FTSWRD_7_QFUNTS | | | | 0.00 | | Humboldt | | Not modeled Aug NQC | QF/Selfgen |
| PG&E | GRSCRK_6_BGCKWW | | | | 0.00 | | Humboldt | | Not modeled Aug NQC | Market |
| PG&E | HUMBPP_1_UNITS3 | 31180 | HUMB_G1 | 13.8 | 16.32 | 1 | Humboldt | | | Market |
| PG&E | HUMBPP_1_UNITS3 | 31180 | HUMB_G1 | 13.8 | 15.85 | 2 | Humboldt | | | Market |
| PG&E | HUMBPP_1_UNITS3 | 31180 | HUMB_G1 | 13.8 | 16.69 | 3 | Humboldt | | | Market |
| PG&E | HUMBPP_1_UNITS3 | 31180 | HUMB_G1 | 13.8 | 16.22 | 4 | Humboldt | | | Market |
| PG&E | HUMBPP_6_UNITS | 31181 | HUMB_G2 | 13.8 | 16.14 | 5 | Humboldt | | | Market |
| PG&E | HUMBPP_6_UNITS | 31181 | HUMB_G2 | 13.8 | 16.33 | 6 | Humboldt | | | Market |
| PG&E | HUMBPP_6_UNITS | 31181 | HUMB_G2 | 13.8 | 16.24 | 7 | Humboldt | | | Market |
| PG&E | HUMBPP_6_UNITS | 31182 | HUMB_G3 | 13.8 | 16.62 | 8 | Humboldt | | | Market |
| PG&E | HUMBPP_6_UNITS | 31182 | HUMB_G3 | 13.8 | 16.33 | 9 | Humboldt | | | Market |

| PG&E | HUMBPP_6_UNITS | 31182 | HUMB_G3 | 13.8 | 15.95 | 10 | Humboldt | | | Market |
|------|---------------------------|-------|-----------|------|-------|----|----------|----------------------------|------------------------|------------|
| PG&E | HUMBSB_1_QF | | | | 0.00 | | Humboldt | | Not modeled Aug NQC | QF/Selfgen |
| PG&E | KEKAWK_6_UNIT | 31166 | KEKAWAK | 9.1 | 0.00 | 1 | Humboldt | | Aug NQC | Net Seller |
| PG&E | LAPAC_6_UNIT | 31158 | LP SAMOA | 12.5 | 0.00 | 1 | Humboldt | | | Market |
| PG&E | LOWGAP_1_SUPHR | | | | 0.00 | | Humboldt | | Not modeled Aug NQC | Market |
| PG&E | PACLUM_6_UNIT | 31152 | PAC.LUMB | 13.8 | 7.88 | 1 | Humboldt | | Aug NQC | Net Seller |
| PG&E | PACLUM_6_UNIT | 31152 | PAC.LUMB | 13.8 | 7.88 | 2 | Humboldt | | Aug NQC | Net Seller |
| PG&E | PACLUM_6_UNIT | 31153 | PAC.LUMB | 2.4 | 4.73 | 3 | Humboldt | | Aug NQC | Net Seller |
| PG&E | ZZZZZ_BLULKE_6_BLUEL K | 31156 | BLUELKPP | 12.5 | 0.00 | 1 | Humboldt | | Retired | Market |
| PG&E | 7STDRD_1_SOLAR1 | 35065 | 7STNDRD_1 | 21 | 8.20 | FW | Kern | South Kern PP, Kern Oil | Aug NQC | Solar |
| PG&E | ADOBEE_1_SOLAR | 35021 | Q622B | 34.5 | 8.20 | 1 | Kern | South Kern PP | Aug NQC | Solar |
| PG&E | BDGRCK_1_UNITS | 35029 | BADGERCK | 13.8 | 42.90 | 1 | Kern | South Kern PP | Aug NQC | Net Seller |
| PG&E | BEARMT_1_UNIT | 35066 | PSE-BEAR | 13.8 | 46.60 | 1 | Kern | South Kern PP, Westpark | Aug NQC | Net Seller |
| PG&E | BKRFLD_2_SOLAR1 | | | | 0.57 | | Kern | South Kern PP | Not modeled Aug NQC | Solar |
| PG&E | DEXZEL_1_UNIT | 35024 | DEXEL + | 13.8 | 11.98 | 1 | Kern | South Kern PP, Kern Oil | Aug NQC | Net Seller |
| PG&E | DISCOV_1_CHEVRN | 35062 | DISCOVRY | 13.8 | 3.53 | 1 | Kern | South Kern PP, Kern Oil | Aug NQC | QF/Selfgen |
| PG&E | DOUBLC_1_UNITS | 35023 | DOUBLE C | 13.8 | 52.23 | 1 | Kern | South Kern PP | Aug NQC | Net Seller |
| PG&E | KERNFT_1_UNITS | 35026 | KERNFRNT | 9.11 | 52.40 | 1 | Kern | South Kern PP | Aug NQC | Net Seller |
| PG&E | LAMONT_1_SOLAR1 | 35019 | REGULUS | 0.4 | 24.60 | 1 | Kern | South Kern PP | Aug NQC | Solar |
| PG&E | LAMONT_1_SOLAR2 | 35092 | Q744G4 | 0.38 | 8.20 | 1 | Kern | South Kern PP | Aug NQC | Solar |
| PG&E | LAMONT_1_SOLAR3 | 35087 | Q744G3 | 0.4 | 6.15 | 3 | Kern | South Kern PP | Aug NQC | Solar |
| PG&E | LAMONT_1_SOLAR4 | 35059 | Q744G2 | 0.4 | 17.26 | 2 | Kern | South Kern PP | Aug NQC | Solar |
| PG&E | LAMONT_1_SOLAR5 | 35054 | Q744G1 | 0.4 | 6.83 | 1 | Kern | South Kern PP | Aug NQC | Solar |
| PG&E | LIVOAK_1_UNIT 1 | 35058 | PSE-LVOK | 9.1 | 44.90 | 1 | Kern | South Kern PP, Kern Oil | Aug NQC | Net Seller |
| PG&E | MAGUND_1_BKISR1 | | | | 0.41 | | Kern | South Kern PP, Kern Oil | Not modeled Aug NQC | Solar |
| PG&E | MAGUND_1_BKSSR2 | | | | 2.15 | | Kern | South Kern PP, Kern Oil | Not modeled Aug NQC | Solar |

| PG&E | MTNPOS_1_UNIT | 35036 | MT POSO | 13.8 | 46.64 | 1 | Kern | South Kern PP, Kern Oil | Aug NQC | Net Seller |
|------|-----------------------|--------|----------|------|-------|----|------|------------------------------|----------------------------|------------|
| PG&E | OLDRIV_6_BIOGAS | | | | 1.70 | | Kern | South Kern PP, Kern 70 kV | Not modeled Aug NQC | Market |
| PG&E | OLDRIV_6_CESDBM | | | | 0.94 | | Kern | South Kern PP, Kern 70 kV | Not modeled Aug NQC | Market |
| PG&E | OLDRIV_6_LKVBM1 | | | | 0.94 | | Kern | South Kern PP, Kern 70 kV | Not modeled Aug NQC | Market |
| PG&E | OLDRV1_6_SOLAR | 35091 | OLD_RVR1 | 12.5 | 8.20 | 1 | Kern | South Kern PP, Kern 70 kV | Aug NQC | Solar |
| PG&E | SIERRA_1_UNITS | 35027 | HISIERRA | 9.11 | 52.43 | 1 | Kern | South Kern PP | Aug NQC | Market |
| PG&E | SKERN_6_SOLAR1 | 35089 | S_KERN | 0.48 | 8.20 | 1 | Kern | South Kern PP, Kern 70 kV | Aug NQC | Solar |
| PG&E | SKERN_6_SOLAR2 | 365563 | Q885 | 0.36 | 4.10 | 1 | Kern | South Kern PP, Kern 70 kV | Aug NQC | Solar |
| PG&E | VEDDER_1_SEKERN | 35046 | SEKR | 9.11 | 4.31 | 1 | Kern | South Kern PP, Kern Oil | Aug NQC | QF/Selfgen |
| PG&E | ZZZZZ_KRNCNY_6_UNIT | 35018 | KERNCNYN | 11 | 0.00 | 1 | Kern | South Kern PP, Kern 70 kV | Aug NQC | Market |
| PG&E | ZZZZZ_OILDAL_1_UNIT 1 | 35028 | OILDALE | 9.11 | 0.00 | RT | Kern | South Kern PP, Kern Oil | Retired | Net Seller |
| PG&E | ZZZZZ_RIOBRV_6_UNIT 1 | 35020 | RIOBRAVO | 9.1 | 0.00 | 1 | Kern | South Kern PP, Kern 70 kV | Aug NQC | Market |
| PG&E | ZZZZZ_ULTOGL_1_POSO | 35035 | ULTR PWR | 9.11 | 0.00 | 1 | Kern | South Kern PP, Kern Oil | Retired | QF/Selfgen |
| PG&E | ADLIN_1_UNITS | 31435 | GEO.ENGY | 9.1 | 8.00 | 1 | NCNB | Eagle Rock, Fulton | | Market |
| PG&E | ADLIN_1_UNITS | 31435 | GEO.ENGY | 9.1 | 8.00 | 2 | NCNB | Eagle Rock, Fulton | | Market |
| PG&E | CLOVDL_1_SOLAR | | | | 0.62 | | NCNB | Eagle Rock, Fulton | Not modeled Aug NQC | Solar |
| PG&E | CSTOGA_6_LNDFIL | | | | 0.00 | | NCNB | Fulton | Not modeled Energy Only | Market |
| PG&E | FULTON_1_QF | | | | 0.05 | | NCNB | Fulton | Not modeled Aug NQC | QF/Selfgen |
| PG&E | GEYS11_7_UNIT11 | 31412 | GEYSER11 | 13.8 | 68.00 | 1 | NCNB | Eagle Rock, Fulton | | Market |
| PG&E | GEYS12_7_UNIT12 | 31414 | GEYSER12 | 13.8 | 50.00 | 1 | NCNB | Fulton | | Market |
| PG&E | GEYS13_7_UNIT13 | 31416 | GEYSER13 | 13.8 | 56.00 | 1 | NCNB | | | Market |
| PG&E | GEYS14_7_UNIT14 | 31418 | GEYSER14 | 13.8 | 50.00 | 1 | NCNB | Fulton | | Market |

| PG&E | GEYS16_7_UNIT16 | 31420 | GEYSER16 | 13.8 | 49.00 | 1 | NCNB | Fulton | | Market |
|------|-----------------|-------|----------|------|-------|---|------|-----------------------|--------------------------------|------------|
| PG&E | GEYS17_7_UNIT17 | 31422 | GEYSER17 | 13.8 | 56.00 | 1 | NCNB | Fulton | | Market |
| PG&E | GEYS18_7_UNIT18 | 31424 | GEYSER18 | 13.8 | 45.00 | 1 | NCNB | | | Market |
| PG&E | GEYS20_7_UNIT20 | 31426 | GEYSER20 | 13.8 | 40.00 | 1 | NCNB | | | Market |
| PG&E | GYS5X6_7_UNITS | 31406 | GEYSR5-6 | 13.8 | 42.50 | 1 | NCNB | Eagle Rock, Fulton | | Market |
| PG&E | GYS5X6_7_UNITS | 31406 | GEYSR5-6 | 13.8 | 42.50 | 2 | NCNB | Eagle Rock, Fulton | | Market |
| PG&E | GYS7X8_7_UNITS | 31408 | GEYSER78 | 13.8 | 38.00 | 1 | NCNB | Eagle Rock, Fulton | | Market |
| PG&E | GYS7X8_7_UNITS | 31408 | GEYSER78 | 13.8 | 38.00 | 2 | NCNB | Eagle Rock, Fulton | | Market |
| PG&E | GYSRVL_7_WSPRNG | | | | 0.87 | | NCNB | Fulton | Not modeled Aug NQC | QF/Selfgen |
| PG&E | HILAND_7_YOLOWD | | | | 0.00 | | NCNB | Eagle Rock, Fulton | Not Modeled. Energy Only | Market |
| PG&E | IGNACO_1_QF | | | | 0.13 | | NCNB | | Not modeled Aug NQC | QF/Selfgen |
| PG&E | INDVLY_1_UNITS | 31436 | INDIAN V | 9.1 | 0.79 | 1 | NCNB | Eagle Rock, Fulton | Aug NQC | Net Seller |
| PG&E | MONTPH_7_UNITS | 32700 | MONTICLO | 9.1 | 3.02 | 1 | NCNB | Fulton | Aug NQC | Market |
| PG&E | MONTPH_7_UNITS | 32700 | MONTICLO | 9.1 | 3.02 | 2 | NCNB | Fulton | Aug NQC | Market |
| PG&E | MONTPH_7_UNITS | 32700 | MONTICLO | 9.1 | 0.91 | 3 | NCNB | Fulton | Aug NQC | Market |
| PG&E | NCPA_7_GP1UN1 | 38106 | NCPA1GY1 | 13.8 | 31.00 | 1 | NCNB | | Aug NQC | MUNI |
| PG&E | NCPA_7_GP1UN2 | 38108 | NCPA1GY2 | 13.8 | 28.00 | 1 | NCNB | | Aug NQC | MUNI |
| PG&E | NCPA_7_GP2UN3 | 38110 | NCPA2GY1 | 13.8 | 0.00 | 1 | NCNB | Fulton | Aug NQC | MUNI |
| PG&E | NCPA_7_GP2UN4 | 38112 | NCPA2GY2 | 13.8 | 52.73 | 1 | NCNB | Fulton | Aug NQC | MUNI |
| PG&E | NOVATO_6_LNDFL | | | | 3.67 | | NCNB | | Not modeled Aug NQC | Market |
| PG&E | POTTER_6_UNITS | 31433 | POTTRVLY | 2.4 | 1.25 | 1 | NCNB | Eagle Rock, Fulton | Aug NQC | Market |
| PG&E | POTTER_6_UNITS | 31433 | POTTRVLY | 2.4 | 0.57 | 3 | NCNB | Eagle Rock, Fulton | Aug NQC | Market |
| PG&E | POTTER_6_UNITS | 31433 | POTTRVLY | 2.4 | 0.57 | 4 | NCNB | Eagle Rock, Fulton | Aug NQC | Market |
| PG&E | POTTER_7_VECINO | | _ | | 0.01 | | NCNB | Eagle Rock, Fulton | Not modeled Aug NQC | QF/Selfgen |
| PG&E | SANTFG_7_UNITS | 31400 | SANTA FE | 13.8 | 31.50 | 1 | NCNB | | | Market |

| PG&E | SANTFG_7_UNITS | 31400 | SANTA FE | 13.8 | 31.50 | 2 | NCNB | | | Market |
|------|----------------------------|-------|----------|------|--------|---|--------|---|----------------------------|------------|
| PG&E | SMUDGO_7_UNIT 1 | 31430 | SMUDGEO1 | 13.8 | 47.00 | 1 | NCNB | | | Market |
| PG&E | SNMALF_6_UNITS | 31446 | SONMA LF | 9.1 | 3.56 | 1 | NCNB | Fulton | Aug NQC | QF/Selfgen |
| PG&E | UKIAH_7_LAKEMN | 38020 | CITY UKH | 115 | 0.49 | 1 | NCNB | Eagle Rock, Fulton | Aug NQC | MUNI |
| PG&E | UKIAH_7_LAKEMN | 38020 | CITY UKH | 115 | 1.21 | 2 | NCNB | Eagle Rock, Fulton | Aug NQC | MUNI |
| PG&E | ZZZZZ_BEARCN_2_UNITS | 31402 | BEAR CAN | 13.8 | 0.00 | 1 | NCNB | Fulton | Retired | Market |
| PG&E | ZZZZZ_BEARCN_2_UNITS | 31402 | BEAR CAN | 13.8 | 0.00 | 2 | NCNB | Fulton | Retired | Market |
| PG&E | ZZZZZ_WDFRDF_2_UNIT S | 31404 | WEST FOR | 13.8 | 0.00 | 1 | NCNB | Fulton | | Market |
| PG&E | ZZZZZ_WDFRDF_2_UNIT S | 31404 | WEST FOR | 13.8 | 0.00 | 2 | NCNB | Fulton | | Market |
| PG&E | ZZZZZZ_GEYS17_2_BOTR CK | 31421 | BOTTLERK | 13.8 | 0.00 | 1 | NCNB | Fulton | Retired | Market |
| PG&E | ALLGNY_6_HYDRO1 | | | | 0.03 | | Sierra | | Not modeled Aug NQC | Market |
| PG&E | APLHIL_1_SLABCK | | | | 0.00 | 1 | Sierra | South of Rio Oso, South of Palermo | Not modeled Energy Only | Market |
| PG&E | BANGOR_6_HYDRO | | | | 1.00 | | Sierra | | Not modeled Aug NQC | Market |
| PG&E | BELDEN_7_UNIT 1 | 31784 | BELDEN | 13.8 | 119.00 | 1 | Sierra | South of Palermo | Aug NQC | Market |
| PG&E | BIOMAS_1_UNIT 1 | 32156 | WOODLAND | 9.11 | 24.79 | 1 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | Net Seller |
| PG&E | BNNIEN_7_ALTAPH | 32376 | BONNIE N | 60 | 0.57 | | Sierra | Placer, Drum-Rio Oso, South of Rio Oso, South of Palermo | Not modeled Aug NQC | Market |
| PG&E | BOGUE_1_UNITA1 | 32451 | FREC | 13.8 | 47.60 | 1 | Sierra | Bogue, Drum-Rio Oso | Aug NQC | Market |
| PG&E | BOWMN_6_HYDRO | 32480 | BOWMAN | 9.11 | 2.57 | 1 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | MUNI |
| PG&E | BUCKCK_2_HYDRO | | | | 0.28 | | Sierra | South of Palermo | Not modeled Aug NQC | Market |
| PG&E | BUCKCK_7_OAKFLT | | | | 1.30 | | Sierra | South of Palermo | Not modeled Aug NQC | Market |
| PG&E | BUCKCK_7_PL1X2 | 31820 | BCKS CRK | 11 | 30.63 | 1 | Sierra | South of Palermo | Aug NQC | Market |

| PG&E | BUCKCK_7_PL1X2 | 31820 | BCKS CRK | 11 | 26.62 | 2 | Sierra | South of Palermo | Aug NQC | Market |
|------|-----------------|-------|----------|------|--------|---|--------|---|------------------------|--------|
| PG&E | CAMPFW_7_FARWST | 32470 | CMP.FARW | 9.11 | 2.90 | 1 | Sierra | | Aug NQC | MUNI |
| PG&E | CHICPK_7_UNIT 1 | 32462 | CHI.PARK | 11.5 | 42.00 | 1 | Sierra | Placer, Drum-Rio Oso, South of Rio Oso, South of Palermo | Aug NQC | MUNI |
| PG&E | COLGAT_7_UNIT 1 | 32450 | COLGATE1 | 13.8 | 161.65 | 1 | Sierra | | Aug NQC | MUNI |
| PG&E | COLGAT_7_UNIT 2 | 32452 | COLGATE2 | 13.8 | 161.68 | 1 | Sierra | | Aug NQC | MUNI |
| PG&E | CRESTA_7_PL1X2 | 31812 | CRESTA | 11.5 | 34.86 | 1 | Sierra | South of Palermo | Aug NQC | Market |
| PG&E | CRESTA_7_PL1X2 | 31812 | CRESTA | 11.5 | 35.54 | 2 | Sierra | South of Palermo | Aug NQC | Market |
| PG&E | DAVIS_1_SOLAR1 | | | | 0.41 | | Sierra | Drum-Rio Oso, South of Palermo | Not modeled Aug NQC | Solar |
| PG&E | DAVIS_1_SOLAR2 | | | | 0.41 | | Sierra | Drum-Rio Oso, South of Palermo | Not modeled Aug NQC | Solar |
| PG&E | DAVIS_7_MNMETH | | | | 1.52 | | Sierra | Drum-Rio Oso, South of Palermo | Not modeled Aug NQC | Market |
| PG&E | DEADCK_1_UNIT | 31862 | DEADWOOD | 9.11 | 0.00 | 1 | Sierra | Drum-Rio Oso | Aug NQC | MUNI |
| PG&E | DEERCR_6_UNIT 1 | 32474 | DEER CRK | 9.11 | 3.04 | 1 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | DRUM_7_PL1X2 | 32504 | DRUM 1-2 | 6.6 | 13.00 | 1 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | DRUM_7_PL1X2 | 32504 | DRUM 1-2 | 6.6 | 13.00 | 2 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | DRUM_7_PL3X4 | 32506 | DRUM 3-4 | 6.6 | 13.26 | 1 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | DRUM_7_PL3X4 | 32506 | DRUM 3-4 | 6.6 | 15.64 | 2 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | DRUM_7_UNIT 5 | 32454 | DRUM 5 | 13.8 | 50.00 | 1 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | DUTCH1_7_UNIT 1 | 32464 | DTCHFLT1 | 11 | 22.00 | 1 | Sierra | Placer, Drum-Rio Oso, South of Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | DUTCH2_7_UNIT 1 | 32502 | DTCHFLT2 | 6.9 | 26.00 | 1 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | MUNI |
| PG&E | ELDORO_7_UNIT 1 | 32513 | ELDRADO1 | 21.6 | 11.00 | 1 | Sierra | South of Rio Oso, South of Palermo | | Market |
| PG&E | ELDORO_7_UNIT 2 | 32514 | ELDRADO2 | 21.6 | 11.00 | 1 | Sierra | South of Rio Oso, South of Palermo | | Market |

| PG&E | FMEADO_6_HELLHL | 32486 | HELLHOLE | 9.11 | 0.37 | 1 | Sierra | South of Rio Oso, South of Palermo | Aug NQC | MUNI |
|------|-----------------|-------|----------|------|--------|---|--------|---|------------------------|------------|
| PG&E | FMEADO_7_UNIT | 32508 | FRNCH MD | 4.2 | 16.00 | 1 | Sierra | South of Rio Oso, South of Palermo | Aug NQC | MUNI |
| PG&E | FORBST_7_UNIT 1 | 31814 | FORBSTWN | 11.5 | 37.50 | 1 | Sierra | Drum-Rio Oso | Aug NQC | MUNI |
| PG&E | GRIDLY_6_SOLAR | 38054 | GRIDLEY | 60 | 0.00 | 1 | Sierra | Pease | Energy Only | Solar |
| PG&E | GRNLF1_1_UNITS | 32490 | GRNLEAF1 | 13.8 | 33.36 | 1 | Sierra | Bogue, Drum-Rio Oso | Aug NQC | Market |
| PG&E | GRNLF1_1_UNITS | 32491 | GRNLEAF1 | 13.8 | 15.84 | 2 | Sierra | Bogue, Drum-Rio Oso | Aug NQC | Market |
| PG&E | GRNLF2_1_UNIT | 32492 | GRNLEAF2 | 13.8 | 37.77 | 1 | Sierra | Pease, Drum-Rio Oso | Aug NQC | QF/Selfgen |
| PG&E | HALSEY_6_UNIT | 32478 | HALSEY F | 9.11 | 13.50 | 1 | Sierra | Placer, Drum-Rio Oso, South of Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | HAYPRS_6_QFUNTS | 32488 | HAYPRES+ | 9.11 | 0.04 | 1 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | QF/Selfgen |
| PG&E | HAYPRS_6_QFUNTS | 32488 | HAYPRES+ | 9.11 | 0.05 | 2 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | QF/Selfgen |
| PG&E | HIGGNS_1_COMBIE | | | | 0.11 | | Sierra | Drum-Rio Oso, South of Rio Oso, South of Palermo | Not modeled Aug NQC | Market |
| PG&E | HIGGNS_7_QFUNTS | | | | 0.22 | | Sierra | Drum-Rio Oso, South of Rio Oso, South of Palermo | Not modeled Aug NQC | QF/Selfgen |
| PG&E | KANAKA_1_UNIT | | | | 0.00 | | Sierra | Drum-Rio Oso | Not modeled Aug NQC | MUNI |
| PG&E | KELYRG_6_UNIT | 31834 | KELLYRDG | 9.11 | 11.00 | 1 | Sierra | Drum-Rio Oso | Aug NQC | MUNI |
| PG&E | LIVEOK_6_SOLAR | | | | 0.51 | | Sierra | Pease | Not modeled Aug NQC | Solar |
| PG&E | LODIEC_2_PL1X2 | 38124 | LODI ST1 | 18 | 103.55 | 1 | Sierra | South of Rio Oso, South of Palermo | | MUNI |
| PG&E | LODIEC_2_PL1X2 | 38123 | LODI CT1 | 18 | 199.03 | 1 | Sierra | South of Rio Oso, South of Palermo | | MUNI |
| PG&E | MDFKRL_2_PROJCT | 32456 | MIDLFORK | 13.8 | 63.94 | 1 | Sierra | South of Rio Oso, South of Palermo | Aug NQC | MUNI |
| PG&E | MDFKRL_2_PROJCT | 32458 | RALSTON | 13.8 | 82.13 | 1 | Sierra | South of Rio Oso, South of Palermo | Aug NQC | MUNI |

| PG&E | MDFKRL_2_PROJCT | 32456 | MIDLFORK | 13.8 | 63.94 | 2 | Sierra | South of Rio Oso, South of Palermo | Aug NQC | MUNI |
|------|-----------------|-------|----------|------|-------|---|--------|---|------------------------|------------|
| PG&E | NAROW1_2_UNIT | 32466 | NARROWS1 | 9.1 | 12.00 | 1 | Sierra | | Aug NQC | Market |
| PG&E | NAROW2_2_UNIT | 32468 | NARROWS2 | 9.1 | 28.51 | 1 | Sierra | | Aug NQC | MUNI |
| PG&E | NWCSTL_7_UNIT 1 | 32460 | NEWCSTLE | 13.2 | 0.06 | 1 | Sierra | Placer, Drum-Rio Oso, South of Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | OROVIL_6_UNIT | 31888 | OROVLLE | 9.11 | 7.50 | 1 | Sierra | Drum-Rio Oso | Aug NQC | Market |
| PG&E | OXBOW_6_DRUM | 32484 | OXBOW F | 9.11 | 3.37 | 1 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | MUNI |
| PG&E | PLACVL_1_CHILIB | 32510 | CHILIBAR | 4.2 | 8.40 | 1 | Sierra | South of Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | PLACVL_1_RCKCRE | | | | 2.39 | | Sierra | South of Rio Oso, South of Palermo | Not modeled Aug NQC | Market |
| PG&E | PLSNTG_7_LNCLND | 32408 | PLSNT GR | 60 | 3.06 | | Sierra | Drum-Rio Oso, South of Rio Oso, South of Palermo | Not modeled Aug NQC | Market |
| PG&E | POEPH_7_UNIT 1 | 31790 | POE 1 | 13.8 | 60.00 | 1 | Sierra | South of Palermo | Aug NQC | Market |
| PG&E | POEPH_7_UNIT 2 | 31792 | POE 2 | 13.8 | 60.00 | 1 | Sierra | South of Palermo | Aug NQC | Market |
| PG&E | RCKCRK_7_UNIT 1 | 31786 | ROCK CK1 | 13.8 | 57.00 | 1 | Sierra | South of Palermo | Aug NQC | Market |
| PG&E | RCKCRK_7_UNIT 2 | 31788 | ROCK CK2 | 13.8 | 56.90 | 1 | Sierra | South of Palermo | Aug NQC | Market |
| PG&E | RIOOSO_1_QF | | | | 0.94 | | Sierra | Drum-Rio Oso, South of Palermo | Not modeled Aug NQC | QF/Selfgen |
| PG&E | ROLLIN_6_UNIT | 32476 | ROLLINSF | 9.11 | 13.50 | 1 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | MUNI |
| PG&E | SLYCRK_1_UNIT 1 | 31832 | SLY.CR. | 9.11 | 13.00 | 1 | Sierra | Drum-Rio Oso | Aug NQC | Market |
| PG&E | SPAULD_6_UNIT 3 | 32472 | SPAULDG | 9.11 | 3.27 | 3 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | SPAULD_6_UNIT12 | 32472 | SPAULDG | 9.11 | 7.00 | 1 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | SPAULD_6_UNIT12 | 32472 | SPAULDG | 9.11 | 4.40 | 2 | Sierra | Drum-Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | SPI LI_2_UNIT 1 | 32498 | SPILINCF | 12.5 | 10.19 | 1 | Sierra | Drum-Rio Oso, South of Rio Oso, South of Palermo | Aug NQC | Net Seller |
| PG&E | STIGCT_2_LODI | 38114 | Stig CC | 13.8 | 49.50 | 1 | Sierra | South of Rio Oso, South of Palermo | | MUNI |

| PG&E | ULTRCK_2_UNIT | 32500 | ULTR RCK | 9.11 | 22.83 | 1 | Sierra | Drum-Rio Oso, South of Rio Oso, South of Palermo | Aug NQC | Market |
|------|---------------------|--------|------------------|------|-------|----|----------|---|------------------------|------------|
| PG&E | WDLEAF_7_UNIT 1 | 31794 | WOODLEAF | 13.8 | 60.00 | 1 | Sierra | Drum-Rio Oso | Aug NQC | MUNI |
| PG&E | WHEATL_6_LNDFIL | 32350 | WHEATLND | 60 | 3.55 | | Sierra | | Not modeled Aug NQC | Market |
| PG&E | WISE_1_UNIT 1 | 32512 | WISE | 12 | 14.50 | 1 | Sierra | Placer, Drum-Rio Oso, South of Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | WISE_1_UNIT 2 | 32512 | WISE | 12 | 3.20 | 1 | Sierra | Placer, Drum-Rio Oso, South of Rio Oso, South of Palermo | Aug NQC | Market |
| PG&E | YUBACT_1_SUNSWT | 32494 | YUBA CTY | 9.11 | 49.97 | 1 | Sierra | Pease, Drum-Rio Oso | Aug NQC | Net Seller |
| PG&E | YUBACT_6_UNITA1 | 32496 | YCEC | 13.8 | 47.60 | 1 | Sierra | Pease, Drum-Rio Oso | | Market |
| PG&E | ZZ_NA | 32162 | RIV.DLTA | 9.11 | 0.00 | 1 | Sierra | Drum-Rio Oso, South of Palermo | No NQC - hist. data | QF/Selfgen |
| PG&E | ZZ_UCDAVS_1_UNIT | 32166 | UC DAVIS | 9.11 | 0.00 | RN | Sierra | Drum-Rio Oso, South of Palermo | No NQC - hist. data | QF/Selfgen |
| PG&E | ZZZ_New Unit | 365510 | Q653F | 0.48 | 4.92 | 1 | Sierra | Drum-Rio Oso, South of Palermo | No NQC - est. data | Solar |
| PG&E | ZZZZZ_GOLDHL_1_QF | | | | 0.00 | | Sierra | South of Rio Oso, South of Palermo | Not modeled | QF/Selfgen |
| PG&E | ZZZZZ_PACORO_6_UNIT | 31890 | PO POWER | 9.11 | 0.00 | 1 | Sierra | Drum-Rio Oso | Retired | QF/Selfgen |
| PG&E | ZZZZZ_PACORO_6_UNIT | 31890 | PO POWER | 9.11 | 0.00 | 2 | Sierra | Drum-Rio Oso | Retired | QF/Selfgen |
| PG&E | BEARDS_7_UNIT 1 | 34074 | BEARDSLY | 6.9 | 8.36 | 1 | Stockton | Tesla-Bellota, Stanislaus | Aug NQC | MUNI |
| PG&E | CAMCHE_1_PL1X3 | 33850 | CAMANCHE | 4.2 | 0.79 | 1 | Stockton | Tesla-Bellota | Aug NQC | MUNI |
| PG&E | CAMCHE_1_PL1X3 | 33850 | CAMANCHE | 4.2 | 0.79 | 2 | Stockton | Tesla-Bellota | Aug NQC | MUNI |
| PG&E | CAMCHE_1_PL1X3 | 33850 | CAMANCHE | 4.2 | 0.79 | 3 | Stockton | Tesla-Bellota | Aug NQC | MUNI |
| PG&E | COGNAT_1_UNIT | 33818 | STCKNBIOMA SS | 13.8 | 44.35 | 1 | Stockton | Weber | Aug NQC | Net Seller |
| PG&E | CRWCKS_1_SOLAR1 | 34051 | Q539 | 34.5 | 0.00 | 1 | Stockton | Tesla-Bellota | Energy Only | Solar |

| PG&E | DONNLS_7_UNIT | 34058 | DONNELLS | 13.8 | 72.00 | 1 | Stockton | Tesla-Bellota, Stanislaus | Aug NQC | MUNI |
|------|-----------------|-------|-----------|------|--------|---|----------|------------------------------|----------------------------|------------|
| PG&E | FROGTN_1_UTICAA | | | | 1.40 | | Stockton | Tesla-Bellota, Stanislaus | Not Modeled Aug NQC | Market |
| PG&E | LOCKFD_1_BEARCK | | | | 0.62 | | Stockton | Tesla-Bellota | Not Modeled Aug NQC | Market |
| PG&E | LOCKFD_1_KSOLAR | | | | 0.41 | | Stockton | Tesla-Bellota | Not Modeled Aug NQC | Solar |
| PG&E | LODI25_2_UNIT 1 | 38120 | LODI25CT | 9.11 | 23.80 | 1 | Stockton | Lockeford | | MUNI |
| PG&E | MANTEC_1_ML1SR1 | | | | 0.00 | | Stockton | Tesla-Bellota | Not modeled Energy Only | Solar |
| PG&E | PEORIA_1_SOLAR | | | | 0.62 | | Stockton | Tesla-Bellota, Stanislaus | Not modeled Aug NQC | Solar |
| PG&E | PHOENX_1_UNIT | | | | 0.82 | | Stockton | Tesla-Bellota, Stanislaus | Not modeled Aug NQC | Market |
| PG&E | SCHLTE_1_PL1X3 | 33805 | GWFTRCY1 | 13.8 | 91.07 | 1 | Stockton | Tesla-Bellota | | Market |
| PG&E | SCHLTE_1_PL1X3 | 33807 | GWFTRCY2 | 13.8 | 91.07 | 1 | Stockton | Tesla-Bellota | | Market |
| PG&E | SCHLTE_1_PL1X3 | 33811 | GWFTRCY3 | 13.8 | 146.76 | 1 | Stockton | Tesla-Bellota | | Market |
| PG&E | SMPRIP_1_SMPSON | 33810 | SP CMPNY | 13.8 | 46.05 | 1 | Stockton | Tesla-Bellota | Aug NQC | Market |
| PG&E | SNDBAR_7_UNIT 1 | 34060 | SANDBAR | 13.8 | 12.93 | 1 | Stockton | Tesla-Bellota, Stanislaus | Aug NQC | MUNI |
| PG&E | SPIFBD_1_PL1X2 | 34055 | SPISONORA | 13.8 | 7.05 | 1 | Stockton | Tesla-Bellota, Stanislaus | Aug NQC | Market |
| PG&E | SPRGAP_1_UNIT 1 | 34078 | SPRNG GP | 6 | 0.00 | 1 | Stockton | Tesla-Bellota, Stanislaus | Aug NQC | Market |
| PG&E | STANIS_7_UNIT 1 | 34062 | STANISLS | 13.8 | 91.00 | 1 | Stockton | Tesla-Bellota, Stanislaus | Aug NQC | Market |
| PG&E | STNRES_1_UNIT | 34056 | STNSLSRP | 13.8 | 19.04 | 1 | Stockton | Tesla-Bellota | Aug NQC | Net Seller |
| PG&E | THMENG_1_UNIT 1 | 33806 | TH.E.DV. | 13.8 | 0.00 | 1 | Stockton | Tesla-Bellota | Aug NQC | Net Seller |
| PG&E | TULLCK_7_UNITS | 34076 | TULLOCH | 6.9 | 5.95 | 1 | Stockton | Tesla-Bellota | Aug NQC | MUNI |
| PG&E | TULLCK_7_UNITS | 34076 | TULLOCH | 6.9 | 6.70 | 2 | Stockton | Tesla-Bellota | Aug NQC | MUNI |
| PG&E | TULLCK_7_UNITS | 34076 | TULLOCH | 6.9 | 4.40 | 3 | Stockton | Tesla-Bellota | Aug NQC | MUNI |
| PG&E | ULTPCH_1_UNIT 1 | 34050 | CH.STN. | 13.8 | 16.19 | 1 | Stockton | Tesla-Bellota, Stanislaus | Aug NQC | QF/Selfgen |
| PG&E | VLYHOM_7_SSJID | | | | 0.57 | | Stockton | Tesla-Bellota, Stanislaus | Not modeled Aug NQC | MUNI |

| PG&E | WEBER_6_FORWRD | | | | 4.20 | | Stockton | Weber | Not modeled Aug NQC | Market |
|------|-----------------------------|-------|------------|------|-------|----|------------|------------------------------|----------------------------|------------|
| PG&E | ZZ_NA | 33687 | STKTN WW | 60 | 1.50 | 1 | Stockton | Weber | No NQC - hist. data | QF/Selfgen |
| PG&E | ZZ_NA | 33821 | PAC_ETH | 12.5 | 0.00 | RN | Stockton | Weber | No NQC - hist. data | QF/Selfgen |
| PG&E | ZZZZZ_FROGTN_7_UTICA | | | | 0.00 | | Stockton | Tesla-Bellota, Stanislaus | Not modeled Energy Only | Market |
| PG&E | ZZZZZ_STOKCG_1_UNIT 1 | 33814 | INGREDION | 12.5 | 0.00 | RN | Stockton | Tesla-Bellota | Retired | QF/Selfgen |
| PG&E | ZZZZZZ_NA | 33830 | GEN.MILL | 9.11 | 0.00 | 1 | Stockton | Lockeford | Retired | QF/Selfgen |
| PG&E | ZZZZZZZ_SANJOA_1_UNI T 1 | 33808 | SJ COGEN | 13.8 | 0.00 | 1 | Stockton | Tesla-Bellota | Retired | QF/Selfgen |
| SCE | ACACIA_6_SOLAR | 29878 | ACACIA_G | 0.48 | 8.20 | EQ | BC/Ventura | | Energy Only | Solar |
| SCE | ALAMO_6_UNIT | 25653 | ALAMO SC | 13.8 | 15.07 | 1 | BC/Ventura | | Aug NQC | MUNI |
| SCE | BGSKYN_2_AS2SR1 | 29773 | ANTLOP2_G1 | 0.42 | 43.05 | EQ | BC/Ventura | | Aug NQC | Solar |
| SCE | BIGCRK_2_EXESWD | 24323 | PORTAL | 4.8 | 9.45 | 1 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24306 | B CRK1-1 | 7.2 | 19.58 | 1 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24311 | B CRK3-1 | 13.8 | 34.44 | 1 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24308 | B CRK2-1 | 13.8 | 49.99 | 1 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24317 | MAMOTH1G | 13.8 | 92.02 | 1 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24306 | B CRK1-1 | 7.2 | 21.26 | 2 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24311 | B CRK3-1 | 13.8 | 33.46 | 2 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24308 | B CRK2-1 | 13.8 | 51.18 | 2 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24318 | MAMOTH2G | 13.8 | 92.02 | 2 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24309 | B CRK2-2 | 7.2 | 18.40 | 3 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24307 | B CRK1-2 | 13.8 | 21.26 | 3 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24312 | B CRK3-2 | 13.8 | 34.44 | 3 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24309 | B CRK2-2 | 7.2 | 19.39 | 4 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24307 | B CRK1-2 | 13.8 | 30.71 | 4 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24312 | B CRK3-2 | 13.8 | 35.43 | 4 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24310 | B CRK2-3 | 7.2 | 16.73 | 5 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24313 | B CRK3-3 | 13.8 | 35.92 | 5 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24310 | B CRK2-3 | 7.2 | 18.21 | 6 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24314 | B CRK 4 | 11.5 | 49.60 | 41 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_2_EXESWD | 24314 | B CRK 4 | 11.5 | 49.80 | 42 | BC/Ventura | Rector, Vestal | Aug NQC | Market |

| SCE | BIGCRK_2_EXESWD | 24315 | B CRK 8 | 13.8 | 24.01 | 81 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
|-----|-----------------|-------|-----------------|-------|--------|----|------------|----------------|----------------------------|--------|
| SCE | BIGCRK_2_EXESWD | 24315 | B CRK 8 | 13.8 | 43.30 | 82 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | BIGCRK_7_DAM7 | | | | 0.00 | | BC/Ventura | Rector, Vestal | Not modeled Energy Only | Market |
| SCE | BIGCRK_7_MAMRES | | | | 0.00 | | BC/Ventura | Rector, Vestal | Not modeled Energy Only | Market |
| SCE | BIGSKY_2_BSKSR6 | 29742 | BSKY G BC | 0.42 | 8.20 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | BIGSKY_2_BSKSR7 | 29703 | BSKY G WABS | 0.42 | 8.20 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | BIGSKY_2_BSKSR8 | 29724 | BSKY G ABSR | 0.38 | 8.20 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | BIGSKY_2_SOLAR1 | 29727 | BSKY G SMR | 0.42 | 8.20 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | BIGSKY_2_SOLAR2 | 29701 | BSKY_G_ESC | 0.42 | 34.41 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | BIGSKY_2_SOLAR3 | 29745 | BSKY_G_BD | 0.42 | 8.20 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | BIGSKY_2_SOLAR4 | 29736 | BSKY_G_BA | 0.42 | 20.00 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | BIGSKY_2_SOLAR5 | 29739 | BSKY_G_BB | 0.42 | 2.05 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | BIGSKY_2_SOLAR6 | 29730 | BSKY_G_SOL V | 0.42 | 34.85 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | BIGSKY_2_SOLAR7 | 29733 | BSKY_G_ADS R | 0.42 | 20.50 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | CEDUCR_2_SOLAR1 | 25049 | DUCOR1 | 0.385 | 0.00 | EQ | BC/Ventura | Vestal | Energy Only | Solar |
| SCE | CEDUCR_2_SOLAR2 | 25052 | DUCOR2 | 0.385 | 0.00 | EQ | BC/Ventura | Vestal | Energy Only | Solar |
| SCE | CEDUCR_2_SOLAR3 | 25055 | DUCOR3 | 0.385 | 0.00 | EQ | BC/Ventura | Vestal | Energy Only | Solar |
| SCE | CEDUCR_2_SOLAR4 | 25058 | DUCOR4 | 0.385 | 0.00 | EQ | BC/Ventura | Vestal | Energy Only | Solar |
| SCE | DELSUR_6_BSOLAR | | | | 1.23 | | BC/Ventura | | Not modeled Aug NQC | Solar |
| SCE | DELSUR_6_CREST | 24411 | DELSUR_DIS T | 66 | 0.00 | A2 | BC/Ventura | | Energy Only | Market |
| SCE | DELSUR_6_DRYFRB | 24411 | DELSUR_DIS T | 66 | 2.05 | A2 | BC/Ventura | | Aug NQC | Market |
| SCE | DELSUR_6_SOLAR1 | 24411 | DELSUR_DIS T | 66 | 2.67 | AS | BC/Ventura | | Aug NQC | Solar |
| SCE | EASTWD_7_UNIT | 24319 | EASTWOOD | 13.8 | 199.00 | 1 | BC/Ventura | Rector, Vestal | | Market |
| SCE | EDMONS_2_NSPIN | 25605 | EDMON1AP | 14.4 | 16.86 | 1 | BC/Ventura | | Pumps | MUNI |
| SCE | EDMONS_2_NSPIN | 25606 | EDMON2AP | 14.4 | 16.86 | 2 | BC/Ventura | | Pumps | MUNI |
| SCE | EDMONS_2_NSPIN | 25607 | EDMON3AP | 14.4 | 16.86 | 3 | BC/Ventura | | Pumps | MUNI |
| SCE | EDMONS_2_NSPIN | 25607 | EDMON3AP | 14.4 | 16.86 | 4 | BC/Ventura | | Pumps | MUNI |
| SCE | EDMONS_2_NSPIN | 25608 | EDMON4AP | 14.4 | 16.86 | 5 | BC/Ventura | | Pumps | MUNI |

| SCE | EDMONS_2_NSPIN | 25608 | EDMON4AP | 14.4 | 16.86 | 6 | BC/Ventura | | Pumps | MUNI |
|-----|-----------------|-------|-----------------|------|--------|----|------------|------------------------------|---|------------|
| SCE | EDMONS_2_NSPIN | 25609 | EDMON5AP | 14.4 | 16.86 | 7 | BC/Ventura | | Pumps | MUNI |
| SCE | EDMONS_2_NSPIN | 25609 | EDMON5AP | 14.4 | 16.86 | 8 | BC/Ventura | | Pumps | MUNI |
| SCE | EDMONS_2_NSPIN | 25610 | EDMON6AP | 14.4 | 16.86 | 9 | BC/Ventura | | Pumps | MUNI |
| SCE | EDMONS_2_NSPIN | 25610 | EDMON6AP | 14.4 | 16.86 | 10 | BC/Ventura | | Pumps | MUNI |
| SCE | EDMONS_2_NSPIN | 25611 | EDMON7AP | 14.4 | 16.85 | 11 | BC/Ventura | | Pumps | MUNI |
| SCE | EDMONS_2_NSPIN | 25611 | EDMON7AP | 14.4 | 16.85 | 12 | BC/Ventura | | Pumps | MUNI |
| SCE | EDMONS_2_NSPIN | 25612 | EDMON8AP | 14.4 | 16.85 | 13 | BC/Ventura | | Pumps | MUNI |
| SCE | EDMONS_2_NSPIN | 25612 | EDMON8AP | 14.4 | 16.85 | 14 | BC/Ventura | | Pumps | MUNI |
| SCE | GLDFGR_6_SOLAR1 | 25079 | PRIDE B G | 0.64 | 8.20 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | GLDFGR_6_SOLAR2 | 25169 | PRIDE C G | 0.64 | 4.67 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | GLOW_6_SOLAR | 29896 | APPINV | 0.42 | 0.00 | EQ | BC/Ventura | | Energy Only | Solar |
| SCE | GOLETA_2_QF | 25335 | GOLETA_DIS T | 66 | 0.05 | S1 | BC/Ventura | S.Clara, Moorpark, Goleta | Aug NQC | QF/Selfgen |
| SCE | GOLETA_6_ELLWOD | 29004 | ELLWOOD | 13.8 | 0.00 | 1 | BC/Ventura | S.Clara, Moorpark, Goleta | Retirement requested effective date January 1, 2019 | Market |
| SCE | GOLETA_6_EXGEN | 24362 | EXGEN2 | 13.8 | 0.00 | G1 | BC/Ventura | S.Clara, Moorpark, Goleta | Aug NQC - Currently out of service | QF/Selfgen |
| SCE | GOLETA_6_EXGEN | 24326 | EXGEN1 | 13.8 | 0.00 | S1 | BC/Ventura | S.Clara, Moorpark, Goleta | Aug NQC - Currently out of service | QF/Selfgen |
| SCE | GOLETA_6_GAVOTA | 25335 | GOLETA_DIS T | 66 | 0.01 | S1 | BC/Ventura | S.Clara, Moorpark, Goleta | Aug NQC | Market |
| SCE | GOLETA_6_TAJIGS | 25335 | GOLETA_DIS T | 66 | 2.84 | S1 | BC/Ventura | S.Clara, Moorpark, Goleta | Aug NQC | Market |
| SCE | LEBECS_2_UNITS | 29051 | PSTRIAG1 | 18 | 165.58 | G1 | BC/Ventura | | Aug NQC | Market |
| SCE | LEBECS_2_UNITS | 29052 | PSTRIAG2 | 18 | 165.58 | G2 | BC/Ventura | | Aug NQC | Market |
| SCE | LEBECS_2_UNITS | 29054 | PSTRIAG3 | 18 | 165.58 | G3 | BC/Ventura | | Aug NQC | Market |
| SCE | LEBECS_2_UNITS | 29053 | PSTRIAS1 | 18 | 170.45 | S1 | BC/Ventura | | Aug NQC | Market |
| SCE | LEBECS_2_UNITS | 29055 | PSTRIAS2 | 18 | 82.79 | S2 | BC/Ventura | | Aug NQC | Market |
| SCE | LITLRK_6_GBCSR1 | 24419 | LTLRCK_DIST | 66 | 1.23 | AS | BC/Ventura | | Aug NQC | Solar |
| SCE | LITLRK_6_SEPV01 | 24419 | LTLRCK_DIST | 66 | 0.00 | AS | BC/Ventura | | Energy Only | Market |

| SCE | LITLRK_6_SOLAR1 | 24419 | LTLRCK_DIST | 66 | 2.05 | AS | BC/Ventura | | Aug NQC | Solar |
|-----|-----------------|-------|-------------|------|-------|----|------------|-------------------|---|------------|
| SCE | LITLRK_6_SOLAR2 | 24419 | LTLRCK_DIST | 66 | 0.82 | AS | BC/Ventura | | Aug NQC | Solar |
| SCE | LITLRK_6_SOLAR3 | 24419 | LTLRCK_DIST | 66 | 0.82 | AS | BC/Ventura | | Aug NQC | Solar |
| SCE | LITLRK_6_SOLAR4 | 24419 | LTLRCK_DIST | 66 | 1.23 | AS | BC/Ventura | | Aug NQC | Solar |
| SCE | LNCSTR_6_CREST | | | | 0.00 | | BC/Ventura | | Not modeled Energy Only | Market |
| SCE | MNDALY_6_MCGRTH | 29306 | MCGPKGEN | 13.8 | 47.20 | 1 | BC/Ventura | S.Clara, Moorpark | | Market |
| SCE | MOORPK_2_CALABS | 25081 | WDT251 | 13.8 | 5.03 | EQ | BC/Ventura | Moorpark | Aug NQC | Market |
| SCE | MOORPK_6_QF | | | | 0.80 | | BC/Ventura | Moorpark | Not modeled Aug NQC | Market |
| SCE | NEENCH_6_SOLAR | 29900 | ALPINE_G | 0.48 | 27.06 | EQ | BC/Ventura | | Aug NQC | Solar |
| SCE | OASIS_6_CREST | 24421 | OASIS_DIST | 66 | 0.00 | AS | BC/Ventura | | Energy Only | Market |
| SCE | OASIS_6_GBDSR4 | | | | 1.23 | | BC/Ventura | | Not modeled Aug NQC | Solar |
| SCE | OASIS_6_SOLAR1 | 25095 | SOLARISG2 | 0.2 | 0.00 | EQ | BC/Ventura | | Not modeled Energy Only | Solar |
| SCE | OASIS_6_SOLAR2 | 25075 | SOLARISG | 0.2 | 8.20 | EQ | BC/Ventura | | Aug NQC | Solar |
| SCE | OASIS_6_SOLAR3 | | | | 0.00 | | BC/Ventura | | Not modeled Energy Only | Solar |
| SCE | OMAR_2_UNIT 1 | 24102 | OMAR 1G | 13.8 | 74.40 | 1 | BC/Ventura | | | Net Seller |
| SCE | OMAR_2_UNIT 2 | 24103 | OMAR 2G | 13.8 | 75.80 | 2 | BC/Ventura | | | Net Seller |
| SCE | OMAR_2_UNIT 3 | 24104 | OMAR 3G | 13.8 | 78.60 | 3 | BC/Ventura | | | Net Seller |
| SCE | OMAR_2_UNIT 4 | 24105 | OMAR 4G | 13.8 | 81.44 | 4 | BC/Ventura | | | Net Seller |
| SCE | ORMOND_7_UNIT 1 | 24107 | ORMOND1G | 26 | 0.00 | 1 | BC/Ventura | Moorpark | Retirement requested effective date October 1, 2018 | Market |
| SCE | ORMOND_7_UNIT 2 | 24108 | ORMOND2G | 26 | 0.00 | 2 | BC/Ventura | Moorpark | Retirement requested effective date October 1, 2018 | Market |
| SCE | OSO_6_NSPIN | 25614 | OSO A P | 13.2 | 2.25 | 1 | BC/Ventura | | Pumps | MUNI |
| SCE | OSO_6_NSPIN | 25614 | OSO A P | 13.2 | 2.25 | 2 | BC/Ventura | | Pumps | MUNI |
| SCE | OSO_6_NSPIN | 25614 | OSO A P | 13.2 | 2.25 | 3 | BC/Ventura | | Pumps | MUNI |
| SCE | OSO_6_NSPIN | 25614 | OSO A P | 13.2 | 2.25 | 4 | BC/Ventura | | Pumps | MUNI |

| SCE | OSO_6_NSPIN | 25615 | OSO B P | 13.2 | 2.25 | 5 | BC/Ventura | | Pumps | MUNI |
|-----|-----------------|-------|------------------|------|-------|----|------------|----------------|----------------------------|------------|
| SCE | OSO_6_NSPIN | 25615 | OSO B P | 13.2 | 2.25 | 6 | BC/Ventura | | Pumps | MUNI |
| SCE | OSO_6_NSPIN | 25615 | OSO B P | 13.2 | 2.25 | 7 | BC/Ventura | | Pumps | MUNI |
| SCE | OSO_6_NSPIN | 25615 | OSO B P | 13.2 | 2.25 | 8 | BC/Ventura | | Pumps | MUNI |
| SCE | PANDOL_6_UNIT | 24113 | PANDOL | 13.8 | 23.32 | 1 | BC/Ventura | Vestal | Aug NQC | Market |
| SCE | PANDOL_6_UNIT | 24113 | PANDOL | 13.8 | 23.32 | 2 | BC/Ventura | Vestal | Aug NQC | Market |
| SCE | PLAINV_6_BSOLAR | 29917 | SSOLAR)GR WKS | 0.8 | 0.00 | 1 | BC/Ventura | | Energy Only | Solar |
| SCE | PLAINV_6_DSOLAR | 29914 | WADR_PV | 0.42 | 4.10 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | PLAINV_6_NLRSR1 | 29921 | NLR_INVTR | 0.42 | 0.00 | 1 | BC/Ventura | | Aug NQC | Solar |
| SCE | PLAINV_6_SOLAR3 | 25089 | CNTRL ANT G | 0.42 | 0.00 | 1 | BC/Ventura | | Energy Only | Solar |
| SCE | PLAINV_6_SOLARC | 25086 | SIRA SOLAR G | 0.8 | 0.00 | 1 | BC/Ventura | | Energy Only | Solar |
| SCE | PMDLET_6_SOLAR1 | | | | 4.10 | | BC/Ventura | | Not modeled Aug NQC | Solar |
| SCE | RECTOR_2_CREST | 25333 | RECTOR_DIS T | 66 | 0.00 | S1 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | RECTOR_2_KAWEAH | 24370 | KAWGEN | 13.8 | 1.77 | 1 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | RECTOR_2_KAWH 1 | 24370 | KAWGEN | 13.8 | 0.65 | 1 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | RECTOR_2_QF | 25333 | RECTOR_DIS T | 66 | 0.07 | S1 | BC/Ventura | Rector, Vestal | Aug NQC | QF/Selfgen |
| SCE | RECTOR_7_TULARE | 25333 | RECTOR_DIS T | 66 | 0.00 | S1 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | REDMAN_2_SOLAR | 24425 | REDMAN_DIS T | 66 | 1.54 | AS | BC/Ventura | | Aug NQC | Solar |
| SCE | ROSMND_6_SOLAR | 24434 | ROSAMOND_ DIS | 66 | 1.23 | AS | BC/Ventura | | Aug NQC | Solar |
| SCE | RSMSLR_6_SOLAR1 | 29984 | DAWNGEN | 0.8 | 8.20 | EQ | BC/Ventura | | Aug NQC | Solar |
| SCE | RSMSLR_6_SOLAR2 | 29888 | TWILGHTG | 0.8 | 8.20 | EQ | BC/Ventura | | Aug NQC | Solar |
| SCE | SAUGUS_2_TOLAND | 24135 | SAUGUS | 66 | 0.00 | | BC/Ventura | | Not modeled Energy Only | Market |
| SCE | SAUGUS_6_MWDFTH | 25336 | SAUGUS_MW D | 66 | 8.76 | S1 | BC/Ventura | | Aug NQC | MUNI |
| SCE | SAUGUS_6_PTCHGN | 24118 | PITCHGEN | 13.8 | 20.64 | D1 | BC/Ventura | | Aug NQC | MUNI |
| SCE | SAUGUS_6_QF | 24135 | SAUGUS | 66 | 0.62 | | BC/Ventura | | Not modeled Aug NQC | QF/Selfgen |
| SCE | SAUGUS_7_CHIQCN | 24135 | SAUGUS | 66 | 5.71 | | BC/Ventura | | Not modeled Aug NQC | Market |

| SCE | SAUGUS_7_LOPEZ | 24135 | SAUGUS | 66 | 5.34 | | BC/Ventura | | Not modeled Aug NQC | QF/Selfgen |
|-----|-----------------|-------|------------------|-------|-------|----|------------|-------------------|----------------------------|------------|
| SCE | SHUTLE_6_CREST | 24426 | SHUTTLE_DI ST | 66 | 0.00 | AS | BC/Ventura | | Energy Only | Market |
| SCE | SNCLRA_2_HOWLNG | 25080 | SANTACLR_D IS | 13.8 | 10.07 | EQ | BC/Ventura | S.Clara, Moorpark | Aug NQC | Market |
| SCE | SNCLRA_2_SPRHYD | 25080 | SANTACLR_D IS | 13.8 | 0.37 | EQ | BC/Ventura | S.Clara, Moorpark | Aug NQC | Market |
| SCE | SNCLRA_2_UNIT | 29952 | CAMGEN | 13.8 | 24.49 | D1 | BC/Ventura | S.Clara, Moorpark | Aug NQC | Market |
| SCE | SNCLRA_2_UNIT1 | 24159 | WILLAMET | 3.8 | 17.54 | D1 | BC/Ventura | S.Clara, Moorpark | Aug NQC | Market |
| SCE | SNCLRA_6_OXGEN | 24110 | OXGEN | 13.8 | 35.10 | D1 | BC/Ventura | S.Clara, Moorpark | Aug NQC | QF/Selfgen |
| SCE | SNCLRA_6_PROCGN | 24119 | PROCGEN | 13.8 | 45.79 | D1 | BC/Ventura | S.Clara, Moorpark | Aug NQC | Market |
| SCE | SNCLRA_6_QF | 25080 | SANTACLR_D IS | 13.8 | 0.27 | EQ | BC/Ventura | S.Clara, Moorpark | Aug NQC | QF/Selfgen |
| SCE | SPRGVL_2_CREST | 25334 | SPRNGVL_DI ST | 66 | 0.00 | S1 | BC/Ventura | Rector, Vestal | Energy Only | Market |
| SCE | SPRGVL_2_QF | 25334 | SPRNGVL_DI ST | 66 | 0.12 | S1 | BC/Ventura | Rector, Vestal | Aug NQC | QF/Selfgen |
| SCE | SPRGVL_2_TULE | 25334 | SPRNGVL_DI ST | 66 | 0.00 | S1 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | SPRGVL_2_TULESC | 25334 | SPRNGVL_DI ST | 66 | 0.47 | S1 | BC/Ventura | Rector, Vestal | Aug NQC | Market |
| SCE | SUNSHN_2_LNDFL | 29954 | WDT273 | 13.66 | 3.34 | 1 | BC/Ventura | | Aug NQC | Market |
| SCE | SUNSHN_2_LNDFL | 29954 | WDT273 | 13.66 | 3.34 | 2 | BC/Ventura | | Aug NQC | Market |
| SCE | SUNSHN_2_LNDFL | 29954 | WDT273 | 13.66 | 3.34 | 3 | BC/Ventura | | Aug NQC | Market |
| SCE | SUNSHN_2_LNDFL | 29954 | WDT273 | 13.66 | 3.34 | 4 | BC/Ventura | | Aug NQC | Market |
| SCE | SUNSHN_2_LNDFL | 29954 | WDT273 | 13.66 | 3.34 | 5 | BC/Ventura | | Aug NQC | Market |
| SCE | SYCAMR_2_UNIT 1 | 24143 | SYCCYN1G | 13.8 | 85.00 | 1 | BC/Ventura | | Aug NQC | Net Seller |
| SCE | SYCAMR_2_UNIT 2 | 24144 | SYCCYN2G | 13.8 | 85.00 | 2 | BC/Ventura | | Aug NQC | Net Seller |
| SCE | SYCAMR_2_UNIT 3 | 24145 | SYCCYN3G | 13.8 | 85.00 | 3 | BC/Ventura | | Aug NQC | Net Seller |
| SCE | SYCAMR_2_UNIT 4 | 24146 | SYCCYN4G | 13.8 | 85.00 | 4 | BC/Ventura | | Aug NQC | Net Seller |
| SCE | TENGEN_2_PL1X2 | 24148 | TENNGEN1 | 13.8 | 18.81 | D1 | BC/Ventura | | Aug NQC | Net Seller |
| SCE | TENGEN_2_PL1X2 | 24149 | TENNGEN2 | 13.8 | 18.81 | D2 | BC/Ventura | | Aug NQC | Net Seller |
| SCE | VESTAL_2_KERN | 24372 | KR 3-1 | 11 | 5.65 | 1 | BC/Ventura | Vestal | Aug NQC | QF/Selfgen |
| SCE | VESTAL_2_KERN | 24373 | KR 3-2 | 11 | 5.32 | 2 | BC/Ventura | Vestal | Aug NQC | QF/Selfgen |
| SCE | VESTAL_2_RTS042 | | | | 0.00 | | BC/Ventura | Vestal | Not modeled Energy Only | Market |

| SCE | VESTAL_2_SOLAR1 | 25064 | TULRESLR_1 | 0.39 | 8.20 | 1 | BC/Ventura | Vestal | Aug NQC | Solar |
|-----|---------------------------|-------|------------|------|-------|----|------------|-------------------|-----------------------------------|------------|
| SCE | VESTAL_2_SOLAR2 | 25065 | TULRESLR_2 | 0.39 | 5.74 | 1 | BC/Ventura | Vestal | Aug NQC | Solar |
| SCE | VESTAL_2_UNIT1 | | | | 4.77 | | BC/Ventura | Vestal | Not modeled Aug NQC | Market |
| SCE | VESTAL_2_WELLHD | 24116 | WELLGEN | 13.8 | 49.00 | 1 | BC/Ventura | Vestal | | Market |
| SCE | VESTAL_6_QF | 29008 | LAKEGEN | 13.8 | 4.18 | 1 | BC/Ventura | Vestal | Aug NQC | QF/Selfgen |
| SCE | WARNE_2_UNIT | 25651 | WARNE1 | 13.8 | 21.80 | 1 | BC/Ventura | | Aug NQC | MUNI |
| SCE | WARNE_2_UNIT | 25652 | WARNE2 | 13.8 | 21.80 | 2 | BC/Ventura | | Aug NQC | MUNI |
| SCE | ZZ_NA | 24340 | CHARMIN | 13.8 | 2.80 | 1 | BC/Ventura | S.Clara, Moorpark | No NQC - hist. data | QF/Selfgen |
| SCE | ZZZZZ_APPGEN_6_UNIT 1 | 24009 | APPGEN1G | 13.8 | 0.00 | 1 | BC/Ventura | | Retired | Market |
| SCE | ZZZZZ_APPGEN_6_UNIT 1 | 24010 | APPGEN2G | 13.8 | 0.00 | 2 | BC/Ventura | | Retired | Market |
| SCE | ZZZZZ_APPGEN_6_UNIT 1 | 24361 | APPGEN3G | 13.8 | 0.00 | 3 | BC/Ventura | | Retired | Market |
| SCE | ZZZZZ_MNDALY_7_UNIT 1 | 24089 | MANDLY1G | 13.8 | 0.00 | 1 | BC/Ventura | S.Clara, Moorpark | Retired | Market |
| SCE | ZZZZZ_MNDALY_7_UNIT 2 | 24090 | MANDLY2G | 13.8 | 0.00 | 2 | BC/Ventura | S.Clara, Moorpark | Retired | Market |
| SCE | ZZZZZ_MNDALY_7_UNIT 3 | 24222 | MANDLY3G | 16 | 0.00 | 3 | BC/Ventura | S.Clara, Moorpark | Retired | Market |
| SCE | ZZZZZ_MOORPK_7_UNIT A1 | 24098 | MOORPARK | 66 | 0.00 | | BC/Ventura | Moorpark | Not modeled Aug NQC | Market |
| SCE | ZZZZZ_SNCLRA_6_WILLM T | 24159 | WILLAMET | 13.8 | 0.00 | D1 | BC/Ventura | S.Clara, Moorpark | Replaced by SNCLRA_2_ UNIT1 | QF/Selfgen |
| SCE | ZZZZZ_VESTAL_6_ULTRG N | 24150 | ULTRAGEN | 13.8 | 0.00 | 1 | BC/Ventura | Vestal | Retired | QF/Selfgen |
| SCE | ALAMIT_7_UNIT 1 | 24001 | ALAMT1 G | 18 | 0.00 | 1 | LA Basin | Western | Retired by 12/31/2019 | Market |
| SCE | ALAMIT_7_UNIT 2 | 24002 | ALAMT2 G | 18 | 0.00 | 2 | LA Basin | Western | Retired by 12/31/2019 | Market |
| SCE | ALAMIT_7_UNIT 3 | 24003 | ALAMT3 G | 18 | 0.00 | 3 | LA Basin | Western | Retired by 2021 | Market |
| SCE | ALAMIT_7_UNIT 4 | 24004 | ALAMT4 G | 18 | 0.00 | 4 | LA Basin | Western | Retired by 2021 | Market |
| SCE | ALAMIT_7_UNIT 5 | 24005 | ALAMT5 G | 20 | 0.00 | 5 | LA Basin | Western | Retired by 2021 | Market |

| SCE | ALAMIT_7_UNIT 6 | 24161 | ALAMT6 G | 20 | 0.00 | 6 | LA Basin | Western | Retired by 12/31/2019 | Market |
|-----|-----------------|-------|------------|------|-------|----|----------|----------------------------|----------------------------|------------|
| SCE | ALTWD_1_QF | 25635 | ALTWIND | 115 | 3.82 | Q1 | LA Basin | Eastern, Valley- Devers | Aug NQC | QF/Selfgen |
| SCE | ALTWD_1_QF | 25635 | ALTWIND | 115 | 3.82 | Q2 | LA Basin | Eastern, Valley- Devers | Aug NQC | QF/Selfgen |
| SCE | ANAHM_2_CANYN1 | 25211 | CanyonGT 1 | 13.8 | 49.40 | 1 | LA Basin | Western | | MUNI |
| SCE | ANAHM_2_CANYN2 | 25212 | CanyonGT 2 | 13.8 | 48.00 | 2 | LA Basin | Western | | MUNI |
| SCE | ANAHM_2_CANYN3 | 25213 | CanyonGT 3 | 13.8 | 48.00 | 3 | LA Basin | Western | | MUNI |
| SCE | ANAHM_2_CANYN4 | 25214 | CanyonGT 4 | 13.8 | 49.40 | 4 | LA Basin | Western | | MUNI |
| SCE | ANAHM_7_CT | 25208 | DowlingCTG | 13.8 | 40.64 | 1 | LA Basin | Western | Aug NQC | MUNI |
| SCE | ARCOGN_2_UNITS | 24011 | ARCO 1G | 13.8 | 52.07 | 1 | LA Basin | Western | Aug NQC | Net Seller |
| SCE | ARCOGN_2_UNITS | 24012 | ARCO 2G | 13.8 | 52.07 | 2 | LA Basin | Western | Aug NQC | Net Seller |
| SCE | ARCOGN_2_UNITS | 24013 | ARCO 3G | 13.8 | 52.07 | 3 | LA Basin | Western | Aug NQC | Net Seller |
| SCE | ARCOGN_2_UNITS | 24014 | ARCO 4G | 13.8 | 52.07 | 4 | LA Basin | Western | Aug NQC | Net Seller |
| SCE | ARCOGN_2_UNITS | 24163 | ARCO 5G | 13.8 | 26.03 | 5 | LA Basin | Western | Aug NQC | Net Seller |
| SCE | ARCOGN_2_UNITS | 24164 | ARCO 6G | 13.8 | 26.03 | 6 | LA Basin | Western | Aug NQC | Net Seller |
| SCE | BARRE_2_QF | 24016 | BARRE | 230 | 0.00 | | LA Basin | Western | Not modeled | QF/Selfgen |
| SCE | BARRE_6_PEAKER | 29309 | BARPKGEN | 13.8 | 47.00 | 1 | LA Basin | Western | | Market |
| SCE | BLAST_1_WIND | 24839 | BLAST | 115 | 12.99 | 1 | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | BUCKWD_1_NPALM1 | 25634 | BUCKWIND | 115 | 0.98 | | LA Basin | Eastern, Valley- Devers | Not modeled Aug NQC | Wind |
| SCE | BUCKWD_1_QF | 25634 | BUCKWIND | 115 | 4.37 | QF | LA Basin | Eastern, Valley- Devers | Aug NQC | QF/Selfgen |
| SCE | BUCKWD_7_WINTCV | 25634 | BUCKWIND | 115 | 0.35 | W5 | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | CABZON_1_WINDA1 | 29290 | CABAZON | 33 | 10.87 | 1 | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | CAPWD_1_QF | 25633 | CAPWIND | 115 | 5.18 | QF | LA Basin | Eastern, Valley- Devers | Aug NQC | QF/Selfgen |
| SCE | CENTER_2_RHONDO | 24203 | CENTER S | 66 | 1.91 | | LA Basin | Western | Not modeled | QF/Selfgen |
| SCE | CENTER_2_SOLAR1 | | | | 0.00 | | LA Basin | Western | Not modeled Energy Only | Solar |
| SCE | CENTER_2_TECNG1 | | | | 0.00 | | LA Basin | Western | Not modeled Energy Only | Market |
| SCE | CENTER_6_PEAKER | 29308 | CTRPKGEN | 13.8 | 47.00 | 1 | LA Basin | Western | | Market |

| SCE | CENTRY_6_PL1X4 | 25302 | CLTNCTRY | 13.8 | 36.00 | 1 | LA Basin | Eastern | Aug NQC | MUNI |
|-----|-----------------|-------|------------------|------|-------|----|----------|------------------|----------------------------|------------|
| SCE | CHEVMN_2_UNITS | 24022 | CHEVGEN1 | 13.8 | 4.61 | 1 | LA Basin | Western, El Nido | Aug NQC | Net Seller |
| SCE | CHEVMN_2_UNITS | 24023 | CHEVGEN2 | 13.8 | 4.61 | 2 | LA Basin | Western, El Nido | Aug NQC | Net Seller |
| SCE | CHINO_2_APEBT1 | 25180 | WDT1250BES S_ | 0.48 | 20.00 | 1 | LA Basin | Eastern | Aug NQC | Battery |
| SCE | CHINO_2_JURUPA | | | | 0.00 | | LA Basin | Eastern | Not modeled Energy Only | Market |
| SCE | CHINO_2_QF | | | | 0.58 | | LA Basin | Eastern | Not modeled Aug NQC | QF/Selfgen |
| SCE | CHINO_2_SASOLR | | | | 0.00 | | LA Basin | Eastern | Not modeled Energy Only | Solar |
| SCE | CHINO_2_SOLAR | | | | 0.41 | | LA Basin | Eastern | Not modeled | Solar |
| SCE | CHINO_2_SOLAR2 | | | | 0.00 | | LA Basin | Eastern | Not modeled Energy Only | Solar |
| SCE | CHINO_6_CIMGEN | 24026 | CIMGEN | 13.8 | 25.51 | D1 | LA Basin | Eastern | Aug NQC | QF/Selfgen |
| SCE | CHINO_6_SMPPAP | 24140 | SIMPSON | 13.8 | 22.78 | D1 | LA Basin | Eastern | Aug NQC | QF/Selfgen |
| SCE | CHINO_7_MILIKN | 24024 | CHINO | 66 | 1.19 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
| SCE | COLTON_6_AGUAM1 | 25303 | CLTNAGUA | 13.8 | 43.00 | 1 | LA Basin | Eastern | Aug NQC | MUNI |
| SCE | CORONS_2_SOLAR | | | | 0.00 | | LA Basin | Eastern | Not modeled Energy Only | Solar |
| SCE | CORONS_6_CLRWTR | 29338 | CLRWTRCT | 13.8 | 20.72 | G1 | LA Basin | Eastern | | MUNI |
| SCE | CORONS_6_CLRWTR | 29340 | CLRWTRST | 13.8 | 7.28 | S1 | LA Basin | Eastern | | MUNI |
| SCE | DELAMO_2_SOLAR1 | | | | 0.62 | | LA Basin | Western | Not modeled Aug NQC | Solar |
| SCE | DELAMO_2_SOLAR2 | | | | 0.72 | | LA Basin | Western | Not modeled Aug NQC | Solar |
| SCE | DELAMO_2_SOLAR3 | | | | 0.51 | | LA Basin | Western | Not modeled Aug NQC | Solar |
| SCE | DELAMO_2_SOLAR4 | | | | 0.53 | | LA Basin | Western | Not modeled Aug NQC | Solar |
| SCE | DELAMO_2_SOLAR5 | | | | 0.41 | | LA Basin | Western | Not modeled Aug NQC | Solar |
| SCE | DELAMO_2_SOLAR6 | | | | 0.82 | | LA Basin | Western | Not modeled Aug NQC | Solar |
| SCE | DELAMO_2_SOLRC1 | | | | 0.00 | | LA Basin | Western | Not modeled Energy Only | Solar |

| SCE | DELAMO_2_SOLRD | | | | 0.00 | | LA Basin | Western | Not modeled Energy Only | Solar |
|-----|-----------------|-------|----------|------|--------|----|----------|----------------------------|----------------------------|------------|
| SCE | DEVERS_1_QF | 25632 | TERAWND | 115 | 8.63 | QF | LA Basin | Eastern, Valley- Devers | Aug NQC | QF/Selfgen |
| SCE | DEVERS_1_QF | 25639 | SEAWIND | 115 | 10.35 | QF | LA Basin | Eastern, Valley- Devers | Aug NQC | QF/Selfgen |
| SCE | DEVERS_1_SEPV05 | | | | 0.00 | | LA Basin | Eastern, Valley- Devers | Not modeled Energy Only | Market |
| SCE | DEVERS_1_SOLAR | | | | 0.00 | | LA Basin | Eastern, Valley- Devers | Not modeled Energy Only | Solar |
| SCE | DEVERS_1_SOLAR1 | | | | 0.00 | | LA Basin | Eastern, Valley- Devers | Not modeled Energy Only | Solar |
| SCE | DEVERS_1_SOLAR2 | | | | 0.00 | | LA Basin | Eastern, Valley- Devers | Not modeled Energy Only | Solar |
| SCE | DEVERS_2_CS2SR4 | | | | 0.00 | | LA Basin | Eastern, Valley- Devers | Not modeled Energy Only | Solar |
| SCE | DEVERS_2_DHSPG2 | | | | 0.00 | | LA Basin | Eastern, Valley- Devers | Not modeled Energy Only | Market |
| SCE | DMDVLY_1_UNITS | 25425 | ESRP P2 | 6.9 | 1.64 | 8 | LA Basin | Eastern | Aug NQC | QF/Selfgen |
| SCE | DREWS_6_PL1X4 | 25301 | CLTNDREW | 13.8 | 36.00 | 1 | LA Basin | Eastern | Aug NQC | MUNI |
| SCE | DVLCYN_1_UNITS | 25648 | DVLCYN1G | 13.8 | 39.40 | 1 | LA Basin | Eastern | Aug NQC | MUNI |
| SCE | DVLCYN_1_UNITS | 25649 | DVLCYN2G | 13.8 | 39.40 | 2 | LA Basin | Eastern | Aug NQC | MUNI |
| SCE | DVLCYN_1_UNITS | 25603 | DVLCYN3G | 13.8 | 52.54 | 3 | LA Basin | Eastern | Aug NQC | MUNI |
| SCE | DVLCYN_1_UNITS | 25604 | DVLCYN4G | 13.8 | 52.54 | 4 | LA Basin | Eastern | Aug NQC | MUNI |
| SCE | ELLIS_2_QF | 24325 | ORCOGEN | 13.8 | 0.04 | 1 | LA Basin | Western | Aug NQC | QF/Selfgen |
| SCE | ELSEGN_2_UN1011 | 29904 | ELSEG5GT | 16.5 | 131.50 | 5 | LA Basin | Western, El Nido | Aug NQC | Market |
| SCE | ELSEGN_2_UN1011 | 29903 | ELSEG6ST | 13.8 | 131.50 | 6 | LA Basin | Western, El Nido | Aug NQC | Market |
| SCE | ELSEGN_2_UN2021 | 29902 | ELSEG7GT | 16.5 | 131.84 | 7 | LA Basin | Western, El Nido | Aug NQC | Market |
| SCE | ELSEGN_2_UN2021 | 29901 | ELSEG8ST | 13.8 | 131.84 | 8 | LA Basin | Western, El Nido | Aug NQC | Market |
| SCE | ETIWND_2_CHMPNE | | | | 0.00 | | LA Basin | Eastern | Not modeled Energy Only | Market |
| SCE | ETIWND_2_FONTNA | 24055 | ETIWANDA | 66 | 0.22 | | LA Basin | Eastern | Not modeled Aug NQC | QF/Selfgen |
| SCE | ETIWND_2_RTS010 | 24055 | ETIWANDA | 66 | 0.62 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
| SCE | ETIWND_2_RTS015 | 24055 | ETIWANDA | 66 | 1.23 | | LA Basin | Eastern | Not modeled Aug NQC | Market |

| SCE | ETIWND_2_RTS017 | 24055 | ETIWANDA | 66 | 1.44 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
|-----|-----------------|-------|----------|------|-------|----|----------|----------------------------|----------------------------|------------|
| SCE | ETIWND_2_RTS018 | 24055 | ETIWANDA | 66 | 0.62 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
| SCE | ETIWND_2_RTS023 | 24055 | ETIWANDA | 66 | 1.03 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
| SCE | ETIWND_2_RTS026 | 24055 | ETIWANDA | 66 | 2.46 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
| SCE | ETIWND_2_RTS027 | 24055 | ETIWANDA | 66 | 0.82 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
| SCE | ETIWND_2_SOLAR1 | | | | 0.00 | | LA Basin | Eastern | Not modeled Energy Only | Solar |
| SCE | ETIWND_2_SOLAR2 | | | | 0.00 | | LA Basin | Eastern | Not modeled Energy Only | Solar |
| SCE | ETIWND_2_SOLAR5 | | | | 0.00 | | LA Basin | Eastern | Not modeled Energy Only | Solar |
| SCE | ETIWND_2_UNIT1 | 24071 | INLAND | 13.8 | 16.88 | 1 | LA Basin | Eastern | Aug NQC | QF/Selfgen |
| SCE | ETIWND_6_GRPLND | 29305 | ETWPKGEN | 13.8 | 46.00 | 1 | LA Basin | Eastern | | Market |
| SCE | ETIWND_6_MWDETI | 25422 | ETI MWDG | 13.8 | 5.94 | 1 | LA Basin | Eastern | Aug NQC | Market |
| SCE | GARNET_1_SOLAR | 24815 | GARNET | 115 | 0.00 | | LA Basin | Eastern, Valley- Devers | Not modeled Energy Only | Solar |
| SCE | GARNET_1_SOLAR2 | 24815 | GARNET | 115 | 1.64 | | LA Basin | Eastern, Valley- Devers | Not modeled Aug NQC | Solar |
| SCE | GARNET_1_UNITS | 24815 | GARNET | 115 | 2.06 | G1 | LA Basin | Eastern, Valley- Devers | Aug NQC | Market |
| SCE | GARNET_1_UNITS | 24815 | GARNET | 115 | 0.71 | G2 | LA Basin | Eastern, Valley- Devers | Aug NQC | Market |
| SCE | GARNET_1_UNITS | 24815 | GARNET | 115 | 1.61 | G3 | LA Basin | Eastern, Valley- Devers | Aug NQC | Market |
| SCE | GARNET_1_WIND | 24815 | GARNET | 115 | 1.72 | | LA Basin | Eastern, Valley- Devers | Not modeled Aug NQC | Wind |
| SCE | GARNET_1_WINDS | 24815 | GARNET | 115 | 5.96 | W2 | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | GARNET_1_WT3WND | 24815 | GARNET | 115 | 0.00 | W3 | LA Basin | Eastern, Valley- Devers | Aug NQC | Market |
| SCE | GARNET_2_DIFWD1 | 24815 | GARNET | 115 | 2.09 | | LA Basin | Eastern, Valley- Devers | Aug NQC | Market |
| SCE | GARNET_2_HYDRO | 24815 | GARNET | 115 | 0.80 | QF | LA Basin | Eastern, Valley- Devers | Aug NQC | Market |

| SCE | GARNET_2_WIND1 | 24815 | GARNET | 115 | 2.97 | | LA Basin | Eastern, Valley- Devers | Not modeled Aug NQC | Wind |
|-----|-----------------|-------|-----------------|------|-------|----|----------|----------------------------|------------------------|--------|
| SCE | GARNET_2_WIND2 | 24815 | GARNET | 115 | 3.10 | | LA Basin | Eastern, Valley- Devers | Not modeled Aug NQC | Wind |
| SCE | GARNET_2_WIND3 | 24815 | GARNET | 115 | 3.34 | | LA Basin | Eastern, Valley- Devers | Not modeled Aug NQC | Wind |
| SCE | GARNET_2_WIND4 | 24815 | GARNET | 115 | 2.60 | | LA Basin | Eastern, Valley- Devers | Not modeled Aug NQC | Wind |
| SCE | GARNET_2_WIND5 | 24815 | GARNET | 115 | 0.80 | | LA Basin | Eastern, Valley- Devers | Not modeled Aug NQC | Wind |
| SCE | GARNET_2_WPMWD6 | 24815 | GARNET | 115 | 1.57 | | LA Basin | Eastern, Valley- Devers | Not modeled Aug NQC | Wind |
| SCE | GLNARM_2_UNIT 5 | 29013 | GLENARM5_ CT | 13.8 | 50.00 | СТ | LA Basin | Western | | MUNI |
| SCE | GLNARM_2_UNIT 5 | 29014 | GLENARM5_S T | 13.8 | 15.00 | ST | LA Basin | Western | | MUNI |
| SCE | GLNARM_7_UNIT 1 | 29005 | PASADNA1 | 13.8 | 22.07 | 1 | LA Basin | Western | | MUNI |
| SCE | GLNARM_7_UNIT 2 | 29006 | PASADNA2 | 13.8 | 22.30 | 1 | LA Basin | Western | | MUNI |
| SCE | GLNARM_7_UNIT 3 | 25042 | PASADNA3 | 13.8 | 44.83 | 1 | LA Basin | Western | | MUNI |
| SCE | GLNARM_7_UNIT 4 | 25043 | PASADNA4 | 13.8 | 42.42 | 1 | LA Basin | Western | | MUNI |
| SCE | HARBGN_7_UNITS | 24062 | HARBOR G | 13.8 | 76.27 | 1 | LA Basin | Western | | Market |
| SCE | HARBGN_7_UNITS | 24062 | HARBOR G | 13.8 | 11.86 | HP | LA Basin | Western | | Market |
| SCE | HARBGN_7_UNITS | 25510 | HARBORG4 | 4.16 | 11.86 | LP | LA Basin | Western | | Market |
| SCE | HINSON_6_CARBGN | 24020 | CARBGEN1 | 13.8 | 14.78 | 1 | LA Basin | Western | Aug NQC | Market |
| SCE | HINSON_6_CARBGN | 24328 | CARBGEN2 | 13.8 | 14.78 | 1 | LA Basin | Western | Aug NQC | Market |
| SCE | HINSON_6_LBECH1 | 24170 | LBEACH12 | 13.8 | 65.00 | 1 | LA Basin | Western | | Market |
| SCE | HINSON_6_LBECH2 | 24170 | LBEACH12 | 13.8 | 65.00 | 2 | LA Basin | Western | | Market |
| SCE | HINSON_6_LBECH3 | 24171 | LBEACH34 | 13.8 | 65.00 | 3 | LA Basin | Western | | Market |
| SCE | HINSON_6_LBECH4 | 24171 | LBEACH34 | 13.8 | 65.00 | 4 | LA Basin | Western | | Market |
| SCE | HINSON_6_SERRGN | 24139 | SERRFGEN | 13.8 | 28.93 | D1 | LA Basin | Western | Aug NQC | Market |
| SCE | HNTGBH_7_UNIT 1 | 24066 | HUNT1 G | 13.8 | 0.00 | 1 | LA Basin | Western | Retired by 12/31/2019 | Market |
| SCE | HNTGBH_7_UNIT 2 | 24067 | HUNT2 G | 13.8 | 0.00 | 2 | LA Basin | Western | Retired by 2021 | Market |
| SCE | INDIGO_1_UNIT 1 | 29190 | WINTECX2 | 13.8 | 42.00 | 1 | LA Basin | Eastern, Valley- Devers | | Market |
| SCE | INDIGO_1_UNIT 2 | 29191 | WINTECX1 | 13.8 | 42.00 | 1 | LA Basin | Eastern, Valley- Devers | | Market |

| SCE | INDIGO_1_UNIT 3 | 29180 | WINTEC8 | 13.8 | 42.00 | 1 | LA Basin | Eastern, Valley- Devers | | Market |
|-----|-----------------|-------|------------|------|--------|----|----------|-----------------------------------|------------------------|------------|
| SCE | INLDEM_5_UNIT 1 | 29041 | IEEC-G1 | 19.5 | 335.00 | 1 | LA Basin | Eastern, Valley, Valley-Devers | Aug NQC | Market |
| SCE | INLDEM_5_UNIT 2 | 29042 | IEEC-G2 | 19.5 | 335.00 | 1 | LA Basin | Eastern, Valley, Valley-Devers | Mothballed | Market |
| SCE | LACIEN_2_VENICE | 24337 | VENICE | 13.8 | 0.00 | 1 | LA Basin | Western, El Nido | Aug NQC | MUNI |
| SCE | LAGBEL_6_QF | 29951 | REFUSE | 13.8 | 0.35 | D1 | LA Basin | Western | Aug NQC | QF/Selfgen |
| SCE | LGHTHP_6_ICEGEN | 24070 | ICEGEN | 13.8 | 48.00 | 1 | LA Basin | Western | Aug NQC | QF/Selfgen |
| SCE | MESAS_2_QF | 24209 | MESA CAL | 66 | 0.00 | | LA Basin | Western | Not modeled Aug NQC | QF/Selfgen |
| SCE | MIRLOM_2_CORONA | | | | 1.70 | | LA Basin | Eastern | Not modeled Aug NQC | QF/Selfgen |
| SCE | MIRLOM_2_LNDFL | | | | 1.23 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
| SCE | MIRLOM_2_MLBBTA | 25185 | WDT1425_G1 | 0.48 | 10.00 | 1 | LA Basin | Eastern | Aug NQC | Battery |
| SCE | MIRLOM_2_MLBBTB | 25186 | WDT1426_G2 | 0.48 | 10.00 | 1 | LA Basin | Eastern | Aug NQC | Battery |
| SCE | MIRLOM_2_ONTARO | | | | 2.26 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
| SCE | MIRLOM_2_RTS032 | | | | 0.62 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
| SCE | MIRLOM_2_RTS033 | | | | 0.41 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
| SCE | MIRLOM_2_TEMESC | | | | 1.07 | | LA Basin | Eastern | Not modeled Aug NQC | QF/Selfgen |
| SCE | MIRLOM_6_PEAKER | 29307 | MRLPKGEN | 13.8 | 46.00 | 1 | LA Basin | Eastern | | Market |
| SCE | MIRLOM_7_MWDLKM | 24210 | MIRALOMA | 66 | 5.00 | | LA Basin | Eastern | Not modeled Aug NQC | MUNI |
| SCE | MOJAVE_1_SIPHON | 25657 | MJVSPHN1 | 13.8 | 4.04 | 1 | LA Basin | Eastern | Aug NQC | Market |
| SCE | MOJAVE_1_SIPHON | 25658 | MJVSPHN1 | 13.8 | 4.04 | 2 | LA Basin | Eastern | Aug NQC | Market |
| SCE | MOJAVE_1_SIPHON | 25659 | MJVSPHN1 | 13.8 | 4.04 | 3 | LA Basin | Eastern | Aug NQC | Market |
| SCE | MTWIND_1_UNIT 1 | 29060 | MOUNTWND | 115 | 11.77 | S1 | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | MTWIND_1_UNIT 2 | 29060 | MOUNTWND | 115 | 5.88 | S2 | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | MTWIND_1_UNIT 3 | 29060 | MOUNTWND | 115 | 5.95 | S3 | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | OLINDA_2_COYCRK | 24211 | OLINDA | 66 | 3.13 | | LA Basin | Western | Not modeled | QF/Selfgen |

| SCE | OLINDA_2_LNDFL2 | 29011 | BREAPWR2 | 13.8 | 4.07 | C1 | LA Basin | Western | Aug NQC | Market |
|-----|-----------------|-------|----------|------|------|----|----------|----------------------------|----------------------------|------------|
| SCE | OLINDA_2_LNDFL2 | 29011 | BREAPWR2 | 13.8 | 4.07 | C2 | LA Basin | Western | Aug NQC | Market |
| SCE | OLINDA_2_LNDFL2 | 29011 | BREAPWR2 | 13.8 | 4.07 | C3 | LA Basin | Western | Aug NQC | Market |
| SCE | OLINDA_2_LNDFL2 | 29011 | BREAPWR2 | 13.8 | 4.07 | C4 | LA Basin | Western | Aug NQC | Market |
| SCE | OLINDA_2_LNDFL2 | 29011 | BREAPWR2 | 13.8 | 7.28 | S1 | LA Basin | Western | Aug NQC | Market |
| SCE | OLINDA_2_QF | 24211 | OLINDA | 66 | 0.01 | | LA Basin | Western | Not modeled Aug NQC | QF/Selfgen |
| SCE | OLINDA_7_BLKSND | 24211 | OLINDA | 66 | 0.41 | | LA Basin | Western | Not modeled Aug NQC | Market |
| SCE | OLINDA_7_LNDFIL | 24211 | OLINDA | 66 | 0.00 | | LA Basin | Western | Not modeled Aug NQC | QF/Selfgen |
| SCE | PADUA_2_ONTARO | 24111 | PADUA | 66 | 0.35 | | LA Basin | Eastern | Not modeled Aug NQC | QF/Selfgen |
| SCE | PADUA_2_SOLAR1 | 24111 | PADUA | 66 | 0.00 | | LA Basin | Eastern | Not modeled Energy Only | Solar |
| SCE | PADUA_6_MWDSDM | 24111 | PADUA | 66 | 2.74 | | LA Basin | Eastern | Not modeled Aug NQC | MUNI |
| SCE | PADUA_6_QF | 24111 | PADUA | 66 | 0.38 | | LA Basin | Eastern | Not modeled Aug NQC | QF/Selfgen |
| SCE | PADUA_7_SDIMAS | 24111 | PADUA | 66 | 1.05 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
| SCE | PANSEA_1_PANARO | 25640 | PANAERO | 115 | 7.95 | QF | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | PWEST_1_UNIT | 24815 | GARNET | 115 | 0.56 | PC | LA Basin | Western | Aug NQC | Market |
| SCE | REDOND_7_UNIT 5 | 24121 | REDON5 G | 18 | 0.00 | 5 | LA Basin | Western | Retired by 2021 | Market |
| SCE | REDOND_7_UNIT 6 | 24122 | REDON6 G | 18 | 0.00 | 6 | LA Basin | Western | Retired by 2021 | Market |
| SCE | REDOND_7_UNIT 7 | 24123 | REDON7 G | 20 | 0.00 | 7 | LA Basin | Western | Retired by 12/31/2019 | Market |
| SCE | REDOND_7_UNIT 8 | 24124 | REDON8 G | 20 | 0.00 | 8 | LA Basin | Western | Retired by 2021 | Market |
| SCE | RENWD_1_QF | 25636 | RENWIND | 115 | 1.33 | Q1 | LA Basin | Eastern, Valley- Devers | Aug NQC | QF/Selfgen |
| SCE | RENWD_1_QF | 25636 | RENWIND | 115 | 1.32 | Q2 | LA Basin | Eastern, Valley- Devers | Aug NQC | QF/Selfgen |
| SCE | RHONDO_6_PUENTE | 24213 | RIOHONDO | 66 | 0.00 | | LA Basin | Western | Not modeled Aug NQC | Net Seller |

| SCE | RVSIDE_2_RERCU3 | 24299 | RERC2G3 | 13.8 | 48.50 | 1 | LA Basin | Eastern | | MUNI |
|-----|-----------------|-------|-----------|------|--------|----|----------|----------------------------|------------------------|------------|
| SCE | RVSIDE_2_RERCU4 | 24300 | RERC2G4 | 13.8 | 48.50 | 1 | LA Basin | Eastern | | MUNI |
| SCE | RVSIDE_6_RERCU1 | 24242 | RERC1G | 13.8 | 48.35 | 1 | LA Basin | Eastern | | MUNI |
| SCE | RVSIDE_6_RERCU2 | 24243 | RERC2G | 13.8 | 48.50 | 1 | LA Basin | Eastern | | MUNI |
| SCE | RVSIDE_6_SOLAR1 | 24244 | SPRINGEN | 13.8 | 3.08 | | LA Basin | Eastern | Not modeled Aug NQC | Solar |
| SCE | RVSIDE_6_SPRING | 24244 | SPRINGEN | 13.8 | 36.00 | 1 | LA Basin | Eastern | | Market |
| SCE | SANITR_6_UNITS | 24324 | SANIGEN | 13.8 | 42.00 | D1 | LA Basin | Eastern | Aug NQC | QF/Selfgen |
| SCE | SANTGO_2_LNDFL1 | 24341 | COYGEN | 13.8 | 19.16 | 1 | LA Basin | Western | Aug NQC | Market |
| SCE | SANTGO_2_MABBT1 | 25192 | WDT1406_G | 0.48 | 2.00 | 1 | LA Basin | Western | Aug NQC | Battery |
| SCE | SANWD_1_QF | 25646 | SANWIND | 115 | 4.11 | Q1 | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | SANWD_1_QF | 25646 | SANWIND | 115 | 4.11 | Q2 | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | SBERDO_2_PSP3 | 24921 | MNTV-CT1 | 18 | 140.56 | 1 | LA Basin | Eastern, West of Devers | | Market |
| SCE | SBERDO_2_PSP3 | 24922 | MNTV-CT2 | 18 | 140.56 | 1 | LA Basin | Eastern, West of Devers | | Market |
| SCE | SBERDO_2_PSP3 | 24923 | MNTV-ST1 | 18 | 243.89 | 1 | LA Basin | Eastern, West of Devers | | Market |
| SCE | SBERDO_2_PSP4 | 24924 | MNTV-CT3 | 18 | 140.56 | 1 | LA Basin | Eastern, West of Devers | | Market |
| SCE | SBERDO_2_PSP4 | 24925 | MNTV-CT4 | 18 | 140.56 | 1 | LA Basin | Eastern, West of Devers | | Market |
| SCE | SBERDO_2_PSP4 | 24926 | MNTV-ST2 | 18 | 243.89 | 1 | LA Basin | Eastern, West of Devers | | Market |
| SCE | SBERDO_2_QF | 24214 | SANBRDNO | 66 | 0.26 | | LA Basin | Eastern, West of Devers | Not modeled Aug NQC | QF/Selfgen |
| SCE | SBERDO_2_REDLND | 24214 | SANBRDNO | 66 | 0.82 | | LA Basin | Eastern, West of Devers | Not modeled Aug NQC | Market |
| SCE | SBERDO_2_RTS005 | 24214 | SANBRDNO | 66 | 1.03 | | LA Basin | Eastern, West of Devers | Not modeled Aug NQC | Market |
| SCE | SBERDO_2_RTS007 | 24214 | SANBRDNO | 66 | 1.03 | | LA Basin | Eastern, West of Devers | Not modeled Aug NQC | Market |
| SCE | SBERDO_2_RTS011 | 24214 | SANBRDNO | 66 | 1.44 | | LA Basin | Eastern, West of Devers | Not modeled Aug NQC | Market |
| SCE | SBERDO_2_RTS013 | 24214 | SANBRDNO | 66 | 1.44 | | LA Basin | Eastern, West of Devers | Not modeled Aug NQC | Market |

| SCE | SBERDO_2_RTS016 | 24214 | SANBRDNO | 66 | 0.62 | | LA Basin | Eastern, West of Devers | Not modeled Aug NQC | Market |
|-----|-----------------|-------|-----------------|------|--------|----|----------|-----------------------------------|----------------------------|------------|
| SCE | SBERDO_2_RTS048 | 24214 | SANBRDNO | 66 | 0.00 | | LA Basin | Eastern, West of Devers | Not modeled Energy Only | Market |
| SCE | SBERDO_2_SNTANA | 24214 | SANBRDNO | 66 | 0.32 | | LA Basin | Eastern, West of Devers | Not modeled Aug NQC | QF/Selfgen |
| SCE | SBERDO_6_MILLCK | 24214 | SANBRDNO | 66 | 1.04 | | LA Basin | Eastern, West of Devers | Not modeled Aug NQC | QF/Selfgen |
| SCE | SENTNL_2_CTG1 | 29101 | SENTINEL_G 1 | 13.8 | 103.76 | 1 | LA Basin | Eastern, Valley- Devers | | Market |
| SCE | SENTNL_2_CTG2 | 29102 | SENTINEL_G 2 | 13.8 | 95.34 | 1 | LA Basin | Eastern, Valley- Devers | | Market |
| SCE | SENTNL_2_CTG3 | 29103 | SENTINEL_G 3 | 13.8 | 96.85 | 1 | LA Basin | Eastern, Valley- Devers | | Market |
| SCE | SENTNL_2_CTG4 | 29104 | SENTINEL_G 4 | 13.8 | 102.47 | 1 | LA Basin | Eastern, Valley- Devers | | Market |
| SCE | SENTNL_2_CTG5 | 29105 | SENTINEL_G 5 | 13.8 | 103.81 | 1 | LA Basin | Eastern, Valley- Devers | | Market |
| SCE | SENTNL_2_CTG6 | 29106 | SENTINEL_G 6 | 13.8 | 100.99 | 1 | LA Basin | Eastern, Valley- Devers | | Market |
| SCE | SENTNL_2_CTG7 | 29107 | SENTINEL_G 7 | 13.8 | 97.06 | 1 | LA Basin | Eastern, Valley- Devers | | Market |
| SCE | SENTNL_2_CTG8 | 29108 | SENTINEL_G 8 | 13.8 | 101.80 | 1 | LA Basin | Eastern, Valley- Devers | | Market |
| SCE | TIFFNY_1_DILLON | 29021 | WINTEC6 | 115 | 11.93 | 1 | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | TRNSWD_1_QF | 25637 | TRANWIND | 115 | 10.33 | QF | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | TULEWD_1_TULWD1 | | | | 33.81 | | LA Basin | Eastern, Valley- Devers | Not modeled Aug NQC | Wind |
| SCE | VALLEY_5_PERRIS | 24160 | VALLEYSC | 115 | 7.94 | | LA Basin | Eastern, Valley, Valley-Devers | Not modeled Aug NQC | QF/Selfgen |
| SCE | VALLEY_5_REDMTN | 24160 | VALLEYSC | 115 | 3.50 | | LA Basin | Eastern, Valley, Valley-Devers | Not modeled Aug NQC | QF/Selfgen |
| SCE | VALLEY_5_RTS044 | 24160 | VALLEYSC | 115 | 3.28 | | LA Basin | Eastern, Valley, Valley-Devers | Not modeled Aug NQC | Market |
| SCE | VALLEY_5_SOLAR1 | 24160 | VALLEYSC | 115 | 0.00 | | LA Basin | Eastern, Valley, Valley-Devers | Not modeled Energy Only | Solar |
| SCE | VALLEY_5_SOLAR2 | 25082 | WDT786 | 34.5 | 8.20 | EQ | LA Basin | Eastern, Valley, Valley-Devers | Aug NQC | Solar |

| SCE | VENWD_1_WIND1 | 25645 | VENWIND | 115 | 2.50 | Q1 | LA Basin | Eastern, Valley- Devers | Aug NQC | QF/Selfgen |
|-----|-------------------|-------|----------|------|-------|----|----------|----------------------------|----------------------------|------------|
| SCE | VENWD_1_WIND2 | 25645 | VENWIND | 115 | 4.25 | Q2 | LA Basin | Eastern, Valley- Devers | Aug NQC | QF/Selfgen |
| SCE | VENWD_1_WIND3 | 25645 | VENWIND | 115 | 5.05 | EU | LA Basin | Eastern, Valley- Devers | Aug NQC | QF/Selfgen |
| SCE | VERNON_6_GONZL1 | 24342 | FEDGEN | 13.8 | 5.75 | 1 | LA Basin | Western | | MUNI |
| SCE | VERNON_6_GONZL2 | 24342 | FEDGEN | 13.8 | 5.75 | 1 | LA Basin | Western | | MUNI |
| SCE | VERNON_6_MALBRG | 24239 | MALBRG1G | 13.8 | 42.37 | C1 | LA Basin | Western | | MUNI |
| SCE | VERNON_6_MALBRG | 24240 | MALBRG2G | 13.8 | 42.37 | C2 | LA Basin | Western | | MUNI |
| SCE | VERNON_6_MALBRG | 24241 | MALBRG3G | 13.8 | 49.26 | S3 | LA Basin | Western | | MUNI |
| SCE | VILLPK_2_VALLYV | 24216 | VILLA PK | 66 | 4.10 | DG | LA Basin | Western | Aug NQC | QF/Selfgen |
| SCE | VILLPK_6_MWDYOR | 24216 | VILLA PK | 66 | 3.99 | | LA Basin | Western | Not modeled Aug NQC | MUNI |
| SCE | VISTA_2_RIALTO | 24901 | VSTA | 230 | 0.41 | | LA Basin | Eastern | Not modeled | Market |
| SCE | VISTA_2_RTS028 | 24901 | VSTA | 230 | 1.44 | | LA Basin | Eastern | Not modeled Aug NQC | Market |
| SCE | VISTA_6_QF | 24902 | VSTA | 66 | 0.06 | | LA Basin | Eastern | Not modeled Aug NQC | QF/Selfgen |
| SCE | WALCRK_2_CTG1 | 29201 | WALCRKG1 | 13.8 | 96.00 | 1 | LA Basin | Western | | Market |
| SCE | WALCRK_2_CTG2 | 29202 | WALCRKG2 | 13.8 | 96.00 | 1 | LA Basin | Western | | Market |
| SCE | WALCRK_2_CTG3 | 29203 | WALCRKG3 | 13.8 | 96.00 | 1 | LA Basin | Western | | Market |
| SCE | WALCRK_2_CTG4 | 29204 | WALCRKG4 | 13.8 | 96.00 | 1 | LA Basin | Western | | Market |
| SCE | WALCRK_2_CTG5 | 29205 | WALCRKG5 | 13.8 | 96.65 | 1 | LA Basin | Western | | Market |
| SCE | WALNUT_2_SOLAR | | | | 0.00 | | LA Basin | Western | Not modeled Energy Only | Solar |
| SCE | WALNUT_6_HILLGEN | 24063 | HILLGEN | 13.8 | 39.44 | D1 | LA Basin | Western | Aug NQC | Net Seller |
| SCE | WALNUT_7_WCOVCT | 24157 | WALNUT | 66 | 3.45 | | LA Basin | Western | Not modeled Aug NQC | Market |
| SCE | WALNUT_7_WCOVST | 24157 | WALNUT | 66 | 5.61 | | LA Basin | Western | Not modeled Aug NQC | Market |
| SCE | WHTWTR_1_WINDA1 | 29061 | WHITEWTR | 33 | 16.30 | 1 | LA Basin | Eastern, Valley- Devers | Aug NQC | Wind |
| SCE | ZZ_ARCOGN_2_UNITS | 24018 | BRIGEN | 13.8 | 0.00 | 1 | LA Basin | Western | No NQC - hist. data | Net Seller |
| SCE | ZZ_HINSON_6_QF | 24064 | HINSON | 66 | 0.00 | 1 | LA Basin | Western | No NQC - hist. data | QF/Selfgen |

| SCE | ZZ_LAFRES_6_QF | 24332 | PALOGEN | 13.8 | 0.00 | D1 | LA Basin | Western, El Nido | No NQC - hist. data | QF/Selfgen |
|-----|---------------------------|-------|-----------------|------|--------|----|----------|----------------------------|------------------------|------------|
| SCE | ZZ_MOBGEN_6_UNIT 1 | 24094 | MOBGEN | 13.8 | 0.00 | 1 | LA Basin | Western, El Nido | No NQC - hist. data | QF/Selfgen |
| SCE | ZZ_NA | 24327 | THUMSGEN | 13.8 | 0.00 | 1 | LA Basin | Western | No NQC - hist. data | QF/Selfgen |
| SCE | ZZ_NA | 24329 | MOBGEN2 | 13.8 | 0.00 | 1 | LA Basin | Western, El Nido | No NQC - hist. data | QF/Selfgen |
| SCE | ZZ_NA | 24330 | OUTFALL1 | 13.8 | 0.00 | 1 | LA Basin | Western, El Nido | No NQC - hist. data | QF/Selfgen |
| SCE | ZZ_NA | 24331 | OUTFALL2 | 13.8 | 0.00 | 1 | LA Basin | Western, El Nido | No NQC - hist. data | QF/Selfgen |
| SCE | ZZ_NA | 29260 | ALTAMSA4 | 115 | 0.00 | 1 | LA Basin | Eastern, Valley- Devers | No NQC - hist. data | Wind |
| SCE | ZZZ_New | 97624 | WH_STN_1 | 13.8 | 49.00 | 1 | LA Basin | Western | No NQC - Pmax | Market |
| SCE | ZZZ_New | 97625 | WH_STN_2 | 13.8 | 49.00 | 1 | LA Basin | Western | No NQC - Pmax | Market |
| SCE | ZZZ_New | 24575 | ALMT CTG1 | 18 | 200.00 | G1 | LA Basin | Western | No NQC - Pmax | Market |
| SCE | ZZZ_New | 24580 | HUNTBCH CTG1 | 18 | 202.00 | G1 | LA Basin | Western | No NQC - Pmax | Market |
| SCE | ZZZ_New | 24576 | ALMT CTG2 | 18 | 200.00 | G2 | LA Basin | Western | No NQC - Pmax | Market |
| SCE | ZZZ_New | 24581 | HUNTBCH CTG2 | 18 | 202.00 | G2 | LA Basin | Western | No NQC - Pmax | Market |
| SCE | ZZZ_New | 24577 | ALMT STG | 18 | 240.00 | S1 | LA Basin | Western | No NQC - Pmax | Market |
| SCE | ZZZ_New | 24582 | HUNTBCH STG | 18 | 240.00 | S1 | LA Basin | Western | No NQC - Pmax | Market |
| SCE | ZZZZZ_BRDWAY_7_UNIT 3 | 29007 | BRODWYSC | 13.8 | 0.00 | | LA Basin | Western | Retired | MUNI |
| SCE | ZZZZZ_CENTER_2_QF | 29953 | SIGGEN | 13.8 | 0.00 | D1 | LA Basin | Western | Aug NQC | QF/Selfgen |
| SCE | ZZZZZ_ETIWND_7_MIDVL Y | 24055 | ETIWANDA | 66 | 0.00 | _ | LA Basin | Eastern | Not modeled Aug NQC | QF/Selfgen |
| SCE | ZZZZZ_ETIWND_7_UNIT 3 | 24052 | MTNVIST3 | 18 | 0.00 | 3 | LA Basin | Eastern | Retired | Market |
| SCE | ZZZZZ_ETIWND_7_UNIT 4 | 24053 | MTNVIST4 | 18 | 0.00 | 4 | LA Basin | Eastern | Retired | Market |

| SCE | ZZZZZ_LAGBEL_2_STG1 | | | | 0.00 | | LA Basin | Western | Retired | Market |
|-------|---------------------------|-------|-----------------|-------|--------|----|----------|-----------------------------------|------------------------|------------|
| SCE | ZZZZZ_MIRLOM_6_DELG EN | 29339 | DELGEN | 13.8 | 0.00 | 1 | LA Basin | Eastern | Aug NQC | QF/Selfgen |
| SCE | ZZZZZ_RHONDO_2_QF | 24213 | RIOHONDO | 66 | 0.00 | DG | LA Basin | Western | Aug NQC | QF/Selfgen |
| SCE | ZZZZZ_VALLEY_7_BADLN D | 24160 | VALLEYSC | 115 | 0.00 | | LA Basin | Eastern, Valley, Valley-Devers | Retired | Market |
| SCE | ZZZZZ_VALLEY_7_UNITA 1 | 24160 | VALLEYSC | 115 | 0.00 | | LA Basin | Eastern, Valley, Valley-Devers | Not modeled Aug NQC | Market |
| SCE | ZZZZZZ_ELSEGN_7_UNIT 4 | 24048 | ELSEG4 G | 18 | 0.00 | 4 | LA Basin | Western, El Nido | Retired | Market |
| SDG&E | BORDER_6_UNITA1 | 22149 | CALPK_BD | 13.8 | 48.00 | 1 | SD-IV | San Diego, Border | | Market |
| SDG&E | BREGGO_6_DEGRSL | 22085 | BORREGO | 12.5 | 2.58 | DG | SD-IV | San Diego | Aug NQC | Solar |
| SDG&E | BREGGO_6_SOLAR | 22082 | BR GEN1 | 0.21 | 10.66 | 1 | SD-IV | San Diego | Aug NQC | Solar |
| SDG&E | CARLS1_2_CARCT1 | 22783 | EA5 REPOWER1 | 13.8 | 105.50 | 1 | SD-IV | San Diego | Aug NQC | Market |
| SDG&E | CARLS1_2_CARCT1 | 22784 | EA5 REPOWER2 | 13.8 | 105.50 | 1 | SD-IV | San Diego | Aug NQC | Market |
| SDG&E | CARLS1_2_CARCT1 | 22786 | EA5 REPOWER4 | 13.8 | 105.50 | 1 | SD-IV | San Diego | Aug NQC | Market |
| SDG&E | CARLS1_2_CARCT1 | 22788 | EA5 REPOWER3 | 13.8 | 105.50 | 1 | SD-IV | San Diego | Aug NQC | Market |
| SDG&E | CARLS2_1_CARCT1 | 22787 | EA5 REPOWER5 | 13.8 | 105.50 | 1 | SD-IV | San Diego | Aug NQC | Market |
| SDG&E | CCRITA_7_RPPCHF | 22124 | CHCARITA | 138 | 2.31 | 1 | SD-IV | San Diego | Aug NQC | Market |
| SDG&E | CHILLS_1_SYCENG | 22120 | CARLTNHS | 138 | 0.71 | 1 | SD-IV | San Diego | Aug NQC | QF/Selfgen |
| SDG&E | CHILLS_7_UNITA1 | 22120 | CARLTNHS | 138 | 1.52 | 2 | SD-IV | San Diego | Aug NQC | QF/Selfgen |
| SDG&E | CNTNLA_2_SOLAR1 | 23463 | DW GEN3&4 | 0.33 | 51.25 | 1 | SD-IV | | Aug NQC | Solar |
| SDG&E | CNTNLA_2_SOLAR2 | 23463 | DW GEN3&4 | 0.33 | 0.00 | 2 | SD-IV | | Energy Only | Solar |
| SDG&E | CPSTNO_7_PRMADS | 22112 | CAPSTRNO | 138 | 5.88 | 1 | SD-IV | San Diego | Aug NQC | Market |
| SDG&E | CPVERD_2_SOLAR | 23309 | IV GEN3 G1 | 0.31 | 31.66 | G1 | SD-IV | | Aug NQC | Solar |
| SDG&E | CPVERD_2_SOLAR | 23301 | IV GEN3 G2 | 0.31 | 25.33 | G2 | SD-IV | | Aug NQC | Solar |
| SDG&E | CRELMN_6_RAMON1 | 22152 | CREELMAN | 69 | 0.82 | DG | SD-IV | San Diego | Aug NQC | Solar |
| SDG&E | CRELMN_6_RAMON2 | 22152 | CREELMAN | 69 | 2.05 | DG | SD-IV | San Diego | Aug NQC | Solar |
| SDG&E | CRELMN_6_RAMSR3 | | | | 1.42 | | SD-IV | San Diego | Not modeled Aug NQC | Solar |
| SDG&E | CRSTWD_6_KUMYAY | 22915 | KUMEYAAY | 0.69 | 13.25 | 1 | SD-IV | San Diego | Aug NQC | Wind |
| SDG&E | CSLR4S_2_SOLAR | 23298 | DW GEN1 G1 | 0.315 | 26.65 | G1 | SD-IV | | Aug NQC | Solar |

| SDG&E | CSLR4S_2_SOLAR | 23299 | DW GEN1 G2 | 0.315 | 26.65 | G2 | SD-IV | | Aug NQC | Solar |
|-------|-----------------|-------|----------------|-------|--------|----|-------|------------------------|---|------------|
| SDG&E | ELCAJN_6_EB1BT1 | 22208 | EL CAJON | 69 | 7.50 | 1 | SD-IV | San Diego, El Cajon | | Battery |
| SDG&E | ELCAJN_6_LM6K | 23320 | EC GEN2 | 13.8 | 48.10 | 1 | SD-IV | San Diego, El Cajon | | Market |
| SDG&E | ELCAJN_6_UNITA1 | 22150 | EC GEN1 | 13.8 | 45.42 | 1 | SD-IV | San Diego, El Cajon | | Market |
| SDG&E | ENERSJ_2_WIND | 23100 | ECO GEN1 G1 | 0.69 | 41.10 | G1 | SD-IV | | Aug NQC | Wind |
| SDG&E | ESCNDO_6_EB1BT1 | 22256 | ESCNDIDO | 69 | 10.00 | 1 | SD-IV | San Diego, Esco | | Battery |
| SDG&E | ESCNDO_6_EB2BT2 | 22256 | ESCNDIDO | 69 | 10.00 | 1 | SD-IV | San Diego, Esco | | Battery |
| SDG&E | ESCNDO_6_EB3BT3 | 22256 | ESCNDIDO | 69 | 10.00 | 1 | SD-IV | San Diego, Esco | | Battery |
| SDG&E | ESCNDO_6_PL1X2 | 22257 | ESGEN | 13.8 | 48.71 | 1 | SD-IV | San Diego, Esco | | Market |
| SDG&E | ESCNDO_6_UNITB1 | 22153 | CALPK_ES | 13.8 | 48.00 | 1 | SD-IV | San Diego, Esco | | Market |
| SDG&E | ESCO_6_GLMQF | 22332 | GOALLINE | 69 | 36.41 | 1 | SD-IV | San Diego, Esco | Aug NQC | Net Seller |
| SDG&E | IVSLRP_2_SOLAR1 | 23440 | DW GEN2 G1 | 0.36 | 82.00 | 1 | SD-IV | | Aug NQC | Solar |
| SDG&E | IVWEST_2_SOLAR1 | 23155 | DU GEN1 G1 | 0.2 | 33.27 | G1 | SD-IV | | Aug NQC | Solar |
| SDG&E | IVWEST_2_SOLAR1 | 23156 | DU GEN1 G2 | 0.2 | 28.23 | G2 | SD-IV | | Aug NQC | Solar |
| SDG&E | JACMSR_1_JACSR1 | 23352 | ECO GEN2 | 0.55 | 8.20 | 1 | SD-IV | | Aug NQC | Solar |
| SDG&E | LAKHDG_6_UNIT 1 | 22625 | LKHODG1 | 13.8 | 20.00 | 1 | SD-IV | San Diego, Esco | | Market |
| SDG&E | LAKHDG_6_UNIT 2 | 22626 | LKHODG2 | 13.8 | 20.00 | 2 | SD-IV | San Diego, Esco | | Market |
| SDG&E | LARKSP_6_UNIT 1 | 22074 | LRKSPBD1 | 13.8 | 46.00 | 1 | SD-IV | San Diego, Border | | Market |
| SDG&E | LARKSP_6_UNIT 2 | 22075 | LRKSPBD2 | 13.8 | 46.00 | 1 | SD-IV | San Diego, Border | | Market |
| SDG&E | LAROA1_2_UNITA1 | 20187 | LRP-U1 | 16 | 0.00 | 1 | SD-IV | | Connect to CENACE/CF E grid for the summer – not available for ISO BAA RA purpose | Market |
| SDG&E | LAROA2_2_UNITA1 | 22996 | INTBST | 18 | 145.19 | 1 | SD-IV | | | Market |
| SDG&E | LAROA2_2_UNITA1 | 22997 | INTBCT | 16 | 176.81 | 1 | SD-IV | | | Market |
| SDG&E | LILIAC_6_SOLAR | 22404 | LILIAC | 69 | 1.23 | DG | SD-IV | San Diego | | Solar |
| SDG&E | MRGT_6_MEF2 | 22487 | MEF_MR2 | 13.8 | 44.00 | 1 | SD-IV | San Diego | | Market |
| SDG&E | MRGT_6_MMAREF | 22486 | MEF_MR1 | 13.8 | 45.00 | 1 | SD-IV | San Diego | | Market |
| SDG&E | MSHGTS_6_MMARLF | 22448 | MESAHGTS | 69 | 4.37 | 1 | SD-IV | San Diego, Mission | Aug NQC | Market |

| SDG&E | MSSION_2_QF | 22496 | MISSION | 69 | 0.65 | 1 | SD-IV | San Diego | Aug NQC | Market |
|-------|-----------------|-------|--------------|------|--------|----|-------|--------------------------------------|----------------------------|------------|
| SDG&E | MURRAY_6_UNIT | 22532 | MURRAY | 69 | 0.00 | | SD-IV | San Diego | Not modeled Energy Only | Market |
| SDG&E | OCTILO_5_WIND | 23314 | OCO GEN G1 | 0.69 | 35.12 | G1 | SD-IV | | Aug NQC | Wind |
| SDG&E | OCTILO_5_WIND | 23318 | OCO GEN G2 | 0.69 | 35.12 | G2 | SD-IV | | Aug NQC | Wind |
| SDG&E | OGROVE_6_PL1X2 | 22628 | PA GEN1 | 13.8 | 48.00 | 1 | SD-IV | San Diego, Pala Inner, Pala Outer | | Market |
| SDG&E | OGROVE_6_PL1X2 | 22629 | PA GEN2 | 13.8 | 48.00 | 1 | SD-IV | San Diego, Pala Inner, Pala Outer | | Market |
| SDG&E | OTAY_6_LNDFL5 | 22604 | OTAY | 69 | 0.00 | | SD-IV | San Diego, Border | Not modeled Energy Only | Market |
| SDG&E | OTAY_6_LNDFL6 | 22604 | OTAY | 69 | 0.00 | | SD-IV | San Diego, Border | Not modeled Energy Only | Market |
| SDG&E | OTAY_6_PL1X2 | 22617 | OYGEN | 13.8 | 35.50 | 1 | SD-IV | San Diego, Border | | Market |
| SDG&E | OTAY_6_UNITB1 | 22604 | OTAY | 69 | 2.03 | 1 | SD-IV | San Diego, Border | Aug NQC | Market |
| SDG&E | OTMESA_2_PL1X3 | 22605 | OTAYMGT1 | 18 | 165.16 | 1 | SD-IV | San Diego | | Market |
| SDG&E | OTMESA_2_PL1X3 | 22606 | OTAYMGT2 | 18 | 166.17 | 1 | SD-IV | San Diego | | Market |
| SDG&E | OTMESA_2_PL1X3 | 22607 | OTAYMST1 | 16 | 272.27 | 1 | SD-IV | San Diego | | Market |
| SDG&E | PALOMR_2_PL1X3 | 22262 | PEN_CT1 | 18 | 170.18 | 1 | SD-IV | San Diego | | Market |
| SDG&E | PALOMR_2_PL1X3 | 22263 | PEN_CT2 | 18 | 170.18 | 1 | SD-IV | San Diego | | Market |
| SDG&E | PALOMR_2_PL1X3 | 22265 | PEN_ST | 18 | 225.24 | 1 | SD-IV | San Diego | | Market |
| SDG&E | PIOPIC_2_CTG1 | 23162 | PIO PICO CT1 | 13.8 | 106.00 | 1 | SD-IV | San Diego | No NQC - Pmax | Market |
| SDG&E | PIOPIC_2_CTG2 | 23163 | PIO PICO CT2 | 13.8 | 106.00 | 1 | SD-IV | San Diego | No NQC - Pmax | Market |
| SDG&E | PIOPIC_2_CTG3 | 23164 | PIO PICO CT3 | 13.8 | 106.00 | 1 | SD-IV | San Diego | No NQC - Pmax | Market |
| SDG&E | PTLOMA_6_NTCCGN | 22660 | POINTLMA | 69 | 2.23 | 2 | SD-IV | San Diego | Aug NQC | QF/Selfgen |
| SDG&E | SAMPSN_6_KELCO1 | 22704 | SAMPSON | 12.5 | 3.06 | 1 | SD-IV | San Diego | Aug NQC | Net Seller |
| SDG&E | SMRCOS_6_LNDFIL | 22724 | SANMRCOS | 69 | 1.50 | 1 | SD-IV | San Diego | Aug NQC | Market |
| SDG&E | TERMEX_2_PL1X3 | 22982 | TDM CTG2 | 18 | 156.44 | 1 | SD-IV | | | Market |
| SDG&E | TERMEX_2_PL1X3 | 22983 | TDM CTG3 | 18 | 156.44 | 1 | SD-IV | | | Market |
| SDG&E | TERMEX_2_PL1X3 | 22981 | TDM STG | 21 | 280.13 | 1 | SD-IV | | | Market |
| SDG&E | VLCNTR_6_VCSLR | 22870 | VALCNTR | 69 | 0.96 | DG | SD-IV | San Diego, Esco | Aug NQC | Solar |
| SDG&E | VLCNTR_6_VCSLR1 | 22870 | VALCNTR | 69 | 1.03 | DG | SD-IV | San Diego, Esco | Aug NQC | Solar |
| SDG&E | VLCNTR_6_VCSLR2 | 22870 | VALCNTR | 69 | 2.05 | DG | SD-IV | San Diego, Esco | Aug NQC | Solar |

| SDG&E | VSTAES_6_VESBT1 | 23541 | Q1061_BESS | 0.48 | 5.50 | 1 | SD-IV | San Diego, Pala Outer | No NQC - est. data | Battery |
|-------|---------------------------|-------|-----------------|------|-------|----|-------|--------------------------------------|------------------------|------------|
| SDG&E | VSTAES_6_VESBT1 | 23216 | Q1294_BESS | 0.48 | 5.50 | C9 | SD-IV | San Diego, Pala Outer | No NQC - est. data | Battery |
| SDG&E | WISTRA_2_WRSSR1 | 23287 | Q429_G1 | 0.31 | 41.00 | 1 | SD-IV | | Aug NQC | Solar |
| SDG&E | ZZ_NA | 22916 | PFC-AVC | 0.6 | 0.00 | 1 | SD-IV | San Diego | No NQC - hist. data | QF/Selfgen |
| SDG&E | ZZZ_New Unit | 23597 | Q1175_BESS | 0.48 | 0.00 | 1 | SD-IV | | Energy Only | Battery |
| SDG&E | ZZZ_New Unit | 23441 | DW GEN2 G2 | 0.42 | 61.60 | 1 | SD-IV | | Aug NQC | Solar |
| SDG&E | ZZZ_New Unit | 23710 | Q1170_BESS | 0.48 | 62.50 | 1 | SD-IV | San Diego | No NQC - Pmax | Battery |
| SDG&E | ZZZ_New Unit | 22942 | BUE GEN 1_G1 | 0.69 | 11.60 | G1 | SD-IV | | No NQC - est. data | Wind |
| SDG&E | ZZZ_New Unit | 22945 | BUE GEN 1_G2 | 0.69 | 11.60 | G2 | SD-IV | | No NQC - est. data | Wind |
| SDG&E | ZZZ_New Unit | 22947 | BUE GEN 1_G3 | 0.69 | 11.60 | G3 | SD-IV | | No NQC - est. data | Wind |
| SDG&E | ZZZ_New Unit | 22949 | BUE GEN 1_G4 | 0.69 | 26.00 | G3 | SD-IV | | No NQC - est. data | Wind |
| SDG&E | ZZZ_New Unit | 22020 | AVOCADO | 69 | 2.00 | S2 | SD-IV | San Diego, Pala Inner, Pala Outer | No NQC - Pmax | Battery |
| SDG&E | ZZZZ_New Unit | 23234 | Q1429 | 0.48 | 0.00 | 1 | SD-IV | | No NQC - est. data | Wind |
| SDG&E | ZZZZ_New Unit | 23412 | Q1434_G | 0.64 | 30.00 | 1 | SD-IV | San Diego | No NQC - Pmax | Battery |
| SDG&E | ZZZZ_New Unit | 23443 | DW GEN2 G3B | 0.6 | 35.10 | 1 | SD-IV | | Aug NQC | Solar |
| SDG&E | ZZZZ_New Unit | 23442 | DW GEN2 G3A | 0.6 | 49.20 | 1 | SD-IV | | Aug NQC | Solar |
| SDG&E | ZZZZ_New Unit | 23544 | Q1169_BESS 1 | 0.4 | 35.00 | C8 | SD-IV | San Diego, Pala Inner, Pala Outer | No NQC - Pmax | Battery |
| SDG&E | ZZZZ_New Unit | 23519 | Q1169_BESS 2 | 0.4 | 35.00 | C8 | SD-IV | San Diego, Pala Inner, Pala Outer | No NQC - Pmax | Battery |
| SDG&E | ZZZZ_New Unit | 23131 | Q183_G1 | 0.69 | 0.00 | G1 | SD-IV | | Energy Only | Wind |
| SDG&E | ZZZZ_New Unit | 23134 | Q183_G2 | 0.69 | 0.00 | G2 | SD-IV | | Energy Only | Wind |
| SDG&E | ZZZZ_New Unit | 23100 | ECOGEN1 | 0.48 | 41.00 | G2 | SD-IV | | No NQC - est. data | Wind |
| SDG&E | ZZZZZ_CBRLLO_6_PLSTP 1 | 22092 | CABRILLO | 69 | 0.00 | 1 | SD-IV | San Diego | Aug NQC | Market |

Attachment A - List of physical resources by PTO, local area and market ID

| SDG&E | ZZZZZ_DIVSON_6_NSQF | 22172 | DIVISION | 69 | 0.00 | 1 | SD-IV | San Diego | Retired | QF/Selfgen |
|-------|--------------------------|-------|----------|------|------|---|-------|------------------------|-----------------|------------|
| SDG&E | ZZZZZ_ELCAJN_7_GT1 | 22212 | ELCAJNGT | 12.5 | 0.00 | 1 | SD-IV | San Diego, El Cajon | Retired | Market |
| SDG&E | ZZZZZ_ENCINA_7_EA1 | 22233 | ENCINA 1 | 14.4 | 0.00 | 1 | SD-IV | San Diego, Encina | Retired | Market |
| SDG&E | ZZZZZ_ENCINA_7_EA2 | 22234 | ENCINA 2 | 14.4 | 0.00 | 1 | SD-IV | San Diego, Encina | Retired by 2019 | Market |
| SDG&E | ZZZZZ_ENCINA_7_EA3 | 22236 | ENCINA 3 | 14.4 | 0.00 | 1 | SD-IV | San Diego, Encina | Retired by 2019 | Market |
| SDG&E | ZZZZZ_ENCINA_7_EA4 | 22240 | ENCINA 4 | 22 | 0.00 | 1 | SD-IV | San Diego, Encina | Retired by 2019 | Market |
| SDG&E | ZZZZZ_ENCINA_7_EA5 | 22244 | ENCINA 5 | 24 | 0.00 | 1 | SD-IV | San Diego, Encina | Retired by 2019 | Market |
| SDG&E | ZZZZZ_ENCINA_7_GT1 | 22248 | ENCINAGT | 12.5 | 0.00 | 1 | SD-IV | San Diego, Encina | Retired by 2019 | Market |
| SDG&E | ZZZZZ_KEARNY_7_KY2 | 22373 | KEARN2AB | 12.5 | 0.00 | 1 | SD-IV | San Diego, Mission | Retired | Market |
| SDG&E | ZZZZZ_KEARNY_7_KY2 | 22374 | KEARN2CD | 12.5 | 0.00 | 1 | SD-IV | San Diego, Mission | Retired | Market |
| SDG&E | ZZZZZ_KEARNY_7_KY2 | 22373 | KEARN2AB | 12.5 | 0.00 | 2 | SD-IV | San Diego, Mission | Retired | Market |
| SDG&E | ZZZZZ_KEARNY_7_KY2 | 22374 | KEARN2CD | 12.5 | 0.00 | 2 | SD-IV | San Diego, Mission | Retired | Market |
| SDG&E | ZZZZZ_KEARNY_7_KY3 | 22375 | KEARN3AB | 12.5 | 0.00 | 1 | SD-IV | San Diego, Mission | Retired | Market |
| SDG&E | ZZZZZ_KEARNY_7_KY3 | 22376 | KEARN3CD | 12.5 | 0.00 | 1 | SD-IV | San Diego, Mission | Retired | Market |
| SDG&E | ZZZZZ_KEARNY_7_KY3 | 22375 | KEARN3AB | 12.5 | 0.00 | 2 | SD-IV | San Diego, Mission | Retired | Market |
| SDG&E | ZZZZZ_KEARNY_7_KY3 | 22376 | KEARN3CD | 12.5 | 0.00 | 2 | SD-IV | San Diego, Mission | Retired | Market |
| SDG&E | ZZZZZ_MRGT_7_UNITS | 22488 | MIRAMRGT | 12.5 | 0.00 | 1 | SD-IV | San Diego | Retired | Market |
| SDG&E | ZZZZZ_MRGT_7_UNITS | 22488 | MIRAMRGT | 12.5 | 0.00 | 2 | SD-IV | San Diego | Retired | Market |
| SDG&E | ZZZZZ_NIMTG_6_NIQF | 22576 | NOISLMTR | 69 | 0.00 | 1 | SD-IV | San Diego | Retired | QF/Selfgen |
| SDG&E | ZZZZZ_OTAY_7_UNITC1 | 22604 | OTAY | 69 | 0.00 | 3 | SD-IV | San Diego, Border | Aug NQC | QF/Selfgen |
| SDG&E | ZZZZZ_PTLOMA_6_NTCQ F | 22660 | POINTLMA | 69 | 0.00 | 1 | SD-IV | San Diego | Retired | QF/Selfgen |

Attachment B – Effectiveness factors for procurement guidance

Table - Eagle Rock.

Effectiveness factors to the Eagle Rock-Cortina 115 kV line:

| Gen Bus | Gen Name | Gen ID | Eff Factor (%) |
|---------|----------|--------|----------------|
| 31406 | GEYSR5-6 | 1 | 36 |
| 31406 | GEYSR5-6 | 2 | 36 |
| 31408 | GEYSER78 | 1 | 36 |
| 31408 | GEYSER78 | 2 | 36 |
| 31412 | GEYSER11 | 1 | 37 |
| 31435 | GEO.ENGY | 1 | 35 |
| 31435 | GEO.ENGY | 2 | 35 |
| 31433 | POTTRVLY | 1 | 34 |
| 31433 | POTTRVLY | 3 | 34 |
| 31433 | POTTRVLY | 4 | 34 |
| 38020 | CITY UKH | 1 | 32 |
| 38020 | CITY UKH | 2 | 32 |

Table - Fulton

Effectiveness factors to the Lakeville-Petaluma-Cotati 60 kV line:

| Gen Bus | Gen Name | Gen ID | Eff Factor (%) |
|---------|----------|--------|----------------|
| 31466 | SONMA LF | 1 | 52 |
| 31422 | GEYSER17 | 1 | 12 |
| 31404 | WEST FOR | 1 | 12 |
| 31404 | WEST FOR | 2 | 12 |
| 31414 | GEYSER12 | 1 | 12 |
| 31418 | GEYSER14 | 1 | 12 |
| 31420 | GEYSER16 | 1 | 12 |
| 31402 | BEAR CAN | 1 | 12 |
| 31402 | BEAR CAN | 2 | 12 |

Attachment B - Effectiveness factors for procurement guidance

| Gen Bus | Gen Name | Gen ID | Eff Factor (%) |
|---------|----------|--------|----------------|
| 38110 | NCPA2GY1 | 1 | 12 |
| 38112 | NCPA2GY2 | 1 | 12 |
| 32700 | MONTICLO | 1 | 10 |
| 32700 | MONTICLO | 2 | 10 |
| 32700 | MONTICLO | 3 | 10 |
| 31435 | GEO.ENGY | 1 | 6 |
| 31435 | GEO.ENGY | 2 | 6 |
| 31408 | GEYSER78 | 1 | 6 |
| 31408 | GEYSER78 | 2 | 6 |
| 31412 | GEYSER11 | 1 | 6 |
| 31406 | GEYSR5-6 | 1 | 6 |
| 31406 | GEYSR5-6 | 2 | 6 |

Table - Lakeville

Effectiveness factors to the Vaca Dixon-Lakeville 230 kV line:

| Gen Bus | Gen Name | Gen ID | Eff Fctr (%) |
|---------|----------|--------|--------------|
| 31400 | SANTA FE | 2 | 38 |
| 31430 | SMUDGEO1 | 1 | 38 |
| 31400 | SANTA FE | 1 | 38 |
| 31416 | GEYSER13 | 1 | 38 |
| 31424 | GEYSER18 | 1 | 38 |
| 31426 | GEYSER20 | 1 | 38 |
| 38106 | NCPA1GY1 | 1 | 38 |
| 38108 | NCPA1GY2 | 1 | 38 |
| 31421 | BOTTLERK | 1 | 36 |
| 31404 | WEST FOR | 2 | 36 |
| 31402 | BEAR CAN | 1 | 36 |
| 31402 | BEAR CAN | 2 | 36 |
| 31404 | WEST FOR | 1 | 36 |
| 31414 | GEYSER12 | 1 | 36 |
| 31418 | GEYSER14 | 1 | 36 |
| 31420 | GEYSER16 | 1 | 36 |

Attachment B - Effectiveness factors for procurement guidance

| Gen Bus | Gen Name | Gen ID | Eff Fctr (%) |
|---------|----------|--------|--------------|
| 31422 | GEYSER17 | 1 | 36 |
| 38110 | NCPA2GY1 | 1 | 36 |
| 38112 | NCPA2GY2 | 1 | 36 |
| 31446 | SONMA LF | 1 | 36 |
| 32700 | MONTICLO | 1 | 31 |
| 32700 | MONTICLO | 2 | 31 |
| 32700 | MONTICLO | 3 | 31 |
| 31406 | GEYSR5-6 | 1 | 18 |
| 31406 | GEYSR5-6 | 2 | 18 |
| 31405 | RPSP1014 | 1 | 18 |
| 31408 | GEYSER78 | 1 | 18 |
| 31408 | GEYSER78 | 2 | 18 |
| 31412 | GEYSER11 | 1 | 18 |
| 31435 | GEO.ENGY | 1 | 18 |
| 31435 | GEO.ENGY | 2 | 18 |
| 31433 | POTTRVLY | 1 | 15 |
| 31433 | POTTRVLY | 2 | 15 |
| 31433 | POTTRVLY | 3 | 15 |
| 38020 | CITY UKH | 1 | 15 |
| 38020 | CITY UKH | 2 | 15 |

Table - Rio Oso

Effectiveness factors to the Rio Oso-Atlantic 230 kV line:

| Gen Bus | Gen Name | Gen ID | Eff Fctr. (%) |
|---------|----------|--------|---------------|
| 32498 | SPILINCF | 1 | 49 |
| 32500 | ULTR RCK | 1 | 49 |
| 32456 | MIDLFORK | 1 | 33 |
| 32456 | MIDLFORK | 2 | 33 |
| 32458 | RALSTON | 1 | 33 |

Attachment B - Effectiveness factors for procurement guidance

| 32513 | ELDRADO1 | 1 | 32 |
|-------|----------|---|----|
| 32514 | ELDRADO2 | 1 | 32 |
| 32510 | CHILIBAR | 1 | 32 |
| 32486 | HELLHOLE | 1 | 31 |
| 32508 | FRNCH MD | 1 | 30 |
| 32460 | NEWCSTLE | 1 | 26 |
| 32478 | HALSEY F | 1 | 24 |
| 32512 | WISE | 1 | 24 |
| 38114 | Stig CC | 1 | 14 |
| 38123 | Q267CT | 1 | 14 |
| 38124 | Q267ST | 1 | 14 |
| 32462 | CHI.PARK | 1 | 8 |
| 32464 | DTCHFLT1 | 1 | 4 |

Table – South of Table Mountain

Effectiveness factors to the Caribou-Palermo 115 kV line:

| Gen Bus | Gen Name | Gen ID | Eff Fctr. (%) |
|---------|----------|--------|---------------|
| 31814 | FORBSTWN | 1 | 7 |
| 31794 | WOODLEAF | 1 | 7 |
| 31832 | SLY.CR. | 1 | 7 |
| 31862 | DEADWOOD | 1 | 7 |
| 31890 | PO POWER | 1 | 6 |
| 31890 | PO POWER | 2 | 6 |
| 31888 | OROVLLE | 1 | 6 |
| 31834 | KELLYRDG | 1 | 6 |
| 32450 | COLGATE1 | 1 | 4 |

Attachment B - Effectiveness factors for procurement guidance

| Gen Bus | Gen Name | Gen ID | Eff Fctr. (%) |
|---------|----------|--------|---------------|
| 32466 | NARROWS1 | 1 | 4 |
| 32468 | NARROWS2 | 1 | 4 |
| 32452 | COLGATE2 | 1 | 4 |
| 32470 | CMP.FARW | 1 | 4 |
| 32451 | FREC | 1 | 4 |
| 32490 | GRNLEAF1 | 1 | 4 |
| 32490 | GRNLEAF1 | 2 | 4 |
| 32496 | YCEC | 1 | 4 |
| 32494 | YUBA CTY | 1 | 4 |
| 32492 | GRNLEAF2 | 1 | 4 |
| 32498 | SPILINCF | 1 | 2 |
| 31788 | ROCK CK2 | 1 | 2 |
| 31812 | CRESTA | 1 | 2 |
| 31812 | CRESTA | 2 | 2 |
| 31820 | BCKS CRK | 1 | 2 |
| 31820 | BCKS CRK | 2 | 2 |
| 31786 | ROCK CK1 | 1 | 2 |
| 31790 | POE 1 | 1 | 2 |
| 31792 | POE 2 | 1 | 2 |
| 31784 | BELDEN | 1 | 2 |
| 32500 | ULTR RCK | 1 | 2 |
| 32156 | WOODLAND | 1 | 2 |
| 32510 | CHILIBAR | 1 | 2 |
| 32513 | ELDRADO1 | 1 | 2 |
| 32514 | ELDRADO2 | 1 | 2 |
| 32478 | HALSEY F | 1 | 2 |
| 32460 | NEWCSTLE | 1 | 1 |

Attachment B - Effectiveness factors for procurement guidance

| Gen Bus | Gen Name | Gen ID | Eff Fctr. (%) |
|---------|----------|--------|---------------|
| 32458 | RALSTON | 1 | 1 |
| 32512 | WISE | 1 | 1 |
| 32456 | MIDLFORK | 1 | 1 |
| 32456 | MIDLFORK | 2 | 1 |
| 32486 | HELLHOLE | 1 | 1 |
| 32508 | FRNCH MD | 1 | 1 |
| 32162 | RIV.DLTA | 1 | 1 |
| 32502 | DTCHFLT2 | 1 | 1 |
| 32462 | CHI.PARK | 1 | 1 |
| 32464 | DTCHFLT1 | 1 | 1 |
| 32454 | DRUM 5 | 1 | 1 |
| 32476 | ROLLINSF | 1 | 1 |
| 32484 | OXBOW F | 1 | 1 |
| 32474 | DEER CRK | 1 | 1 |
| 32504 | DRUM 1-2 | 1 | 1 |
| 32504 | DRUM 1-2 | 2 | 1 |
| 32506 | DRUM 3-4 | 1 | 1 |
| 32506 | DRUM 3-4 | 2 | 1 |
| 32166 | UC DAVIS | 1 | 1 |
| 32472 | SPAULDG | 1 | 1 |
| 32472 | SPAULDG | 2 | 1 |
| 32472 | SPAULDG | 3 | 1 |
| 32480 | BOWMAN | 1 | 1 |
| 32488 | HAYPRES+ | 1 | 1 |
| 32488 | HAYPRES+ | 2 | 1 |
| 38124 | LODI ST1 | 1 | 1 |
| 38123 | LODI CT1 | 1 | 1 |

Attachment B - Effectiveness factors for procurement guidance

| Gen Bus | Gen Name | Gen ID | Eff Fctr. (%) |
|---------|----------|--------|---------------|
| 38114 | STIG CC | 1 | 1 |

Table - San Jose

Effectiveness factors to the El Patio-San Jose 'A' 115 kV line:

| Gen Bus | Gen Name | Gen ID | Eff Fctr (%) |
|---------|----------|--------|--------------|
| 35863 | CATALYST | 1 | 36 |
| 36863 | DVRaGT1 | 1 | 13 |
| 36864 | DVRbGt2 | 1 | 13 |
| 36865 | DVRaST3 | 1 | 13 |
| 36859 | Laf300 | 2 | 13 |
| 36859 | Laf300 | 1 | 13 |
| 36856 | CCA100 | 1 | 13 |
| 36858 | Gia100 | 1 | 12 |
| 36895 | Gia200 | 1 | 12 |
| 35861 | SJ-SCL W | 1 | 9 |
| 35854 | LECEFGT1 | 1 | 9 |
| 35855 | LECEFGT2 | 1 | 9 |
| 35856 | LECEFGT3 | 1 | 9 |
| 35857 | LECEFGT4 | 1 | 9 |
| 35858 | LECEFST1 | 1 | 9 |
| 35860 | OLS-AGNE | 1 | 9 |

Table - South Bay-Moss Landing

Effectiveness factors to the Moss Landing-Las Aguillas 230 kV line:

| Gen Bus | Gen Name | Gen ID | Eff Fctr. (%) |
|---------|----------|--------|---------------|
| 36209 | SLD ENRG | 1 | 20 |
| 36221 | DUKMOSS1 | 1 | 20 |
| 36222 | DUKMOSS2 | 1 | 20 |

Attachment B - Effectiveness factors for procurement guidance

| 36223 | DUKMOSS3 | 1 | 20 |
|-------|----------|----|----|
| 36224 | DUKMOSS4 | 1 | 20 |
| 36225 | DUKMOSS5 | 1 | 20 |
| 36226 | DUKMOSS6 | 1 | 20 |
| 36405 | MOSSLND6 | 1 | 17 |
| 36406 | MOSSLND7 | 1 | 17 |
| 35881 | MEC CTG1 | 1 | 13 |
| 35882 | MEC CTG2 | 1 | 13 |
| 35883 | MEC STG1 | 1 | 13 |
| 35850 | GLRY COG | 1 | 12 |
| 35850 | GLRY COG | 2 | 12 |
| 35851 | GROYPKR1 | 1 | 12 |
| 35852 | GROYPKR2 | 1 | 12 |
| 35853 | GROYPKR3 | 1 | 12 |
| 35623 | SWIFT | ВТ | 10 |
| 35863 | CATALYST | 1 | 10 |
| 36863 | DVRaGT1 | 1 | 8 |
| 36864 | DVRbGt2 | 1 | 8 |
| 36865 | DVRaST3 | 1 | 8 |
| 36859 | Laf300 | 2 | 8 |
| 36859 | Laf300 | 1 | 8 |
| 36858 | Gia100 | 1 | 7 |
| 36895 | Gia200 | 1 | 7 |
| 35854 | LECEFGT1 | 1 | 7 |
| 35855 | LECEFGT2 | 1 | 7 |
| | | | |

Attachment B - Effectiveness factors for procurement guidance

| 35856 | LECEFGT3 | 1 | 7 |
|-------|----------|---|---|
| 35857 | LECEFGT4 | 1 | 7 |
| 35858 | LECEFST1 | 1 | 7 |
| 35860 | OLS-AGNE | 1 | 7 |

Table - Ames/Pittsburg/Oakland

Effectiveness factors to the Ames-Ravenswood #1 115 kV line:

| Gen Bus | Gen Name | Gen ID | Eff Fctr. (%) |
|---------|----------|--------|---------------|
| 35304 | RUSELCT1 | 1 | 10 |
| 35305 | RUSELCT2 | 2 | 10 |
| 35306 | RUSELST1 | 3 | 10 |
| 33469 | OX_MTN | 1 | 10 |
| 33469 | OX_MTN | 2 | 10 |
| 33469 | OX_MTN | 3 | 10 |
| 33469 | OX_MTN | 4 | 10 |
| 33469 | OX_MTN | 5 | 10 |
| 33469 | OX_MTN | 6 | 10 |
| 33469 | OX_MTN | 7 | 10 |
| 33107 | DEC STG1 | 1 | 3 |
| 33108 | DEC CTG1 | 1 | 3 |
| 33109 | DEC CTG2 | 1 | 3 |
| 33110 | DEC CTG3 | 1 | 3 |
| 33102 | COLUMBIA | 1 | 3 |
| 33111 | LMECCT2 | 1 | 3 |
| 33112 | LMECCT1 | 1 | 3 |

Attachment B - Effectiveness factors for procurement guidance

| 33113 | LMECST1 | 1 | 3 |
|-------|-------------|---|---|
| 33151 | FOSTER W | 1 | 2 |
| 33151 | FOSTER W | 2 | 2 |
| 33151 | FOSTER W | 3 | 2 |
| 33136 | CCCSD | 1 | 2 |
| 33141 | SHELL 1 | 1 | 2 |
| 33142 | SHELL 2 | 1 | 2 |
| 33143 | SHELL 3 | 1 | 2 |
| 32900 | CRCKTCOG | 1 | 2 |
| 32910 | UNOCAL | 1 | 2 |
| 32910 | UNOCAL | 2 | 2 |
| 32910 | UNOCAL | 3 | 2 |
| 32920 | UNION CH | 1 | 2 |
| 32921 | ChevGen1 | 1 | 2 |
| 32922 | ChevGen2 | 1 | 2 |
| 32923 | ChevGen3 | 3 | 2 |
| 32741 | HILLSIDE_12 | 1 | 2 |
| 32901 | OAKLND 1 | 1 | 1 |
| 32902 | OAKLND 2 | 2 | 1 |
| 32903 | OAKLND 3 | 3 | 1 |
| 38118 | ALMDACT1 | 1 | 1 |
| 38119 | ALMDACT2 | 1 | 1 |

Effectiveness factors to the Moraga-Claremont #2 115 kV line:

| Gen Bus Gen Name | Gen ID | Eff Fctr. (%) |
|------------------|--------|---------------|
|------------------|--------|---------------|

Attachment B - Effectiveness factors for procurement guidance

| 32741 | HILLSIDE_12 | 1 | 15 |
|-------|-------------|---|----|
| 32921 | ChevGen1 | 1 | 15 |
| 32922 | ChevGen2 | 1 | 15 |
| 32923 | ChevGen3 | 3 | 15 |
| 32920 | UNION CH | 1 | 14 |
| 32910 | UNOCAL | 1 | 13 |
| 32910 | UNOCAL | 2 | 13 |
| 32910 | UNOCAL | 3 | 13 |
| 32901 | OAKLND 1 | 1 | 10 |
| 32902 | OAKLND 2 | 2 | 10 |
| 32903 | OAKLND 3 | 3 | 10 |
| 38118 | ALMDACT1 | 1 | 10 |
| 38119 | ALMDACT2 | 1 | 10 |
| 33141 | SHELL 1 | 1 | 9 |
| 33142 | SHELL 2 | 1 | 9 |
| 33143 | SHELL 3 | 1 | 9 |
| 33136 | CCCSD | 1 | 8 |
| 32900 | CRCKTCOG | 1 | 7 |
| 33151 | FOSTER W | 1 | 6 |
| 33151 | FOSTER W | 2 | 6 |
| 33151 | FOSTER W | 3 | 6 |
| 33102 | COLUMBIA | 1 | 3 |
| 33111 | LMECCT2 | 1 | 3 |
| 33112 | LMECCT1 | 1 | 3 |
| 33113 | LMECST1 | 1 | 3 |

Attachment B - Effectiveness factors for procurement guidance

| 33107 | DEC STG1 | 1 | 3 |
|-------|----------|---|---|
| 33108 | DEC CTG1 | 1 | 3 |
| 33109 | DEC CTG2 | 1 | 3 |
| 33110 | DEC CTG3 | 1 | 3 |

Table – HerndonEffectiveness factors to the Herndon-Manchester 115 kV line:

| Gen Bus | Gen Name | Gen ID | Eff Fctr. (%) |
|---------|--------------|--------|---------------|
| 34624 | BALCH 1 | 1 | 22 |
| 34616 | KINGSRIV | 1 | 21 |
| 34500 | DINUBA | TA | 19 |
| 34648 | DINUBA E | 1 | 19 |
| 34671 | KRCDPCT1 | 1 | 19 |
| 34672 | KRCDPCT2 | 1 | 19 |
| 34308 | KERCKHOF | 1 | 17 |
| 34344 | KERCK1-1 | 1 | 17 |
| 34345 | KERCK1-3 | 3 | 17 |
| 34690 | CORCORAN_3 | FW | 15 |
| 34692 | CORCORAN_4 | FW | 15 |
| 34677 | Q558 | 1 | 15 |
| 34696 | CORCORANPV_S | 1 | 15 |
| 34610 | HAAS | 1 | 13 |
| 34610 | HAAS | 2 | 13 |
| 34612 | BLCH 2-2 | 1 | 13 |
| 34614 | BLCH 2-3 | 1 | 13 |

Attachment B - Effectiveness factors for procurement guidance

| 34431 | GWF_HEP1 | 1 | 8 |
|--------|-------------|---|---|
| 34433 | GWF_HEP2 | 1 | 8 |
| 34617 | Q581 | 1 | 5 |
| 34680 | KANSAS | 1 | 5 |
| 34467 | GIFFEN_DIST | 1 | 4 |
| 34563 | STROUD_DIST | 2 | 4 |
| 34563 | STROUD_DIST | 1 | 4 |
| 34608 | AGRICO | 2 | 4 |
| 34608 | AGRICO | 3 | 4 |
| 34608 | AGRICO | 4 | 4 |
| 34644 | Q679 | 1 | 4 |
| 365502 | Q632BC1 | 1 | 4 |

Table – LA Basin

Effectiveness factors to the Mesa – Laguna Bell #1 230 kV line:

| Gen Bus | Gen Name | Gen ID | Eff Fctr. (%) |
|---------|----------|--------|---------------|
| 29951 | REFUSE | D1 | 35 |
| 24239 | MALBRG1G | C1 | 34 |
| 24240 | MALBRG1G | C2 | 34 |
| 24241 | MALBRG1G | S3 | 34 |
| 29903 | ELSEG6ST | 6 | 27 |
| 29904 | ELSEG5GT | 5 | 27 |
| 29902 | ELSEG7ST | 7 | 27 |
| 29901 | ELSEG8GT | 8 | 27 |
| 24337 | VENICE | 1 | 26 |

Attachment B - Effectiveness factors for procurement guidance

| 24094 | MOBGEN1 | 1 | 26 |
|-------|----------|----|----|
| 24329 | MOBGEN2 | 1 | 26 |
| 24332 | PALOGEN | D1 | 26 |
| 24011 | ARCO 1G | 1 | 23 |
| 24012 | ARCO 2G | 2 | 23 |
| 24013 | ARCO 3G | 3 | 23 |
| 24014 | ARCO 4G | 4 | 23 |
| 24163 | ARCO 5G | 5 | 23 |
| 24164 | ARCO 6G | 6 | 23 |
| 24062 | HARBOR G | 1 | 23 |
| 24062 | HARBOR G | HP | 23 |
| 25510 | HARBORG4 | LP | 23 |
| 24327 | THUMSGEN | 1 | 23 |
| 24020 | CARBGEN1 | 1 | 23 |
| 24328 | CARBGEN2 | 1 | 23 |
| 24139 | SERRFGEN | D1 | 23 |
| 24070 | ICEGEN | 1 | 22 |
| 24001 | ALAMT1 G | I | 18 |
| 24002 | ALAMT2 G | 2 | 18 |
| 24003 | ALAMT3 G | 3 | 18 |
| 24004 | ALAMT4 G | 4 | 18 |
| 24005 | ALAMT5 G | 5 | 18 |
| 24161 | ALAMT6 G | 6 | 18 |
| 90000 | ALMT-GT1 | X1 | 18 |
| 90001 | ALMT-GT2 | X2 | 18 |
| | | - | |

Attachment B - Effectiveness factors for procurement guidance

| ALMT-ST1 | X3 | 18 |
|------------|---|--|
| CTRPKGEN | 1 | 18 |
| SIGGEN | D1 | 18 |
| BARPKGEN | 1 | 13 |
| WALCRKG1 | 1 | 12 |
| WALCRKG2 | 1 | 12 |
| WALCRKG3 | 1 | 12 |
| WALCRKG4 | 1 | 12 |
| WALCRKG5 | 1 | 12 |
| BREAPWR2 | C1 | 12 |
| BREAPWR2 | C2 | 12 |
| BREAPWR2 | C3 | 12 |
| BREAPWR2 | C4 | 12 |
| BREAPWR2 | S1 | 12 |
| ORCOGEN | I | 12 |
| COYGEN | I | 11 |
| WDT1406_G | I | 11 |
| DowlingCTG | 1 | 10 |
| CanyonGT 1 | 1 | 10 |
| CanyonGT 2 | 2 | 10 |
| CanyonGT 3 | 3 | 10 |
| CanyonGT 4 | 4 | 10 |
| VILLA PK | DG | 9 |
| | SIGGEN BARPKGEN WALCRKG1 WALCRKG2 WALCRKG3 WALCRKG4 WALCRKG5 BREAPWR2 BREAPWR2 BREAPWR2 BREAPWR2 COYGEN COYGEN WDT1406_G DowlingCTG CanyonGT 1 CanyonGT 3 CanyonGT 4 | CTRPKGEN 1 SIGGEN D1 BARPKGEN 1 WALCRKG1 1 WALCRKG2 1 WALCRKG3 1 WALCRKG4 1 WALCRKG5 1 BREAPWR2 C1 BREAPWR2 C2 BREAPWR2 C3 BREAPWR2 C4 BREAPWR2 S1 ORCOGEN I COYGEN I WDT1406_G I DowlingCTG 1 CanyonGT 1 1 CanyonGT 2 2 CanyonGT 3 3 CanyonGT 4 4 |

Table - Rector

Attachment B - Effectiveness factors for procurement guidance

Effectiveness factors to the Rector-Vestal 230 kV line:

| Gen Bus | Gen Name | Gen ID | MW Eff Fctr (%) |
|---------|----------|--------|-----------------|
| 24370 | KAWGEN | 1 | 51 |
| 24306 | B CRK1-1 | 1 | 45 |
| 24306 | B CRK1-1 | 2 | 45 |
| 24307 | B CRK1-2 | 3 | 45 |
| 24307 | B CRK1-2 | 4 | 45 |
| 24319 | EASTWOOD | 1 | 45 |
| 24323 | PORTAL | 1 | 45 |
| 24308 | B CRK2-1 | 1 | 45 |
| 24308 | B CRK2-1 | 2 | 45 |
| 24309 | B CRK2-2 | 3 | 45 |
| 24309 | B CRK2-2 | 4 | 45 |
| 24310 | B CRK2-3 | 5 | 45 |
| 24310 | B CRK2-3 | 6 | 45 |
| 24315 | B CRK 8 | 81 | 45 |
| 24315 | B CRK 8 | 82 | 45 |
| 24311 | B CRK3-1 | 1 | 45 |
| 24311 | B CRK3-1 | 2 | 45 |
| 24312 | B CRK3-2 | 3 | 45 |
| 24312 | B CRK3-2 | 4 | 45 |
| 24313 | B CRK3-3 | 5 | 45 |
| 24317 | MAMOTH1G | 1 | 45 |
| 24318 | MAMOTH2G | 2 | 45 |
| 24314 | B CRK 4 | 41 | 43 |
| 24314 | B CRK 4 | 42 | 43 |

Table - San Diego

Effectiveness factors to the Imperial Valley – El Centro 230 kV line (i.e., the "S" line):

Attachment B - Effectiveness factors for procurement guidance

| Gen Bus | Gen Name | Gen ID | Eff Fctr. (%) |
|---------|--------------|--------|---------------|
| 22982 | TDM CTG2 | 1 | 25 |
| 22983 | TDM CTG3 | 1 | 25 |
| 22981 | TDM STG | 1 | 25 |
| 22997 | INTBCT | 1 | 25 |
| 22996 | INTBST | 1 | 25 |
| 23440 | DW GEN2 G1 | 1 | 25 |
| 23298 | DW GEN1 G1 | G1 | 25 |
| 23156 | DU GEN1 G2 | G2 | 25 |
| 23299 | DW GEN1 G2 | G2 | 25 |
| 23155 | DU GEN1 G1 | G1 | 25 |
| 23441 | DW GEN2 G2 | 1 | 25 |
| 23442 | DW GEN2 G3A | 1 | 25 |
| 23443 | DW GEN2 G3B | 1 | 25 |
| 23314 | OCO GEN G1 | G1 | 23 |
| 23318 | OCO GEN G2 | G2 | 23 |
| 23100 | ECO GEN1 G | G1 | 22 |
| 23352 | ECO GEN2 G | 1 | 21 |
| 22605 | OTAYMGT1 | 1 | 18 |
| 22606 | OTAYMGT2 | 1 | 18 |
| 22607 | OTAYMST1 | 1 | 18 |
| 23162 | PIO PICO CT1 | 1 | 18 |
| 23163 | PIO PICO CT2 | 1 | 18 |
| 23164 | PIO PICO CT3 | 1 | 18 |

Attachment B - Effectiveness factors for procurement guidance

| 22915 | KUMEYAAY | 1 | 17 |
|-------|----------|---|----|
| 23320 | EC GEN2 | 1 | 17 |
| 22150 | EC GEN1 | 1 | 17 |
| 22617 | OY GEN | 1 | 17 |
| 22604 | OTAY | 1 | 17 |
| 22604 | OTAY | 3 | 17 |
| 22172 | DIVISION | 1 | 17 |
| 22576 | NOISLMTR | 1 | 17 |
| 22704 | SAMPSON | 1 | 17 |
| 22092 | CABRILLO | 1 | 17 |
| 22074 | LRKSPBD1 | 1 | 17 |
| 22075 | LRKSPBD2 | 1 | 17 |
| 22660 | POINTLMA | 1 | 17 |
| 22660 | POINTLMA | 2 | 17 |
| 22149 | CALPK_BD | 1 | 17 |
| 22448 | MESAHGTS | 1 | 16 |
| 22120 | CARLTNHS | 1 | 16 |
| 22120 | CARLTNHS | 2 | 16 |
| 22496 | MISSION | 1 | 16 |
| 22486 | MEF MR1 | 1 | 16 |
| 22124 | CHCARITA | 1 | 16 |
| 22487 | MEF MR2 | 1 | 16 |
| 22625 | LkHodG1 | 1 | 16 |
| 22626 | LkHodG2 | 2 | 16 |
| 22332 | GOALLINE | 1 | 15 |

Attachment B - Effectiveness factors for procurement guidance

| 22262 | PEN_CT1 | 1 | 15 |
|-------|-------------|---|----|
| 22153 | CALPK_ES | 1 | 15 |
| 22786 | EA GEN1 U6 | 1 | 15 |
| 22787 | EA GEN1 U7 | 1 | 15 |
| 22783 | EA GEN1 U8 | 1 | 15 |
| 22784 | EA GEN1 U9 | 1 | 15 |
| 22789 | EA GEN1 U10 | 1 | 15 |
| 22257 | ES GEN | 1 | 15 |
| 22263 | PEN_CT2 | 1 | 15 |
| 22265 | PEN_ST | 1 | 15 |
| 22724 | SANMRCOS | 1 | 15 |
| 22628 | PA GEN1 | 1 | 14 |
| 22629 | PA GEN2 | 1 | 14 |
| 22082 | BR GEN1 | 1 | 14 |
| 22112 | CAPSTRNO | 1 | 12 |