IMPORTANT NOTE:

California ISO Conformed Tariff as of January 12, 2006

The Tariff is current through January 12, 2006. Currently effective language from Tariff Amendments and compliance filings which FERC has approved is shown in clean copy. Pending language from compliance filings that FERC has not ruled on as of January 12, 2006, but whose proposed effective date has already arrived, is shown in highlight.

Note that where such pending compliance filing language will supersede currently approved language, it will be necessary to consult previous versions of the Tariff to see the full text of the language superseded by the highlighted pending language.

The Tariff does not include Tariff Amendments submitted to the Commission but not yet approved.

This version updates the September 21, 2005 version of the Conformed Tariff to reflect:

- FERC's September 22, 2005 Order in the GMC SWPL matter (Docket Nos. ER04-115 et al), which approved the proposed settlement filed by the ISO June 8, 2005 in those dockets (see 112 FERC \P 62,329). The approved language can be found on pages 375 and 376l.
- FERC's acceptance of Tariff Amendment No. 70, with modifications, in an Order issued September 23, 2005 (see 112 FERC ¶ 61,323). The Amendment 70 language can be found on pages 299A, 299B, 299C, 299D, 299E, 350, 350A, and 1088 through 1110.
- FERC's acceptance of Tariff Amendment No. 72, with modifications, in an Order issued November 21, 2005 (see 113 FERC ¶ 61,187). The approved language can be found on pages 15, 15A, 28, 28A, 33, 33.01, and 290.
- FERC's December 1, 2005 letter Order in the Amendment 66 Docket (ER05-718), which accepted the ISO's November 1, 2005 compliance filing in that docket. The approved language can be found on pages 247.03 and 247.04.
- FERC's December 15, 2005 letter Order in the Amendment 62 Docket (ER04-1087), which accepted the ISO's June 8, 2005 compliance filing in that docket. The approved language (shown in highlight in previous versions of the Conformed Tariff) can be found on page 349A.
- FERC's December 19, 2005 letter Order in the Amendment 55 Docket (ER03-1102), which accepted the ISO's August 1, 2005 compliance filing in that docket. The approved language (shown in highlight in the previous version of the Conformed Tariff) can be found on pages 859A, 859B, 861, 862, 871, 871A, 871B, 872 and 873.
- The ISO's Compliance Filing made on December 21, 2005 in the Amendment 72 Docket (ER05-1502). The proposed language can be found on page 15, 28, 588, 597, 598 and 598A; as this filing has not been approved by FERC as of January 12, 2006, all of the proposed language is shown in highlight.
- FERC's January 10 letter order in the Amendment 70 Docket (ER05-1025), which accepted the ISO's October 21, 2005 compliance filing in that docket. The approved language can be found on page 1095. [This page is contained in the PDF document below numbered 29, as well as in the Combined Tariff PDF document.]

It should also be noted that there are two supplementary Tabs accompanying this Conformed Tariff which contain language which, although accepted by FERC, has not yet gone into effect. Tab 1 contains Section 2.2.9, a provision concerning scheduling on zero-rated paths which was added by Amendment 55, but will not go into effect until the ISO implements certain changes in its scheduling system. Tab 2 shows language accepted but not yet effective from Amendment 68 regarding Station Power.

INDEX

| Α | rticle Number | Provisions | Sheet No. |
|----|---------------------------------|--|-----------|
| 1. | DEFINITIONS AND INTERPRI | ETATION. | 1 |
| 2. | ISO OPERATIONS. | | 2 |
| | 2.1 Access to the ISO Control | lled Grid. | 2 |
| | 2.2 Scheduling. | | 3 |
| | 2.3 System Operations under | Normal and Emergency Operating Condition | ns. 33 |
| | 2.4 [Not Used] | | 50 |
| | 2.4.3 Existing Contracts for Tr | ransmission Service | 50 |
| | 2.5 Ancillary Services. | | 61 |
| | 2.6 Incorporation of the ISO N | Market Monitoring & Information Protocol | 139 |
| 3. | RELATIONSHIP BETWEEN IS | SO AND PARTICIPATING TOS. | 140 |
| | 3.1 Nature of Relationship. | | 140 |
| | 3.2 Transmission Expansion. | | 141 |
| | 3.3 [Not Used] | | 150 |
| 4. | RELATIONSHIP BETWEEN IS | SO AND UDCS. | 161 |
| | 4.1 General Nature of Relation | nship Between ISO and UDCs. | 161 |
| | 4.2 Coordinating Maintenance | e Outages of UDC Facilities. | 162 |
| | 4.3 UDC Responsibilities. | | 162 |
| | 4.4 System Emergencies. | | 163 |
| | 4.5 Electrical Emergency Plan | ı (EEP). | 164 |
| | 4.6 System Emergency Repo | rts: UDC Obligations. | 164A |
| | 4.7 Coordination of Expansion | n or Modifications to UDC Facilities. | 165 |
| | 4.8 Information Sharing. | | 165 |
| | 4.9 UDC Facilities under ISO | Control. | 167 |
| 5. | RELATIONSHIP BETWEEN IS | SO AND GENERATORS. | 167 |
| | 5.1 General Responsibilities. | | 167 |
| | 5.2 Procurement of Reliability | Must-Run Generation by the ISO. | 170 |
| | 5.3 Identification of Generatin | g Units. | 179 |
| | 5.4 WECC Requirements. | | 179 |
| | 5.5 Outages. | | 179A |
| | 5.6 System Emergencies. | | 180 |

|--|

| | 5.7 Interconnection of Generating Units and Generating Facilities to the ISC |) | |
|----|--|---------|--|
| | Controlled Grid. | 181B | |
| | 5.8 Recordkeeping; Information Sharing. | 182 | |
| | 5.9 Access Right. | 183 | |
| | 5.10 Black Start Services. | 184 | |
| | 5.11 Must-Offer Obligations. | 184A | |
| | 5.12 [Not Used] | 184G | |
| | 5.13 Energy Bids. | 184G | |
| 6. | TRANSMISSION SYSTEM INFORMATION AND COMMUNICATIONS. | 185 | |
| | 6.1 WEnet. | 185 | |
| | 6.2 Reliable Operation of the WEnet. | 187 | |
| | 6.3 Information to be Provided By Connected Entities to the ISO. | 188 | |
| | 6.4 Failure or Corruption of the WEnet. | 188 | |
| | 6.5 Confidentiality. | 189 | |
| | 6.6 Standards of Conduct. | 189 | |
| 7. | TRANSMISSION PRICING. | 189 | |
| | 7.1 Access Charges. | 189 | |
| | 7.2 Zonal Congestion Management. | 198 | |
| | 7.3 Usage Charges and Grid Operations Charges. | 207 | |
| | 7.4 Transmission Losses. | 213 | |
| | 7.5 FERC Annual Charges. | 215 | |
| 8. | GRID MANAGEMENT CHARGE. | 215D | |
| | 8.1 ISO's Obligations. | 215D | |
| | 8.2 Costs Included in the Grid Management Charge. | 216 | |
| | 8.3 Allocation of the Grid Management Charge Among Scheduling Coordinators. | 217 | |
| | 8.4 Calculation and Adjustment of the Grid Management Charge. | 217A.02 | |
| | 8.5 Operating and Capital Reserves Account. | 218 | |
| | 8.6 Transition Mechanism | 218 | |
| 9. | FIRM TRANSMISSION RIGHTS | 219 | |
| | 9.1 General | 219 | |
| | 9.2 Characteristics of Firm Transmission Rights | 219 | |
| | 9.3 Maximum Number of Firm Transmission Rights | 221 | |
| | 9.4 Issuance of Firm Transmission Rights by the ISO | 222 | |

| | Sheet No. ii-a |
|---|----------------|
| 9.5 Distribution of Auction Revenues Received by the ISO for Firm Transmission Rights | 228 |
| 9.6 Distribution of Usage Charges to FTR Holders | 228A |
| 9.7 Scheduling Priority of FTR Holders | 230 |
| 9.8 Assignment of Firm Transmission Rights | 231 |

| | Sheet No. iii |
|--|---------------|
| 10. METERING. | 233 |
| 10.1 Applicability. | 233 |
| 10.2 Responsibilities of ISO Metered Entities | 233 |
| 10.3 Meter Service Agreements for ISO Metered Entities. | 237 |
| 10.4 Low Side Metering. | 238 |
| 10.5 Audit, Testing Inspection and Certification Requirements. | 239 |
| 10.6 Metering for Scheduling Coordinator Metered Entities. | 239 |
| 11. ISO SETTLEMENTS AND BILLING. | 245 |
| 11.1 Settlement Principles. | 245 |
| 11.2 Calculations of Settlements. | 246 |
| 11.3 Billing and Payment Process. | 253A |
| 11.4 General Principles for Production of Settlement Statements. | 253A |
| 11.5 Calculation in the Event of Lack of Meter Data for the Balancing of Market Accounts. | 254 |
| 11.6 Settlements Cycle. | 255 |
| 11.7 Confirmation and Validation. | 257 |
| 11.8 Payment Procedures. | 259 |
| 11.9 Invoices. | 260 |
| 11.10 Instructions for Payment. | 260 |
| 11.11 ISO's Responsibilities. | 260 |
| 11.12 Non-payment by a Scheduling Coordinator. | 261 |
| 11.13 Payment to ISO Creditors. | 261 |
| 11.14 Using the ISO Reserve Account. | 261 |
| 11.15 Prohibition on transfers. | 262 |
| 11.16 Alternative Payment Procedures. | 262 |
| 11.17 [DELETED] | 262A |
| 11.18 Payment Errors. | 262A |
| 11.19 Defaults. | 263 |
| 11.20 Proceedings to Recover Overdue Amounts. | 264 |
| 11.21 Data Gathering and Storage. | 264 |
| 11.22 Confidentiality. | 265 |
| 11.23 Communications. | 265 |
| 11.24 ISO Payments Calendar. | 266 |

| | Sheet No. iv |
|--|--------------|
| 12. AUDITS. 266 | |
| 12.1 Materials Subject to Audit. | 266 |
| 12.2 ISO Audit Committee. | 266 |
| 12.3 Audit Results. | 268 |
| 12.4 Availability of Records. | 268 |
| 12.5 Confidentiality of Information. | 268 |
| 12.6 Payments. | 269 |
| 13. DISPUTE RESOLUTION. | 269 |
| 13.1 Applicability. | 269 |
| 13.2 Negotiation and Mediation. | 270 |
| 13.3 Arbitration. | 272 |
| 13.4 Appeal of Award. | 281 |
| 13.5 Allocation of Awards Payable by or to the ISO | 282 |
| 14. LIABILITY AND INDEMNIFICATION. | 284 |
| 14.1 Liability for Damages. | 284 |
| 14.2 Exclusion of Certain Types of Loss. | 284 |
| 14.3 Market Participant's Indemnity. | 284 |
| 14.4 Potomac Economics, Ltd. Limitation of Liability. | 284A |
| 15. UNCONTROLLABLE FORCES. | 285 |
| 16. ISO GRID OPERATIONS COMMITTEE; CHANGES TO ISO PROTOCO | DLS. 286 |
| 16.1 ISO Grid Operations Committee | 286 |
| 16.2 ISO Protocol Amendment Process | 286 |
| 16.3 Market Surveillance: Changes to Operating Rules and Protocols | 286 |
| 17. ASSIGNMENT. | 287 |
| 18. TERM AND TERMINATION. | 287 |
| 19. REGULATORY FILINGS. | 287 |
| 20. MISCELLANEOUS. | 288 |
| 20.1 Notice. | 288 |
| 20.2 Waiver. | 289 |
| 20.3 Confidentiality. | 289 |
| 20.4 Staffing and Training To Meet Obligations. | 292.01 |
| 20.5 Accounts and Reports. | 292.01 |
| 20.6 Titles. | 292A |
| 20.7 Applicable Law and Forum. | 292A |

| | | Sheet No | ٥. ٢ |
|-----|--|----------|------|
| | 20.8 Consistency with Federal Laws and Regulations | 293 | |
| 21 | . GENERATION METER MULTIPLIERS. | 294 | |
| | 21.1 Temporary Simplification Relating to GMM Loss Factors. | 294 | |
| | 21.2 Application. | 294 | |
| | 21.3 Notices of Full-Scale Operations. | 295 | |
| 22. | SCHEDULE VALIDATION TOLERANCES. | 295 | |
| | 22.1 Temporary Simplification of Schedule Validation Tolerances. | 295 | |
| | 22.2 Application. | 296 | |
| | 22.3 Notices of Full-Scale Operations. | 296 | |
| 23. | METERED SUBSYSTEMS | 297 | |
| | 23.1 General Nature of Relationship Between ISO and MSS | 297 | |
| | 23.2 Coordination of Operations. | 297 | |
| | 23.3 Coordinating Maintenance Outages of MSS Facilities. | 297 | |
| | 23.4 MSS Operator Responsibilities. | 297A | |
| | 23.5 Scheduling by or on Behalf of a MSS Operator. | 297B | |
| | 23.6 System Emergencies. | 297C | |
| | 23.7 Under Frequency Load Shedding (UFLS). | 297D | |
| | 23.8 Electrical Emergency Plan (EEP) | 297E | |
| | 23.9 System Emergency Reports: MSS Obligations | 297E | |
| | 23.10 Coordination of Expansion or Modifications to MSS Facilities. | 297E | |
| | 23.11 Ancillary Service Obligations for MSS. | 297F | |
| | 23.12 Load Following | 297F | |
| | 23.13 Information Sharing. | 2971 | |
| | 23.14 Installation of and Rights of Access to MSS Facilities. | 297K | |
| | 23.15 MSS System Unit | 297L | |
| | 23.16 MSS Settlements | 297N | |
| 24. | [NOT USED] | 297P | |
| 25. | [NOT USED] | 297P | |
| 26. | TEMPORARY CHANGES TO ANCILLARY SERVICES PENALTIES | 297P | |
| | 26.1 Application and Termination | 297P | |
| 27. | TEMPORARY RULE LIMITING ADJUSTMENT BIDS APPLICABLE TO DISPATCHABLE LOADS AND EXPORTS | 297Q | |
| | 27.1 Application and Termination | 297Q | |
| 28. | RULES LIMITING CERTAIN ENERGY AND ANCILLARY SERVICE BIDS | 298 | |

| Sheet No. v-a |
|-----------------|
| 298A |
| 298A |
| 298A |
| 299 |
| s 299 |
| 299A |
| 299A |
| 299A |
| 299B |
| 299B |
| 299B |
| 299C |
| s 299C |
| 299C |
| Facilities 299D |
| 300 |
| 358 |
| 363 |
| 367 |
| 369 |
| 372 |
| 388 |
| ED 389 |
| 391 |
| |

| | Sheet No. vi |
|--|--------------|
| APPENDIX J - END-USE METER STANDARDS & CAPABILITIES | 393 |
| APPENDIX K - QUALIFYING FACILITY PARTICIPATING GENERATOR | |
| AGREEMENT | 396 |
| APPENDIX L - ISO PROTOCOLS | 397 |

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 1

1. DEFINITIONS AND INTERPRETATION.

1.1 Capitalized terms used in this ISO Tariff shall have the meanings set out in the Master Definitions Supplement set out in Appendix A to this ISO Tariff unless otherwise stated or the context otherwise requires.

- 1.2 In this ISO Tariff "includes" or "including" shall mean "including without limitation".
- 1.3 In this ISO Tariff, unless the context otherwise requires:
- (a) the singular shall include the plural and vice versa;
- (b) references to a Section or Appendix shall mean a section or appendix of this ISO Tariff;
- (c) references to any law shall be deemed references to such law as it may be amended, replaced or restated from time to time;
- (d) any reference to a "person" includes any individual, partnership, firm, company, corporation, joint venture, trust, association, organization or other entity, in each case, whether or not having separate legal personality;
- (e) any reference to a day, month, week or year is to a calendar day, month, week or year.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 2

2. ISO OPERATIONS.

2.1 Access to the ISO Controlled Grid.

2.1.1 Open Access.

The ISO shall, subject to Sections 2.1.2 and 2.1.3, provide to all Eligible Customers open and non-

discriminatory access to the ISO Controlled Grid regardless of the locations of their connections to the

ISO Controlled Grid in accordance with the terms of this ISO Tariff including, in particular, the

procedures for scheduling and Congestion Management. Energy and Ancillary Services may be

transmitted on behalf of an Eligible Customer into, out of or through the ISO Controlled Grid only if

scheduled by a Scheduling Coordinator. A Scheduling Coordinator must ensure that each Eligible

Customer which it represents has all appropriate licenses or authorizations from the Local Regulatory

Authority, FERC or any other regulatory body.

2.1.2 Eligibility of Customers for Direct Access or Wholesale Sales.

The eligibility of an End-Use Customer for Direct Access will be determined in accordance with the

Direct Access eligibility and phase-in procedures (if any) adopted by the Local Regulatory Authority.

Any dispute as to whether an End-Use Customer meets the eligibility criteria must be resolved by the

Local Regulatory Authority prior to the ISO providing Direct Access to that End-Use Customer.

A Wholesale Customer shall not be entitled to participate in Wholesale Sales through a

Scheduling Coordinator if it is not entitled to wholesale transmission service pursuant to the provisions

of FPA Section 212(h).

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

Effective: October 13, 2000

2.1.3 Facilities Financed by Local Furnishing Bonds or Other Tax-Exempt Bonds.

2.1.3.1 This Section 2.1.3 applies only to transmission facilities which are under the Operational

Control of the ISO and are owned by a Local Furnishing Participating TO or other Tax Exempt

Participating TO. Nothing in this ISO Tariff or the TCA shall compel (and the ISO is not authorized to

request) any Local Furnishing Participating TO or other Tax Exempt Participating TO to violate:

(1) restrictions applicable to facilities which are part of a system that was financed in whole or part with

Local Furnishing Bonds or other Tax Exempt Debt or (2) the contractual restrictions and covenants

regarding the use of any transmission facilities specified in Appendix B to the TCA.

2.1.3.2 Each Local Furnishing Participating TO and other Tax Exempt Participating TO shall

cooperate with and provide all necessary assistance to the ISO in developing an ISO Protocol to meet

the objectives of Section 2.1.3.1 and shall keep the ISO fully informed of any changes necessary to

that ISO Protocol from time to time.

2.1.3.3 The ISO shall implement the ISO Protocol referred to in Section 2.1.3.1 provided that the

Local Furnishing TOs and other Tax Exempt Participating TOs shall bear sole responsibility for the

development of that ISO Protocol including the interpretation of all relevant legislation and the tax and

other financial consequences of its implementation.

2.2 Scheduling.

2.2.1 Scheduling Responsibilities and Obligations.

The provisions of this Section 2.2 shall govern the ISO's scheduling of Energy and Ancillary Services

on the ISO Controlled Grid and Congestion Management. Nothing in this ISO Tariff is intended to

permit or require the violation of Federal or California law concerning hydro-generation and Dispatch,

including but not limited to fish release

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 4

Effective: October 13, 2000

Superseding Original Sheet No. 4

requirements, minimum and maximum dam reservoir levels for flood control purposes, and in-stream

flow levels. In carrying out its functions, the ISO will comply with and will have the necessary authority

to give instructions to Participating TOs and Market Participants to enable it to comply with

requirements of environmental legislation and environmental agencies having authority over the ISO in

relation to Environmental Dispatch and will expect that submitted Schedules will support compliance

with the requirements of environmental legislation and environmental agencies having authority over

Generators in relation to Environmental Dispatch. In contracting for Ancillary Services and Imbalance

Energy the ISO will not act as principal but as agent for and on behalf of the relevant Scheduling

Coordinators.

2.2.2 ISO Scheduling Responsibilities.

To fulfill its obligations with respect to scheduling Energy and Ancillary Services, the ISO shall:

(a) provide Scheduling Coordinators with operating information and system status on a Day-Ahead

and Hour-Ahead, Zonal and/or Scheduling Point basis to enable Scheduling Coordinators to

optimize Generation, Demand and the provision of Ancillary Services;

(b) determine whether Preferred Schedules submitted by Scheduling Coordinators meet the

requirements of Section 2.2.7.2, and whether they will cause Congestion;

(c) prepare Suggested Adjusted Schedules on a Day-Ahead basis and Final Schedules on a Day-

Ahead and Hour-Ahead basis;

(d) validate all Ancillary Services bids and self-provided Ancillary Services;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

First Revised Sheet No. 5 Superseding Original Sheet No. 5

(e) reduce or eliminate Inter-Zonal Congestion based on Adjustment Bids and in accordance with

the Congestion Management procedures, and Intra-Zonal Congestion in accordance with

Section 7.2.6; and

(f) if necessary, make mandatory adjustments to Schedules in accordance with the Congestion

Management procedures.

2.2.3 Scheduling Coordinator Certification.

The ISO shall accept Schedules and bids for Energy and Ancillary Services only from Scheduling

Coordinators which it has certified in accordance with Section 2.2.4 as having met the requirements of

this Section 2.2.3. Scheduling Coordinators scheduling Ancillary Services shall additionally meet the

requirements of Section 2.5.6.

2.2.3.1 Each Scheduling Coordinator shall:

(a) demonstrate to the ISO's reasonable satisfaction that it is capable of performing the functions

of a Scheduling Coordinator under this ISO Tariff including (without limitation) the functions

specified in Sections 2.2.6 and 2.2.7 and that it is capable of complying with the

requirements of all ISO Protocols;

(b) identify each of the Eligible Customers (including itself if it trades for its own account) which it

is authorized to represent as Scheduling Coordinator and confirm that the metering

requirements under Section 10 are met in relation to each Eligible Customer for which it is

submitting bids under this ISO Tariff;

(c) confirm that each of the End-Use Customers it represents is eligible for Direct Access;

(d) confirm that none of the Wholesale Customers it represents is ineligible for wholesale

transmission service pursuant to the provisions of FPA Section 212(h);

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 31, 2003 Effective: May 30, 2003

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 6 Superseding Original Sheet No. 6

(e) demonstrate to the ISO's reasonable satisfaction that it meets the financial criteria

set out in Section 2.2.3.2;

(f) enter into an SC Agreement with the ISO; and

(g) provide NERC tagging data.

2.2.3.2 The creditworthiness requirements in this section apply to the ISO's acceptance of

Schedules and to all transactions in an ISO Market. Each Scheduling Coordinator, UDC or

MSS shall either maintain an Approved Credit Rating (which may differ for different types of

transactions with the ISO) or provide in favor of the ISO one of the following forms of security

for an amount to be determined by the Scheduling Coordinator, UDC or MSS and notified to the

ISO under Section 2.2.7.3:

(a) an irrevocable and unconditional letter of credit confirmed by a bank or financial

institution reasonably acceptable to the ISO;

(b) an irrevocable and unconditional surety bond posted by an insurance company

reasonably acceptable to the ISO;

(c) an unconditional and irrevocable guarantee by a company which has and maintains

an Approved Credit Rating;

(d) a cash deposit standing to the credit of an interest bearing escrow account

maintained at a bank or financial institution designated by the ISO;

(e) a certificate of deposit in the name of the ISO from a financial institution designated

by the ISO; or

(f) a payment bond certificate in the name of the ISO from a financial institution

designated by the ISO.

Letters of credit, guarantees, surety bonds, payment bond certificates, escrow agreements

Issued by: Roger Smith Senior Regulatory Counsel

Issued on: May 11, 2001 Effective: April 26, 2001

FIRST REPLACEMENT VOLUME NO. I

Fourth Revised Sheet No. 7

Superseding Third Revised Sheet No. 7

and certificates of deposit must cover all applicable outstanding and estimated liabilities

under Section 2.2.7.3 and shall be in such form as the ISO may reasonably require from

time to time by notice to Scheduling Coordinators, UDCs or MSSs. A Scheduling

Coordinator, UDC or MSS which does not maintain an Approved Credit Rating shall be

subject to the limitations on trading set out in Section 2.2.7.3. Notwithstanding anything to

the contrary in the ISO Tariff, a Scheduling Coordinator or UDC that had an Approved

Credit Rating on January 3, 2001, and is an Original Participating Transmission Owner or

is a Scheduling Coordinator for an Original Participating Transmission Owner shall not be

precluded by Section 2.2.7.3 from scheduling transactions that serve a UDC's Demand

from -

(1) a resource that the UDC owns; and

(2) a resource that the UDC has under contract to serve its Demand.

2.2.3.3 Review of Creditworthiness.

The ISO may review the creditworthiness of any Scheduling Coordinator, UDC or MSS

which delays or defaults in making payments due under the ISO Tariff and, as a

consequence of that review, may require such Scheduling Coordinator, UDC or MSS,

whether or not it has (or is deemed to have) an Approved Credit Rating, to provide credit

support in the form of:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: April 26, 2001 FIRST REPLACEMENT VOLUME NO. I

- an irrevocable and unconditional letter of credit by a bank or financial institution (a) reasonably acceptable to the ISO;
- (b) a cash deposit standing to the credit of an interest-bearing escrow account maintained at a bank or financial institution designated by the ISO;
- (c) an irrevocable and unconditional surety bond posted by an insurance company reasonably acceptable to the ISO; or
- (d) a payment bond certificate in the name of the ISO from a financial institution designated by the ISO.

The ISO may require the Scheduling Coordinator, UDC or MSS to maintain such credit support for at least one (1) year from the date of such delay or default.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: May 11, 2001 Effective: April 26, 2001

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 8

Effective: October 13, 2000

2.2.4 Certification Procedure.

2.2.4.1 The ISO shall certify Scheduling Coordinators in accordance with the following application

procedure. An SC Applicant shall furnish the ISO with the following:

(a) a completed SC Application Form; and

(b) a non-refundable application fee set by the ISO Governing Board.

The application fee will cover the reasonable costs associated with processing the application, including

credit reference verification and the provision of documentation.

2.2.4.2 Application.

(a) The SC Application Form must be sent to the ISO in accordance with Section 20.1, at least

sixty (60) days in advance of the date on which the SC Applicant proposes to commence

operating as a Scheduling Coordinator.

(b) The ISO shall acknowledge receipt of the SC Application Form in writing promptly after

receiving it.

(c) The ISO shall review the application and may request additional information, clarifications or

further documentation from the SC Applicant that the ISO reasonably considers may be

relevant in determining whether the SC Applicant meets the eligibility requirements of

Section 2.2.3 within 14 days after receiving the SC Application Form.

(d) If the SC Applicant fails to respond appropriately to any request by the ISO pursuant to

subsection (c), within seven (7) days or such longer period as the ISO may agree, the ISO

may reject the application.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 9

(e) The ISO will notify the SC Applicant in writing whether its application has been accepted or

rejected and, if rejected, will give a written explanation of the reasons for the rejection within

14 days after the SC Applicant has provided all of the additional information requested by the

ISO pursuant to subsection (c).

(f) The SC Applicant shall become a Scheduling Coordinator when, following acceptance of its

Application, it has entered into an SC Agreement with the ISO and has met the requirements

of Section 2.2.3.2.

2.2.4.3 The SC Applicant may within twenty-eight (28) days following rejection of its application,

appeal in writing that rejection to the ISO Governing Board setting out the grounds for the appeal. The

ISO Governing Board will hear the appeal on and present an oral decision within thirty-five (35) days of

the date the appeal notice is served on the ISO Governing Board in accordance with Section 20.1. The

ISO Governing Board will notify the SC Applicant in writing of its decision within seven (7) days of

hearing the appeal.

2.2.4.4 If the ISO Governing Board rejects the application on appeal then the SC Applicant may

appeal under the ISO ADR Procedure. The ISO shall agree to mediation under Section 13.2 if the SC

Applicant so requests.

2.2.4.5 Termination of Service Agreement.

(a) A Scheduling Coordinator's SC Agreement may be terminated by the ISO on written notice to

the Scheduling Coordinator:

(i) if the Scheduling Coordinator no longer meets the requirements for eligibility set out in

Section 2.2.3 and fails to remedy the default within a period of seven (7) days after the

Effective: October 13, 2000

ISO has given written notice of the default;

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 10

Superseding Original Sheet No. 10

(ii) if the Scheduling Coordinator fails to pay any sum under this ISO Tariff and fails to

remedy the default within a period of seven (7) days after the ISO has given written

notice of the default; or

(iii) if the Scheduling Coordinator commits any other default under this ISO Tariff or any of

the ISO Protocols which, if capable of being remedied, is not remedied within thirty

(30) days after the ISO has given it written notice of the default; or

(b) by the Scheduling Coordinator on sixty (60) days written notice to the ISO, provided that such

notice shall not be effective to terminate the SC Agreement until the Scheduling Coordinator

has complied with all applicable requirements of Section 2.2.5.

The ISO shall, following termination of an SC Agreement and within thirty (30) days of being satisfied

that no sums remain owing by the Scheduling Coordinator under the ISO Tariff, return or release to the

Scheduling Coordinator, as appropriate, any money or credit support provided by such Scheduling

Coordinator to the ISO under Section 2.2.3.2.

2.2.4.5.1 Pending acceptance of termination of service pursuant to Section 2.2.4.6.1 by FERC, the

ISO will suspend the certification of a Scheduling Coordinator which has received a notice of

termination under Section 2.2.4.5(a) and the Scheduling Coordinator will not be eligible to submit

Schedules and bids for Energy and Ancillary Services to the ISO.

2.2.4.6 Notification of Termination. The ISO shall, promptly after providing written notice of

default to a Scheduling Coordinator as specified in Section 2.2.4.5(a), notify the Scheduling

Coordinators that could be required to represent End Use Eligible Customers

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 11

Effective: October 13, 2000

of the Scheduling Coordinator under Section 2.2.4.7.2 if the default is not cured. The ISO shall, as

soon as reasonably practicable following the occurrence of any of the events specified in Section

2.2.4.5, notify the Scheduling Coordinator and the Scheduling Coordinators that could be required to

represent End Use Eligible Customers of the defaulting Scheduling Coordinator, and the UDCs, and

shall as soon as reasonably practicable after the issuance of such notice of termination post such

notice on the ISO Home Page. Termination of the SC Agreement will automatically remove the

Scheduling Coordinator's certification under Section 2.2.4 and Section 2.5.6.

2.2.4.6.1 Filing of Notice of Termination. Any notice of termination given pursuant to Section

2.2.4.5 shall also be filed by the ISO with FERC.

2.2.4.7 Continuation of Service on Termination.

2.2.4.7.1 Option for Eligible Customers to choose a new Scheduling Coordinator.

When the ISO suspends the certification of a Scheduling Coordinator pending termination, Eligible

Customers of the defaulting Scheduling Coordinator shall be entitled to select another Scheduling

Coordinator to represent them. The ISO will post notice of any suspension on the ISO Home Page.

Until the ISO is notified by another Scheduling Coordinator that it represents an Eligible Customer of

the defaulting Scheduling Coordinator, the Eligible Customer of the defaulting Scheduling Coordinator

will receive interim service in accordance with Section 2.2.4.7.2.

2.2.4.7.2 Interim Service.

The ISO shall maintain a list of Scheduling Coordinators willing to represent Eligible Customers of a

defaulting Scheduling Coordinator, which list may be differentiated by UDC

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 12

Effective: October 13, 2000

Service Area. Scheduling Coordinators who indicate to the ISO their desire to be on such list shall be

placed thereon by the ISO in random order.

(a) When the ISO suspends the certification of a Scheduling Coordinator in accordance

with Section 2.2.4.5.1, Eligible Customers of the defaulting Scheduling Coordinators

shall be assigned to all Scheduling Coordinators on the list established pursuant to

Section 2.2.4.7.2 in a non-discriminatory manner to be established by the ISO, and

each Eligible Customer shall thereafter be represented by the Scheduling

Coordinator to which it is assigned unless and until it selects another Scheduling

Coordinator in accordance with Section 2.2.4.7.1, subject to subsection (b).

(b) Unless the ISO is notified by another Scheduling Coordinator that it represents an

Eligible Customer of a defaulting Scheduling Coordinator within seven (7) days of the

notice of termination being posted on the ISO Home Page, the Scheduling Coordinator

to which that Eligible Customer has been assigned in accordance with subsection (a)

may establish a reasonable minimum period for service, not to exceed thirty (30) days.

In the event no Scheduling Coordinator indicates its willingness to represent Eligible (c)

Customers of a defaulting Scheduling Coordinator, the UDC, who has the obligation to

serve End Use Customers of the Eligible Customer, if any, shall arrange to serve those

End Use Customers of such Eligible Customers that are located within the Service

Area of the UDC. Such service will be provided in a manner consistent with that

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 13

Effective: October 13, 2000

which the UDC provides, pursuant to the rules and tariffs of the Local Regulatory

Authority, for its bundled end-use customers.

(d) This Section shall not in any way require a UDC to provide or arrange for Scheduling

Coordinator service for wholesale Eligible Customers.

2.2.5 Eligible Customers Represented by Scheduling Coordinators.

Each Scheduling Coordinator shall within ten (10) days of a request by the ISO provide the ISO with a

list of the Eligible Customers which it represents at the date of the request.

2.2.6 Responsibilities of a Scheduling Coordinator.

Each Scheduling Coordinator shall be responsible for:

2.2.6.1 Obligation to Pay. Paying the ISO's charges in accordance with this ISO Tariff;

2.2.6.2 Submit Schedules. Submitting Schedules for Energy in the Day-Ahead Market and Hour-

Ahead Market in relation to Market Participants for which it serves as Scheduling Coordinator;

2.2.6.3 Modifications in Demand and Supply. Coordinating and allocating modifications in

scheduled Demand and exports and scheduled Generation and imports at the direction of the ISO in

accordance with this ISO Tariff;

2.2.6.4 Trades between Scheduling Coordinators. Billing and settling an Inter-Scheduling

Coordinator Energy or Ancillary Service Trade shall be done in accordance with the agreements

between the parties to the trade. The parties to an Inter-Scheduling Coordinator Energy or Ancillary

Service Trade shall notify the ISO, in accordance with the ISO Protocols, of the Zone in which the

transaction is deemed to occur, which, for Inter-Scheduling Coordinator Energy Trades, shall be used

for the purpose of identifying which Scheduling Coordinator will be responsible for payment of

applicable Usage Charges;

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Third Revised Sheet No. 14

FIRST REPLACEMENT VOLUME NO. I

Superseding Second Revised Sheet No. 14

2.2.6.5 Scheduling Deliveries. Including in its Schedules to be submitted to the ISO under this ISO

Tariff, the Demand, Generation and Transmission Losses necessary to give effect to trades with other

Scheduling Coordinators;

2.2.6.6 Tracking and Settling Trades. Tracking and settling all intermediate trades among the

entities for which it serves as Scheduling Coordinator;

Ancillary Services. Providing Ancillary Services in accordance with Section 2.5; 2.2.6.7

2.2.6.8 Annual and Weekly Forecasts. Submitting to the ISO the forecasted weekly peak Demand

on the ISO Controlled Grid and the forecasted Generation capacity. The forecasts shall cover a period

of twelve (12) months on a rolling basis;

2.2.6.9 ISO Protocols. Complying with all ISO Protocols and ensuring compliance by each of the

Market Participants which it represents with all applicable provisions of the ISO Protocols;

2.2.6.10 **Interruptible Imports.** Identifying any Interruptible Imports included in its Schedules;

2.2.6.11 Participating Intermittent Resources. Submitting Schedules consistent with the ISO

Protocols; and

2.2.6.12 Compliance with Environmental Constraints, Operating Permits and Applicable Law.

Submitting Ancillary Services bids, Adjustment Bids and Supplemental Energy bids so that any service

provided in accordance with such bids does not violate environmental constraints, operating permits or

applicable law. All submitted bids must reflect resource limitations and other constraints as such are

required to be reported to the ISO Control Center.

2.2.7 Operations of a Scheduling Coordinator.

2.2.7.1 Maintain Twenty-four (24) Hour Scheduling Centers. Each Scheduling Coordinator

shall operate and maintain a twenty-four (24) hour, seven (7) days per week, scheduling center. Each

Scheduling Coordinator shall designate a senior member of staff as its scheduling center manager who

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: Upon Written Notice Provided by the ISO To FERC and Market Participants

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 14A

shall be responsible for operational communications with the ISO and who shall have sufficient authority to commit and bind the Scheduling Coordinator.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 29, 2002

Effective: Upon Written Notice Provided By The ISO To FERC and Market Participants

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Substitute Third Revised Sheet No. 15

FIRST REPLACEMENT VOLUME NO. I

Superseding Second Revised Sheet No. 15

2.2.7.2 Submitting Balanced Schedules. A Scheduling Coordinator shall submit to the ISO only

Balanced Schedules in the Day-Ahead Market and the Hour-Ahead Market. A Schedule shall be

treated as a Balanced Schedule when aggregate Generation, Inter-Scheduling Coordinator Energy

Trades (whether purchases or sales), and imports or exports to or from external Control Areas adjusted

for Transmission Losses as appropriate, equals aggregate forecast Demand with respect to all entities

for which the Scheduling Coordinator schedules in each Zone. If a Scheduling Coordinator submits a

Schedule that is not a Balanced Schedule, the ISO shall reject that Schedule provided that Scheduling

Coordinators shall have an opportunity to validate their Schedules prior to the deadline for submission

to the ISO by requesting such validation prior to the applicable deadline.

2.2.7.2.1 Submission of Schedules Sufficient to Meet Forecasted Demand

2.2.7.2.1.1 Each Scheduling Coordinator shall submit to the ISO, for each hour of each Trading Day, a

Day-Ahead Schedule that includes at least ninety-five percent (95%) of that Scheduling Coordinator's

forecast Demand for each hour, for each UDC Service Area, with respect to all entities for which the

Scheduling Coordinator schedules in the applicable UDC Service Areas.

2.2.7.3 Limitation on Trading. A Scheduling Coordinator, UDC or MSS that does not maintain an

Approved Credit Rating, as defined with respect to either payment of the Grid Management Charge, or

payment of other charges, shall maintain security in accordance with Section 2.2.3.2. For the

avoidance of doubt, the ISO Security Amount is intended to cover the entity's outstanding and

estimated liability for

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: December 21, 2005

Effective: September 23, 2005

either (i) Grid Management Charge; and/or (ii) Imbalance Energy, Ancillary Services, Grid Operations Charge, Wheeling Access Charge, High Voltage Access Charge, Transition Charge, Usage Charges, and FERC Annual Charges. Each Scheduling Coordinator, UDC or MSS required to provide an ISO Security Amount under Section 2.2.3.2 shall notify the ISO of the initial ISO Security Amount (separated into amounts securing payment of the Grid Management Charge and amounts securing payments of other charges) that it wishes to provide at least fifteen (15) days in advance and shall ensure that the ISO has received such ISO Security Amount prior to the date the Scheduling Coordinator commences trading or the UDC or MSS commences receiving bills for the High Voltage

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 22, 2005 Effective: September 23, 2005

Access Charge and Transition Charge. A Scheduling Coordinator, UDC or MSS may at any time increase its ISO Security Amount by providing additional guarantees or credit support in accordance with Section 2.2.3.2. A Scheduling Coordinator, UDC or MSS may reduce its ISO Security Amount by giving the ISO not less than fifteen (15) days notice of the reduction, provided that the Scheduling Coordinator, UDC or MSS is not then in breach of this Section 2.2.7.3. The ISO shall release, or permit a reduction in the amount of, such guarantees or other credit support required to give effect to a permitted reduction in the ISO Security Amount as the Scheduling Coordinator, UDC or MSS may select.

Following the date on which a Scheduling Coordinator commences trading, the Scheduling Coordinator shall not be entitled to submit a Schedule to the ISO and the ISO may reject any Schedule submitted if, at the time of submission, the Scheduling Coordinator's ISO Security Amount is exceeded by the Scheduling Coordinator's estimated aggregate liability for (i) Grid Management Charge and/or Imbalance Energy, Ancillary Services, Grid Operations Charge, Wheeling Access Charge, Usage Charges, and FERC Annual Charges on each Trading Day for which Settlement has not yet been made in accordance with Section 11.3.1 and the Scheduling Coordinator's estimated liability for High Voltage Access Charge and Transition Charge for which Settlement has not yet been made in accordance with Section 11.3. The ISO shall notify a Scheduling Coordinator if at any time such outstanding liabilities exceed 90% of the relevant portion of the ISO Security Amount. For the purposes of calculating the Scheduling Coordinator's estimated aggregate liability, the estimate shall include (1) outstanding charges for Trading Days for which Settlement data is available, and (2) an estimate of charges for Trading Days for which Settlement data is not yet available. To estimate charges for Trading Days for which Settlement data is not yet available, the ISO will consider available historical Settlement data, appropriately adjusted to reflect recent market prices and trends, or other available information for individual Scheduling Coordinators.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000 Effective: January 1, 2001

Following the date on which a UDC or MSS commences operation, the UDC's or MSS's Scheduling Coordinator shall not be entitled to submit a Schedule to the ISO and the ISO may reject any Schedule submitted if, at the time of submission, the UDC's or MSS's ISO Security Amount is exceeded by the UDC's or MSS's estimated aggregate liability for Grid Management Charge, and/or High Voltage Access Charges and Transition Charges for which Settlement has not yet been made in accordance with Section 11.3. The ISO shall notify a UDC or MSS if at any time such outstanding liabilities exceed 90% of the relevant portion of the ISO Security Amount. For the purposes of estimating the UDC's or MSS's aggregate liability for High Voltage Access Charges and Transition Charges, the UDC's or MSS's liability shall be equal to the billed Demand use (in MWh) for a month in the UDC's or MSS's Service Area (including exports from the Service Area) multiplied by the ISO's estimated High Voltage Access Charge and Transition Charge for that month, as such estimated cost is notified by the ISO to UDCs and MSSs from time to time.

- **2.2.7.4** The ISO shall notify the relevant Scheduling Coordinator if it rejects a Schedule under Section 2.2.7.3 in which event the Scheduling Coordinator shall not be entitled to submit any further Schedules until it has demonstrated to the ISO's satisfaction that its ISO Security Amount has been increased sufficiently to avoid the limit on trading imposed under Section 2.2.7.3 from being exceeded.
- 2.2.7.5 The ISO may restrict, or suspend a Scheduling Coordinator's right to Schedule or require the Scheduling Coordinator to increase its ISO Security Amount if at any time such Scheduling Coordinator's liability for Imbalance Energy is determined by the ISO to be

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: January 1, 2001

Superseding First Revised Sheet No. 18

excessive by comparison with the likely cost of the amount of Energy scheduled by the Scheduling Coordinator.

2.2.7.6 Dynamic Scheduling. Scheduling Coordinators may dynamically schedule imports of Energy, Supplemental Energy, and Ancillary Services (other than Regulation) for which associated Energy is delivered dynamically from System Resources located outside of the ISO Control Area, provided that (a) such dynamic scheduling is technically feasible and consistent with all applicable NERC and WECC criteria and policies, (b) all operating, technical, and business requirements for dynamic scheduling functionality, as posted in standards on the ISO Home Page, are satisfied, (c) the Scheduling Coordinator for the dynamically scheduled System Resource executes an agreement with the ISO for the operation of dynamic scheduling functionality, and (d) all affected host and intermediary Control Areas each execute with the ISO an Interconnected Control Area Operating Agreement or special operating agreement related to the operation of dynamic functionality.

2.2.8 The Scheduling Process.

The ISO scheduling process is described for information purposes only in tabular form in Appendix C.

The scheduling process by nature will need constant review and amendment as the market develops and matures and, therefore, is subject to change. The description in Appendix C aids understanding of the implementation and operation of the various markets administered by the ISO and is filed for information purposes only.

2.2.8.1 Preferred Schedule. A Preferred Schedule shall be submitted by each Scheduling Coordinator on a daily and/or hourly basis to the ISO. Scheduling Coordinators may also submit to the ISO, Ancillary Services bids in accordance with Section 2.5.10 and, where they elect to self-provide Ancillary Services pursuant to Section 2.5.20.1, an Ancillary Service schedule meeting the requirements set forth in Section 2.5.20.6. The Preferred Schedule shall also include an indication of which resources (Generation or Load) if any may be adjusted by the ISO to eliminate Congestion. On receipt of the Preferred Schedule in the Day-Ahead scheduling process, the ISO shall notify the Scheduling Coordinator of any specific Reliability Must-Run Units which have not been included in the Preferred

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 30, 2004 Effective: June 29, 2004

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 18A

Schedule but which the ISO requires to run in the next Trading Day. The ISO will also notify the Scheduling Coordinator of any Ancillary Services it requires from specific Reliability Must-Run Units under their Reliability Must-Run Contracts in the next Trading Day. If the ISO identifies mismatches in the scheduled quantity or location for any Inter-Scheduling Coordinator Energy Trade, it will notify the Scheduling Coordinators concerned and give them until a specified time, which will allow

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 30, 2004 Effective: June 29, 2004 them approximately one half-hour, in which to modify their Schedules to resolve the mismatch before it applies the provisions of Section 2.2.11.3.4. If the ISO notifies a Scheduling Coordinator that there will be no Congestion on the ISO Controlled Grid and, subject to Section 2.2.11.3.4, the Preferred Schedule shall become that Scheduling Coordinator's Final Schedule.

2.2.8.2 Suggested Adjusted Schedules. In the Day-Ahead scheduling process, if the sum of Scheduling Coordinators' Preferred Schedules would cause Congestion across any Inter-Zonal Interface, the ISO shall issue to all Scheduling Coordinators an estimate of the Usage Charges if Congestion is not relieved and Suggested Adjusted Schedules that shall reflect adjustments made by the ISO to each Scheduling Coordinator's Preferred Schedule to eliminate Congestion, based on the initial Adjustment Bids submitted in the Preferred Schedules. The ISO will include in the Suggested Adjusted Schedules the resolution of any mismatches in Inter-Scheduling Coordinator Energy Trades, as determined by the ISO.

2.2.8.3 Revised Schedules. Following receipt of a Suggested Adjusted Schedule, a Scheduling Coordinator may submit to the ISO a Revised Schedule, which shall be a Balanced Schedule, and which shall seek to reduce or eliminate Congestion. If the ISO identifies mismatches in the scheduled quantity or location for any Inter-Scheduling Coordinator Energy Trade, it will notify the Scheduling Coordinators concerned and give them until a specified time, which will allow them approximately one half-hour, in which to modify their Schedules to resolve the mismatch before it applies the provisions of Section 2.2.11.3.4.

2.2.8.4 Final Schedules. If the ISO notifies a Scheduling Coordinator that there will be no Congestion on the ISO Controlled Grid, the Revised Schedule shall become that Scheduling Coordinator's Final Schedule. If no Scheduling Coordinator submits any

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

Substitute FIrst Revised Sheet No. 20

Superseding Original Sheet No. 20

changes to the Suggested Adjusted Schedules, all of the Suggested Adjusted Schedules shall become

the Final Schedules. The Final Schedules shall serve as the basis for Settlement between the ISO and

each Scheduling Coordinator.

2.2.9 [Not Used]

2.2.10 Information to be Provided by the ISO to all Scheduling Coordinfators.

By 6:00 p.m. two days prior to a Trading Day, the ISO shall publish on WEnet information, including the

following to all Scheduling Coordinators for each Settlement Period of the Trading Day:

2.2.10.1 Scheduled Line Outages. Scheduled transmission line Outages;

2.2.10.2 [Not Used]

2.2.10.3 Forecast Loop-Flow. Forecast Loop Flow over ISO Inter-zonal Interfaces and Scheduling

Points;

2.2.10.4 Advisory Demand Forecasts. Advisory Demand Forecasts by location;

2.2.10.5 Updated Transmission Loss Factors. Updated Generation Meter Multipliers reflecting

Transmission Losses to be supplied by each Generating Unit and by each import into the ISO Control

Area;

2.2.10.6 Ancillary Services. Expected Ancillary Services requirement by reference to Zones for

each of the reserve Ancillary Services.

2.2.10.7 [Not Used]

2.2.10.8 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: June 30, 2003 Effective: May 30, 2003

Effective: October 13, 2000

Superseding Original Sheet No. 21

2.2.11 Information to Be Submitted by Scheduling Coordinators to the ISO.

Each Preferred Schedule submitted by a Scheduling Coordinator shall represent its preferred mix of

Generation to meet its Demand and account for Transmission Losses and must include the name and

identification number of each Eligible Customer for whom a Demand Bid or an Adjustment Bid is

submitted, as well as:

2.2.11.1 For Demand:

2.2.11.1.1 Designated Location Code. For all Demand the Location Code of the Take-Out

Point;

2.2.11.1.2 Quantity at Take-Out Point. The aggregate quantity (in MWh) of Demand being

served at each Take-Out Point for which a bid has been submitted;

2.2.11.1.3 Flexibility. Whether the Preferred Schedule is flexible for adjustment to eliminate

Congestion;

2.2.11.1.4 Adjustment Bids. The MW and \$/MWh values representing the Adjustment Bid curve

for any Dispatchable Load.

2.2.11.2 For Generation:

2.2.11.2.1 Location of Generating Units. The Location Code of all Generating Units scheduled,

if applicable, or the source Control Area and Scheduling Point;

2.2.11.2.2 Quantity Scheduled. The aggregate quantity (in MWh) being scheduled from each

Generating Unit and System Resource;

2.2.11.2.3 Notification of Flexibility. Notification of whether the Preferred Schedule is flexible

for adjustment to eliminate Congestion;

2.2.11.2.4 Adjustment Bids. The MW and \$/MWh values representing the Adjustment Bid curve for each Generating Unit and System Resource for which an Adjustment Bid has been submitted;

2.2.11.2.5 Operating Characteristics. Operating characteristics for each Generating Unit and System Resource for which an Adjustment Bid has been submitted; and

2.2.11.2.6 Must-Take/Must-Run Generation. Identification of all scheduled Generating Units that are Regulatory Must-Take Generation or Regulatory Must-Run Generation.

2.2.11.3 For deliveries to/from other Scheduling Coordinators:

2.2.11.3.1 Identification Code. Identification Code of Scheduling Coordinator to which Energy is provided or from which Energy is received;

2.2.11.3.2 Quantity of Energy. Quantity (in MWh) of Energy being received or delivered;

Zone. The Zone within which Energy is deemed to be provided by one Scheduling Coordinator to another under the Inter-Scheduling Coordinator Energy Trades.

2.2.11.3.4 Adjustments. Scheduling Coordinators will have the opportunity to resubmit Preferred Schedules and or Revised Schedules upon notice by the ISO if the ISO determines that the quantity or location of the receiving Scheduling Coordinator is not consistent with the quantity or location of the delivering Scheduling Coordinator. If the Scheduling Coordinators involved in a mismatched Inter-Scheduling Coordinator Energy Trade do not submit adjusted Schedules which resolve any mismatch as to quantities and provided that there is no dispute as to whether the mismatched trade occurred or over its

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

location, the ISO will adjust the Schedule containing the higher quantity to match the scheduled quantity of Energy in the other Schedule, except where the Schedule to be reduced contains only Inter-Scheduling Coordinator Energy Trades, in which case the ISO will adjust the other Schedule to match the Schedule containing the higher quantity. If there is a dispute between the Scheduling Coordinators as to whether the Inter-Scheduling Coordinator Energy Trade occurred or over its location, the ISO will remove the disputed trade from the Schedules in which it appears. The ISO will then balance the Schedules which are no longer Balanced Schedules by adjusting resources in the relevant Scheduling Coordinator's portfolio in accordance with the procedures detailed in the ISO Protocols.

- **2.2.11.3.5** The Generating Unit or Dispatchable Load that the source or recipient of Energy traded.
- **2.2.11.3.6** The MW and \$/MWh values representing the Adjustment Bid for any Generating Unit or Dispatchable Load that is the source or recipient of Energy traded.
- **2.2.11.4** For Self-Provided Ancillary Services: Scheduling Coordinators electing to self-provide Ancillary Services shall supply the information referred to in Section 2.5.20.5 in relation to each Ancillary Service to be self-provided.
- **2.2.11.5 For Interruptible Imports:** the quantity (in MWh) of Energy categorized as Interruptible Imports and whether the Scheduling Coordinator intends to self-provide the Operating Reserve required by Section 2.5.3.2 to cover such Interruptible Imports or to purchase such Operating Reserve from the ISO.
- 2.2.12 Timing of Day-Ahead Scheduling.
- 2.2.12.1 The ISO may in its sole discretion waive the timing requirements of this Section 2.2 where necessary to preserve System Reliability. The ISO may also waive the

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Superseding Second Revised Sheet No. 24

Third Revised Sheet No. 24

timing requirements of Section 2.2 where, because of error or delay, the ISO is unable to meet the timing requirements. Any such waiver shall be published on WEnet.

2.2.12.2 Reliability Must Run Information. By no later than 5:00 a.m. on the day before the Trading Day, the ISO will notify Scheduling Coordinators for Reliability Must-Run Units of the amount and time of Energy requirements from specific Reliability Must-Run Units that the ISO requires to deliver Energy in the Trading Day to the extent that the ISO is aware of such requirements (the "RMR Dispatch Notice"). The Energy to be delivered for each hour of the Trading Day pursuant to the RMR Dispatch Notice (including Energy the RMR Owner is entitled to substitute for Energy from the Reliability Must-Run Unit pursuant to the RMR Contract) shall be referred to as the "RMR Energy".

2.2.12.2.1 No later than 6:00 a.m. on the day before the Trading Day, any RMR Owner receiving an RMR Dispatch Notice as indicated in this Section 2.2.12.2 (the "Applicable RMR Owner") must notify the ISO through the RMR Owner's Scheduling Coordinator (the "Applicable RMR SC"), with regard to each hour of the Trading Day identified in the RMR Dispatch Notice whether it intends to satisfy its obligation to deliver RMR Energy (i) by delivering RMR Energy pursuant to a market transaction ("RMR Market Energy"), and receiving only market compensation therefore (the "RMR Market Option"), or (ii) by delivering RMR Energy as a contract transaction ("RMR Contract Energy"), and accepting payment under the relevant RMR Contract (the "RMR Contract Option"). If the Applicable RMR Owner so notifies the ISO by March 1, 2001, for calendar year 2001, and by January 1 of any subsequent calendar year, the RMR Owner may during that calendar year notify the ISO directly of its choice of payment option, rather than through the Applicable RMR Owner's Scheduling Coordinator. If the Applicable RMR Owner elects to provide notice of its choice of

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 17, 2003 Effective: December 1, 2003

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 24A

payment option directly, the ISO will not accept notice from the Applicable RMR Owner's Scheduling

Coordinator during the relevant calendar year. Notwithstanding anything to the contrary in any RMR

Contract, the Applicable RMR Owner may not elect to satisfy its obligation to deliver the RMR Energy

specified in the RMR Dispatch Notice by delivering that RMR Energy pursuant to a transaction in the

Real Time Market.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000

Effective: Upon Notice After February 27, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Supers

Fifth Revised Sheet No. 25 Superseding Fourth Revised Sheet No. 25

Effective: December 1, 2003

2.2.12.2.2 **RMR Contract Option --**For each hour for which the Applicable RMR Owner elects the RMR Contract Option, the Scheduling Coordinator shall submit a Day-Ahead Energy Schedule that includes all RMR Contract Energy. Any RMR Contract Energy not Scheduled to forecast Demand or through Inter-Scheduling Coordinator Energy Trades shall be balanced by also Scheduling an additional quantity of Demand equal to the remaining amount of RMR Contract Energy at a Load Point specified by the ISO for each RMR Unit (the "RMR Contract Energy Load Point"). The RMR Contract Energy Load Point shall be used solely for the purpose of balancing the RMR Contract Energy not otherwise Scheduled to forecast Demand or an Inter-Scheduling Coordinator Energy Trade. The price for the RMR Contract Energy Scheduled to the RMR Contract Energy Load Point shall be the price paid to Demand deviations from Final Hour-Ahead Schedules. The ISO shall post the list of RMR Contract Energy Load Points on the ISO Home Page and shall make any modifications to that list effective only 1) after providing at least five (5) days notice and 2) on the first day of a month. Whether or not the RMR Contract Energy is in the Final Schedule, the Applicable RMR Owner must deliver the RMR Contract Energy pursuant to the RMR Dispatch Notice. Notwithstanding anything to the contrary in the RMR Contract, neither the Applicable RMR Owner nor the Applicable RMR SC shall be entitled to any payment from any source for RMR Energy that is not scheduled as required by this Section 2.2.12.2.2. All RMR Energy delivered under this option shall be deemed delivered under a Nonmarket Transaction for the purposes of the RMR Contract. In the event that the RMR Contract Energy is not delivered for any hour, (i) if the RMR Contract Energy had been scheduled, the Applicable RMR Owner shall not be entitled to an Availability Payment under the RMR Contract and the Applicable RMR SC shall pay for the Imbalance Energy necessary to replace that RMR Energy; and (ii) if the RMR Contract Energy had not been scheduled, the Applicable RMR Owner shall not be entitled to an Availability Payment under the RMR Contract and, if the variable costs saved by

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 17, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 25A Superseding Original Sheet No. 25A

the Owner's failure to deliver the RMR Contract Energy (which shall be equal to the Variable Cost Payment determined pursuant to Schedule C in the RMR Contract) are greater than the foregone Availability Payment under the RMR Contract, the Applicable RMR Owner shall pay the difference between the variable costs saved and the Availability Payment.

2.2.12.2.2.1 [not used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 17, 2003 Effective: December 1, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Supe

Fourth Revised Sheet No. 26 Superseding Third Revised Sheet No. 26

2.2.12.2.3 RMR Market Option – This Section 2.2.12.2.3 provides how an Applicable RMR Owner electing the RMR Market Option shall satisfy its obligation to deliver RMR Energy.

2.2.12.2.3.1 For each hour for which an Applicable RMR Owner has selected the Market Option, the Applicable RMR Owner (i) may bid into a power exchange market any amount of the RMR Market Energy and (ii) may schedule as a bilateral Day-Ahead transaction any amount of RMR Market Energy.

The Preferred Day-Ahead Schedule of the Applicable RMR SC shall include as RMR Market Energy for each hour the sum of the amount awarded to the Applicable RMR Owner in any power exchange market for that hour and the amount scheduled as a bilateral Day-Ahead transaction for that hour. If the Preferred Day-Ahead Schedule of the Applicable RMR SC for any hour includes Adjustment Bids for the RMR Unit, the Adjustment Bid shall specify the RMR Market Energy as the minimum MW output to which the Applicable RMR SC will allow the RMR Unit to be redispatched for that hour.

Notwithstanding anything to the contrary in the RMR Contract, neither the Applicable RMR Owner nor the Applicable RMR SC shall be entitled to any payment from any source for RMR Market Energy that is not bid and scheduled as required by this Section 2.2.12.2.3. In the event that the RMR Market Energy is not delivered, (i) if the RMR Market Energy had been scheduled, the Applicable RMR Owner shall not be entitled to an Availability Payment under the RMR Contract and the Applicable RMR SC shall pay for the Imbalance Energy necessary to replace that RMR Market Energy, or (ii) if the RMR Market Energy had not been scheduled, the Applicable RMR Owner shall not be entitled to an Availability Payment under the RMR Contract and, if the variable costs saved by the Owner's failure to deliver the RMR Market Energy (which shall be equal to the Variable Cost Payment determined pursuant to Schedule C in the RMR Contract) are greater than the

FIRST REPLACEMENT VOLUME NO. I

Superseding Sub. Original Sheet No. 26A

First Revised Sheet No. 26A

foregone Availability Payment under the RMR Contract, the Applicable RMR Owner shall pay the difference between the variable costs saved and the Availability Payment.

2.2.12.2.3.2 If the Applicable RMR SC's Preferred Day-Ahead Schedule does not include the entire amount of RMR Market Energy for any hour, the Applicable RMR Owner shall bid all remaining RMR Market Energy for that hour, net of any RMR Energy the Applicable RMR Owner elects to provide through an Hour-Ahead bilateral transaction for that hour, into the next available power exchange market for such hour at zero dollars per MWh.

2.2.12.2.3.2.1 The Applicable RMR SC's Preferred Hour-Ahead Schedule for each hour shall include all RMR Market Energy specified in the RMR Dispatch Notice for that hour, except for the amount of RMR Energy that the Applicable RMR Owner was required to bid into the power exchange markets under Section 2.2.12.2.3.2 but was not awarded in such power exchange markets for such hour. If the Preferred Hour-Ahead Schedule of the Applicable RMR SC for any hour includes Adjustment Bids for the RMR Unit, the Adjustment Bid shall specify the RMR Market Energy as the minimum MW output to which the Applicable RMR SC will allow the RMR Unit to be redispatched for that hour.

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I Supers

Superseding Second Revised Sheet No. 27

Third Revised Sheet No. 27

2.2.12.2.3.3 Whether or not the RMR Energy is in a Final Schedule, the Applicable RMR Owner must deliver the RMR Energy pursuant to the RMR Dispatch Notice. If the RMR Owner has bid and scheduled the RMR Energy as required by this Section 2.2.12.2.3, any RMR Energy provided but not included in the Final Schedule will be paid as Uninstructed Imbalance Energy. Notwithstanding anything to the contrary in the RMR Contract, neither the Applicable RMR Owner nor the Applicable RMR SC shall be entitled to any payment from any source for RMR Market Energy that is not bid and scheduled as required by this Section 2.2.12.2.3.

2.2.12.2.4 If, at any time after 5:00 a.m. on the day before the Trading Day, the ISO determines that it requires additional Energy from specific Reliability Must-Run Units during the Trading Day, the ISO will notify Scheduling Coordinators for such Reliability Must-Run Units of the amount and time of the additional Energy requirements from such Reliability Must-Run Units (the "Supplemental RMR Dispatch Notice").

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 17, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
SeFIRST REPLACEMENT VOLUME NO. I
Superseding

Second Revised Sheet No. 27A Superseding First Revised Sheet No. 27A

If the owner of the RMR Unit or the Applicable RMR SC for the RMR Unit specified in the Supplemental RMR Dispatch Notice has not already notified the ISO of a payment option for any hour of the Trading Day included in the Supplemental Dispatch Notice at the time the Supplemental Dispatch Notice is issued, the RMR Owner shall do so no later than three hours before the hour specified in the Supplemental RMR Dispatch Notice for each such hour that is at least four hours after the issuance of the Supplemental Dispatch Notice. If the RMR Owner elects to provide the Energy requested in the Supplemental RMR Dispatch Notice as RMR Contract Energy, the Scheduling Coordinator shall 1) submit an Hour-Ahead Energy Schedule that includes all or part of the RMR Contract Energy requested in the Supplemental RMR Dispatch Notice in a bilateral transaction to Demand or in an Inter-Scheduling Coordinator Energy Trade and 2) submit an Hour-Ahead Energy Schedule for all RMR Contract Energy requested in the Supplemental RMR Dispatch Notice not Scheduled in a bilateral transaction as a Schedule to the RMR Contract Energy Load Point and balance that Schedule by also Scheduling an additional quantity of Demand equal to the remaining amount of RMR Contract Energy at the RMR Contract Energy Load Point. The RMR Contract Energy Load Point shall be used solely for the purpose of balancing the RMR Contract Energy not otherwise Scheduled to forecast Demand or through an Inter-Scheduling Coordinator Energy Trade. The price for the RMR Contract Energy Scheduled to the RMR Contract Energy Load Point shall be the price paid to Demand deviations from Final Hour-Ahead Schedules.

2.2.12.2.5 [not used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 17, 2003 Effective: December 1, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Substitute Fourth Revised Sheet No. 28

FIRST REPLACEMENT VOLUME NO. I

Superseding Third Revised Sheet No. 28

2.2.12.3 Demand Information.

2.2.12.3.1 Daily Information. By 10:00 a.m. on the day preceding the Trading Day, each

Scheduling Coordinator shall provide to the ISO a Demand Forecast specified by UDC Service Area for

which it will schedule deliveries for each of the Settlement Periods of the following Trading Day. The

ISO shall aggregate the Demand information by UDC Service Area and transmit the aggregate

Demand information to each UDC serving such aggregate Demand.

2.2.12.3.2 Preliminary Weekly Information. Each Scheduling Coordinator shall provide to the

ISO, no later than seven (7) days after the end of each week, which shall end at Sunday HE 24, data

for the previous week (Monday through Sunday), in electronic format, comparing, for each hour of that

week: (1) the Scheduling Coordinator's total Day-Ahead scheduled Demand by UDC Service Area, as

submitted pursuant to Section 2.2.7.2, (2) the Scheduling Coordinator's total Day-Ahead Demand

Forecast by UDC Service Area, as submitted pursuant to Section 2.2.12.3.1, and (3) an estimate of the

Scheduling Coordinator's actual Demand by UDC Service Area.

2.2.12.4 The Preferred Schedule of each Scheduling Coordinator for the following Trading Day

shall be submitted at or prior to 10:00 a.m. on the day preceding the Trading Day together with any

Adjustment Bids and Ancillary Services bids.

2.2.12.5 In submitting its Preferred Schedule, each Scheduling Coordinator shall notify the ISO

of any Dispatchable Loads which are not scheduled but have submitted Adjustment Bids and are

available for Dispatch at those same Adjustment Bids to assist in relieving Congestion.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: December 21, 2005

Effective: September 23, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 28A

2.2.12.6 ISO Analysis of Preferred Schedules. On receipt of the Preferred Schedules, the ISO will analyze the Preferred Schedules of Applicable RMR SCs to determine the compatibility of such Preferred Schedules with the RMR Dispatch Notices. If the ISO identifies mismatches in the scheduled quantity or location for any Inter-Scheduling Coordinator Energy Trade, it will notify the Scheduling Coordinators concerned

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 22, 2005 Effective: September 23, 2005

and give them until a specified time, which will allow them approximately one half-hour, in which to modify their Schedules to resolve the mismatch before it applies the provisions of Section 2.2.11.3.4. The ISO shall analyze the combined Preferred Schedules submitted by all Scheduling Coordinators to forecast the probability of Congestion being caused by the Preferred Schedules. If the ISO finds that the Preferred Schedules will not cause Congestion, and subject to Section 2.2.11.3.4, the Preferred Schedules shall become the Final Schedules and the ISO shall notify Scheduling Coordinators accordingly.

2.2.12.7 Issuance of Suggested Adjusted Schedules. If the ISO finds that the Preferred Schedules would cause Congestion, it shall issue Suggested Adjusted Schedules no later than 11:00 a.m. on the day preceding the Trading Day. The ISO will include in the Suggested Adjusted Schedules the resolution of any mismatches in Inter-Scheduling Coordinator Energy Trades, as determined by the ISO.

2.2.12.8 Submission of Revised Schedules. If the ISO has issued Suggested Adjusted Schedules, by 12:00 noon on the day preceding the Trading Day, each Scheduling Coordinator may submit a Revised Schedule to the ISO or shall inform the ISO that it does not wish to make any change to its previously submitted Preferred Schedule. If the ISO identifies mismatches in the scheduled quantity or location for any Inter-Scheduling Coordinator Energy Trade, it will notify the Scheduling Coordinators concerned and give them until a specified time, which will allow them approximately one half-hour, in which to modify their Schedules to resolve the mismatch before it applies the provisions of Section 2.2.11.3.4.

2.2.12.8.1 Revised Schedules Become Final Day-Ahead Schedules. Subsequent to receiving Revised Schedules if the ISO identifies no Congestion on the ISO Controlled Grid and subject to Section 2.2.11.3.4, the Revised Schedules and any unamended

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 30

Superseding First Revised Sheet No. 30

Preferred Schedules shall become Final Day-Ahead Schedules and the ISO shall notify Scheduling Coordinators accordingly.

2.2.12.8.2 Use of Congestion Management for Final Schedule. Subsequent to receiving Revised Schedules if the ISO identifies Congestion on the ISO Controlled Grid, it shall use the Congestion Management provisions of this ISO Tariff and the ISO Protocols to develop the Final Day-Ahead Schedules.

2.2.13 Timing of Hour-Ahead Scheduling.

2.2.13.1 Submission of Preferred Schedule. Each Scheduling Coordinator's Preferred Schedule for each Settlement Period during a Trading Day together with any additional or updated Adjustment Bids or Ancillary Services bids shall be submitted at least two hours and fifteen minutes (i.e., 135 minutes) prior to the commencement of that Settlement Period.

2.2.13.1.1 Statements in Preferred Schedule. In submitting its Preferred Schedule, each Scheduling Coordinator may submit Adjustment Bids for use in the Hour-Ahead Market to assist in relieving Congestion.

2.2.13.1.2 Final Hour-Ahead Schedule Submission. Each Hour-Ahead Schedule shall indicate the changes which the relevant Scheduling Coordinator wishes to make to the Final Day-Ahead Schedule.

2.2.13.2 ISO Analysis of Preferred Schedules. The ISO shall analyze the combined
Preferred Schedules submitted by all Scheduling Coordinators to forecast the probability of Congestion being caused by the Preferred Schedules.

2.2.13.2.1 Preferred Schedules Become Final Hour-Ahead Schedules. If the ISO identifies no Congestion on the ISO Controlled Grid, the Preferred Schedules shall

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: December 11, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Second Revised Sheet No. 31

FIRST REPLACEMENT VOLUME NO. I

Superseding Substitute First Revised Sheet No. 31

become Final Hour-Ahead Schedules and the ISO shall notify Scheduling Coordinators accordingly.

2.2.13.2.2 Congestion Management Provisions for Final Hour-Ahead Schedules. If the ISO

identifies Congestion, it shall use the Congestion Management provisions of Section 7.2 of this ISO

Tariff and the ISO Scheduling Protocol to develop the Final Hour-Ahead Schedules.

2.2.13.2.3 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: January 1, 2001

2.2.13.3 Final Hour-Ahead Schedules. The ISO shall inform each Scheduling Coordinator of its responsibilities to provide Ancillary Services in accordance with Section 2.5.21. Not later than thirty (30) minutes before the commencement of each Settlement Period, the ISO shall provide each Scheduling Coordinator with the Final Schedule for that Settlement Period. Each Final Schedule shall be a Balanced Schedule and shall contain the following information:

2.2.13.3.1 Generation.

- **2.2.13.3.1.1** Name and identification number of each Participating Generator appearing in the Final Schedule:
- **2.2.13.3.1.2** Location Code of each Generating Unit, System Resource and Scheduling Point;
- **2.2.13.3.1.3** The changes in the final scheduled quantity (in MWh) for each such Generating Unit, System Resource and scheduled voltage;
- 2.2.13.3.1.4 Notification if the scheduled Generation was adjusted to resolve Congestion; and

2.2.13.3.1.5 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: January 25, 2002 Effective: January 1, 2001

Effective: October 13, 2000

2.2.13.3.2 Load.

2.2.13.3.2.1 For each Load where a Demand Bid has been submitted, the Location Code of the

Take-Out Point:

2.2.13.3.2.2 Final Scheduled Quantity. Final scheduled quantity (in MWh) of Demand; and

2.2.13.3.2.3 Notification of Adjustment. Notification if the scheduled Demand was adjusted to

resolve Congestion.

2.2.13.4 Usage Charges. The ISO shall notify each Scheduling Coordinator of the applicable

Usage Charge calculated in accordance with Section 7.3.

2.2.14 Communications.

2.2.14.1 Communications between the ISO and Scheduling Coordinators shall take place via

direct computer link to a dedicated terminal at the Scheduling Coordinator's scheduling center. The

ISO will establish the back-up communication procedures as part of the ISO Protocols.

2.2.14.2 Any Generation or Demand that is available for Dispatch must be capable of

responding to ISO Dispatch instructions through a direct computer link or other means in accordance

with the ISO Protocol on Dispatch.

2.2.15 Verification of Information.

The ISO shall be entitled to take all reasonable measures to verify that Scheduling Coordinators meet

the technical and financial criteria set forth in Section 2.2.3 hereof and the accuracy of information

submitted to the ISO pursuant to Section 2.2.11.

Third Revised Sheet No. 33

2.2.16 Relationship Between ISO and Participating Loads

The ISO shall only accept bids for Supplemental Energy or Ancillary Services, or Schedules for self-

provision of Ancillary Services, from Loads if such Loads are Participating Loads which meet standards

adopted by the ISO and published on the ISO Home Page. The ISO shall not schedule Energy or

Ancillary Services from a Participating Load other than through a Scheduling Coordinator.

2.2.17 Relationship Between ISO and Eligible Intermittent Resources and Between the ISO and

Participating Intermittent Resources

The ISO shall not schedule Energy from an Eligible Intermittent Resource other than through a

Scheduling Coordinator. Settlement with Participating Intermittent Resources that meet the scheduling

obligations established in the ISO Protocols shall be as provided in this ISO Tariff. No Adjustment Bids

or Supplemental Energy bids may be submitted on behalf of Participating Intermittent Resources. Any

Eligible Intermittent Resource that is not a Participating Intermittent Resource, or any Participating

Intermittent Resource for which Adjustment Bids or Supplemental Energy bids are submitted, or that

fails to meet the scheduling obligations established in the ISO Protocols, shall be scheduled and settled

as a Generating Unit for the associated Settlement Periods (except that the Forecasting Fee shall apply

in such Settlement Periods).

2.2.18 Compliance with Scheduling and Data Provision Requirements. Pursuant to its

obligation to notify FERC of any potential violations of Section 7 of the ISO's Enforcement Protocol, the

ISO will routinely report any underscheduling behavior that it observes to FERC, for investigation as a

potential violation of Section 7 of the Enforcement Protocol and/or FERC's Market Behavior Rule 2.

2.3 System Operations under Normal and Emergency Operating Conditions.

2.3.1 ISO Control Center Operations.

2.3.1.1 ISO Control Center.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 22, 2005 Effective: September 23, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO.

Original Sheet No. 33.01

2.3.1.1.1 Establish ISO Control Center. The ISO shall establish a WECC approved Control

Area and control center to direct the operation of all facilities forming part of the ISO Controlled Grid,

Reliability Must-Run Units and Generating Units providing Ancillary Services.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 22, 2005 Effective: September 23, 2005

FIRST REPLACEMENT VOLUME NO.

Second Revised Sheet No. 33A

Superseding First Revised Sheet No. 33A

2.3.1.1.2 Establish Back-up Control Facility. The ISO shall establish back-up control facilities

remote from the ISO Control Center sufficient to enable the ISO to continue to direct the operation of

the ISO Controlled Grid, Reliability Must-Run Units, System Resources and Generating Units providing

Ancillary Services in the event of the ISO Control Center becoming inoperable.

2.3.1.1.3 ISO Control Center Authorities. The ISO shall have full authority, subject to Section

2.3.1.2, to direct the operation of the facilities referred to in Section 2.3.1.1.2 including (without

limitation), to:

(a) direct the physical operation by the Participating TOs of transmission facilities under the

Operational Control of the ISO, including (without limitation) circuit

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 30, 2004 Effective: June 29, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Second Revised Sheet No. 34
Superseding First Revised Sheet No. 34

FIRST REPLACEMENT VOLUME NO. Superseding First Revised Sheet No. 34

breakers, switches, voltage control equipment, protective relays, metering, and Load Shedding

equipment;

(b) commit and dispatch Reliability Must-Run Units;

(c) order a change in operating status of auxiliary equipment required to control voltage or

frequency;

(d) take any action it considers to be necessary consistent with Good Utility Practice to protect

against uncontrolled losses of Load or Generation and/or equipment damage resulting from

unforeseen occurrences;

(e) control the output of Generating Units and System Resources that are selected to provide

Ancillary Services and Imbalance Energy;

(f) dispatch Loads through direct Load control or other means at the ISO's discretion that are

curtailable as an Ancillary Service; and

(g) procure Supplemental Energy.

2.3.1.1.4 Coordination and Approval for Outages. The ISO shall have authority to coordinate

and approve Outages and returns to service of all facilities comprised in the ISO Controlled Grid and

Reliability Must-Run Units in accordance with Section 2.3.3.

2.3.1.1.5 Responsibility for Authorized Work on Facilities. The ISO shall have authority to

approve requests by Participating TOs to work on all energized transmission equipment under the

Operational Control of the ISO.

2.3.1.1.6 The ISO shall be the WECC reliability coordinator for the ISO Controlled Grid.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 30, 2004 Effective: June 29. 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Third Revised Sheet No. 35
FIRST REPLACEMENT VOLUME NO.

Superseding Second Revised Sheet No. 35

2.3.1.2 Market Participant Responsibilities.

- 2.3.1.2.1 Comply with Operating Orders Issued. With respect to this Section 2.3.1.2, all Market Participants within the ISO Control Area and all System Resources shall comply fully and promptly with the ISO's operating orders, unless such operation would impair public health or safety. A Market Participant is not required to comply with an ISO operating order if it is physically impossible for the Market Participant to perform in compliance with that operating order. The Market Participant shall immediately notify the ISO of its inability to perform in compliance with the operating order. The ISO will honor the terms of Existing Contracts, provided that, in a System Emergency and circumstances in which the ISO considers that a System Emergency is imminent or threatened, holders of Existing Rights must follow ISO operating orders even if those operating orders directly conflict with the terms of Existing Contracts. For this purpose ISO operating orders to shed Load shall not be considered as an impairment to public health or safety. This section does not prohibit a Scheduling Coordinator from modifying its Schedule or re-purchasing Energy in the Hour-Ahead Market.
- **2.3.1.2.2 Implementation of Instructions.** All Market Participants shall respond to ISO instructions with no more delay than specified in the response times set out in the ISO Protocols.

2.3.1.3 Operating Reliability Criteria.

2.3.1.3.1 The ISO shall exercise Operational Control over the ISO Controlled Grid to meet planning and Operating Reserve criteria no less stringent than those established by WECC and NERC as those standards may be modified from time to time, and Local Reliability Criteria that are in existence on the ISO Operations Date and have been submitted to the ISO by each Participating TO pursuant to

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: Upon Commission Approval

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO.

Second Revised Sheet No. 35A

Superseding First Revised Sheet No. 35A

Section 2.2.1(v) of the TCA. All Market Participants and the ISO shall comply with the ISO Reliability

Criteria, standards, and procedures.

2.3.1.3.2 The ISO may establish planning and Operating Reserve criteria more stringent than those

established by WECC and NERC or revise the Local Reliability Criteria subject to and in accordance

with the provisions of the TCA.

2.3.2 Management of System Emergencies.

2.3.2.1 Declaration of System Emergencies. The ISO shall, when it considers that conditions

giving rise to a System Emergency exist, declare the existence of such System

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: Upon Commission Approval

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 36

Effective: October 13, 2000

Superseding Original Sheet No. 36

Emergency. A declaration by the ISO of a System Emergency shall be binding on all Market

Participants until the ISO announces that the System Emergency no longer exists.

2.3.2.2 Emergency Procedures. In the event of a System Emergency, the ISO shall take such

action as it considers necessary to preserve or restore stable operation of the ISO Controlled Grid. The

ISO shall act in accordance with Good Utility Practice to preserve or restore reliable, safe and efficient

service as quickly as reasonably practicable. The ISO shall keep system operators in adjacent Control

Areas informed as to the nature and extent of the System Emergency in accordance with WECC

procedures and, where practicable, shall additionally keep the Market Participants within the Control

Area informed.

2.3.2.3 Intervention in Market Operations. The ISO may intervene in the operation of the Day-

Ahead Market, the Hour-Ahead Market or the Real Time Market and set the Administrative Price, if the

ISO determines that such intervention is necessary in order to contain or correct a System Emergency

as follows.

2.3.2.3.1 The ISO will not intervene in the operation of the Day-Ahead Market unless there has

been a total or major collapse of the ISO Controlled Grid and the ISO is in the process of restoring it.

2.3.2.3.2 Before any such intervention the ISO must (in the following order): (a) dispatch all

scheduled Generation and all other Generation offered or available to it regardless of price (including

all Adjustment Bids, Supplemental Energy bids, Ancillary Services and reserves); (b) dispatch all

interruptible Loads made available by UDCs to the ISO in accordance with the relevant agreements

with UDCs; (c) dispatch or curtail all price-responsive Demand that has been bid into any of the

markets and exercise its rights under all load curtailment contracts available to it; (d) exercise Load

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Shedding to curtail Demand on an involuntary basis to the extent that the ISO considers necessary.

2.3.2.3.3 The Administrative Price in relation to each of the markets for Imbalance Energy and Ancillary Services shall be set at the applicable Market Clearing Price in the Settlement Period immediately preceding the Settlement Period in which the intervention took place. When Administrative Prices are imposed, Inter-Zonal Congestion will be managed in accordance with DP 8.5 of the Dispatch Protocol.

2.3.2.3.4 The intervention will cease as soon as the ISO has restored all Demand that was curtailed on an involuntary basis under Section 2.3.2.3.2(d).

2.3.2.4 Emergency Guidelines. The ISO shall issue protocols for all Market Participants to follow during a System Emergency. These guidelines shall be consistent with the specific obligations of Scheduling Coordinators and Market Participants referenced in Section 2.3.2.7 below.

2.3.2.5 Periodic Tests of Emergency Procedures. The ISO shall develop and administer periodic unannounced tests of System Emergency procedures set out in the ISO Protocols. Such tests shall be designed to ensure that the ISO Market Participants are capable of promptly and efficiently responding to imminent or actual System Emergencies.

2.3.2.6 Prioritization Schedule for Shedding and Restoring Load. Prior to the ISO Operations

Date, and annually thereafter, the ISO shall, in consultation with Market Participants and subject to the provisions of Section 2.1.3, develop a prioritization schedule for Load Shedding should a System Emergency require such action. The prioritization schedule shall also establish a sequence for the restoration of Load in the event that multiple Scheduling Coordinators or Market Participants are affected by service interruptions and Load must be restored in blocks. For Load shed in accordance with Section 4.5.3.2, the prioritization schedule will only include those UDCs or MSS Operators that have Scheduling Coordinators that are scheduling insufficient resources to meet the Load in the UDC or MSS Service Area. For Load shed in accordance with Section 4.5.3.3, the prioritization schedule will include all UDCs and MSS Operators.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 15, 2002 Effective: September 1, 2002

2.3.2.7 Further Obligations Relating to System Emergencies. The ISO and Participating TOs shall comply with their obligations in Section 9 of the TCA. The ISO and UDCs shall comply with their obligations in Section 4 of this ISO Tariff. The ISO and Generators shall comply with their obligations in Section 5 of this ISO Tariff.

2.3.2.8 Use of Load Curtailment Programs.

- 2.3.2.8.1 Use of UDC's Existing Load Curtailment Programs. As an additional resource for managing System Emergencies, the ISO will, subject to Section 2.1.3, notify the UDCs when the conditions to implement their Load curtailment programs have been met in accordance with their terms. Each UDC shall by not later than October 1 of each year advise the ISO of the capabilities of its Load curtailment programs for the forthcoming year, and the conditions under which those capabilities may be exercised and shall give the ISO as much notice as reasonably practicable of any change to such programs.
- 2.3.2.8.2 Load Curtailment. A Scheduling Coordinator may specify that Loads will be reduced at specified Market Clearing Prices or offer the right to exercise Load curtailment to the ISO as an Ancillary Service or utilize Load curtailment itself (by way of self-provision of Ancillary Services) as Non-Spinning Reserve or Replacement Reserve. The ISO, at its discretion, may require direct control over such Curtailable Demand to assume response capability for managing System Emergencies. However, non-firm Loads shall not be eligible to provide Curtailable Demand if they are receiving incentives for interruption under existing programs approved by a Local Regulatory Authority, unless: a) participation in the ISO's Ancillary Services markets is specifically authorized by such Local Regulatory Authority, and b) there exist no contingencies on the availability, nor any unmitigated incentives encouraging prior curtailment, of such interruptible Load for Dispatch as Curtailable Demand as a result of the operation of such existing program.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 39

The ISO may establish standards for automatic communication of curtailment instructions to implement Load curtailment as a condition for accepting any offered Curtailable Demand as an Ancillary Service.

2.3.2.9 System Emergency Reports and Sanctions.

2.3.2.9.1 Review of Major Outages. The ISO with the cooperation of any affected UDC shall jointly perform a review following a major Outage that affects at least ten (10) percent of the Load served by the Distribution System of a UDC or any Outage that results in major damage to the ISO Controlled Grid or to the health and safety of personnel. The review shall address the cause of the Outage, the response time and effectiveness of emergency management efforts, and whether the operation, maintenance or scheduling practices of the ISO, any Participating TOs, Eligible Customers, UDCs or Participating Generators enhanced or undermined the ability of the ISO to maintain or restore service efficiently and in a timely manner.

2.3.2.9.2 Provide Information to Review Outages. Participating TOs, Participating Generators, Eligible Customers, Scheduling Coordinators and UDCs shall promptly provide information requested by the ISO to review Outages pursuant to Section 2.3.2.9.1 and to prepare Outage reports. The ISO shall seek the views of any affected Participating TOs, Participating Generators, Eligible Customers, Scheduling Coordinator or UDCs and allow such affected Participating TOs, Participating Generators, Eligible Customers, Scheduling Coordinators or UDCs to comment on any issues arising during the preparation of a report. All findings and reports arising from the ISO's review shall be shared with Participating TOs, Participating Generators, Eligible Customers and UDCs.

Issued by: Roger Smith, Senior Regulactry Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

2.3.2.9.3 Imposing Sanctions. If the ISO finds that the operation and maintenance practices of any Participating TOs, Participating Generators, Eligible Customers, or UDCs prolonged the response time or contributed to the Outage, the ISO may impose sanctions on the responsible Participating TOs, Participating Generators, Eligible Customers, or UDCs provided that no sanction shall be imposed in respect of actions taken in compliance with the ISO's instructions or pursuant to a Remedial Action Scheme. The ISO shall develop and file with FERC a schedule of such sanctions. Any dispute concerning whether sanctions should be imposed under this Section shall be resolved through the ISO ADR Procedures. The schedule of sanctions filed with FERC (including categories and levels of sanctions) shall not be subject to the ISO ADR Procedures. The ISO shall publish on the ISO Home Paget details of all instances in which a sanction has been imposed.

2.3.3 Coordination of Outages and Maintenance.

2.3.3.1 ISO Outage Coordination Office. The ISO Outage Coordination Office shall be established by the ISO and shall coordinate and approve Maintenance Outages of: (i) all facilities that comprise the ISO Controlled Grid and (ii) Participating Generators. The ISO shall additionally coordinate and approve Outages required for new construction and for work on de-energized and live transmission facilities (e.g., relay maintenance or insulator washing) and associated equipment.

2.3.3.1.1 California Department of Water Resources. The provisions of Section 2.3.3, and the provisions of the Outage Coordination Protocol, shall apply to the California Department of Water Resources("CDWR"). However, the ISO shall be permitted to deny a requested Maintenance Outage or a requested change to an Approved Maintenance Outage, or cancel an Approved Maintenance Outage, relating to hydroelectric Generating Units owned and operated by the CDWR, only if, in the reasonable opinion of the ISO, the requested Maintenance Outage, Approved Maintenance Outage, or requested change to an Approved Maintenance Outage, is likely to have a detrimental effect on the reliable operation of the ISO Controlled Grid.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 5, 2005 Effective: July 22, 2004

Furthermore, if CDWR informs the ISO Outage Coordination Office that an action of the ISO Outage Coordination Office, made pursuant to Section 2.3.3 and/or the provisions of the Outage Coordination Protocol, will result in a violation of federal or state law affecting hydroelectric operations or compromise CDWR's ability to deliver water to its customers, the ISO will use all other options at its disposal under Section 2.3.3 and the Outage Coordination Protocol in order to ensure the reliable operation of the ISO Controlled Grid before rejecting a requested Maintenance Outage or a requested change to an Approved Maintenance Outage, or canceling an Approved Maintenance Outage, relating to the hydroelectric Generating Units owned and operated by the CDWR.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 5, 2005 Effective: July 22, 2004

2.3.3.2 Requirement for Approval. An Operator shall not take: (i) facilities that comprise the ISO Controlled Grid or (ii) Participating Generators out of service for the purposes of planned maintenance or for new construction or other work except as approved by the ISO Outage Coordination Office.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 22, 2004 Effective: July 22, 2004

Superseding Sub. First Revised Sheet No. 41

Second Revised Sheet No. 41

FIRST REPLACEMENT VOLUME NO. I

2.3.3.3 Requests for Outages in Real-Time Operation. Requests for Outages of: (i) facilities that comprise the ISO Controlled Grid or (ii) Participating Generators in real-time operation shall be made by the Operator to the ISO Control Center. The ISO will not approve any Outage request made within seventy-two (72) hours of the requested Outage start time unless: (i) the requested Outage could not have been reasonably foreseen and scheduled through the Outage coordination process provided in Section 2.3.3; and (ii) the requested Outage will not compromise ISO Controlled Grid reliability.

2.3.3.4 Single Point of Contact. Requests for approvals and coordination of all Maintenance Outages (consistent with Section 2.3.3.1) will be through a single point of contact between the ISO Outage Coordination Office and each Operator. The single point of contact for the ISO and each Operator will be specified from time to time by the Operator and the ISO pursuant to the detailed procedures referred to in Section 2.3.3.5.

2.3.3.5 Maintenance Outage Planning. Each Operator shall, by not later than October 15 each year, provide the ISO with a proposed schedule of all Maintenance Outages it wishes to undertake in the following year. The proposed schedule shall include all of the Operator's transmission facilities that comprise the ISO Controlled Grid and Participating Generators. In the case of a Participating TO's transmission facilities, that proposed schedule shall be developed in consultation with the UDCs interconnected with that Participating TO's system and shall take account of each UDC's planned maintenance requirements. The nature of the information to be provided and the detailed Maintenance Outage Planning Procedure shall be established by the ISO and set out in an ISO Protocol. Either the ISO, pursuant to Section 2.3.3.6, or an Operator, subject to Section 2.3.3.5.4, may at any time request a change to an Approved

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 29, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Sub. Originald Sheet No. 41A Superseding Original Sheet No. 41A

Maintenance Outage. An Operator may, upon seventy-two (72) hours advance notice, schedule with the ISO Outage Coordination Office a Maintenance Outage on its system, subject to the conditions of Sections 2.3.3.5.1, 2.3.3.5.2, and 2.3.3.5.3.

2.3.3.5.1 The ISO Outage Coordination Office shall evaluate whether the requested Maintenance Outage or change to an Approved Maintenance Outage is likely to have a detrimental effect on the efficient use and reliable operation of the ISO Controlled Grid or the facilities of a Connected Entity.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 7, 2001 Effective: May 29, 2001

- 2.3.3.5.2 Where the ISO Outage Coordination Office reasonably determines that the requested Maintenance Outage or the requested change to an Approved Maintenance Outage, when evaluated together with existing Approved Maintenance Outages, is not likely to have a detrimental effect on the efficient use and reliable operation of the ISO Controlled Grid, the ISO shall authorize the Maintenance Outage or change to the Approved Maintenance Outage, and shall so notify the requesting Operator and other entities who may be directly affected.
- 2.3.3.5.3 Where, in the reasonable opinion of the ISO Outage Coordination Office, the requested Maintenance Outage or requested change to an Approved Maintenance Outage is likely to have a detrimental effect on the efficient use and reliable operation of the ISO Controlled Grid, the ISO Outage Coordination Office may reject the requested Maintenance Outage or requested change to Approved Maintenance Outage. The determination of the ISO Outage Coordination Office shall be final and binding on the Operator. If, within fourteen (14) days of having made its determination, the Operator requests the ISO Outage Coordination Office to provide reasons for its determination, it shall do so as soon as is reasonably practicable. The ISO will give reasons for informational purposes only and without affecting in any way the finality or validity of the determination.
- 2.3.3.5.4 In the event an Operator of facilities forming part of the ISO Controlled Grid cancels an Approved Maintenance Outage after 5:00 a.m. of the day prior to the day upon which the Outage is scheduled to commence and the ISO determines that the change was not required to preserve System Reliability, the ISO may disregard the availability of the affected facilities in determining the availability of transmission capacity in the Day-Ahead Market, provided, however, that the ISO will, as promptly as practicable, notify Market

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: May 11, 2001 Effective: May 29, 2001

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 43

Superseding Sub. First Revised Sheet No. 43

Participants and reflect the availability of the affected facilities in determining the availability of transmission capacity in the Hour-Ahead Market.

2.3.3.6 Maintenance Outage Requests by the ISO. The ISO Outage Coordination Office may at any time request a Maintenance Outage or a change to an Approved Maintenance Outage from an Operator if, in the opinion of the ISO Outage Coordination Office, the requested Maintenance Outage or change is required to secure the efficient use and reliable operation of the ISO Controlled Grid. In addition, the ISO Outage Coordination Office may, by providing notice no later than 5:00 a.m. of the day prior to the day upon which the Outage is scheduled to commence, direct the Operator to cancel an Approved Maintenance Outage, when necessary to preserve or maintain System Reliability or, with respect to Reliability Must-Run Units or facilities that form part of the ISO Controlled Grid, to avoid unduly significant market impacts that would arise of the Outage were to proceed as scheduled. The Operator, acting in accordance with Good Utility Practice, shall comply with the ISO's direction and the provisions of Sections 2.3.3.6.1 and 2.3.3.6.2 shall apply. The ISO shall give notice of any such direction to Market Participants prior to the deadline for submission of initial Preferred Day-Ahead Schedules for the day on which the Outage was to have commenced. For purposes of this section and Section 2.3.3.3, an "unduly significant market impact" means an unplanned event or circumstance (e.g., unseasonable weather, a Forced Outage of a facility, or other occurrence) that adversely affects the competitive nature and efficient workings of the ISO Markets, and is of such severity that a prudent Operator would not have scheduled a Maintenance Outage of its facility if the unplanned event or circumstance could have been anticipated.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 29, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 43A

2.3.3.6.1 The Operator may: (1) refuse the request; (2) agree to the request; or

(3) agree to the request subject to specific conditions. The Operator, acting in accordance with Good Utility Practice, shall make every effort to comply with requests by the ISO

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 7, 2001 Effective: May 29, 2001

Outage Coordination Office. In the event that the Operator refuses the ISO's request, it shall provide to the ISO Outage Coordination Office written justification for its position within seventy-two (72) hours.

2.3.3.6.2 In response the ISO Outage Coordination Office may: (1) overrule any refusal of a Maintenance Outage or a change to an Approved Maintenance Outage by an Operator, in which case the ISO Outage Coordination Office determination shall be final; (2) accept any changes or conditions proposed by the Operator, in which case the Maintenance Outage request or the request to change an Approved Maintenance Outage shall be deemed to be amended accordingly; or (3) reject the change or condition, in which case the ISO Outage Coordination Office and the Operator shall determine if acceptable alternative conditions or changes can be agreed. If the Operator and the ISO Outage Coordination Office cannot agree on acceptable alternative conditions or changes to the ISO Outage Coordination Office's request for a Maintenance Outage or change to an Approved Maintenance Outage, the ISO Outage Coordination Office determination shall be final. If the Operator and the ISO Outage Coordination Office cannot agree on acceptable alternative conditions or changes to the ISO Outage Coordination Office's request for a Maintenance Outage or change to an Approved Maintenance Outage, the ISO may notify the FERC of the dispute and take any other steps that are within its authority to maintain the reliability of the ISO Controlled Grid.

2.3.3.6.3 The ISO will compensate the applicable Participating TO or Participating Generator for any direct and verifiable costs that such Participating TO or Participating Generator incurs as a result of the ISO's cancellation of an Approved Maintenance Outage pursuant to this Section 2.3.3.6. For purposes of this section, direct costs include verifiable labor and equipment rental costs that have been incurred by the applicable

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: May 11, 2001 Effective: May 29, 2001

Participating TO or Participating Generator solely as a result of the ISO's cancellation of the Approved Maintenance Outage. Each Participating TO or Participating Generator must make a reasonable effort to avoid incurring any such direct costs through such measures as, but not limited to, the prompt cancellation of all contractual arrangements with third parties related to the Approved Maintenance Outage.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: May 11, 2001 Effective: May 29, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Third Revised Sheet No. 45 Superseding Second Revised Sheet No. 45

FIRST REPLACEMENT VOLUME NO. I

2.3.3.6.4 The amount used to compensate each applicable Participating TO and

Participating Generator, as described in Section 2.3.3.6.3, shall be charged to the

Scheduling Coordinators in proportion to their metered Demand (including exports) during

the Settlement Period(s) of the originally scheduled Outage.

2.3.3.7 The ISO Outage Coordination Office shall provide notice to the Operator of the

approval or disapproval of any requested Maintenance Outage. Additionally, the ISO

Outage Coordination Office shall notify any Connected Entity that may in the reasonable

opinion of the ISO Outage Coordination Office be directly affected by an Approved

Maintenance Outage. The content of and procedures for such notice shall be established

by the ISO.

2.3.3.8 Final Approval. On the day on which an Approved Maintenance Outage is

scheduled to commence, the Operator shall contact the ISO Control Center for final

approval of the Maintenance Outage. No Maintenance Outage shall commence without

such final approval (including the time of release, in hours and minutes) being obtained

from the ISO Control Center whose decision shall be final.

2.3.3.9 Forced Outages.

2.3.3.9.1 Coordination of all Forced Outages (consistent with Section 2.3.3.4) will be

through the single point of contact between the Operator and the ISO Control Center.

2.3.3.9.2 All notifications of Forced Outages shall be communicated to the ISO

Control Center with as much notice as possible in order that the necessary security

analysis and ISO Controlled Grid assessments may be performed. If prior notice of a

Forced Outage cannot be given, the Operator shall notify the ISO of the Forced Outage

within thirty (30) minutes after it occurs.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 20, 2002

Effective: Upon Written Notice Provided By The ISO To FERC and Market Participants

Second Revised Sheet No. 46

FIRST REPLACEMENT VOLUME NO. I

Superseding Sub. First Revised Sheet No. 46

2.3.3.9.3 The ISO Control Center shall coordinate any operational changes necessary to accommodate a Forced Outage and Market Participants shall comply with the ISO's instructions given for that purpose.

- 2.3.3.9.4 All Forced Outages shall be communicated by the ISO Control Center to Operators likely to be affected by the Outage using the same procedures adopted for Maintenance Outage coordination procedures.
- 2.3.3.9.5 Within forty-eight (48) hours of the commencement of a Forced Outage, the Operator shall provide to the ISO an explanation of the Forced Outage, including a description of the equipment failure or other cause and a description of all remedial actions taken by the Operator. Upon request of the ISO, Operators, and where applicable, Eligible Customers, Scheduling Coordinators, UDCs and MSSs promptly shall provide information requested by the ISO to enable the ISO to review the explanation submitted by the Operator and to prepare reports on Forced Outages. If the ISO determines that any Forced Outage may have been the result of gaming or other questionable behavior by the Operator, the ISO shall submit a report describing the basis for its determination to the FERC. The ISO shall consider the following factors when evaluating the Forced Outage to determine if the Forced Outage was the result of gaming or other questionable behavior by the Operator: 1) if the Forced Outage coincided with certain market conditions such that the Forced Outage may have influenced market prices or the cost of payments associated with out-of-sequence dispatches, out-of-market dispatches, or Real Time Market dispatches above the Marginal Proxy Clearing Price or Non-Emergency Clearing Price Limit, as applicable; 2) if the Forced Outage coincided with a change in the bids submitted for any units or resources controlled by the Operator or the Operator's Scheduling Coordinator; 3) if the ISO had recently rejected a request for an outage for, or to shut down, the Generating

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 29, 2001

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 46A

Superseding Sub. First Revised Sheet No. 46A

Unit experiencing the Forced Outage; 4) if the timing or content of the notice of the

Forced Outage provided to the ISO was inconsistent with subsequent reports of or the

actual cause of the outage; 5) if the Forced Outage or the duration of the Forced Outage

was inconsistent with the history or past performance of that Generating Unit or similar

Generating Units; 6) if the Forced Outage created or exacerbated Congestion; 7) if the

Forced Outage was extended with little or no notice; 8) if the Operator had other

alternatives to resolve the problems leading to the Forced Outage; 9) if the Operator took

reasonable action to minimize the duration of the Forced Outage; or 10) if the Operator

failed to provide the ISO an explanation of the Forced Outage within forty-eight (48) hours

or failed to provide any additional information or access to the generating facility

requested by the ISO within a reasonable time.

2.3.3.10 Other Control Areas. The ISO Outage Coordination Office shall make

all reasonable efforts to coordinate Outages involving other Control Areas or affecting an

intertie, import or export capability not under the Operational Control of the ISO to the

extent that they may affect the reliability of the ISO Controlled Grid.

2.3.3.11 Records. The ISO and all Operators shall develop procedures to keep a

record of approved Maintenance Outages as they are implemented and to report the

completion of approved Maintenance Outages.

2.3.4 Management of Overgeneration Conditions.

The ISO's management of Overgeneration relates only to real time. Overgeneration in

real time will be mitigated by the ISO as follows; provided that the ISO Operator will have

the discretion, if necessary to avoid a System Emergency, to eliminate one or more of the

following steps.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: May 29, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 46B

2.3.4.1 Commencing one hour prior to the start of the Settlement Period, the ISO will, based on available Adjustment Bids, Supplemental Energy bids and Ancillary Service Energy bids, issue Dispatch instructions to Scheduling Coordinators to reduce Generation and imports for the next operating hour.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 7, 2001 Effective: May 29, 2001

2.3.4.2 To the extent that there are insufficient decremental Energy bids available for the operating hour to fully mitigate the Overgeneration condition, the ISO will notify Scheduling Coordinators of the

projected amount of Overgeneration to be mitigated in that hour.

2.3.4.3 In addition to the action taken under 2.3.4.2, the ISO will, if it considers it necessary to maintain the reliable operation of the ISO Control Area, offer Energy for sale on behalf of Scheduling Coordinators to adjacent Control Area operators at the estimated BEEP Interval Ex Post Price or, if the ISO considers it necessary, at a price established by the ISO on behalf of Scheduling Coordinators, to

be paid to adjacent Control Area operators.

2.3.4.4 To the extent that the steps described in Sections 2.3.4.1 through 2.3.4.3 fail to mitigate Overgeneration, the ISO will instruct Scheduling Coordinators to reduce either Generation, or imports, or both. The amount of the reduction for each Scheduling Coordinator will be calculated pro rata based on the product of the total required reduction in Generation and imports (or increase in exports) and the

ratio of its Demand to the total Demand in the ISO Control Area.

2.3.4.5 To the extent that the above steps fail to fully mitigate the Overgeneration, the ISO will issue mandatory Dispatch instructions for specific reductions in Generating Unit output and external imports and all relevant Scheduling Coordinators shall be obligated to comply with such Dispatch instructions.

2.3.4.6 Any costs incurred by the ISO in implementing Section 2.3.4.3 shall be reimbursed to the ISO

by Scheduling Coordinators based upon the extent to which they supplied Energy, in metered amounts,

greater than the Generation and imports scheduled in their Final Schedules and consumed Energy, in

metered amounts, less than the Demand scheduled in their Final Schedules, as a proportion of the total

amount of such excess or shortfall among all Scheduling Coordinators.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

First Revised Sheet No. 48 Superseding Original Sheet No. 48

2.3.5 Assurance of Adequate Generation and Transmission to meet Applicable Operating and Planning Reserve.

2.3.5.1 Generation Planning Reserve Criteria. Generation planning reserve criteria shall be met as

follows:

2.3.5.1.1 On an annual basis, the ISO shall prepare a forecast of weekly Generation capacity and

weekly peak Demand on the ISO Controlled Grid. This forecast shall cover a period of twelve months

and be posted on the WEnet and the ISO may make the forecast available in other forms at the ISO's

option.

2.3.5.1.2 If the forecast shows that the applicable WESCC/NERC Reliability Criteria can be met

during peak Demand periods, then the ISO shall take no further action.

2.3.5.1.3 If the forecast shows that the applicable WECC/NERC Reliability Criteria cannot be met

during peak Demand periods, then the ISO shall facilitate the development of market mechanisms to

bring the ISO Controlled Grid during peak periods into compliance with the Applicable Reliability

Criteria (or such more stringent criteria as the ISO may impose pursuant to Section 2.3.1.3.2). The ISO

shall solicit bids for Replacement Reserve in the form of Ancillary Services, short-term Generation

supply contracts of up to one (1) year with Generators, and Load curtailment contracts giving the ISO

the right to reduce the Demands of those parties that win the contracts when there is insufficient

Generation capacity to satisfy those Demands in addition to all other Demands. The curtailment

contracts shall provide that the ISO's curtailment rights can only be exercised after all available

Generation capacity has been fully utilized unless the exercise of such rights would allow the ISO to

satisfy the Applicable Reliability Criteria at lower cost, and the curtailment rights shall not be exercised

to stabilize or otherwise influence prices for power in the Energy markets.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

the satisfaction of those Applicable Reliability Criteria at the lowest cost.

FIRST REPLACEMENT VOLUME NO. I

Superseding Original Sheet No. 49

2.3.5.1.4 If Replacement Reserve, short-term Generation supply contracts or curtailment contracts are required to meet Applicable Reliability Criteria, the ISO shall select the bids that permit

2.3.5.1.5 Notwithstanding the foregoing, if the ISO concludes that it may be unable to comply with the Applicable Reliability Criteria, the ISO shall, acting in accordance with Good Utility Practice, take such steps as it considers to be necessary to ensure compliance, including the negotiation of contracts through processes other than competitive solicitations.

2.3.5.1.6 The ISO may, in addition to the required annual forecast, publish a forecast of the peak Demands and Generation resources for two or more additional years. This forecast would be for information purposes to allow Market Participants to take appropriate steps to satisfy the Applicable Reliability Criteria, and would not be used by the ISO to determine whether additional resources are necessary.

2.3.5.1.7 In fulfilling its requirement to ensure that the applicable Generation planning reserve criteria are satisfied, the ISO shall rely to the maximum extent possible on market forces.

2.3.5.1.8 Except where and to the extent that such costs are recovered from Scheduling Coordinators pursuant to Section 2.5, and except as provided in Section 2.3.5.1.9, all costs incurred by the ISO in any hour pursuant to any contract entered into under this Section 2.3.5.1 shall be charged to each Scheduling Coordinator pro rata based upon the same proportion as the Scheduling Coordinator's metered hourly Demand (including exports) bears to the total metered hourly Demand (including exports) served in that hour.

2.3.5.1.9 Costs incurred by the ISO pursuant to any contract entered into under this Section 2.3.5.1 for resources to meet any portion of the anticipated difference between

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 50

Effective: October 13, 2000

forward schedules and the real-time deviations from those schedules shall be charged to each Scheduling Coordinator pro rata based upon the same proportion as the Scheduling Coordinator's obligation for deviation Replacement Reserve in the hour, determined in accordance with Section 2.5.28.4 bears to the total deviation Replacement Reserve in that hour.

2.4 [Not Used]

2.4.1 [Not Used]

2.4.1.1 [Not Used]

2.4.2 [Not Used]

2.4.2.1 [Not Used]

2.4.2.2 [Not Used]

2.4.3 Existing Contracts for Transmission Service.

2.4.3.1 In accordance with Section 2.4.4 each Participating TO and holder of transmission rights under an Existing Contract will work with the ISO to develop operational protocols (which shall be based on existing protocols and procedures to the extent possible) which allow existing contractual rights to be exercised in accordance with Section 2.4.4 in a way that: (i) maintains the existing scheduling and curtailment priorities under the Existing Contract; (ii) is minimally burdensome to the ISO (i.e., creates the least impact on the ISO's preferred operational protocols, rules and procedures); (iii) to the extent possible, imposes no additional financial burden on either the Participating TO or the contract rights holder (beyond that in the Existing Contract); (iv) consistent with the terms of the Existing Contracts, makes as much transmission capacity not otherwise utilized by the holder of the transmission rights as possible available to the ISO for allocation to Market Participants; (v) is minimally burdensome to the Participating TO and the holder of the transmission

Issued by: Roger Smith, Senior Regulatory Counsel

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 51

Superseding Original Sheet No. 51

rights from an operational point of view; and (vi) does not require the ISO to interpret or underwrite the

economics of the Existing Contract.

2.4.3.2 The ISO may refuse to accept Schedules submitted pursuant to Existing Contracts which do

not meet the requirements of the principles, protocols and rules referred to in this Section 2.4.3 and

Section 2.4.4.

2.4.3.3 The ISO will, if requested, advise parties to Existing Contracts regarding the operational

aspects of any Existing Contract renegotiations that they undertake.

2.4.4 ISO Administration of Existing Contracts for Transmission Service.

2.4.4.1 Continuation of Rights and Obligations of Non-Participating TOs Under Existing

Contracts.

2.4.4.1.1 The transmission service rights and obligations of Non-Participating TOs under

Existing Contracts, including all terms, conditions and rates of the Existing Contracts, as they may

change from time to time under the terms of the Existing Contracts, will continue to be honored by the

parties to those contracts, for the duration of those contracts. For the purpose of Section 2.4.4, the

transmission service rights of Non-Participating TOs are called "Existing Rights."

2.4.4.1.2 If a Participating TO is a party to an Existing Contract under which Existing Rights are

provided, the Participating TO shall attempt to negotiate changes to the Existing Contract to align the

contract's scheduling and operating provisions with the ISO's scheduling and operational procedures,

rules and protocols, to align operations under the contract with ISO operations, and to minimize the

contract parties' costs of administering the contract while preserving their financial rights and

obligations as defined in Section 2.4.4.3.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 52

Effective: October 13, 2000

In addition, the Participating TO shall attempt to negotiate changes to provisions in the Existing

Contract to ensure that whenever transmission services under the Existing Contract are used to deliver

power to a Market Participant that is subject to Access Charges under this Tariff, no duplicative charge

for access to the ISO Controlled Grid will be charged under the Existing Contract. For purposes of

such negotiations, there shall be a presumption that any charges in an Existing Contract that were

designed to recover the embedded cost of transmission facilities within the ISO Controlled Grid will be

fully recovered through the Access Charges established under Section 7.1 of this Tariff.

2.4.4.1.3 If a Non-Participating TO has an Existing Contract with a Participating TO under which

the Non-Participating TO's transmission facilities are subject to use by the Participating TO, the Non-

Participating TO's rights to the use and ownership of its facilities shall remain unchanged, regardless of

the Participating TO's act of turning over the Participating TO's entitlement to use the Non-Participating

TO's facilities to the extent possible to the Operational Control of the ISO.

2.4.4.1.4 If the parties to an Existing Contract are unable to reach agreement on the changes

needed to meet the requirements of Section 2.4.4.1.2 or Section 2.4.4.1.3, any disputes related thereto

shall be addressed using the dispute resolution provisions of the Existing Contract, including any

remedies as are provided by law. The rights of the parties to seek changes or to challenge such

changes, under the FPA or as otherwise provided by law, are preserved consistent with the terms of the

Existing Contract. Unless and until the necessary changes to the Existing Contract are made, all terms

and conditions of the Existing Contracts will continue to be honored by the parties to the contracts.

2.4.4.2 Conversion of Participating TOs' Rights and Obligations Under Existing Contracts.

Issued by: Roger Smith, Senior Regulatory Counsel

2.4.4.2.1 Parties who are entitled to transmission service rights under Existing Contracts and who choose to become Participating TOs must, at the time of becoming a Participating TO exercise those rights by converting them to "Converted Rights", which are described in Section 2.4.4.3. A party who ceases to be a Participating TO at or before the end of the five year period beginning at the ISO Operations Date shall be entitled to resume service under any Existing Contract to which it is then a party, so long as that contract has not expired or been terminated. For the purposes of Sections 2.4.3 and 2.4.4, Pacific Gas & Electric Company, Southern California Edison Company and San Diego Gas & Electric Company will be deemed to have converted all rights that they may hold under Existing Contracts to Converted Rights as described in Section 2.4.4.3 with effect from the ISO Operations Date. Schedules that utilitze Converted Rights shall be submitted by a Scheduling Coordinator that has been certified in accordance with Section 2.2.4.

2.4.4.2.2 As part of the conversion referred to in Section 2.4.4.2.1, modifications to an Existing Contract may be needed. Any required modifications must be agreed upon by all parties to the contract. Failure of the parties to reach agreement on the modifications required under Section 2.4.4.2.1 shall be addressed using the dispute resolution provisions of the Existing Contract, including any remedies as are provided by law consistent with the terms of the Existing Contract. The rights of the parties to challenge such changes, under the FPA or as otherwise provided by law, are preserved.

2.4.4.3 Converted Rights.

2.4.4.3.1 A recipient of transmission service under an Existing Contract that chooses to become a Participating TO and convert its rights to ISO transmission service, and the Participating TO which provides the transmission service under the Existing Contract shall change the terms and conditions of the contract to provide that:

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 54

Effective: October 13, 2000

2.4.4.3.1.1 The recipient of the transmission service received under an Existing Contract that has

converted its rights to ISO transmission service shall turn over Operational Control of its transmission

entitlement to the ISO for management by the ISO in accordance with the ISO's scheduling,

Congestion Management, curtailment and other ISO Protocols;

2.4.4.3.1.2 The recipient of the transmission service under an Existing Contract that has converted

its rights to ISO transmission service shall obtain all future transmission services within, into (starting at

the ISO Controlled Grid), out of, or through the ISO Controlled Grid using the ISO's scheduling and

operational procedures and protocols and the ISO Tariff and any applicable TO Tariff, provided that

this provision shall not affect the rights, if any, of the contract parties to extend Existing Contracts.

2.4.4.3.1.3 [Not Used]

2.4.4.3.1.4 For the capacity represented by its rights, the recipient of firm transmission service

under an Existing Contract that has converted its rights to ISO transmission service shall be entitled to

receive the Usage Charge revenues for the capacity (and/or alternatives to such revenues, such as

physical transmission rights or transmission congestion contracts, should they exist) and all Wheeling

revenue credits throughout the term that the capacity is available under the Existing Contract. The

recipient of less than firm service shall receive these revenues in proportion to the degree of firmness

and the terms and conditions of their service.

2.4.4.3.1.5 The recipient of the transmission service received under an Existing Contract that has

converted its rights to ISO transmission service shall continue to have the obligation to pay the provider

of the service for its transmission service at the rates provided in the Existing Contract, as they may

change from time to time under the terms of the Existing Contract, or as mutually agreed between the

contract parties, through the term of the

Issued by: Roger Smith, Senior Regulatory Counsel

contract, subject to the terms and conditions of the contract, including the rights of the parties to the contract to seek unilateral or other changes pursuant to Section 205 or Section 206 of the Federal Power Act and the FERC's Rules and Regulations or as otherwise provided by law.

2.4.4.3.2 Other aspects of such an Existing Contract may also need to be changed. If the parties to the contract are unable to negotiate such changes, they shall seek appropriate changes through the mechanisms provided within the contract, including the rights, if any, to seek unilateral or other changes pursuant to Section 205 or Section 206 of the Federal Power Act and the FERC's Rules and Regulations or as otherwise provided by law.

2.4.4.4 ISO Treatment of Non-Participating TOs Existing Rights.

2.4.4.4.1 For the purposes of Section 2.4.4, Existing Rights fall into one of three general categories: firm transmission service, non-firm transmission service, and conditional firm transmission service. The parties to an Existing Contract shall notify the ISO which Existing Rights fall into each category, through the operating instructions described in Section 2.4.4.5.1.1. The parties to an Existing Contract shall also be responsible to submit to the ISO any other necessary operating instructions based on their contract interpretations needed by the ISO to enable the ISO to perform its duties.

2.4.4.4.1.1 The ISO will have no role in interpreting Existing Contracts. The parties to an Existing Contract will, in the first instance, attempt jointly to agree on any operating instructions that will be submitted to the ISO. In the event that the parties to the Existing Contract cannot agree upon the operating instructions submitted by the parties to the Existing Contract, the dispute resolution provisions of the Existing Contract, if applicable, shall be used to resolve the dispute; provided that, until the dispute is resolved, and unless the Existing Contract specifies otherwise, the ISO shall implement the Participating TO's operating instructions. If both parties to an Existing Contract are Participating TOs and the

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 56

Effective: October 13, 2000

parties cannot agree to the operating instructions submitted by the parties, until the dispute is resolved,

and unless the Existing Contract specifies otherwise, the ISO shall implement the operating instructions

of the first Participating TO for which the Existing Contract is an Encumbrance.

2.4.4.4.2 The ISO's scheduling protocols will accommodate Existing Rights, so that the holders

of Existing Rights will receive the same priorities (in scheduling, curtailment, assignment and other

aspects of transmission system usage) to which they are entitled under their Existing Contracts.

2.4.4.4.3 Scheduling deadlines and operational procedures associated with Existing Rights will

be honored by the ISO.

2.4.4.4.4 All contractual provisions that have been communicated to the ISO in writing in

accordance with Section 2.4.4.4.1 by the parties to the Existing Contracts, shall be honored by the ISO

and the parties to the Existing Contracts and shall be implemented in accordance with the terms and

conditions of the relevant Existing Contracts so notified.

2.4.4.4.4.1 The holders of Existing Rights will not be responsible for paying Usage Charges related

to those rights, nor will they be entitled to receive Usage Charge revenues related to those rights.

2.4.4.4.4.2 Other than any existing rights to such revenues under the Existing Contracts, the

holders of Existing Rights will not be entitled to an allocation of revenues from Wheeling Out or

Wheeling Through services on the ISO Controlled Grid, related to those rights.

2.4.4.4.4.3 The holders of Existing Rights shall continue to pay the providers of the Existing Rights

at the rates provided in the associated Existing Contracts, as they may change from time to time under

the terms of the Existing Contracts.

Issued by: Roger Smith, Senior Regulatory Counsel

2.4.4.4.4 [Not Used]

2.4.4.4.5 Parties with Existing Rights shall continue to pay for Transmission Losses or Ancillary Services requirements in accordance with such Existing Contracts as they may be modified or changed in accordance with the terms of the Existing Contract. Likewise the Participating TOs shall continue to provide Transmission Losses and any other Ancillary Services to the holder of the rights under an Existing Contract as may be required by the Existing Contracts. To the extent that Transmission Losses or Ancillary Service requirements associated with Existing Rights are not the same as those under the ISO's rules and protocols, the ISO will not charge or credit the Participating TO for any cost differences between the two, but will provide the parties to the Existing Contracts with details of its Transmission Losses and Ancillary Services calculations to enable them to determine whether the ISO's calculations result in any associated shortfall or surplus and to enable the parties to the Existing Contracts to settle the differences bilaterally or through the relevant TO Tariff.

2.4.4.5 ISO Protocols Shall Accommodate Existing Rights.

The ISO will implement the provisions of Section 2.4.4.4 in its Scheduling Protocol. The objective will be to ensure that under the ISO rules and protocols, Existing Rights will enjoy the same relative priorities vis-à-vis new, ISO-provided transmission uses, as they would under the Existing Contracts and the FERC Order 888 tariffs. Under the ISO Scheduling Protocol:

2.4.4.5.1.1 Existing scheduling rules, curtailment priorities and any other relevant terms and conditions associated with the scheduling and day-to-day implementation of transmission rights will be documented in sets of operating instructions provided to the ISO by the parties to the Existing Contracts. The documentation of these operating instructions,

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 58

Effective: October 13, 2000

and disputes related to these operating instructions, will be handled in accordance with the terms of

Section 2.4.4.4.1.1.

2.4.4.5.1.2 To the extent that the operating instructions can be exercised independently of the ISO

by the parties to the Existing Contract and the results forwarded to the ISO, the operating instructions

shall be exercised by the Participating TOs, and the outcomes shall be forwarded to the ISO. The

determination of whether the operating instructions can be "exercised independently of the ISO by the

parties to the Existing Contract" shall be made using the same procedures described in Section

2.4.4.4.1.1.

2.4.4.5.1.3 To the extent that the operating instructions can not be exercised independently of the

ISO and the results forwarded to the ISO (because, for example, they require iteration with the ISO's

scheduling process, would unduly interfere with the ISO's real-time management of curtailments or

would unduly interfere with the ability of the holder of rights to exercise its rights), the operating

instructions will be provided to the ISO for day-to-day implementation. In this case, the ISO shall act

as the scheduling agent for the Participating TOs with regard to Existing Rights.

2.4.4.5.1.4 The ISO shall determine, based on the information provided by the Participating TOs

and contract rights holders under Sections 2.4.4.5.1.2 and 2.4.4.5.1.3, the transmission capacities that

(i) must be reserved for firm Existing Rights, (ii) may be allocated for use as ISO transmission service

(i.e., new firm uses), (iii) must be reserved by the ISO for conditional firm Existing Rights, and (iv)

remain for any non-firm Existing Rights for which a Participating TO has no discretion over whether or

not to provide such non-firm service.

2.4.4.5.1.5 The ISO shall coordinate the scheduling of Existing Rights with the scheduling of ISO

transmission service, using the ISO's Day-Ahead scheduling rules and protocols. In doing so, the ISO

shall subtract, from the capacity that is available for the ISO

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 59

Effective: October 13, 2000

to schedule in the ISO's Day-Ahead scheduling process, an appropriate amount of transmission

capacity reflecting the amount and nature of the Existing Rights.

2.4.4.5.1.6 For those Existing Rights the use of which has not been scheduled by the rights-

holders by the start of the ISO's Hour-Ahead scheduling process, the ISO shall coordinate the

scheduling of Existing Rights with the scheduling of ISO transmission service, using the ISO's Hour-

Ahead scheduling protocols. In doing so, the ISO may, at its own discretion, consider as available for

the ISO to schedule in its Hour-Ahead scheduling process, any or all of the transmission capacity

associated with Existing Rights the use of which has not been scheduled by the rights-holders in the

ISO's Hour-Ahead scheduling process.

2.4.4.5.2 The ISO shall recognize that the obligations, terms or conditions of Existing Contracts

may not be changed without the voluntary consent of all parties to the contract (unless such contract

may be changed pursuant to any applicable dispute resolution provisions in the contract or pursuant to

Section 205 or Section 206 of the FPA and the FERC's Rules and Regulations or as otherwise provided

by law).

2.4.4.5.3 The parties to Existing Contracts shall remain liable for their performance under the

Existing Contracts. The ISO shall be liable in accordance with the provisions of this ISO Tariff for any

damage or injury caused by its non-compliance with the operating instructions submitted to it pursuant

to this Section 2.4.4.

2.4.4.5.4 Unless specified otherwise, in the event that the dispute resolution mechanisms

prescribed in an Existing Contract, including all recourses legally available under the contract, can not,

in the first instance, result in a resolution of such a dispute, the ISO's ADR Procedure will be used to

resolve any disputes between the ISO and the

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 60

Effective: October 13, 2000

Participating TO regarding any aspects of the implementation of Section 2.4.3 and 2.4.4, including the

reasonableness of a Participating TO's operating instructions or any other decision rules which the

Participating TO may submit to the ISO as part of the operational protocols. The transmission rights-

holder(s) under the Existing Contract shall have standing to participate in the ISO ADR Procedure.

Issued by: Roger Smith, Senior Regulatory Counsel

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 61

Superseding Original Sheet No. 61

2.5 Ancillary Services.

2.5.1 Scope.

The ISO shall be responsible for ensuring that there are sufficient Ancillary Services available to

maintain the reliability of the ISO Controlled Grid consistent with WECC and NERC criteria.

The ISO's Ancillary Services requirements may be self-provided by Scheduling Coordinators.

Those Ancillary Services which the ISO requires to be available but which are not being self-

provided will be competitively procured by the ISO from Scheduling Coordinators in the Day-

Ahead Market, Hour-Ahead Market and in real time or by longer-term contracts. The ISO will

manage both ISO procured and self-provided Ancillary Services as part of the real-time

Dispatch. The ISO will calculate payments for Ancillary Services to Scheduling Coordinators

and charge the cost to Scheduling Coordinators.

For purposes of this ISO Tariff, Ancillary Services are: (i) Regulation, (ii) Spinning

Reserve, (iii) Non-Spinning Reserve, (iv) Replacement Reserve, (v) Voltage Support, and

(vi) Black Start capability. Bids for Non-Spinning Reserve and Replacement Reserve may be

submitted by the Demand-side as well as by owners of Generation. Identification of specific

services in this ISO Tariff shall not preclude development of additional interconnected operation

services over time. The ISO and Market Participants will seek to develop additional categories

of these unbundled services over time as the operation of the ISO Controlled Grid matures.

2.5.2 Ancillary Services Standards.

All Ancillary Services shall meet the ISO's Ancillary Services standards.

2.5.2.1 Determination of Ancillary Service Standards. The ISO shall set the required

standard for each Ancillary Service necessary to maintain the reliable operation of the ISO

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: October 13, 2000

Superseding Original Sheet No. 62

Controlled Grid. Ancillary Services standards shall be based on WECC Minimum Operating

Reliability Criteria (MORC) and ISO Controlled Grid reliability requirements. The ISO Grid

Operations Committee, in conjunction with the relevant reliability council (WECC), shall develop

these Ancillary Services standards to determine reasonableness, cost effectiveness, and

adherence to national and WECC standards. The standards developed by the ISO shall be

used as a basis for determining the quantity and type of each Ancillary Service which the ISO

requires to be available.

2.5.2.2 Time-frame For Revising Ancillary Service Standards. The ISO Technical

Advisory Committee shall periodically undertake a review of the ISO Controlled Grid operation

to determine any revision to the Ancillary Services standards to be used in the ISO Control

Area. At a minimum the ISO Grid Operations Committee shall conduct such reviews to

accommodate revisions to WECC and NERC standards. The ISO may adjust the Ancillary

Services standards temporarily to take into account, among other things variations in system

conditions, real-time Dispatch constraints, contingencies, and voltage and dynamic stability

assessments. Where practicable, the ISO will provide notice, via the ISO Home Page, of any

temporary adjustments to Ancillary Service standards by 6:00 p.m. two days ahead of the

Trading Day to which the adjustment will apply.

2.5.3 Quantities of Ancillary Services Required.

For each of the Ancillary Services, the ISO shall determine the quantity and location of the

Ancillary Service which is required and which must be under the direct Dispatch control of the

ISO on an hourly basis each day. The ISO shall determine the quantities it requires as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 63

Superseding Original Sheet No. 63

2.5.3.1 Regulation Service. The ISO shall maintain sufficient Generating Units immediately

responsive to AGC in order to provide sufficient Regulation service to allow the system to meet

WECC and NERC criteria.

2.5.3.2 Spinning And Non-Spinning Reserves. The ISO shall maintain minimum

contingency Operating Reserve made up of Spinning Reserve and Non-Spinning Reserve in

accordance with WECC MORC criteria equal to (a) 5% of the Demand to be met by Generation

from hydroelectric resources plus 7% of the Demand to be met by Generation from other

resources, or (b) the single largest Contingency, if this is greater or (c) by reference to such

more stringent criteria as the ISO may determine from time to time. When the level of

Operating Reserve is determined by Demand, the ISO shall not maintain Operating Reserve

with respect to Demand covered by firm purchases from outside the ISO Control Area. In

addition, the ISO shall maintain Operating Reserve equal to the total amount of Interruptible

Imports scheduled by Scheduling Coordinators for any hour. Such additional Operating

Reserve must either be self-provided or purchased from the ISO by Scheduling Coordinators.

To the extent such additional Operating Reserve is self-provided by a Scheduling Coordinator,

it may consist entirely of Non-Spinning Reserve. To the extent that such additional Operating

Reserve is not self-provided by a Scheduling Coordinator, the ISO will procure the necessary

amounts of Operating Reserve, but not necessarily entirely from Non-Spinning Reserve.

2.5.3.3 Replacement Reserve. The ISO shall make its determination of the required

quantity of Replacement Reserve based on:

(a) historical analysis of the deviation between actual and Day-Ahead forecast Demand,

(b) historical patterns of unplanned Generating Unit Outages,

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 64

Effective: October 13, 2000

Superseding Original Sheet No. 64

(c) historical patterns of shortfalls between Final Day-Ahead Schedules and actual

Generation and Demand,

(d) historical patterns of unexpected transmission Outages, and

(e) such other factors affecting the ability of the ISO to maintain System Reliability as the

ISO may from time to time determine.

The ISO shall have discretion to determine the quantity of Replacement Reserve it requires in

each Zone.

2.5.3.4 Voltage Support.

The ISO shall determine on an hourly basis for each day the quantity and location of Voltage

Support required to maintain voltage levels and reactive margins within WECC and NERC

criteria using a power flow study based on the quantity and location of scheduled Demand. The

ISO shall issue daily voltage schedules, which are required to be maintained for ISO Controlled

Grid reliability. All other Generating Units shall comply with the power factor requirements set

forth in contractual arrangements in effect on the ISO Operations Date, or, if no such

contractual arrangements exist and the Generating Unit exists within the system of a

Participating TO, the power factor requirements applicable under the Participating TO's TO

Tariff or other tariff on file with the FERC.

All Participating Generators shall maintain the ISO specified voltage schedule at the

transmission interconnection points to the extent possible while operating within the power

factor range specified in their interconnection agreements or, for Regulatory Must-Take

Generation, Regulatory Must-Run Generation and Reliability Must-Run Generation consistent

with existing obligations. For Generating Units, that do not operate under one of these

agreements, the minimum power factor range will be within a band of 0.90 lag

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

(producing VARs) and 0.95 lead (absorbing VARs) power factors. Participating Generators with Generating Units existing at the ISO Operations Date that are unable to meet this operating power factor requirement may apply to the ISO for an exemption. Prior to granting such an exemption, the ISO shall require the Participating TO or UDC to whose system the relevant Generating Units are interconnected to notify it of the existing contractual requirements for Voltage Support established prior to the ISO Operations Date for such Generating Units. Such requirements may be contained in CPUC Electric Rule 21 or the Interconnection Agreement with the Participating TO or UDC. The ISO shall not grant any exemption under this Section from such existing contractual requirements. The ISO shall be entitled to instruct Participating Generators to operate their Generating Units at specified points within their power factor ranges. Generators shall receive no compensation for operating within these specified ranges.

If the ISO requires additional Voltage Support, it shall procure this either through Reliability Must-Run Contracts or, if no other more economic sources are available by instructing a Generating Unit to move its MVar output outside its mandatory range. Only if the Generating Unit must reduce its MW output in order to comply with such an instruction will it be compensated in accordance with Section 2.5.18.

All Loads directly connected to the ISO Controlled Grid shall maintain reactive flow at grid interface points within a specified power factor band of 0.97 lag to 0.99 lead. Loads shall not be compensated for the service of maintaining the power factor at required levels within the bandwidth. A UDC interconnecting with the ISO Controlled Grid at any point other than a Scheduling Point shall be subject to the same power factor requirement.

The power factor for both the Generating Units and Loads shall be measured at the interconnection point with the ISO Controlled Grid. The ISO will develop and will be authorized to levy penalties against Participating Generators, UDCs or Loads whose

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 66 Superseding Original Sheet No. 66

Voltage Support does not comply with the ISO's requirements. The ISO will establish voltage

control standards with UDCs and the operators of other Control Areas and will enter into

operational agreements providing for the coordination of actions in the event of a voltage

problem occurring.

Wheeling Through and Wheeling Out transactions may also be subject to a reactive

charge as developed by the ISO. If the ISO shall determine that a reactive charge should be

payable at a future date, it shall, subject to FERC acceptance and approval, publish annually

the Voltage Support obligations and applicable charges for Wheeling Through and Wheeling

Out transactions at Scheduling Points. The obligations shall be predetermined by the ISO

based on the estimated amount of the Wheeling Through and Wheeling Out transactions each

year.

2.5.3.5 Black Start Capability. The ISO shall determine the amount and location of Black

Start Generation it requires through contingency studies that are used as the basis of the ISO's

emergency plans. The studies shall specify:

(a) the initiating disturbance;

(b) the magnitude of the Outage, including the extent of the Outage (local area, ISO

Controlled Grid, or WECC), the assumed status of Generation after the initiating

disturbance, the status of interconnections, the system Demand level at the time of

the disturbance, the interconnection support, and assumptions regarding the

availability of support from other utilities to help restore Generation and Demand;

(c) the Generator performance including a percentage of Black Start units (to be

determined by the ISO) which are expected to fail to start, and

(d) expected transmission system damage.

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 67

Superseding Original Sheet No. 67

The ISO shall also specify the following load restoration performance goals:

(i) Black Start unit startup and connection times;

(ii) ISO Controlled Grid restoration times; and

(iii) load restoration times.

Scheduling Coordinators shall provide the ISO with their load restoration time requirements for

any Loads that provide emergency services.

2.5.3.6 The ISO, whenever possible, will increase its purchases of an Ancillary Service that

can substitute for another Ancillary Service, when doing so is expected to reduce its total cost

of procuring Ancillary Services while meeting reliability requirements. The ISO will make such

adjustments in accordance with the following principles:

(a) The Regulation requirement must be satisfied by Regulation bids from Resources

qualified to provide Regulation;

(b) Additional Regulation capacity can be used to satisfy requirements for any type of

reserves (Spinning Reserve, Non-Spinning Reserve or Replacement Reserve);

(c) Regulation and Spinning Reserve requirements must be satisfied by the combination

of Regulation and Spinning Reserve bids;

(d) Additional Regulation and Spinning Reserve capacity can be used to satisfy

requirements for Non-Spinning and Replacement Reserve, except that any Spinning

Reserve capacity that has been designated as available to supply Imbalance Energy

only in the event of the occurrence of an unplanned Outage, a Contingency or an

imminent or actual System Emergency cannot be used to satisfy requirements for

Replacement Reserve;

Effective: Upon notice after May 19, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 67-A

(e) Regulation, Spinning Reserve, Non-Spinning Reserve requirements must be satisfied by the combination of Regulation, Spinning Reserve and Non-Spinning Reserve bids;

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: March 20, 2001 Effective: Upon notice after May 19, 2001

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 68

Superseding Original Sheet No. 68

(f) Additional Regulation, Spinning Reserve, Non-Spinning Reserve, and Replacement

Reserve capacity can be used to satisfy requirements for Replacement Reserve

except that any Spinning and Non-Spinning Reserve capacity that has been

designated as available to supply Imbalance Energy only in the event of the

occurrence of an unplanned Outage, a Contingency or an imminent or actual System

Emergency cannot be used to satisfy requirements for Replacement Reserve;

(g) Total MW purchased from the Regulation, Spinning Reserve, Non-Spinning Reserve,

and Replacement Reserve markets will not be changed by this Section 2.5.3.6; and

(h) All quantities of Ancillary Services so procured must be non-negative.

2.5.4 Locational Quantities of Ancillary Services.

For each of the Ancillary Services, the ISO shall determine the required locational dispersion in

accordance with ISO Controlled Grid reliability requirements. These standards shall be used as

guidance only. The actual location of Ancillary Services on a daily and hourly basis shall

depend on the locational spread of Demand within the ISO Control Area, the available

transmission capacity, the locational mix of Generation, and historical patterns of transmission

and Generation availability.

2.5.4.1 Black Start Units.

(a) must be located in the ISO Control Area;

(b) may be located anywhere in the ISO Controlled Area provided that the Black Start

resource is capable of meeting the ISO performance requirements for starting and

interconnection to the ISO Controlled Grid; but

(c) must be dispersed throughout the ISO Control Area.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: March 20, 2001

Effective: Upon notice after May 19, 2001

2.5.5 Time-frame For Contracting for Ancillary Services.

The ISO shall procure on a daily and hourly basis, each day, Regulation, Spinning, Non-

Spinning and Replacement Reserves. The ISO shall procure Replacement Reserve on a

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: March 20, 2001 Effective: Upon notice after May 19, 2001

Superseding First Revised Sheet No. 69

longer-term basis pursuant to Section 2.3.5.1.3 if necessary to meet reliability criteria. The ISO Governing Board must approve all long-term Replacement Reserve contracts. The ISO shall contract for Voltage Support annually (or for such other period as the ISO may determine is economically advantageous) and on a daily or hourly basis as required to maintain System Reliability. The ISO shall contract annually (or for such other period as the ISO may determine is economically advantageous) for Black Start Generation.

2.5.6 Technical Requirements for Providing Ancillary Services.

All Generating Units, System Units, Loads and System Resources providing Ancillary Services shall comply with the technical requirements set out in Sections 2.5.6.1 to 2.5.6.4 below relating to their operating capabilities, communication capabilities and metering infrastructure. No Scheduling Coordinator shall be permitted to submit a bid to the ISO for the provision of an Ancillary Service from a Generating Unit, System Unit, Load or System Resource, or to submit a Schedule for self-provision of an Ancillary Service from that Generating Unit, System Unit, Load or System Resource, unless the Scheduling Coordinator is in possession of a current certificate issued by the ISO confirming that the Generating Unit, System Unit, Load or System Resource complies with the ISO's technical requirements for providing the Ancillary Service concerned. Scheduling Coordinators can apply for Ancillary Services certificates in accordance with the ISO's Protocols for considering and processing such applications. The ISO shall have the right to inspect Generating Units, Loads or the individual resources comprising System Units and other equipment for the purposes of the issue of a certificate and periodically thereafter to satisfy itself that its technical requirements continue to be met. If at any time the ISO's technical requirements are not being met, the ISO may withdraw the certificate for the Generating Unit, System Unit, Load or System Resource concerned.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 70

2.5.6.1 Operating Characteristics Required to Provide Ancillary Services. Each

Generating Unit, System Unit, Load or System Resource which a Scheduling Coordinator

wishes to schedule or bid to provide Ancillary Services must comply with the requirements for

the specific Ancillary Service in regard to the following:

(a) ramp rate increase and decrease (MW/minute);

(b) power factor (leading and lagging) as required by Section 2.5.3.4;

(c) maximum output (real and reactive), except that System Resources shall be required

to comply only with the requirement for maximum real power;

(d) minimum output (real and reactive), except that System Resources shall be required

to comply only with the requirement for minimum real power;

(e) AGC capability, control scheme, and range; and

(f) minimum length of time the resource can be available to provide the relevant Ancillary

Service.

The ISO will differentiate the operating characteristics according to the Ancillary Service being

provided.

2.5.6.2 Communication Equipment. Unless otherwise authorized by the ISO, all

Scheduling Coordinators wishing to submit an Ancillary Service schedule or bid must have the

capability to submit and receive information by direct computer link. In addition, they must be

capable of receiving Dispatch instructions electronically and they must provide the ISO with a

telephone number, or fax number through which Dispatch instructions for each Generating Unit,

System Unit, Load and System Resource may be given if necessary. The ISO will determine

which method of communication is appropriate; provided that the

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 71

ISO will consult with the Scheduling Coordinator, if time permits, and will consider the method of communication then utilized by such Scheduling Coordinator; provided further, that the ISO shall make the final determination as to the additional communication methods. Participating Generators, owners or operators of Loads and operators of System Units or System Resources whose resources are scheduled, bid in or under contract, shall ensure that there is a 24 hour personal point of contact with the ISO for the Generating Unit, System Unit, Load or System Resource. Operators of System Resources from which dynamic schedules or bids are submitted to the ISO shall provide communications links meeting ISO standards for dynamic imports from System Resources. Participating Generators and operators of System Units providing Regulation shall also provide communication links meeting ISO standards for direct digital control. Operators of System Resources providing Regulation shall provide communications links meeting ISO standards for external imports of Regulation. If any communication system becomes unavailable, the relevant Participating Generators, operators of System Units, Loads and System Resources and the ISO shall take immediate action to identify the cause of the interruption and to restore the communication system. A Scheduling Coordinator, that has scheduled or bid in or contracted for Ancillary Services shall ensure that the Generating Unit, System Unit, Load or System Resource concerned is able to receive and implement Dispatch Instructions.

2.5.6.3 Metering Infrastructure. All Participating Generators, owners or operators of Loads and operators of System Units or System Resources which a Scheduling Coordinator wishes to schedule or bid to provide Ancillary Services shall have the metering infrastructure for the Generating Units, System Units, Loads or System Resources concerned which complies with requirements to be established by the ISO relating to:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 30, 2004 Effective: June 29, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 71A

- (a) meter type;
- meter location; (b)
- meter reading responsibility; (c)

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: April 30, 2004 Effective: June 29, 2004 CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 72

Effective: October 13, 2000

Superseding Original Sheet No. 72

(d) meter capability in regard to AGC response; and

(e) any other aspect of metering infrastructure required by the ISO under this ISO Tariff.

2.5.6.4 Additional Requirements for Black Start Units.

A Participating Generator who wishes to offer Black Start must ensure that the requirements set

out in Appendix D to this ISO Tariff are met in relation to the Generating Units from which Black

Start will be offered.

2.5.7 Methodology For Procurement of Ancillary Services Upon Commencement of

ISO Operations.

2.5.7.1 [NOT USED]

2.5.7.2 Usage Charge in Ancillary Service Bid Evaluation.

As of the ISO Operations Date, the ISO will not incorporate forecast Usage Charges into its

Ancillary Service bid evaluations as the means to evaluate Ancillary Service bids across Zones

when Congestion is present.

2.5.7.3 Market-Based Prices.

Public utilities under the FPA must submit bids for Ancillary Services capped at FERC

authorized cost-based rates unless and until FERC authorizes different pricing. Public utilities

under the FPA shall seek FERC Ancillary Services rate approval on bases consistent with the

ISO time-frame for contracting for each Ancillary Service (hourly rate for some Ancillary

Services, annual rate or otherwise for other Ancillary Services) so that cost-based bids and

market-based bids for each service shall be on comparable terms. All

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Superseding Second Revised Sheet No. 73

other entities may use market-based rates not subject to any restrictions apart from those found in this ISO Tariff. Public utilities under the FPA which have not been approved to bid at marketbased rates, will not be paid above their cost-based bid for the Ancillary Service concerned even if the relevant Market Clearing Price is higher.

2.5.7.4 **Bidding and Self-Provision of Ancillary Services**

The ISO will procure Ancillary Services in accordance with this ISO Tariff, and the applicable ISO Protocols.

2.5.7.4.1 Scheduling Coordinators may bid or self-provide Ancillary Services or specify Inter-Scheduling Coordinator Ancillary Service Trades from resources located within the ISO Control Area.

2.5.7.4.2 Scheduling Coordinators may bid or self-provide external imports of Spinning Reserve, Non-Spinning Reserve or Replacement Reserve from System Resources located outside the ISO Control Area including dynamically scheduled System Resources, where technically feasible and consistent with WECC criteria; and provided that such Scheduling Coordinators have certified to the ISO their ability to deliver the service to the point of interchange with the ISO Control Area (including with respect to their ability to make changes, or cause such changes to be made, to interchange schedules during any interval of a Settlement Period at the discretion of the ISO).

2.5.7.4.3 Scheduling Coordinators may bid or self-provide external imports of Regulation from System Resources located outside the ISO Control Area, where technically feasible and consistent with WECC criteria; provided that the operator of the Control Area in which the System Resources are located has entered into an agreement with the ISO for interconnected Control Area operations; and provided that such Scheduling Coordinator and the operator of the Control Area in which the resources are located have been

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 30, 2004 Effective: June 29, 2004

Effective: October 13, 2000

certified by the ISO as to their ability to dynamically adjust interchange schedules based on

control signals issued by the ISO anytime during a Settlement Period at the discretion of the

ISO. Such certification shall include a demonstration of their ability to support the dynamic

interchange of Regulation service based on ISO control signals received on dedicated

communications links in accordance with ISO standards and procedures posted on the ISO

Home Page.

2.5.7.4.4 Scheduling Coordinators may utilize transmission service under Existing Contracts to

self-provide Regulation (consistent with the applicable ISO Protocols), from resources located

outside the ISO Control Area, where technically feasible, consistent with WECC standards

2.5.7.4.5 Scheduling Coordinators' bidding or self-provision of Ancillary Services according to

this Section 2.5.7.4 shall be consistent with the ISO Protocols.

2.5.8 The Bidding Process.

The ISO shall operate a competitive Day-Ahead and Hour-Ahead Market to procure Ancillary

Services. It shall purchase Ancillary Services capacity at least cost to End-Use Customers

consistent with maintaining System Reliability. Any Scheduling Coordinator representing

Generating Units, System Units, Loads or external imports of System Resources may bid into

the ISO's Ancillary Services market provided that it is in possession of a current certificate for

the Generating Units, System Units, external imports of System Resources or Loads

concerned.

2.5.9 Provision of System Information to Scheduling Coordinators.

By 6:00 p.m. two days prior to the Trading Day, the ISO shall make available to Scheduling

Coordinators general system information including those items of information set forth in

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 75

Effective: October 13, 2000

Superseding Original Sheet No. 75

Section 2.2.10. This information shall be provided at the same time as the ISO provides

general system information to all Scheduling Coordinators wishing to schedule power on the

ISO Controlled Grid.

2.5.10 Time Frame for Submitting And Evaluating Bids.

2.5.10.1 Day-Ahead Auction. Bids for the ISO's Day-Ahead Regulation, Spinning Reserve,

Non-Spinning Reserve and Replacement Reserve service market must be received by 10:00

am on the day prior to the Trading Day. The bids shall include information for each of the

twenty-four (24) Settlement Periods of the Trading Day. Failure to provide the information

within the stated time frame shall result in the bids being declared invalid by the ISO.

2.5.10.2 Hour-Ahead Auction. Bids for the ISO's Hour-Ahead Regulation, Spinning Reserve,

Non-Spinning Reserve and Replacement Reserve service market for each Settlement Period

must be received at least two hours prior to the commencement of that Settlement Period. The

bids shall include information for only the relevant Settlement Period. Failure to provide the

information within the stated time frame shall result in the bids being declared invalid by the

ISO. Scheduling Coordinators wishing to buy back in the Hour-Ahead Market Regulation,

Spinning Reserve, Non-Spinning Reserve or Replacement Reserve capacity sold to the ISO in

the Day-Ahead Market pursuant to Section 2.5.21 must do so by submitting a revised bid in the

Hour-Ahead Market for the Ancillary Service and resource concerned.

2.5.11 Information To Be Submitted By Bidders.

Bids shall be submitted by Scheduling Coordinators acting on behalf of Participating

Generators, and owners or operators of Loads. Bids must be in the format specified by

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 76

Superseding Original Sheet No. 76

the ISO and include the bid information for each service described in Sections 2.5.14 to 2.5.19

and such other information as the ISO may determine it requires to evaluate bids as published

from time to time in ISO Protocols. The ISO will verify and respond to submitted bid data in

accordance with Appendix E and the ISO Protocols. Bidders may submit new bids on a daily

basis (or hourly basis for the Hour-Ahead Market).

2.5.12 Bid Evaluation Rules.

Bid evaluation shall be based on the following principles:

(a) the ISO shall not differentiate between bidders other than through price and capability

to provide the service, and the required locational mix of services;

(b) to minimize the costs to users of the ISO Controlled Grid, the ISO shall select the

bidders with lowest bids for capacity which meet its technical requirements, including

location and operating capability;

(c) for the Day-Ahead Market, the Day-Ahead bids shall be evaluated independently for

each of the 24 Settlement Periods of the following Trading Day;

(d) for the Hour-Ahead Market, the ISO shall evaluate bids in the two hours preceding

the hour of operation;

(e) the ISO will procure sufficient Ancillary Services in the Day-Ahead Market to meet its

forecasted requirements, as known at the close of the Day-Ahead Market, except that

the ISO may elect to procure a portion of such requirements in the Hour-Ahead

Markets if the ISO first provides notice to Scheduling Coordinators of such action,

including the approximate hourly megawatt amounts of each Ancillary Service that it

intends to procure in the Hour-Ahead Markets.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 77

Effective: October 13, 2000

Superseding Original Sheet No. 77

2.5.13 Evaluation of Ancillary Services Bids.

When Scheduling Coordinators bid into the Regulation, Spinning Reserve, Non-Spinning

Reserve and Replacement Reserve markets, they may bid the same capacity into as many of

these markets as desired by providing the appropriate bid information to the ISO. The ISO shall

evaluate bids in the markets for Regulation, Spinning Reserve, Non-Spinning Reserve and

Replacement Reserve sequentially and separately in the following order: Regulation, Spinning

Reserve, Non-Spinning Reserve and Replacement Reserve. Any capacity accepted by the ISO

in one of these markets shall not be passed on to another market, except that capacity

accepted in the Regulation market that represents the downward range of movement accepted

by the ISO may be passed on to another market; any losing bids in one market may be passed

onto another market, if the Scheduling Coordinator so indicates to the ISO. A Scheduling

Coordinator may specify capacity bid into only the markets it desires. A Scheduling Coordinator

shall also have the ability to specify different capacity prices and different Energy prices for the

Spinning Reserve, Non-Spinning Reserve, Replacement Reserve and Regulation markets. The

bid information, bid evaluation and price determination rules set forth below shall be used in the

Day-Ahead, Hour-Ahead and real-time procurement of Regulation, Spinning Reserve, Non-

Spinning Reserve, and Replacement Reserve.

A Scheduling Coordinator providing one or more Regulation, Spinning Reserve, Non-

Spinning Reserve, and Replacement Reserve services may not change the identification of the

Generating Units or Loads offered in the Day-Ahead Market, the Hour-Ahead Market or in real

time for such services unless specifically approved by the ISO.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

2.5.14 The Regulation Auction.

<u>Bid Information.</u> Each Scheduling Coordinator j shall submit the following information for each Generating Unit or System Unit i for each Settlement Period t of the following Trading Day:

- (a) bidder name/Identification Code;
- (b) resource identification (name and Location Code);
- (c) the date for which the bid applies;
- (d) maximum operating level (MW);
- (e) minimum operating level (MW);
- (f) ramp rate (MW/Min) *Ramp_{ijt}*;
- the upward and downward range of generating capacity over which Generating Unit or System Unit i from Scheduling Coordinator j is willing to provide Regulation for Settlement Period t (Cap_{iji}max (MW) where Cap_{iji}max ≤ Period _{minutes} * Ramp_{iji}. Period _{minutes} is established by the ISO, by giving Scheduling Coordinators twenty-four (24) hours advance notice, within a range from a minimum of 10 minutes to a maximum of 30 minutes. Bidders shall offer upward and downward range for Regulation service; and
- (h) the bid price of the capacity reservation, stated separately for Regulation Up and Regulation Down (*CapRes*_{iit} (\$/MW)).

If the bid is for the provision of Regulation from an external import of a System Resource, each Scheduling Coordinator i shall submit the following information for each System

- (a) bidder name/Identification Code;
- (b) type of market (Day-Ahead or Hour-Ahead) and Trading Day;

Resource i for each Settlement Period t of the following Trading Day:

- (c) Scheduling Point;
- (d) interchange ID code;
- external Control Area ID; (e)
- (f) Schedule ID (NERC ID number) and complete WECC tag;
- (g) preferred bid flag, a "YES" indicates a bid and a "NO" indicates a self-provided schedule;
- (h) the contract reference number, if applicable;
- maximum operating level (MW); (i)
- (j) minimum operating level (MW);
- (k) ramp rate (MW/Min) Rampijt;
- (I) the upward and downward range of generating capacity over which System Resource i from Scheduling Coordinator j is willing to provide Regulation for Settlement Period t $(Cap_{ijt}max \text{ (MW)})$ where $Cap_{ijt}max \leq Period_{minutes} * Ramp_{ijt}$. Period_minutes is established by the ISO, by giving Scheduling Coordinators twenty-four (24) hours advance notice, within a range from a minimum of 10 minutes to a maximum of 30 minutes. Bidders shall offer upward and downward range for Regulation service; and

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 80

Superseding Original Sheet No. 80

Effective: Upon Notice After September 6, 2003

(m) the bid price of the capacity reservation, stated separately for Regulation Up and

Regulation Down (CapRes_{ijt} (\$/MW)).

<u>Bid Evaluation.</u> Based on the quantity and location of the system requirements, the ISO shall

select Generating Units, System Units, and System Resources with the bids, which minimize

the sum of the total bids of the Generating Units, System Units, and System Resources

selected for Regulation Up or Regulation Down, subject to two constraints:

(a) the sum of the selected bid capacities must be greater than or equal to the required

Regulation capacity; and

(b) each Generating Unit's, System Unit's, or System Resource's bid capacity must be

less than or equal to that Generating Unit's, System Unit's, or System Resource's

ramp rate times Period minutes.

The total bid for each Generating Unit, System Unit, or System Resource is calculated by

multiplying the capacity reservation bid price by the bid capacity.

Thus, subject to any locational requirements, the ISO will accept winning Regulation

bids in accordance with the following criteria:

$$\begin{aligned} \mathit{Min} \, & \sum \mathit{TotalBidijt} \\ & \mathit{i, j} \end{aligned}$$

Subject to

$$\sum_{i} Cap_{ijt} \ge Requirement_t \ and \ Cap_{ijt} \le Cap_{ijtmax}$$

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 81

Superseding Original Sheet No. 81

Where

 $TotalBid_{iit} = CapRes_{iit} * Cap_{iit}$

 $Requirement_t = Amount of upward and downward movement capacity required$

Price Determination. The price payable to Scheduling Coordinators for Regulation Capacity

made available for upward and downward movement in accordance with the ISO's Final Day-

Ahead Schedules shall, for each Generating Unit, System Unit, and System Resource

concerned, be the Zonal Market Clearing Price as follows:

 $PAGC_x = MCP_{xt}$

Where:

The Zonal Market Clearing Price (MCP_{xl}) is the highest priced winning Regulation capacity bid

in Zone X based on the capacity reservation bid price, i.e.

 $MCP_{xt} = Max (CapRes_{iit})$ in Zone x for Settlement Period t

The ISO's auction does not compensate the Scheduling Coordinator for the minimum Energy

output of Generating Units, System Units, or System Resources bidding to provide Regulation.

Therefore, disposition of any minimum Energy associated with Regulation selected in the ISO's

Ancillary Services markets is the responsibility of the Scheduling Coordinator selling the

Regulation.

The price payable to Scheduling Coordinators for Regulation capacity not included in the ISO's

Final Day-Ahead Schedules but made available in accordance with amended Ancillary Services

supplier schedules issued in accordance with Section 2.5.21 shall be the bid price of the

Regulation Capacity reserved (CapRes_{iit} (\$/MW)).

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

Second Revised Sheet No. 82

2.5.15 The Spinning Reserve Auction.

<u>Bid Information.</u> If the bid is for the provision of Spinning Reserve from a Generating Unit or System Unit, each Scheduling Coordinator j must submit the following information for each Generating Unit or System Unit i for each Settlement Period t of the following Trading Day:

- (a) bidder name/Identification Code;
- (b) resource identification (name and Location Code);
- (c) the date for which the bid applies;
- (d) maximum operating level (MW);
- (e) minimum operating level (MW);
- (f) ramp rate (MW/min);
- (g) MW additional capability synchronized to the system, immediately responsive to system frequency, and available within 10 minutes ($Cap_{ij}max$) for Generating Unit i, or System Unit I, from Scheduling Coordinator j, for Settlement Period t.
- (h) bid price of capacity reserved (*CapRes_{ijt}* (\$/MW));

and

(i) an indication whether the capacity reserved would be available to supply Imbalance Energy only in the event of the occurrence of an unplanned Outage, a Contingency or an imminent or actual System Emergency.

If the bid is for the provision of Spinning Reserve from an external import of a System Resource, each Scheduling Coordinator j must submit the following information for each external import of a System Resource i for each Settlement Period t of the following Trading Day:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Fourth Revised Sheet No. 83

Superseding Third Revised Sheet No. 83

(a) bidder name/Identification Code;

(b) the date for which the bid applies;

(c) ramp rate if applicable (MW/Min);

(d) MW additional capability synchronized to the system, immediately responsive to

system frequency and available at the point of interchange with the ISO Control Area,

within 10 minutes (Capiitmax) of the ISO calling for the external import of System

Resource i, from Scheduling Coordinator j, for Settlement Period t;

(e) bid price of capacity reserved (CapRes_{ijt} (\$/MW));

(f) an indication whether the capacity reserved would be available to supply Imbalance

Energy only in the event of the occurrence of an unplanned Outage, a Contingency or an

imminent or actual System Emergency; and, for a dynamic import of a System Resource, the

following additional information:

(g) type of market (Day-Ahead or Hour-Ahead) and Trading Day;

(h Scheduling Point;

(i) interchange ID code;

(j) external Control Area ID;

(k) Schedule ID (NERC ID number) and complete WECC tag;

(I) preferred bid flag, a "YES" indicates a bid and a "NO" indicates a self-provided

schedule; and

(m) the contract reference number, if applicable.

<u>Bid Evaluation</u>. Based on the quantity and location of the system requirements, the ISO shall

select the Generating Units, System Units and external imports of System Resources with the

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 83A

Superseding First Revised Sheet No. 83A

bids which minimize the sum of the total bids of the Generating Units, System Units and external

imports of System Resources selected subject to two constraints:

(a) the sum of the selected bid capacities must be greater than or equal to the required

Spinning Reserve capacity; and

(b) each Generating Unit's, System Unit's or external import's bid capacity must be less

than or equal to that Generating Unit's, System Unit's or external import's ramp rate

times 10 minutes.

The total bid for each Generating Unit, System Unit or external import of a System Resource is

calculated by multiplying the capacity reservation bid price by the bid capacity. Thus, subject to

any locational requirements, the ISO will select the winning Spinning Reserve bids in

accordance with the following criteria:

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 84 Superseding Original Sheet No. 84

$$Min \sum_{i,j} Totalbid_{ijt}$$

Subject to

$$\sum_{i,j} Cap_{ijt} \ge Requirement_t$$

and Cap_{ijt} ≤ Cap_{ijt}max

Where

 $Requirement_t$ = the amount of Spinning Reserve capacity required

<u>Price Determination</u>. The price payable to Scheduling Coordinators for Spinning Reserve Capacity made available in accordance with the ISO's Final Day-Ahead Schedules shall, for each Generating Unit or external import of a System Resource concerned be the Zonal Market Clearing Price for Spinning Reserve calculated as follows:

$$Psp_{xt} = MCP_{xt}$$

Where the Zonal Market Clearing Price (MCP_{xt}) for Spinning Reserve is the highest priced winning Spinning Reserve capacity bid in Zone X based on the capacity reservation bid price, i.e.:

 $MCP_{xt} = Max(CapRes_{ijt})$ in Zone x for Settlement Period t

The ISO's auction does not compensate a Scheduling Coordinator for the minimum Energy output of Generating Units, System Units or System Resources bidding to provide Spinning Reserve. Therefore, any minimum Energy output associated with Spinning Reserve selected in the ISO's auction is the responsibility of the Scheduling Coordinator selling the Spinning Reserve.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

The price payable to Scheduling Coordinators for Spinning Reserve Capacity not included in the ISO's Final Day-Ahead Schedules but made available in accordance with amended Ancillary Services supplier schedules issued in accordance with Section 2.5.21 shall

be the bid price of the Spinning Reserve capacity reserved (CapResii (\$/MW)).

2.5.16 The Non-Spinning Reserve Auction.

Bid information. If the bid is for the provision of Non-Spinning Reserve from a Generating Unit

or System Unit, each Scheduling Coordinator j must submit the following information for each

Generating Unit or System Unit i for each Settlement Period t of the following Trading Day:

(a) bidder name/Identification Code;

(b) Generating Unit or System Unit identification (name and Location Code);

(c) the date for which the bid applies;

(d) maximum operating level (MW);

(e) minimum operating level (MW);

(f) ramp rate (MW/Min);

(g) the MW capability available within 10 minutes (*Cap_{iit}max*);

(h) the bid price of the capacity reserved (*CapResiit*(\$/MW));

(i) time to synchronization following notification (min);

and

(j) an indication whether the capacity reserved would be available to supply Imbalance

Energy only in the event of the occurrence of an unplanned Outage, a Contingency or

an imminent or actual System Emergency.

FIRST REPLACEMENT VOLUME NO. I

Fourth Revised Sheet No. 86

Superseding Third Revised Sheet No. 86

If the bid is for the provision of Non-Spinning Reserve from an external import of a

System Resource, each Scheduling Coordinator j must submit the following information for

each external import of a System Resource i for each Settlement Period t of the following

Trading Day:

(a) bidder name/Identification Code;

(b) the date for which the bid applies;

(c) ramp rate if applicable (MW/Min);

(d) the MW capability available at the point of interchange with the ISO Control Area,

within 10 minutes (Capiimax) of the ISO calling for the external import of System

Resource I, from Scheduling Coordinator j, for Settlement Period t;

(e) the bid price of the capacity reserved (*CapRes*_{iit}(\$/MW));

(f) an indication whether the capacity reserved would be available to supply Imbalance

Energy only in the event of the occurrence of an unplanned Outage, a Contingency or

an imminent or actual System Emergency; and, for a dynamic import of a System

Resource, the following additional information:

(g) type of market (Day-Ahead or Hour-Ahead) and Trading Day;

(h) Scheduling Point;

(i) interchange ID code;

(j) external Control Area ID;

(k) Schedule ID (NERC ID number) and complete WECC tag;

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I Superse

Second Revised Sheet No. 86A Superseding First Revised Sheet No. 86A

(I) preferred bid flag, a "YES" indicates a bid and a "NO" indicates a self-provided schedule; and

(m) the contract reference number, if applicable.

If the bid is for the provision of Non-Spinning Reserve from a Load located within the ISO Control Area, each Scheduling Coordinator j must submit the following information for each Load i for each Settlement Period t of the following Trading Day:

- (a) bidder name/Identification Code;
- (b) Load identification name and Location Code;
- (c) the date for which the bid applies;
- (d) Demand reduction available within 10 minutes (*Cap_{iit}max*);
- (e) to interruption following notification (min);
- (f) maximum allowable curtailment duration (hr);

Issued by: Charles F. Robinson, Vice President and General Counsel

Superseding First Revised Sheet No. 87

Second Revised Sheet No. 87

FIRST REPLACEMENT VOLUME NO. I

(g) the bid price of the capacity reserved (*CapResiit*(\$/MW)); and

(h) an indication whether the capacity reserved would be available for Demand reduction

only in the event of the occurrence of an unplanned Outage, a Contingency or an

imminent or actual System Emergency

<u>Bid Evaluation</u>. Based on the quantity and location of the system requirements, the ISO shall

select the Generating Units, System Units, Loads or external imports of System Resources with

the bids which minimize the sum of the total bids of the Generating Units, System Units, Loads

or external imports of System Resources selected subject to two constraints:

(a) the sum of the selected bid capacities must be greater than or equal to the required

Non-Spinning Reserve capacity; and

(b) each Generating Unit's, System Unit's, Load's or external import's bid capacity must

be less than or equal to that Generating Unit's, System Unit's, Load's or external

import's ramp rate (or time to interruption in the case of a Load offering Demand

reduction) times the difference between 10 minutes and the time to synchronize in the

case of a Generating Unit or System Unit or to interruption in the case of a Load. The

total bid for each Generating Unit, System Unit, Load or external import of a System

Resource is calculated by multiplying the capacity reservation bid by the bid capacity.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 87-A

Thus subject to any locational requirements, the ISO will accept the winning Non-

Spinning Reserve bids in accordance with the following criteria:

$$Min \sum_{i,j} Totalbid_{ijt}$$

Subject to

$$\sum_{i,j} Cap_{ijt} \geq Requirement_t$$

Capijt≤*Capijtmax*

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: March 20, 2001 Effective: Upon notice after May 19, 2001

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 88

Effective: October 13, 2000

Superceding Original Sheet No. 88

Where

TotalBid_{iit} = Cap_{iit} * CapRes_{iit}

Requirement_t = the amount of Non-Spinning Reserve capacity required

Price Determination. The price payable to Scheduling Coordinators for Non-Spinning Reserve

Capacity made available in accordance with the ISO's Final Day-Ahead Schedules shall for

each Generating Unit, System Unit, Load or external import of a System Resource concerned

be the Zonal Market Clearing Price for Non-Spinning Reserve calculated as follows:

 $Pnonsp_{xt} = MCP_{xt}$

Where the Zonal Market Clearing Price (MCP_{xt}) for Non-Spinning Reserve is the

highest priced winning Non-Spinning Reserve bid in Zone X based on the capacity reservation

bid price, i.e.:

 $MCP_{xt} = Max(CapRes_{ijt})$ in Zone x for Settlement Period t.

The price payable to Scheduling Coordinators for Non-Spinning Reserve Capacity not

included in the ISO's Final Day-Ahead Schedules but made available in accordance with

amended Ancillary Services supplier schedules issued in accordance with Section 2.5.21 shall

be the bid price of the Non-Spinning Capacity reserved (CapRes_{ijt}(\$/MW)).

2.5.17 The Replacement Reserve Auction.

Bid Information. If the bid is for the provision of Replacement Reserve from a Generating Unit

or System Unit each Scheduling Coordinator j must submit the following information

for each Generating Unit or System Unit i for each Settlement Period t of the following Trading Day:

- (a) bidder name/Identification Code;
- (b) Generating Unit or System Unit identification (name and Location Code);
- (c) the date for which the bid applies;
- (d) maximum operating level (MW);
- (e) minimum operating level (MW);
- (f) ramp rate (MW/Min);
- (g) the MW capacity available within 60 minutes ($Cap_{ij}max$);
- (h) the bid price of the capacity reserved (*CapRes*_{iit} (\$/MW)); and
- (i) time to synchronize following notification (min).

If the bid is for the provision of Replacement Reserve from an external import of a System Resource, each Scheduling Coordinator j must submit the following information for each external import of a System Resource i for each Settlement Period t of the following Trading Day:

- (a) bidder name/Identification Code;
- (b) the date for which the bid applies;
- (c) ramp rate applicable (MW/Min);
- (d) the MW capability available at the point of interchange with the ISO Control Area, within 60 minutes (Cap_{ijt}max) of the ISO calling for the external import of System Resource i, from Scheduling Coordinator j, for Settlement Period t;

Issued by: Charles F. Robinson, Vice President and General Counsel

Third Revised Sheet No. 90

Superseding Second Revised Sheet No. 90

(e) bid price of capacity reserved (CapRes_{ijt};(\$/MW)); and, for a dynamic import of a System

Resource, the following additional information:

(h) type of market (Day-Ahead or Hour-Ahead) and Trading Day;

(i) Scheduling Point;

(j) interchange ID code;

(k) external Control Area ID;

(I) Schedule ID (NERC ID number) and complete WECC tag;

(m) preferred bid flag, a "YES" indicates a bid and a "NO" indicates a self-provided

schedule; and

(n) the contract reference number, if applicable.

If the bid is for the provision of Replacement Reserve from a Load located within the ISO Control Area, each Scheduling Coordinator j must submit the following information for each

Load i for each Settlement Period t of the following Trading Day:

(a) bidder name/Identification Code;

(b) Load identification (name and Location Code);

(c) the date for which the bid applies;

(d) the Demand reduction available within 60 minutes (Cap_{iit} (MW));

(e) time to interruption following notification (min);

(f) maximum allowable curtailment duration (hr); and

(g) the bid price of the capacity reserved ($CapRes_{ijt}$ (\$/MW)).

<u>Bid Evaluation</u>. Based on the quantity and location of the system requirements, the ISO shall

select the Generating Units, System Units, Loads or external imports of System Resources with

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 90A Superseding Original Sheet No. 90A

the bids which minimize the sum of the total bids of the Generating Units, System Units, Loads or external imports of System Resources selected subject to two constraints:

(a) the sum of the selected bid capacities must be greater than or equal to the required Replacement Reserve capacity; and

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 91

Effective: October 13, 2000

(b) each Generating Unit's, System Unit's, Load's or external import's bid capacity must

be less than or equal to that Generating Unit's, System Unit's, Load's or external

import's ramp rate (or time to interruption in the case of a Load offering Demand

reduction) times the difference between 60 minutes and the time to synchronize in the

case of Generating Unit or System Unit, or to interruption in the case of Load.

The total bid for each Generating Unit, System Unit, Load or external import of System

Resource is calculated by multiplying the capacity reservation bid price by the bid capacity.

Thus, subject to any locational requirements, the ISO will select the winning Replacement

Reserve bids in accordance with the following criteria:

$$Min \sum_{i,j} Totalbid_{ijt}$$

Subject to

$$\sum_{i,j} Cap_{ijt} \ge Requirement_t$$

Where

 $Requirement_t = the amount of Replacement Reserve capacity$

Price Determination. The price payable to Scheduling Coordinators for Replacement Reserve

Capacity made available in accordance with the ISO's Final Day-Ahead Schedules shall, for

each Generating Unit, System Unit, Load or external import of a

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 92

Effective: October 13, 2000

Superseding Original Sheet No. 92

System Resource, be the Zonal Market Clearing Price for Replacement Reserve calculated as

follows:

 $PRepRes_{xt} = MCP_{xt}$

Where the Zonal Market Clearing Price (MCP_{xt}) for Replacement Reserve is the

highest priced winning Replacement Reserve bid in Zone X based on the capacity reservation

bid price, i.e.:

 $MCP_{xt} = Max(CapRes_{ijt})$ in Zone x for Settlement Period t.

The price payable to Scheduling Coordinators for Replacement Reserve Capacity not

included in the ISO's Final Day-Ahead Schedules but made available in accordance with

amended Ancillary Services schedules issued in accordance with Section 2.5.21 shall be the

bid price of the Replacement Reserve capacity reserved (*CapRes_{iit}*(\$/MW)).

2.5.18 Voltage Support.

As of the ISO Operations Date, the ISO will contract for Voltage Support service with the

owners of Reliability Must-Run Units. Payments for public utilities under the FPA shall be

capped at the FERC authorized cost-based rates unless and until FERC authorizes different

pricing. The ISO shall pay owners of Reliability Must-Run Units for long-term Voltage Support

through their Scheduling Coordinators.

In addition, any Participating Generator who is producing Energy shall, upon the

ISO's specific request, provide reactive energy output outside the Participating Generator's

Voltage Support obligation defined in Section 2.5.3.4.

The ISO shall select Participating Generator's Generating Units which have been

certified for Voltage Support to provide this additional Voltage Support. Subject to any

locational requirements, the ISO shall select the least costly Generating Units from a computerized merit order stack to back down to produce additional Voltage Support in each location where Voltage Support is needed.

The ISO shall pay to the Scheduling Coordinator for that Participating Generator the opportunity cost of reducing Energy output to enable reactive energy production. This opportunity cost shall be:

Max{0, Zonal Settlement Interval Ex Post Price - Generating Unit bid price } x reduction in Energy output (MW).

If necessary, the ISO shall develop a regulatory cost-based determination of marginal operating cost to be used in place of the Generating Unit bid price.

2.5.19 Black Start Capability and Energy Output.

As of the ISO Operations Date, the ISO will contract for Black Start capability and Energy with owners of Reliability Must-Run Units and Black Start Generators. Public utilities under the FPA will be paid rates capped at the FERC authorized cost base rates unless and until FERC authorizes different pricing. The ISO shall pay owners of Reliability Must-Run Units for Black Start Energy output through their Scheduling Coordinators. The ISO shall pay Black Start Generators for Black Start Energy output directly.

2.5.20 Obligations for and Self-Provision of Ancillary Services.

2.5.20.1 Ancillary Service Obligations. Each Scheduling Coordinator shall be assigned a share of the total Regulation, Spinning Reserve, Non-Spinning and Replacement Reserve requirements by the ISO. Any references in this Tariff to the Ancillary Service "Regulation" shall be read as referring to "Regulation Up" or "Regulation Down". The

Issued by: Charles F. Robinson, Vice President and General Counsel

share assigned to each Scheduling Coordinator is described in Section 2.5.20 and in Section 2.5.28 as that Scheduling Coordinator's obligation. Each Scheduling Coordinator's Regulation obligation in each Zone shall be pro rata based upon the same proportion as the Scheduling Coordinator's metered hourly Demand (excluding exports) bears to the total metered Demand (excluding exports) served in each hour in that Zone. Each Scheduling Coordinator's Operating Reserve obligation in each Zone shall be pro rata based upon the same proportion as the ratio of the product of its percentage obligation based on metered output and the sum of its metered Demand and firm exports bears to the total of such products for all Scheduling Coordinators in the Zone. The Scheduling Coordinator's percentage obligation based on metered output shall be calculated as the sum of 5% of its real-time Demand (except the Demand covered by firm purchases from outside the ISO Control Area) met by Generation from hydroelectric resources plus 7% of its Demand (except the Demand covered by firm purchases from outside the ISO Control Area) met by Generation from non-hydroelectric resources in that Zone, plus 100% of any Interruptible Imports and on-demand obligations which it schedules. Each Scheduling Coordinator's Replacement Reserve obligation in each Zone is calculated as described in Section 2.5.28.4. Scheduling Coordinator obligations for each Ancillary Service will be calculated based on the requirement for each Ancillary Service as the ISO determines prior to the adjustment set forth in Section 2.5.3.6.

2.5.20.2 Right to Self-Provide.

Each Scheduling Coordinator may choose to self-provide all, or a portion, of its Regulation, Operating Reserve, and Replacement Reserve obligation in each Zone. The ISO shall schedule self-provided Ancillary Services, Day-Ahead and Hour-Ahead, and Dispatch self-provided Ancillary Services in real time. To the extent that a Scheduling Coordinator self-provides, the ISO shall correspondingly reduce the quantity of the Ancillary Services

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 95

Superseding Original Sheet No. 95

concerned, which it procures as described in Sections 2.5.14 to 2.5.17. In accordance with

Section 2.5.22.11 and Section 2.5.26.2, if a Scheduling Coordinator uses capacity scheduled to

self-provide Spinning Reserve, Non-Spinning Reserve, or Replacement Reserve to supply

Uninstructed Imbalance Energy to the ISO from a Generating Unit, Curtailable Demand, or

System Resource under circumstances that would cause the elimination of payments to the

Scheduling Coordinator under Section 2.5.26.2 if the capacity had been bid and was selected

by the ISO to supply the Ancillary Service, the Scheduling Coordinator shall pay to the ISO the

amount of the payment that would be eliminated under that section. Scheduling Coordinators

may trade Ancillary Services obligations so that any Scheduling Coordinator may reduce its

Ancillary Services obligation through purchase of Ancillary Services capacity from another

Scheduling Coordinator, or self-provide in excess of its obligation to sell Ancillary Services to

another Scheduling Coordinator, subject to the limits specified under Section 2.5.20.5.2. If a

Scheduling Coordinator's Day-Ahead self-provided Ancillary Service Schedule is decreased in

the Hour-Ahead Market, such decrease shall be deemed to be replaced at the Market Clearing

Price in the Hour-Ahead Market, pursuant to Section 2.5.21.

2.5.20.3 [Not Used]

2.5.20.4 Services Which May Be Self-Provided. The ISO shall permit Scheduling

Coordinators to self-provide the following Ancillary Services:

(a) Regulation;

(b) Spinning Reserve;

(c) Non-Spinning Reserve; and

(d) Replacement Reserve.

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Superseding Sub. First Revised Original Sheet No. 96

Second Revised Sheet No. 96

Effective: November 23, 2002

The ISO may from time to time add other Ancillary Services to this list as it considers

appropriate.

2.5.20.5 Time Frame for Informing ISO of Self-Provision.

2.5.20.5.1 Day-Ahead Schedule. At the Day-Ahead scheduling process, Scheduling

Coordinators shall be required to submit information on self-provided Ancillary Services within

the time frame stated in Section 2.5.10.1. Failure to submit the required information within the

stated time frame for any hour shall lead to the self-provision for that hour being declared invalid

by the ISO, and under such circumstances the ISO shall purchase sufficient Ancillary Services

to meet the Scheduling Coordinator's requirements to match its Day-Ahead Schedule.

2.5.20.5.2 Hour-Ahead Schedule. Increases in each Scheduling Coordinator's self-

provided Ancillary Service between the Day-Ahead and Hour-Ahead Markets shall be limited to

the estimated incremental Ancillary Service requirement associated with the increase between

the Day-Ahead and Hour-Ahead Markets in that Scheduling Coordinator's scheduled Zonal

Demand. Notwithstanding this limit on increases in Hour-Ahead self-provision, a Scheduling

Coordinator may buy or sell Ancillary Services through Inter-Scheduling Coordinator Ancillary

Service Trades in the Hour-Ahead Market. In the Hour-Ahead scheduling process, Scheduling

Coordinators shall be required to submit information on self-provided Ancillary Services within

the time frame stated in Section 2.5.10.2. Failure to submit the required adjusted information

within the stated time frame shall lead to the self-provision being declared invalid by the ISO,

and under such circumstances the ISO shall purchase the additional Ancillary Services

necessary to meet the requirements for that Scheduling Coordinator.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

First Revised Sheet No. 97 Superseding Original Sheet No. 97

2.5.20.6 Information To Be Submitted By Scheduling Coordinators For Each Service.

Scheduling Coordinators electing to self-provide Ancillary Services shall submit the information for each self-provided Ancillary Service as described in Sections 2.5.14 to 2.5.17, excluding the capacity price information, but including the name of the trading Scheduling Coordinator in the case of Inter-Scheduling Coordinator Ancillary Service Trades.

2.5.20.7 Acceptance of Self-Provided Ancillary Service Schedules. The ISO will refuse to accept self-provided Ancillary Service Schedules only to the extent that they fail to meet requirements contained in this ISO Tariff. In particular, self-provided Ancillary Service Schedules must satisfy the following conditions:

- (a) the Scheduling Coordinator has a current certificate of technical eligibility for the Generating Units, System Units, Loads or System Resources selected for the Ancillary Services in question;
- (b) to the extent not provided under (a), the Generating Units, System Units, Loads and System Resources have the instrumentation, communication and metering equipment necessary to permit the ISO to dispatch the offered Ancillary Services and verify that the services have been provided;
- (c) the scheduling information provided by the Scheduling Coordinator is deemed to be valid in accordance with Appendix E and the ISO Protocols; and
- (d) the Generating Units, System Units, Loads or System Resources meet the ISO's locational requirements for the Ancillary Services.

2.5.21 Scheduling of Units to Provide Ancillary Services.

The ISO shall prepare supplier schedules for Ancillary Services (both self-provided and purchased by the ISO) for the Day-Ahead and the Hour-Ahead Markets. The ISO shall

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

notify each Scheduling Coordinator no later than 1:00 p.m. of the day prior to the Trading Day of their Ancillary Services schedules for the Day-Ahead and no later than one hour prior to the operating hour of their Ancillary Services schedules for the Hour-Ahead. The ISO Protocols set forth the information, which will be included in these schedules. Where long-term contracts are involved, the information may be treated as standing information for the duration of the contract.

If, at any time after the issuance of Final Day-Ahead Schedules for the Trading Day and before the close of the Hour-Ahead Market for the first Settlement Period of the Trading Day, the ISO determines that it requires Ancillary Services in addition to those included in the Final Day-Ahead Schedule (in the appropriate Zone if procuring zonally), the ISO may procure such additional Ancillary Services by providing Scheduling Coordinators with amended supplier schedules for the Day-Ahead Markets that include Ancillary Services for which previously submitted (but not selected) bids remain available and have not previously been withdrawn. The ISO shall select such Ancillary Services in price merit order (and in the relevant Zone if the ISO is procuring Ancillary Services on a Zonal basis). Such amended supplier schedules shall be provided to the Scheduling Coordinators no later than the close of the Hour-Ahead Market for the first Settlement Period of the Trading Day.

Once the ISO has given Scheduling Coordinators notice of the Day-Ahead and Hour-Ahead Schedules, these schedules represent binding commitments made in the markets between the ISO and the Scheduling Coordinators concerned, subject to any amendments issued as described above. Any minimum energy input and output associated with Regulation and Spinning Reserve services shall be the responsibility of the Scheduling Coordinator, or provided in accordance with the must-offer obligation as set forth in Section 5.11, as the ISO's auction does not compensate the Scheduling Coordinator for the minimum energy output of Generating Units bidding to provide these

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 11, 2004 Effective: July 11, 2004

services. Accordingly, except as set forth under Section 5.11, the Scheduling Coordinators shall adjust their schedules to accommodate the minimum outputs required by the Generating Units to facilitate delivery of Energy from Ancillary Services.

Notwithstanding the foregoing, a Scheduling Coordinator who has sold or self-provided Regulation, Spinning Reserve, Non-Spinning Reserve or Replacement Reserve capacity to the ISO in the Day-Ahead Market shall be required to replace that capacity in whole or in part from the ISO if the scheduled self-provision is decreased between the Day-Ahead and Hour-Ahead Markets, or if the Ancillary Service associated with a Generating Unit, Curtailable Demand, or System Resource successfully bid in a Day-Ahead Ancillary Service Market is reduced in the Hour-Ahead Market, for any reason (other than the negligence or willful misconduct of the ISO, or a Scheduling Coordinator's involuntary decrease in such sold capacity or scheduled self-provision on the instruction of the ISO). The price for such replaced Ancillary Service shall be the Market Clearing Price in the Hour-Ahead Market for the Ancillary Service for the Settlement Period concerned for the Zone in which the Generating Units or other resources are located. The ISO will purchase the Ancillary Service concerned from another Scheduling Coordinator in the Hour-Ahead Market in accordance with the provisions of the ISO Tariff.

2.5.22 Rules For Real-Time Dispatch of Imbalance Energy Resources.

2.5.22.1 Overview. During real time, the ISO shall dispatch Generating Units, Loads and System Resources to procure Imbalance Energy. In addition, the ISO may also need to purchase additional Ancillary Services if the services arranged in advance are used to provide Imbalance Energy, and such depletion needs to be recovered to meet reliability contingency requirements.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 11, 2004 Effective: July 11, 2004

2.5.22.2 General Principles. The ISO shall base real-time Dispatch of Generating Units, System Units, Loads and System Resources on the following principles:

- (a) the ISO shall dispatch Generating Units, System Units, and System Resources providing Regulation service to meet NERC and WECC Area Control Error (ACE) performance requirements;
- (b) the ISO shall determine whether the Regulation Generating Units, System Units, and System Resources are operating at a point away from their preferred operating point and project the Imbalance Energy requirements based on the forecasted Demand for the next Dispatch Interval. The ISO shall then Dispatch Generating Units, System Units, and System Resources available (either providing Spinning Reserve, Non-Spinning Reserve, Replacement Reserve or offering Supplemental Energy) to meet the projected Imbalance Energy requirements for the next Dispatch Interval and return the Regulation Generating Units, System Units, and System Resources to their preferred operating points to restore their full regulating margin;
- (c) the ISO shall economically Dispatch Generating Units, System Units, Loads and System Resources only to meet its Imbalance Energy requirements and eliminate any Price Overlap between Energy Bids subject to resource and transmission system Constraints;
- (d) subject to Section 2.5.22.3 and its subparts, the ISO shall select the Generating Units, System Units, Loads and System Resources to be dispatched to meet its Imbalance Energy requirements and eliminate any Price Overlap based on a constrained optimization method to minimize the overall cost of Imbalance Energy subject to resource and transmission system Constraints;
- (e) subject to Section 2.5.22.3 and its subparts, the ISO shall not discriminate between Generating Units, System Units, Loads and System Resources other than based on

Issued by: Charles F. Robinson, Vice President and General Counsel

price, and the effectiveness (e.g., location and ramp rate) of the resource concerned to respond to the fluctuation in Demand or Generation;

- (f) Generating Units, System Units, Loads and System Resources shall be dispatched during the operating hour only until the next variation in Demand or the end of the operating hour, whichever is sooner. In dispatching such resources, the ISO makes no further commitment as to the duration of their operation, nor the level of their output or Demand, except to the extent that a Dispatch instruction causes Energy to be delivered in a different Dispatch Interval.
- **2.5.22.3** Ancillary Services Dispatch. The ISO may Dispatch Generating Units, Loads, System Units and System Resources contracted to provide Ancillary Services (either procured through the ISO's competitive market, or self-provided by Scheduling Coordinators) to supply Imbalance Energy. During normal operating conditions, the ISO shall Dispatch the following resources to supply Imbalance Energy: (i) those Generating Units, Loads, System Units and System Resources having offered Supplemental Energy bids, (ii) those Generating Units, Loads, System Units and System Resources contracted to provide Replacement Reserve and (iii) those Generating Units, Loads, System Units and System Resources that have contracted to provide Spinning and Non-Spinning Reserve, except for those resources that have indicated that the capacity reserved would be available to supply Imbalance Energy only in the event of the occurrence of an unplanned Outage, a Contingency or an imminent or actual System Emergency. In the event of an unplanned Outage, a Contingency or a threatened or actual System Emergency, the ISO may also Dispatch all other Generating Units, Loads, System Units and System Resources contracted to provide Spinning Reserve or Non-Spinning Reserve to supply Imbalance Energy. If a Generating Unit, Load, System Unit or System Resource, which is supplying Operating Reserve, is Dispatched to provide Imbalance Energy, the ISO shall

Issued by: Charles F. Robinson, Vice President and General Counsel

2.5.22.3.2

replace the Operating Reserve from the same or another resource within the time frame specified in the WECC guidelines.

2.5.22.3.1 Dispatch of Competitively Procured and Self-Provided Ancillary Services.

Generating Units and Loads selected in the ISO competitive auction or self-provided shall be Dispatched based on their Energy Bids as described in Dispatch Protocol Section 8.6.2, subject to the limitation on the Dispatch of Spinning Reserve and Non-Spinning Reserve set forth in Section 2.5.22.3.

Dispatch of Self-Provided Ancillary Services. Where a Scheduling

Coordinator has chosen to self-provide the whole of the additional Operating Reserve required to cover any Interruptible Imports which it has scheduled and has identified specific Generating

to cover any interruptible imports which it has scheduled and has identified specific Generating

Units, Loads, System Units or System Resources as the providers of the additional Operating

Reserve concerned, the ISO shall Dispatch only the designated Generating Units, Loads,

System Units or System Resources in the event of the ISO being notified that the Interruptible

Import is being curtailed. For all other Ancillary Services

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Sixth Revised Sheet No. 102

Superseding Fifth Revised Sheet No. 102

FIRST REPLACEMENT VOLUME NO. I

which are being self-provided the Energy Bid shall be used to determine the Dispatch, subject

to the limitation on the Dispatch of Spinning Reserve and Non-Spinning Reserve set forth in

Section 2.5.22.3.

2.5.22.4 Supplemental Energy Bids. In addition to the Generating Units, Loads and System

Resources which have been scheduled to provide Ancillary Services in the Day-Ahead and

Hour-Ahead Markets, the ISO may Dispatch Generating Units, Loads or System Resources for

which Scheduling Coordinators have submitted Supplemental Energy bids.

2.5.22.4.1 Timing of Supplemental Energy Bids.

Supplemental Energy bids must be submitted to the ISO no later than sixty-two (62) minutes

prior to the operating hour. Bids may also be submitted at any time after the Day-Ahead Market

closes. These Supplemental Energy bids cannot be withdrawn after sixty-two (62) minutes

prior to the Settlement Period.

2.5.22.4.2 Form of Supplemental Energy Bid Information.

Supplemental Energy bids must include the information specified in Schedules and Bids

Protocol Section 6.1.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 8, 2005

Effective: April 9, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Seventh Revised Sheet No. 103

Superseding Sixth Revised Sheet No. 103

2.5.22.5 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: July 8, 2003 Effective: Up Effective: Upon Notice After September 6, 2003 2.5.22.6 Real-Time Dispatch. The ISO shall economically Dispatch each Generating Unit, Curtailable Demand, System Unit or System Resource that is effective to meet Imbalance Energy requirements and eliminate any Price Overlap in real time, subject to the limitation on the Dispatch of Spinning Reserve and Non-Spinning Reserve set forth in Section 2.5.22.3. The ISO shall determine that additional output is needed if the current output levels of the Regulation Generating Units, System Units, and System Resources deviate from their preferred operating points by more than a specified threshold (to be determined by the ISO), or to meet the projected Imbalance Energy requirements for the next Dispatch Interval. The ISO shall employ a multi-interval constrained optimization methodology (RTD Software) to calculate an optimal dispatch for each Dispatch Interval within a time horizon that shall extend to the end of the next hour. The ISO shall Dispatch resources that have submitted Energy Bids over the time horizon to meet forecasted Imbalance Energy requirements minimizing the Imbalance Energy procurement cost over the entire time horizon, subject to resource and transmission system constraints. However, Dispatch Instructions shall be issued for the next Dispatch Interval only. The ISO also shall instruct resources to start up or shut down over the time horizon based on their submitted and validated Start-Up Fuel Costs, Minimum Load Costs and Energy Bids. These resources shall receive binding start-up or shut-down pre-dispatch instructions as required by their startup time. The ISO shall only start resources that can start within the time horizon. The ISO may shut down resources that do not need to be on-line if constraints within the time horizon permit. However, resources providing Regulation or Spinning Reserve shall not be shut down. On-line resources providing Non-Spinning or Replacement Reserve shall also not be eligible for shutdown, unless their minimum down time does not exceed 10 minutes.

2.5.22.6.1 Resource Constraints.

The RTD Software shall enforce the following resource physical constraints:

Issued by: Charles F. Robinson, Vice President and General Counsel

Superseding Second Revised Sheet No. 104

- a) Minimum and maximum operating resource limits. Outages and limitations due to transmission clearances shall be reflected in these limits. The more restrictive operating or regulating limit shall be used for resources providing Regulation so that the RTD Software shall not Dispatch them outside their regulating range.
- b) Forbidden Operating Regions. Resources can only be ramped through these regions. The RTD Software shall not Dispatch resources within their Forbidden Operating Regions unless at the maximum applicable ramp rate to clear the Forbidden Operating Region in consecutive Dispatch Intervals.
- c) Operational ramp rates and start-up times. The submitted operational ramp rate as provided for in SBP Section 6.5 shall be used for all Dispatch Instructions. Each Energy Bid shall be Dispatched only up to the amount of Imbalance Energy that can be provided within the Dispatch Interval based on the applicable operational ramp rate. The Dispatch Instruction shall consider the relevant start-up time as provided for in SBP Section 6.6, if the resource is off-line, the relevant ramp rate function, and any prior commitments such as schedule changes across hours and previous Dispatch Instructions. The start-up time shall be determined from the start-up time function and when the resource was last shut down. The start-up time shall not apply if the corresponding resource is on-line or expected to start.
- d) Maximum number of daily start-ups. The RTD Software shall not cause a resource to exceed its daily maximum number of start-ups.
- e) Minimum up and down time. The RTD Software shall not start up off-line resources before their minimum down time expires and shall not shut down on-line resources before their minimum up time expires.
- f) Operating (Spinning and Non-Spinning) Reserve. The RTD Software shall Dispatch Spinning and Non-Spinning Reserve subject to the limitations set forth in Section 2.5.22.3.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 104A

(g) Hourly Pre-Dispatch. If Dispatched, each System Resource flagged for Hourly Pre-Dispatch in the next hour shall be Dispatched to operate at a constant level over the entire hour. The RTD Software shall perform the Hourly Pre-Dispatch for each hour once prior to the operating hour. Hourly Pre-Dispatched System Resources shall be Pre-Dispatched in merit order and shall not set the price. The Hourly Pre-Dispatch shall not subsequently be revised by the RTD Software.

2.5.22.6.2 Transmission System Constraints.

RTD shall use a Zonal DC network model where all nodes within a Zone would be collapsed into a single equivalent "Zonal bus." The constraints using the Zonal network model shall be the following:

- a) Power balance constraint in each Zone. The system Imbalance Energy requirement shall be calculated on a Zonal basis. The power balance constraints shall dictate an optimal Dispatch that would eliminate the Imbalance Energy requirement in all Zones, subject to (b) below.
- b) Inter-Zonal Interface constraints. These constraints shall limit the net active power flow on Inter-Zonal Interfaces at or below their transfer limits. For Inter-Zonal Interfaces between the ISO Control Area and another Control Area, inter-Zonal transfer capacity shall be reserved for awarded Ancillary Services from System Resources not already Dispatched.

2.5.22.6.3 Inter-hour Dispatch of Resources Without Real-Time Energy Bids.

Real-time Dispatch Instructions shall be issued for each Dispatch Interval as needed to prescribe the ramp between a resource's Final Hour-Ahead Schedule in one hour to its Final Hour-Ahead Schedule in the immediately succeeding operating hour. Such Dispatch Instructions shall be based on the lesser of: 1) the applicable operational ramp rate as provided for in SBP Section 6.5 and 2) the ramp rate associated with the Standard Ramp. The Dispatch

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 23, 2005 Effective: March 24, 2005

First Revised Sheet No. 104B

Instructions for ramping of Generating Units without real-time Energy Bids in both operating hours shall begin 10 minutes prior to the start of each operating hour and shall end no sooner than 10 minutes after and no later than 50 minutes after the start of each operating hour. Energy resulting from the Standard Ramp shall be deemed Standard Ramping Energy and will be settled in accordance with SABP Appendix D-1 Section 2.1.2. Energy resulting from any ramp extending beyond the Standard Ramp will be deemed Ramping Energy Deviation and will be settled in accordance with SABP Appendix D-1 Section 2.1.2.

2.5.22.6.4 Inter-hour Dispatch of Resources With Real-Time Energy Bids.

Real-time Dispatch Instructions associated with the ramp between a resource's Final Hour-Ahead Schedule in one hour to its Final Hour-Ahead Schedule in the immediately succeeding operating hour shall be determined optimally by the RTD Software if the ISO has bids for either or both relevant operating hours. For any operating hour(s) for which bids have been submitted Dispatch Instructions will be optimized such that the Dispatch Operating Point is within the bid range(s). For any operating hour without submitted bids Dispatch Instructions will be optimized such that the Dispatch Operating Point conforms to the schedule within the operating hour. Energy resulting from the Standard Ramp shall be deemed Standard Ramping Energy and will be settled in accordance with SABP Appendix D Section 2.1.2. Energy resulting from any ramp extending beyond the Standard Ramp will be deemed Ramping Energy Deviation and will be settled in accordance with SABP Appendix D Section 2.1.2. Energy delivered or consumed as a result of ISO Dispatch of a resource's Energy Bid in one operating hour to a Dispatch Operating Point such that the resource cannot return to its successive operating hour Final Hour-Ahead Schedule by the beginning of the next operating hour is Residual Energy and shall be settled as Instructed Imbalance Energy as provided for in SABP Appendix D Section 2.1.2 and also may be eligible for recovery of its applicable Energy Bid costs in accordance with Section 11.2.4.1.1.1. Similarly, Energy delivered or consumed as a result of ISO Dispatch of a

Issued by: Charles F. Robinson, Vice President and General Counsel

resource's Energy Bid in a future operating hour to a Dispatch Operating Point different from its current operating hour Final Hour-Ahead Schedule prior to the end of the current operating hour is also considered Residual Energy and shall be settled as Instructed Imbalance Energy as provided for in SABP Appendix D Section 2.1.2 and also may be eligible for recovery of its applicable Energy Bid costs in accordance with Section 11.2.4.1.1.1. When Ramping Energy Deviation and Residual Energy coexist within a given Dispatch Interval, the Ramping Energy Deviation shall be the portion of Instructed Imbalance Energy that is produced or consumed within the schedule-change band defined by the Final Hour-Ahead Schedules of the two consecutive Settlement Periods; the Residual Energy shall be the portion of Instructed Imbalance Energy that is produced or consumed outside the schedule-change band.

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

Second Revised Sheet No. 105

FIRST REPLACEMENT VOLUME NO. I

Superseding First Revised Sheet No. 105

2.5.22.7 Inter-Zonal Congestion. In the event of Inter-Zonal Congestion in real time, the ISO

shall procure Imbalance Energy as described in Section 2.5.22.6.

2.5.22.8 Intra-Zonal Congestion. Except as provided in Section 5.2, in the event of Intra-

Zonal Congestion in real time, the ISO shall adjust resources in accordance with Sections

7.2.6.1 and 7.2.6.2.

2.5.22.9 Recovery of Operating Reserve. If procured Operating Reserve is used to meet

Imbalance Energy requirements, such Operating Reserve may be recovered by the ISO's

replacing the associated Imbalance Energy through the Dispatch of other Energy Bids in merit

order to allow the resources that were providing Energy from the procured Operating Reserve

to return to their operating point before the provided the Energy from the Operating Reserves.

Any additional real-time Operating Reserve needs may be met through unloaded

capacity from RMR resources.

2.5.22.10 Dispatch Instructions.

All Dispatch Instructions except those for the Dispatch of Regulation (which will be

communicated by direct digital control signals to Generating Units and, for System Resources,

through dedicated communication links which satisfy the ISO's standards for external imports of

Regulation) will be communicated electronically, except that, at the ISO's discretion, Dispatch

Instructions may be communicated by telephone, or fax. Except in the case of deteriorating

system conditions or emergency, and except for instructions for the Dispatch of Regulation, the

ISO will send all Dispatch Instructions to the Scheduling Coordinator for the Generating Unit,

System Unit, Load or System Resource, which it

wishes to Dispatch. The recipient Scheduling Coordinator shall ensure that the Dispatch Instruction is communicated immediately to the operator of the Generating Unit, System Unit, external import of System Resources or Load concerned. The ISO may, with the prior permission of the Scheduling Coordinator concerned, communicate with and give Dispatch Instructions to the operators of Generating Units, System Units, external imports of System Resources and Loads directly without having to communicate through their appointed Scheduling Coordinator. The recipient of a Dispatch Instruction shall confirm the Dispatch in accordance with DP 4.4. The ISO shall record the communications between the ISO and Scheduling Coordinators relating to Dispatch Instructions in a manner that permits auditing of the Dispatch Instructions, and of the response of Generating Units, System Units, external imports of System Resources and Loads to Dispatch Instructions.

The ISO Protocols govern the content, issue, receipt, confirmation and recording of Dispatch Instructions.

2.5.22.11 Failure to Conform to Dispatch Instructions. All Scheduling Coordinators, Participating Generators, owners or operators of Curtailable Demands and operators of System Resources providing Ancillary Services (whether self-provided or procured by the ISO) or whose Supplemental Energy bids have been accepted by the ISO shall be obligated to respond or to secure response to the ISO's Dispatch Instructions in accordance with their terms, and to be available and capable of doing so, for the full duration of the Settlement Period. Dispatch Instructions will be deemed delive red and associated Energy will be settled as Instructed Imbalance Energy in accordance with Section 11.2.4.1.1. If a Generating Unit, Curtailable Demand or System Resource is unavailable or incapable of responding to a Dispatch Instruction, or fails to respond to a Dispatch Instruction in accordance with its terms, the Generating Unit, Curtailable Demand or System Resource:

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

(a)

Second Revised Sheet No. 106A Superseding First Revised Sheet No. 106A

notified the ISO of an event that prevents it from performing its obligations within 30

minutes of the onset of such event through a SLIC log entry. Notification of non-

compliance via the Automated Dispatch System (ADS) will not supplant nor serve as

shall be declared and labeled as non-conforming to the ISO's instructions unless it has

the offical notification mechanism to the ISO;

(b) cannot set the Dispatch Interval Ex Post Price pursuant to Section 2.5.23.2.1.2; and

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

Superseding Fifth Revised Sheet No. 107

(c) the Scheduling Coordinator for the Participating Generator, owner or operator of the

Curtailable Demand or System Resource concerned shall have Uninstructed Imbalance

Energy due to the difference between the Generating Unit's, Curtailable Demand's or

System Resource's instructed and actual output (or Demand). The Uninstructed

Imbalance Energy shall be subject to the settlement for Uninstructed Imbalance Energy

in accordance with Section 11.2.4.1 and the Uninstructed Deviation Penalty in

accordance with Section 11.2.4.1.2. This applies whether the Ancillary Services

concerned are contracted or self-provided.

The ISO will develop additional mechanisms to deter Generating Units, Curtailable

Demand and System Resources from failing to perform according to Dispatch instructions, for

example reduction in payments to Scheduling Coordinators, or suspension of the Scheduling

Coordinator's Ancillary Services certificate for the Generating Unit, Curtailable Demand or

System Resource concerned.

2.5.23 Pricing Imbalance Energy.

2.5.23.1 General Principles. Instructed and Uninstructed Imbalance Energy shall be paid or

charged the applicable Resource-Specific Settlement Interval Ex Post Price or the Zonal

Settlement Interval Ex Post Price except for hourly pre-dispatched Instructed Imbalance

Energy, which shall be settled as set forth in Section D 2.1.2 in Appendix D of the Settlement

and Billing Protocol. These prices are determined using the Dispatch Interval Ex Post Prices.

The Dispatch Interval Ex Post Prices shall be based on the bid of the marginal Generating

Units, System Units, and Curtailable Demand dispatched by the ISO to increase or reduce

Demand or Energy output in each Dispatch Interval as provided in Section 2.5.23.2.1.

The marginal bid is

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 23, 2005 Effective: March 24, 2005

the highest bid that is accepted by the ISO's RTD Software for increased energy Supply or the lowest bid that is accepted by the ISO's RTD Software for reduced energy Supply. In the event the lowest price decremental bid accepted by the ISO is greater and not equal to the highest priced incremental bid accepted, then the Dispatch Interval Ex-Post Price shall be equal to the highest incremental bid accepted when there is a non-negative Imbalance Energy system requirement and equal to the lowest accepted decremental bid when there is a negative Imbalance Energy requirement.

When an Inter-Zonal Interface is operated at the capacity of the interface (whether due to scheduled uses of the interface, or decreases in the capacity of the interface), the marginal incremental or decremental bid prices in some Zones may differ from one another. In such cases, the ISO will determine separate Ex Post Prices for the Zones.

The ISO will respond to the Dispatch instructions issued by the RTD Software to the extent practical in the time available and acting in accordance with Good Utility Practice. The ISO will record the reasons for any variation from the Dispatch instructions issued by the RTD Software.

- 2.5.23.2 Determining Ex Post Prices.
- 2.5.23.2.1 Dispatch Interval Ex Post Prices.
- 2.5.23.2.1.1 Computation. For each Dispatch Interval, the ISO will compute updated supply and demand curves, using the Generating Units, System Units, and Curtailable Demand Dispatched according to the ISO's RTD Software during that time period to meet Imbalance Energy requirements and to eliminate any Price Overlap. The Dispatch Interval Ex Post Price is equal to the bid price of the marginal resource accepted by the ISO for Dispatch, subject to any limitation applicable under Section 2.5.23.2.1. In the event of Inter-Zonal Congestion, the ISO

FERC ELECTRIC TARIFF

Substitute Fourth Revised Sheet No. 109

FIRST REPLACEMENT VOLUME NO. I

Superseding Sub. Third Revised Sheet No. 109

will determine separate Dispatch Interval Ex Post Prices for each Zone or groups of Zones on either side of the Congested interface.

2.5.23.2.1.2 Eligibility. A resource constrained at an upper or lower operating limit, a boundary of a Forbidden Operating Region or dispatched for the maximum Energy deliverable based on its maximum applicable ramp rate cannot be marginal (*i.e.*, it cannot move in a particular direction) and thus is not eligible to set the Dispatch Interval Ex Post Price. System Resources are not eligible to set the Dispatch Interval Ex Post Price. Constrained Output Generation that has the ability to be committed or shut off within the two-hour time horizon of the Real Time Market will be eligible to set the Dispatch Interval Ex Post Price if any portion of its Energy is necessary to serve Demand.

2.5.23.2.2 Hourly Ex Post Price. The Hourly Ex Post Price in a Settlement Period in each Zone will equal the absolute-value Energy-weighted average of the Dispatch Interval Ex Post Prices in each Zone, where the weights are the system total Instructed Imbalance Energy, except Regulation Energy, for the Dispatch Interval.

Issued by: Charles F. Robinson, Vice President and General Counsel

If the ISO declares a System Emergency, e.g. during times of supply scarcity, and involuntary Load Shedding occurs during the real-time Dispatch, the ISO shall set the Hourly Ex Post Price at the Administrative Price.

2.5.23.2.3 Price for Uninstructed Deviations for Participating Intermittent Resources.

Deviations associated with each Participating Intermittent Resource in a Scheduling Coordinator's Zonal portfolio shall be settled as provided in Section 11.2.4.5.1 at the monthly weighted average Dispatch Interval Ex Post Price, where the weights are the quantities of Instructed Imbalance Energy associated with each Dispatch Interval Ex Post Price.

2.5.23.3 [Not Used]

2.5.23.3.1 [Not Used]

2.5.23.3.1.1 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Fifth Revised Sheet No. 110A

Superseding Fourth Revised Sheet No. 110A

2.5.23.3.1.2 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 29, 2002 Effective: October 30, 2002

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Fourth Revised Sheet No. 110B Superseding Third Revised Sheet No. 110B

2.5.23.3.1.3 [Not Used]

2.5.23.3.2 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 29, 2002 Effective: October 30, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I Superseding Fourth Revised Sheet No. 110C

Fifth Revised Sheet No. 110C

2.5.23.3.3 Requirement of Must-Offer Generators to File Heat Rate and Emissions Rate Data

Must-Offer Generators, as defined in Section 5.11 of this ISO Tariff, that own or control gasfired Generating Units must file with the ISO and the FERC, on a confidential basis, the heat
rates and emissions rates for each gas-fired Generating Unit that they own or control. Heat rate
and emissions rate data shall be provided in the format specified by the ISO as posted on the
ISO Home Page. Heat rate data provided to comply with this requirement shall not include
start-up or minimum load fuel costs. Must-Offer Generators must also file periodic updates of
this data upon the direction of either FERC or the ISO. The ISO will treat the information
provided to the ISO in accordance with this Section 2.5.23.3.3 as confidential and will apply the

procedures in Section 20.3.4 of this ISO Tariff with regard to requests for disclosure of such

information. 2.5.23.3.4 Calculation of the Proxy Price

The ISO shall calculate each day separate Proxy Prices for each gas-fired Generating Unit owned or controlled by a Must-Offer Generator by applying the filed heat rates for those Generating Units to a daily proxy figure for natural gas costs with an additional \$6/MWh allowed for operations and maintenance expenses. The proxy figures for natural gas costs shall be based on the most recent data available and shall be posted on the ISO Home Page by 8:00 AM on the day prior to which the figures will be used for calculation of the Proxy Price.

2.5.23.3.5 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 30, 2002

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Third Revised Sheet No. 110D

Superseding Second Revised Sheet No. 110D

[Page Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 29, 2002 Effective: October 30, 2002

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Third Revised Sheet No. 110E

Effective: October 30, 2002

Superseding Second Revised Sheet No. 110E

2.5.23.3.6 Emissions Costs

2.5.23.3.6.1 Obligation to Pay Emissions Cost Charges

Each Scheduling Coordinator shall be obligated to pay a charge which will be used to pay the

verified Emissions Costs incurred by a Must-Offer Generator as a direct result of an ISO

Dispatch instruction, in accordance with this Section 2.5.23.3.6. The ISO shall levy this

administrative charge (the "Emissions Cost Charge") each month, against all Scheduling

Coordinators based upon each Scheduling Coordinator's Control Area Gross Load and

Demand within California outside of the ISO Control Area that is served by exports from the ISO

Control Area. Scheduling Coordinators shall make payment for all Emissions Cost Charges in

accordance with the ISO Payments Calendar.

2.5.23.3.6.2 Emissions Cost Trust Account

All Emissions Cost Charges received by the ISO shall be deposited in the Emissions Cost Trust

Account. The Emissions Cost Trust Account shall be an interest-bearing account separate from

all other accounts maintained by the ISO, and no other funds shall be commingled in it at any

time.

2.5.23.3.6.3 Rate For the Emissions Cost Charge

The rate at which the ISO will assess the Emissions Cost Charge shall be at the projected

annual total of all Emissions Costs incurred by Must-Offer Generators as a direct result of ISO

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 29, 2002

Substitute Original Sheet No. 110F

Dispatch instruction, adjusted for interest projected to be earned on the monies in the

Emissions Cost Trust Account, divided by the sum of the Control Area Gross Load and the

projected Demand within California outside of the ISO Control Area that is served by exports

from the ISO Control Area of all Scheduling Coordinators for the applicable year ("Emissions

Cost Demand"). The initial rate for the Emissions Cost Charge, and all subsequent rates for the

Emissions Cost Charge, shall be posted on the ISO Home Page.

2.5.23.3.6.4 Adjustment of the Rate For the Emissions Cost Charge

The ISO may adjust the rate at which the ISO will assess the Emissions Cost Charge on a

monthly basis, as necessary, to reflect the net effect of the following:

(a) the difference, if any, between actual Emissions Cost Demand and projected Emissions

Cost Demand;

(b) the difference, if any, between the projections of the Emissions Costs incurred by Must-

Offer Generators as a direct result of ISO Dispatch instructions and the actual

Emissions Costs incurred by Must-Offer Generators as a direct result of ISO Dispatch

instructions as invoiced to the ISO and verified in accordance with this Section

2.5.23.3.6; and

(c) the difference, if any, between actual and projected interest earned on funds in the

Emissions Cost Trust Account.

The adjusted rate at which the ISO will assess the Emissions Cost Charge shall take effect on a

prospective basis on the first day of the next calendar month. The ISO shall publish all data

and calculations used by the ISO as a basis for such an adjustment on the ISO Home Page at

least five (5) days in advance of the date on which the new rate shall go into effect.

2.5.23.3.6.5 Credits and Debits of Emissions Cost Charges Collected from Scheduling

Coordinators

In addition to the surcharges or credits permitted under Section 11.6.3.3 of this ISO Tariff, the

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: January 25, 2002 Effective: December 20, 2001

Superseding Substitute Original Sheet No. 110G

ISO may credit or debit, as appropriate, the account of a Scheduling Coordinator for any overor under-assessment of Emissions Cost Charges that the ISO determines occurred due to the error, omission, or miscalculation by the ISO or the Scheduling Coordinator.

2.5.23.3.6.6 **Submission of Emissions Cost Invoices**

Scheduling Coordinators for Must-Offer Generators that incur Emissions Costs as a direct result of an ISO Dispatch instruction may submit to the ISO an invoice in the form specified on the ISO Home Page (the "Emissions Cost Invoice") for the recovery of such Emissions Costs. Emissions Cost Invoices shall not include any Emissions Costs specified in an RMR Contract for a unit owned or controlled by a Must-Offer Generator. All Emissions Cost Invoices must include a copy of all final invoice statements from air quality districts demonstrating the Emissions Costs incurred by the applicable Generating Unit, and such other information as the ISO may reasonably require to verify the Emissions Costs incurred as a direct result of an ISO Dispatch instruction.

2.5.23.3.6.7 **Payment of Emissions Cost Invoices**

The ISO shall pay Scheduling Coordinators for all Emissions Costs submitted in an Emissions Cost Invoice and demonstrated to be a direct result of an ISO Dispatch instruction. If the Emissions Costs indicated in the applicable air quality districts' final invoice statements include emissions produced by operation not resulting from ISO Dispatch instructions, the ISO shall pay an amount equal to Emissions Costs multiplied by the ratio of the MWh associated with ISO Dispatch instruction to the total MWh associated with such Emissions Costs. The ISO shall pay Emissions Cost Invoices each month in accordance with the ISO Payments Calendar from the funds available in the Emissions Cost Trust Account. To the extent there are insufficient funds available in Emissions Cost Trust Account in any month to pay all Emissions Costs submitted in an Emissions Cost Invoice and demonstrated to be a direct result of an ISO Dispatch instruction, the ISO shall make pro rata payment of such Emissions Costs and shall adjust the rate at which

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: December 20, 2001

FERC ELECTRIC TARIFF

Substitute Second Revised Sheet No. 110H

FIRST REPLACEMENT VOLUME NO. I

Superseding First Revised Sheet No. 110H

the ISO will assess the Emissions Cost Charge in accordance with Section 2.5.23.3.6.4. Any

outstanding Emissions Costs owed from previous months will be paid in the order of the month

in which such costs were invoiced to the ISO. The ISO's obligation to pay Emissions Costs is

limited to the obligation to pay Emissions Cost Charges received. All disputes concerning

payment of Emissions Cost Invoices shall be subject to ISO ADR Procedures, in accordance

with Section 13 of this ISO Tariff.

2.5.23.3.7 Start-Up Costs

2.5.23.3.7.1 Obligation to Pay Start-Up Cost Charges

Each Scheduling Coordinator shall be obligated to pay a charge which will be used to pay the

verified Start-Up Costs incurred by a Must-Offer Generator as a direct result of an ISO Dispatch

instruction, in accordance with this Section 2.5.23.3.7. Such Start-Up Costs shall include (1)

fuel and (2) auxiliary power. The ISO shall levy this charge (the "Start-Up Cost Charge"), each

month, against all Scheduling Coordinators based upon each Scheduling Coordinator's Control

Area Gross Load and Demand within California outside of the ISO Control Area that is served

by exports from the ISO Control Area. Scheduling Coordinators shall make payment for all

Start-Up Cost Charges in accordance with the ISO Payments Calendar.

2.5.23.3.7.2 Start-Up Cost Trust Account

All Start-Up Cost Charges received by the ISO shall be deposited in the Start-Up Cost Trust

Account. The Start-Up Cost Trust Account shall be an interest-bearing account separate from

all other accounts maintained by the ISO, and no other funds shall be commingled in it at any

time.

2.5.23.3.7.3 Rate For the Start-Up Cost Charge

The rate at which the ISO will assess the Start-Up Cost Charge shall be at the projected annual

total of all Start-Up Costs incurred by Must-Offer Generators as a direct result of

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004 Effective: July 11, 2004

ISO Dispatch instruction, adjusted for interest projected to be earned on the monies in the Start-Up Cost Trust Account, divided by the sum of the Control Area Gross Load and the projected Demand within California outside of the ISO Control Area that is served by exports from the ISO Control Area ("Start-Up Cost Demand"). The initial rate for the Start-Up Cost Charge, and all subsequent rates for the Start-Up Cost Charge, shall be posted on the ISO Home Page.

2.5.23.3.7.4 Adjustment of the Rate For the Start-Up Cost Charge

The ISO may adjust the rate at which the ISO will assess the Start-Up Cost Charge on a monthly basis, as necessary, to reflect the net effect of the following:

- (a) the difference, if any, between actual Start-Up Cost Demand and projected Start-UpCost Demand:
- (b) the difference, if any, between the projections of the Start-Up Costs incurred by Must-Offer Generators as a direct result of ISO Dispatch instructions and the actual Start-Up Costs incurred by Must-Offer Generators as a direct result of ISO Dispatch instructions as invoiced to the ISO and verified in accordance with this Section 2.5.23.3.7; and
- (c) the difference, if any, between actual and projected interest earned on funds in the Start-Up Cost Trust Account.

The adjusted rate at which the ISO will assess the Start-Up Cost Charge shall take effect on a prospective basis on the first day of the next calendar month. The ISO shall publish all data and calculations used by the ISO as a basis for such an adjustment on the ISO Home Page at least five (5) days in advance of the date on which the new rate shall go into effect.

2.5.23.3.7.5 Credits and Debits of Start-Up Cost Charges Collected from Scheduling Coordinators

In addition to the surcharges or credits permitted under Section 11.6.3.3 of this ISO Tariff, the

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 11, 2004 Effective: July 11, 2004

FERC ELECTRIC TARIFF

Substitute First Revised Sheet No. 110J

Effective: July 11, 2004

FIRST REPLACEMENT VOLUME NO. I

Superseding Sub. Original Sheet No. 110J

ISO may credit or debit, as appropriate, the account of a Scheduling Coordinator for any over- or

under-assessment of Start-Up Cost Charges that the ISO determines occurred due to the error,

omission, or miscalculation by the ISO or the Scheduling Coordinator.

2.5.23.3.7.6 Submission of Start-Up Cost Invoices

Scheduling Coordinators for Must-Offer Generators that incur Start-Up Costs as a direct result

of an ISO Dispatch instruction or if the ISO revokes a waiver from compliance with the must-

offer obligation while the unit is off-line in accordance with Section 5.11.6 of this ISO Tariff, and

Scheduling Coordinators for Generating Units operating under Condition 2 of the relevant RMR

Contract which are called out-of-market in accordance with Section 11.2.4.2 of this ISO Tariff

may submit to the ISO an invoice in the form specified on the ISO Home Page (the "Start-Up Cost

Invoice") for the recovery of such Start-Up Costs. Such Start-Up Costs shall not exceed the costs

which would be incurred within the start-up time for a unit specified in Schedule 1 of the

Participating Generator Agreement. Start-Up Cost Invoices shall use the applicable proxy figure for

natural gas costs as determined by Equation C1-8 (Gas) of the Schedules to the Reliability

Must-Run Contract for the relevant Service Area (San Diego Gas & Electric Company,

Southern California Gas Company, or Pacific Gas and Electric Company), or, if the Must-Offer

Generator is not served from one of those three Service Areas, from the nearest of those three

Service Areas. Start-Up Cost Invoices shall specify the amount of auxiliary power used during

the start-up and the actual price paid for that power. Start-Up Cost Invoices shall not include any

Start-Up Costs specified in an RMR Contract for a unit owned or controlled by a Must-Offer

Generator.

2.5.23.3.7.7 Payment of Start-Up Cost Invoices

The ISO shall pay Scheduling Coordinators for all Start-Up Costs submitted in a Start-Up Cost

Invoice and demonstrated to be a direct result of an ISO Dispatch instruction. The ISO shall pay

such Start-Up Cost Invoices each month in accordance with the ISO Payments Calendar from

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004

the funds available in the Start-Up Cost Trust Account. To the extent there are insufficient funds available in the Start-Up Cost Trust Account in any month to pay all Start-Up Costs submitted in a Start-Up Cost Invoice and demonstrated to be a direct result of an ISO Dispatch instruction, the ISO shall make pro rata payment of such Start-Up Costs and shall adjust the rate at which the ISO will assess the Start-Up Cost Charge in accordance with Section 2.5.23.3.7.4. Any outstanding Start-Up Costs owed from previous months will be paid in the order of the month in which such costs were invoiced to

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 11, 2004 Effective: July 11, 2004

FERC ELECTRIC TARIFF

2646

Seventh Revised Sheet No. 110K

FIRST REPLACEMENT VOLUME NO. I

Superseding Sixth Revised Sheet No. 110K

the ISO. The ISO's obligation to pay Start-Up Costs is limited to the obligation to pay Start-Up Cost Charges received. All disputes concerning payment of Start-Up Cost Invoices shall be subject to ISO ADR Procedures, in accordance with Section 13 of this ISO Tariff.

2.5.23.3.8 [Not Used]

2.5.23.3.8.1 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Fourth Revised Sheet No. 110L

FIRST REPLACEMENT VOLUME NO. I

Superseding Third Revised Sheet No. 110L

2.5.23.3.8.2 [Not Used]

2.5.24 Verification of Performance of Ancillary Services.

Availability of both contracted and self-provided Ancillary Services shall be verified by the ISO by unannounced testing of Generating Units, Loads and System Resources, by auditing of response to ISO Dispatch instructions, and by analysis of the appropriate Meter Data, or interchange schedules. Participating Generators, owners or operators of Loads, operators of System Units or System Resources and Scheduling Coordinators shall notify the ISO immediately whenever they become aware that an Ancillary Service is not available in any way.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 30, 2002

FERC ELECTRIC TARIFF

First Revised Sheet No. 110M Superseding Substitute Original Sheet No. 110M

FIRST REPLACEMENT VOLUME NO. I

All Participating Generators, owners or operators of Loads and operators of System Units or

System Resources shall check, monitor and/or test their system and related equipment

routinely to assure availability of the committed Ancillary Services. These requirements apply whether the Ancillary Services are contracted or self-provided. For a duration specified by the

ISO, the ISO may suspend the technical eligibility certificate of a Scheduling Coordinator for a

Generating Unit, System Unit, Load or System Resource, which repeatedly fails to perform.

The ISO shall develop measures to discourage repeated non-performance on the part of both

bidders and self-providers.

2.5.25 **Periodic Testing of Units.**

The ISO may test Generating Units, System Units, Loads and System Resources in the manner

described herein. The frequency of testing shall be within such timeframes as are reasonable

under all the circumstances. Scheduling Coordinators shall manage the resulting Energy

output if notification of testing permits the Energy to be scheduled. If a Generating Unit, System

Unit, Load, or System Resource fails to meet requirements in a

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: December 20, 2001 test under this section, the ISO shall notify the relevant Participating Generator, owner or operator of Loads, System Units or System Resources, or Scheduling Coordinator of such failure as soon as reasonably practicable after the completion of the test. Failure to meet requirements shall lead to the penalties described in Section 2.5.26.

2.5.25.1 Regulation. The ISO shall continuously monitor the response of a Generating Unit, System Unit, or System Resource to the ISO's Regulation instructions in order to determine compliance with Dispatch instructions.

2.5.25.2 Spinning Reserve. The ISO shall test the Spinning Reserve capability of a Generating Unit, System Unit or System Resource by issuing unannounced Dispatch instructions requiring the Generating Unit, System Unit or System Resource to ramp up to its ten minute capability. The ISO shall measure the response of the Generating Unit, System Unit or System Resource to determine compliance with requirements. The Scheduling Coordinator for the Generating Unit, System Unit or System Resource shall be paid the Energy Bid price of the Generating Unit or System Unit for the output under the Spinning Reserve test.

2.5.25.3 Non-Spinning Reserve. The ISO may test the Non-Spinning Reserve capability of a Generating Unit, Load, System Unit or System Resource by issuing unannounced Dispatch instructions requiring the Generating Unit, Load, System Unit or System Resource to come on line and ramp up or to reduce Demand to its ten minute capability. The ISO shall measure the response of the Generating Unit, System Unit, System Resource or Load to determine compliance with requirements. The Scheduling Coordinator for the Generating Unit, System Unit, Load or System Resource shall be paid the Energy (or Demand reduction) Bid price of the Generating Unit, System Unit, Load or System Resource for its output or reduction, under the Non-Spinning Reserve test.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

2.5.25.4 Replacement Reserve. The ISO may test the Replacement Reserve capability of a Generating Unit, Load, System Unit or System Resource by issuing unannounced Dispatch instructions requiring the Generating Unit, Load, System Unit or System Resource to come on line and ramp up or reduce Demand to its sixty minute capability. The ISO shall measure the response of the Generating Unit, Load, System Unit or System Resource to determine compliance with requirements. The Scheduling Coordinator for the Generating Unit, Load, System Unit or System Resource of the Generating Unit, Load, System Unit or System Resource for the output, or reduction, of the Generating Unit, Load, System Unit or System Resource under the Replacement Reserve test.

2.5.25.5 Voltage Support. The ISO shall monitor a Generating Unit's response to Voltage Support instructions in order to determine compliance with Dispatch instructions.

2.5.25.6 Black Start. The ISO may test the Black Start capability of a Generating Unit by issuing unannounced dispatch instructions requiring the Generating Unit to start on a Black Start basis. The ISO shall measure the response of the Generating Unit to determine compliance with the terms of the Black Start contract. The Scheduling Coordinator or Black Start Generator as stated in Section 2.5.27.6 for the Generating Unit shall be paid the Generating Unit's contract price for the output under the Black Start test.

2.5.26 Penalties for Failure to Pass Tests and Rescission of Payment for Non-Delivery.

2.5.26.1 Penalties for Failure to Pass Tests. A Generating Unit, Curtailable Demand,
System Unit or System Resource that fails an availability test, as determined under criteria to be
established by the ISO, shall be deemed not to have been available to provide the Ancillary
Service concerned or the relevant portion of that Service for the entire period the Generating
Unit, Curtailable Demand, System Unit or System Resource was committed to

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

Effective: October 13, 2000

Superseding Original Sheet No. 113

availability of that service during the committed period(s) is presented to the ISO. The "committed period" is defined as the total of all the hours/days the Generating Unit, Curtailable Demand, System Unit or System Resource was scheduled by the ISO to provide the Ancillary Service beginning from: (i) the last successful availability test; or (ii) the last time the Generating Unit, Curtailable Demand, System Unit or System Resource actually provided

provide the Service, unless appropriate documentation (i.e., daily test records) confirming the

Energy or reduced Demand as part of the Ancillary Service; whichever results in a shorter

committed period. The Scheduling Coordinator for a Generating Unit, Curtailable Demand,

System Unit or System Resource that fails an availability test shall not be entitled to payment

for the Ancillary Service concerned for the committed period and adjustments to reflect this

shall be made in the calculation of payments to the Scheduling Coordinator, provided that any

such penalty shall be reduced to reflect any adjustment made over the duration of the

committed period under Section 2.5.26.2 or 2.5.26.3.

System Units engaged in self-provision of Ancillary Services, or providing Ancillary Services to the ISO are subject to the same testing, compensation, and penalties as are applied to individual Generating Units engaged in self-provision or provision of Ancillary Services. To perform testing, the ISO will bias the MSS's MSRE to test the responsiveness of the System Unit.

If payments for capacity for a particular Ancillary Service in a particular Settlement Period would be rescinded under more than one provision of this Section 2.5.26, the total amount to be rescinded for a particular Ancillary Service in a particular Settlement Period shall not exceed the total payment due in that Settlement Period.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

FIRST REPLACEMENT VOLUME NO. I

Superseding Second Revised Sheet No. 114

2.5.26.2 Rescission of Payments for Unavailability. If capacity scheduled into the

ISO's Ancillary Services markets from a Generating Unit, Curtailable Demand, System Unit or

System Resource is unavailable during the relevant Settlement Interval, then payments will be

rescinded as described herein. For self-provided Ancillary Services, the payment obligation

shall be equivalent to that which would arise if the Ancillary Services had been bid into each

market in which they were scheduled.

2.5.26.2.1 If the ISO determines that a Scheduling Coordinator has supplied Uninstructed

Imbalance Energy to the ISO during a Settlement Interval from the capacity of a Generating

Unit, System Unit or System Resource that is obligated to supply Spinning Reserve, Non-

Spinning Reserve, or Replacement Reserve to the ISO during such Settlement Interval,

payments to the Scheduling Coordinator representing the Generating Unit, System Unit or

System Resource for the Ancillary Service capacity used to supply Uninstructed Imbalance

Energy shall be eliminated to the extent of the deficiency, except to the extent (i) the deficiency

in the availability of Ancillary Service capacity from the Generating Unit, System Unit or System

Resource is attributable to control exercised by the ISO in that Settlement Interval through AGC

operation, an RMR Dispatch Notice, or dispatch to avoid an intervention in Market operations or

to prevent a System Emergency; or (ii) a penalty is imposed under Section 2.5.26.1 with respect

to the deficiency.

2.5.26.2.2 If a Curtailable Demand is insufficient to deliver the full amount of the Non-

Spinning and Replacement Reserve to which that Curtailable Demand is obligated in that

Settlement Interval, then the related capacity payments will be rescinded to the extent of that

deficiency as explained in Section 2.5.26.2.4 and 2.5.26.2.5, unless a penalty is imposed on

that Curtailable Demand for that Settlement Interval under Section 2.5.26.1.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

Superseding Third Revised Sheet No. 115

Fourth Revised Sheet No. 115

FIRST REPLACEMENT VOLUME NO. I

2.5.26.2.3 The ISO shall calculate the real-time ability of each Generating Unit and System Unit to deliver Energy from Ancillary Services capacity awarded or self-provided for each Settlement Interval based on its operational ramp rate as described in SBP Section 6.5, maximum operating capability, and actual telemetered output. If the Generating Unit or System Unit cannot deliver the full amount of Energy from the awarded or self-provided Spinning, Non-Spinning or Replacement Reserve for a Settlement Interval then Ancillary Services capacity payments for the amount of Energy that cannot be delivered for the particular Settlement Interval shall be rescinded.

- 2.5.26.2.4 This Section 2.5.26.2.4 shall not apply to the capacity payment for any particular Ancillary Service if the Zonal Market Clearing Price determined in accordance with Sections 2.5.15, 2.5.16 or 2.5.17 is less than or equal to zero. For those Ancillary Services for which such Zonal Market Clearing Prices are greater than zero, the payment for Ancillary Service capacity otherwise payable under Section 2.5.27.2, 2.5.27.3, and/or 2.5.27.4 shall be reduced by one sixth of the product of the applicable prices and the amount of Ancillary Service capacity from which the Generating Unit, Curtailable Demand, System Unit or System Resource has supplied Uninstructed Imbalance Energy in a Settlement Interval. If a Scheduling Coordinator schedules Ancillary Services through both the Day-Ahead and Hour-Ahead Markets, capacity payments due the Scheduling Coordinator from each market will be rescinded in proportion to the amount of capacity sold to the ISO in each market.
- 2.5.26.2.5 Payment shall be eliminated first for any Replacement Reserve capacity for which the Generating Unit, Curtailable Demand, System Unit or System Resource would otherwise be entitled to payment. If the amount of Ancillary Service capacity from which the Generating Unit, System Unit or System Resource has supplied Uninstructed Imbalance Energy exceeds the amount of Replacement Reserve capacity for which it would otherwise be entitled to receive payment, payment shall be eliminated for Non-Spinning

Issued by: Charles F. Robinson, Vice President and General Counsel

Superseding Third Revised Sheet No. 116

Reserve capacity, and then for Spinning Reserve capacity, until payment has been withheld for the full amount of Ancillary Service capacity from which the Generating Unit, Curtailable Demand, System Unit or System Resource supplied Uninstructed Imbalance Energy.

2.5.26.2.6 For each Settlement Interval in which a Generating Unit, Curtailable Demand, System Unit or System Resource fails to actually supply Energy from Spinning Reserve, Non-Spinning Reserve or Replacement Reserve capacity in accordance with a Dispatch Instruction, or supplies only a portion of the Energy specified in the Dispatch Instruction, the capacity payment will be pro-rated to reflect the unavailability in that Settlement Interval of the difference between (1) the total MW of the particular Ancillary Service scheduled in that Settlement Period and (2) the amount of Energy, if any, supplied in response to the Dispatch Instruction in that Settlement Interval.

2.5.26.3 Rescission of Payments When Dispatch Instruction is Not Followed

If the total metered output of a Generating Unit, Curtailable Demand, System Unit or System Resource is insufficient to supply the amount of Instructed Imbalance Energy associated with a Dispatch Instruction issued in accordance with a bid on Spinning Reserve, Non-Spinning Reserve, or Replacement Reserve in any Settlement Interval, then the capacity payment associated with the difference between the total scheduled amount of each Ancillary Service for which Insufficient Energy was delivered, and the actual output attributed to the response to the Dispatch Instruction on each Ancillary Service, shall be rescinded. However, no capacity payment shall be rescinded if the shortfall in the metered output of the Generating Unit, Curtailable Demand, System Unit, or System Resource is less than a deadband amount published by ISO on the ISO Home Page at least twenty-four hours prior to the Settlement Interval. For any Settlement Interval with respect to which no

Issued by: Charles F. Robinson, Vice President and General Counsel

deadband amount has been published by the ISO, the deadband amount shall be zero MWH. If the Generating Unit, Curtailable Demand, System Unit or System Resource is scheduled to provide more than one Ancillary Service in the Settlement Period, then the actual output will be attributed first to Replacement Reserve, then to Non-Spinning Reserve, and finally to Spinning Reserve, and the capacity payments associated with the balance of each Ancillary Service shall be rescinded. If the same Ancillary Service is scheduled in both the Day-Ahead and Hour-Ahead Markets, then payments shall be rescinded in proportion to the amount of each Ancillary Service scheduled in each market.

- **2.5.26.4** Penalties applied pursuant to Section 2.5.26.1, and payments rescinded pursuant to Section 2.5.26.2 and 2.5.26.3 shall be redistributed to Scheduling Coordinators in proportion to ISO Control Area metered Demand and scheduled exports for the same Trading Day.
- 2.5.26.5 If the ISO determines that non-compliance of a Load, Generating Unit, System Unit or System Resource, with an operating order or Dispatch Instruction from the ISO, or with any other applicable technical standard under the ISO Tariff, causes or exacerbates system conditions for which the WECC imposes a penalty on the ISO, then the Scheduling Coordinator of such Load, Generating Unit, System Unit or System Resource shall be assigned that portion of the WECC penalty which the ISO reasonably determines is attributable to such non-compliance, in addition to any other penalties or sanctions applicable under the ISO Tariff.
- 2.5.26.6 Temporary Exemption from Rescission of Energy Payments Any Participating Load that has entered into a Participating Load Agreement and has responded to a Dispatch Instruction will be exempt from the requirements of Section 2.5.26.2.3 in the hour of the Dispatch and for the following two (2) hours during the period beginning on June 15, 2000 and ending on the date specified in a notice ("Notice Terminating Temporary Exemption") to be issued by the ISO. Such notice shall be posted on the ISO Home Page and distributed to

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 117A

Market Participants via e-mail at least seven (7) calendar days in advance of the termination of this temporary exemption.

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: December 29, 2000 Effective: October 15, 2000 FIRST REPLACEMENT VOLUME NO. I

2.5.27 Settlements For Contracted Ancillary Services.

Based on the prices and quantities determined in accordance with this Section, the ISO shall operate a daily Settlement function for Ancillary Services it contracts for with Scheduling

Coordinators.

The ISO shall calculate imbalances between scheduled, instructed and actual

quantities of Energy provided based upon Meter Data obtained pursuant to Section 10.

Schedules between Control Areas shall be deemed as being delivered in accordance with Good

Utility Practice. Dynamic schedules shall be integrated over time through the operating hour

and the MWh quantity obtained by such integration shall be deemed to be the associated

scheduled interchange for that operating hour. The difference between actual and scheduled

interchange shall then be addressed in accordance with the WECC and NERC inadvertent

interchange practices and procedures. Following this practice, all dynamic schedules for

Ancillary Services provided to the ISO from System Resources in other Control Areas shall be

deemed delivered to the ISO. The difference between the Energy requested by the ISO and

that actually delivered by the other Control Area shall then be accounted for and addressed

through the WECC and NERC inadvertent interchange practices and procedures.

Separate payments shall be calculated for each Settlement Period t for each

Generating Unit, System Unit, System Resource and Curtailable Demand. The ISO shall then

calculate a total daily payment for each Scheduling Coordinator for all the Generating Units,

System Units, System Resources and Curtailable Demands that it represents for each

Settlement Period t.

The settlements for the Hour-Ahead Markets shall be calculated by substituting Hour-

Ahead prices in the relevant formulae and deducting any amounts due to the ISO from

Scheduling Coordinators who buy back in the Hour-Ahead Market Regulation, Spinning

Reserve, Non-Spinning Reserve or Replacement Reserve capacity they sold to the ISO in the

Day-Ahead Market.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 30, 2004 Effective: June 29, 2004

FERC ELECTRIC TARIFF

Fifth Revised Sheet No. 119 Superseding Fourth Revised Sheet No. 119

FIRST REPLACEMENT VOLUME NO. I

2.5.27.1 **Regulation.**

Regulation Up and Regulation Down payments shall be calculated separately.

Quantities. The following quantity definitions shall be used for each Scheduling Coordinator in

the settlement process:

 $AGCUpQDA_{xt}$ = the Scheduling Coordinator's total quantity of Regulation Up capacity in Zone X

sold through the ISO auction and scheduled Day-Ahead j for Settlement Period t.

 $AGCDownQDA_{xt}$ = the Scheduling Coordinator's total quantity of Regulation Down capacity in

Zone X sold through the ISO auction and scheduled Day-Ahead j for Settlement Period t.

 $EnQInst_{xt}$ = Instructed Imbalance Energy increase or decrease in Zone X in real-time Dispatch

for each Dispatch Interval b of Settlement Period t, determined in accordance with the ISO

Protocols.

Prices. The prices in the Settlement process for Regulation Up and Regulation Down shall be

those determined in Section 2.5.14.

Adjustment. penalty described in Section 2.5.26.1.

 $PAGCUpDA_{xy}$ = the Market Clearing Price, PAGC, in Zone X for Regulation Up capacity in the

Day-Ahead Market for Settlement Period t.

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Supe

First Revised Sheet No. 119A Superseding Original Sheet No. 119A

 $PAGCDownDA_{xt}$ = the Market Clearing Price, PAGC, in Zone X for Regulation Down capacity in the Day-Ahead Market for Settlement Period t.

Payments. Scheduling Coordinators for Generating Units providing Regulation Up capacity through the ISO auction shall receive the following payments for Regulation Up:

 $AGCUpPay_{xt} = AGCUpQDA_{xt} *PAGCUpDA_{xt} - Adjustment$

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: January 1, 2001

FIRST REPLACEMENT VOLUME NO. I

Superseding Second Revised Sheet No. 120

Scheduling Coordinators for Generating Units providing Regulation Down capacity through the ISO auction shall receive the following payments for Regulation Down:

 $AGCDownPay_{xt} = AGCDownQDA_{xt} *PAGCDownDA_{xt} - Adjustment$

Scheduling Coordinators for Generating Units shall receive the following payment for Energy output from Regulation in accordance with the settlement for Instructed Imbalance Energy under Section 11.2.4.1:

 $\sum [(EnQInst_{ixt}*Zonal\ Settlement\ IntervalExPostPriceinZoneX) + REPAi_{xt}]$

 $REPA_{ixt}$ = the Regulation Energy Payment Adjustment for Generating Unit i in Zone X for Settlement Period t calculated as follows:

$$[(R_{UPixt} * C_{UP}) + (R_{DNixt} * C_{DN})] * max ($20/MWh, P_{xt})$$

Where

 R_{UPixt} = the upward range of generating capacity for the provision of Regulation from Generating Unit i in Zone X included in the bid accepted by the ISO for Generating Unit i for Settlement Period t, weighted in proportion to the ISO's need for upward Regulation. The weighting factors will be specified within a range from 0-100 percent. The weighting factors will be set at the discretion of the ISO based on system conditions, and will be set

at a level that will provide sufficient incentive to the market to supply upward Regulation for the ISO's purposes of satisfying WECC criteria and NERC control performance standards. The ISO shall post the weighting factors consistent with the ISO Weighting Procedure, posted on the ISO website.

 R_{DNixt} = the downward range of generating capacity for the provision of Regulation for Generating Unit i in Zone X included in the bid accepted by the ISO for Generating Unit i for Settlement Period t, weighted in proportion to the ISO's need for downward Regulation. The weighting factors will be specified within a range from 0-100 percent. The weighting factors will be set at the discretion of the ISO based on system conditions, and will be set at a level that will provide sufficient incentive to the market to supply downward Regulation for the ISO's purposes of satisfying WECC criteria and NERC control performance standards. The ISO shall post the weighting factors consistent with the ISO Weighting Procedure, posted on the ISO website.

 $C_{UP} = 0 \text{ to } 1$

 $C_{DN} = 0 \text{ to } 1$

 P_{xt} = the Hourly Ex Post Price for Zone X in Settlement Period t.

The ISO may modify the value of the constants C_{UP} or C_{DN} within a range of 0-1 either generally in regard to all hours or specifically in regard to particular times of the day, after the ISO Governing Board approves such modification, by a notice issued by the Chief

FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 122

Superseding First Revised Sheet No. 122

Executive Officer of the ISO and posted on the ISO Internet "Home Page," at

http://www.caiso.com, or such other Internet address as the ISO may publish from time to time,

specifying the date and time from which the modification shall take effect, which shall be not

less than seven (7) days after the Notice is issued.

REPA shall not be payable unless the Generating Unit is available and capable of being

controlled and monitored by the ISO Energy Management System over the full range of its

Scheduled Regulation capacity for the entire Settlement Period at least the ramp rates

(increase and decrease in MW/minute) stated in its bid. In addition, the total Energy available

 $(R_{UP} \text{ plus } R_{DN})$ may be adjusted to be only R_{UP} or only R_{DN} , a percentage of R_{UP} or R_{DN} , or the

sum of R_{UP} and R_{DN}, depending on the needs of the ISO for each direction of Regulation

service.

2.5.27.2 Spinning Reserve.

Quantities. The following quantity definitions shall be used for each Scheduling Coordinator in

the Settlement process:

SpinQDA_{xt} = the Scheduling Coordinator's total quantity of Spinning Reserve capacity in Zone X

sold through the ISO auction and scheduled Day-Ahead for Settlement Period t.

EnQInst_{xt} = Instructed Imbalance Energy output in Zone X in real-time Dispatch for Settlement

Period t, supplied in accordance with the ISO Protocols.

Prices. The prices in the Settlement process for Spinning Reserve shall be those determined

in Section 2.5.15.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: January 1, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 122A

Adjustment = penalty described in Section 2.5.26.1, or rescinded capacity payments described in Section 2.5.26.2 or 2.5.26.3.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: January 2, 2001 Effective: January 1, 2001 Filed to comply with order of the Federal Energy Regulatory Commission, Docket Nos. EL00-95 *et al.*, issued December 15, 2000, 93 FERC ¶ 61,294 (2000).

 $PspDA_{xt}$ = Market Clearing Price, Psp, in Zone X for Spinning Reserve capacity in the Day-

Ahead Market for Settlement Period t.

<u>Payments.</u> Scheduling Coordinators for Generating Units, System Units, or System Resources

providing Spinning Reserve capacity through the ISO auction shall receive the following

payments for Spinning Reserve capacity:

 $SpinPay_{xt} = SpinQDA_{xt} * PspDA_{xt-Adjustment}$

Scheduling Coordinators for Generating Units, System Units, or System Resources shall

receive the following payments for Energy output from Spinning Reserve capacity:

 $EnQInst_{xt}$ * Resource-Specific Settlement Interval Ex Post Price_{xt}

2.5.27.3 Non-Spinning Reserve.

Quantities. The following quantity definitions shall be used for each Scheduling Coordinator in

the Settlement process:

NonSpinODA_v = the Scheduling Coordinator's total Quantity of Non-Spinning Reserve capacity

in Zone X sold through the ISO's auction and scheduled Day-Ahead for Settlement Period t.

 $EnQInst_{xt}$ = Instructed Imbalance Energy output or Demand reduction in Zone X in real-time

Dispatch for Settlement Period t, supplied in accordance with the ISO Protocols.

<u>Prices</u>. The prices in the Settlement process for Non-Spinning Reserve shall be those

determined in Section 2.5.16.

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 123A Superseding Original Sheet No. 123A

Adjustment = penalty described in Section 2.5.26.1, or rescinded capacity payments described in Section 2.5.26.2 or 2.5.26.3.

 $PnonspDA_{xt}$ = Market Clearing Price, Pnonsp, in Zone X for Non-Spinning Reserve capacity in the Day-Ahead Market for Settlement Period t.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: January 1, 2001

<u>Payments.</u> Scheduling Coordinators for Generating Units, System Units, System Resources,

or Loads supplying Non-Spinning Reserve capacity through the ISO auction shall be paid the

following for the Non-Spinning Reserve capacity:

 $NonspPay_{xt} = NonSpinQDA_{xt} * PnonspDAxt - Adjustment$

Scheduling Coordinators for Generating Units, System Units, System Resources or

Loads shall receive the following payments for Energy output from Non-Spinning Reserve

capacity:

EnQInst_{xt} * Resource-Specific Settlement Interval Ex Post Price_{xt}

2.5.27.4 Replacement Reserve.

Quantities. The following quantity definitions shall be used for each Scheduling Coordinator in

the Settlement process:

RepResODA_y = the Scheduling Coordinator's total quantity of Replacement Reserve capacity in

Zone X sold through the ISO auction scheduled Day-Ahead for Settlement Period t, and from

which Energy has not been generated.

 $EnQInst_{xt}$ = Instructed Imbalance Energy output or Demand reduction in Zone X in real-time

Dispatch for Settlement Period t, supplied in accordance with the ISO Protocols.

Prices. The prices in the Settlement process for Replacement Reserve shall be those

determined in Section 2.5.17.

Adjustment = penalty described in Section 2.5.26.1, or rescinded capacity payments described

in Section 2.5.26.2 or 2.5.26.3.

 $PRepResDA_{xt}$ = Market Clearing Price, PRepRes, in Zone X for Replacement Reserve capacity

in the Day-Ahead Market for Settlement Period t.

Payments. Scheduling Coordinators for Generating Units, System Units, System Resources,

or Loads providing Replacement Reserve capacity through the ISO auction shall receive the

following payments for the portion of a Scheduling Coordinator's Replacement Reserve

capacity from which Energy has not been generated:

 $RepResPay_{ijt} = (RepResQDA_{xt} -) * PRepResDA_{xt-Adjustment}$

Scheduling Coordinators shall not receive capacity payments for the portion of a Scheduling

Coordinator's Replacement Reserve capacity from which Energy has been generated. The

payments for Energy output from Replacement Reserve capacity are calculated as follows:

EnQInst_{iit} * Resource-Specific Settlement Interval Ex Post Price_{xt}

2.5.27.5 Voltage Support. The total payments for each Scheduling Coordinator shall be the

sum of the short-term procurement payments, based on opportunity cost, as described in

Section 2.5.18, and the payments under long-term contracts.

2.5.27.6 Black Start.

Quantities. The following quantities shall be used in the Settlement process:

EnQBSiit = Energy output from Black Start made by Generating Unit i from Scheduling

Coordinator j (or Black Start Generator j, as the case may be) for Settlement Period t, pursuant

to the ISO's order to produce.

Prices. The prices used in the Settlement process are those described in the contracts

referred to in Section 2.5.19.

Adjustment = penalty described in Section 2.5.26.1.

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Eighth Revised Sheet No. 126

Superseding Seventh Revised Sheet No. 126

Payments.

Scheduling Coordinators for owners of Reliability Must-Run Units (or Black Start Generators, as

the case may be) shall receive the following payments for Energy output from Black Start

facilities:

BSEN_{ijt}=(EnQBS_{ijt}*EnBid_{ijt})+BSSUP_{ijt}-Adjustment

where BSSUPijt is the start-up payment for a Black Start successfully made by Generating Unit

i of Scheduling Coordinator j (or Black Start Generator j) in Trading Interval t calculated in

accordance with the applicable Reliability Must-Run Contract (or the Interim Black Start

Agreement as the case may be).

2.5.27.7

[Not Used]

2.5.27.7.1

[Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: October 30, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Sixth Revised Sheet No. 126A Superseding Fifth Revised Sheet No. 126A

2.5.27.7.2 [Not Used]

2.5.27.7.3 [Not Used]

2.5.27.7.4 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 29, 2002 Effective: October 30, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Third Revised Sheet No. 126B

Superseding Second Revised Sheet No. 126B

2.5.28 Settlement for User Charges for Ancillary Services.

(a) The ISO shall determine a separate hourly user rate for Regulation, Spinning

Reserve, Non-Spinning Reserve and Replacement Reserve for each Settlement Period

purchased in the Day-Ahead Market, and in the Hour-Ahead Market. Each rate will be charged

to Scheduling Coordinators on a volumetric basis applied to each Scheduling Coordinator's

obligation for the Ancillary Service concerned which it has not self-provided, as adjusted by any

Inter-Scheduling Coordinator Ancillary Service Trades.

Each Scheduling Coordinator's obligation for Regulation, Spinning Reserve, Non-

Spinning Reserve and Replacement Reserve for each Zone shall be calculated in accordance

with Section 2.5.20.1, notwithstanding any adjustment to the quantities of each Ancillary Service

purchased by the ISO in accordance with Section 2.5.3.6.

The cost of Voltage Support and Black Start shall be allocated to Scheduling

Coordinators as described in Sections 2.5.28.5 and 2.5.28.6.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: October 30, 2002

Superseding Original Sheet No. 127

Quantities and rates for the Hour-Ahead Markets shall be calculated by substituting the Hour-Ahead quantities and prices in the relevant formulae (including self-provided quantities of the Ancillary Service) except that the user rates for Regulation, Spinning Reserve, Non-Spinning Reserve and Replacement Reserve capacity shall be calculated by dividing the net payments made by the ISO for each service by the MW quantity purchased for each service. The net payments are the total payments for each service net of sums payable by Scheduling Coordinators who have bought back in the Hour-Ahead Regulation, Spinning Reserve, Non-Spinning Reserve or Replacement Reserve capacity, as the case may be, which they had sold to the ISO in the Day-Ahead Market.

Ancillary Services obligations may be negative, and credits for such negative obligations will be in accordance with the rates calculated in Sections 2.5.28.1, 2.5.28.2, 2.5.28.3 and 2.5.28.4, except that a Scheduling Coordinator's credit shall be reduced by the greater of: a) the amount of any self-provision scheduled from resources which are deemed to meet the ISO's Ancillary Services standards, and which are not subject to the certification and testing requirements of the ISO Tariff; or b) if the ISO has no incremental requirement to be met in the Hour-Ahead Market for an Ancillary Service, the incremental amount of such service scheduled by that Scheduling Coordinator in the Hour-Ahead Market.

The ISO will allocate the Ancillary Services capacity charges, for both Day-Ahead and Hour-Ahead Markets, on a Zonal basis if the Day-Ahead Ancillary Services market is procured on a Zonal basis. The ISO will allocate the Ancillary Services capacity charges, for both the Day-Ahead and Hour-Ahead Markets, on an ISO Control Area wide basis if the Day-Ahead Ancillary Services market is defined on an ISO Control Area wide basis.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

- (b) If, in any Settlement Period, no quantity of Regulation, Spinning Reserve, Non-Spinning Reserve or Replacement Reserve is purchased in the Day-Ahead Market or the Hour-Ahead Market due to the operation of Section 2.5.3.6, then in lieu of the user rate determined in accordance with Section 2.5.28.1, 2.5.28.2, 2.5.28.3, or 2.5.28.4, as applicable, the user rate for the affected Ancillary Service for that Settlement Period shall be determined as follows:
- (i) If the affected market is a Day-Ahead Market, the user rate for the affected Ancillary Service shall be set at the lowest capacity reservation price for an unaccepted qualified capacity bid in the Day-Ahead Market for the same Settlement Period for that Ancillary Service or for another Ancillary Service that meets the requirements for the affected Ancillary Service. If there are no such unaccepted bids, the user rate for the affected Ancillary Service shall be the lowest Market Clearing Price for the same Settlement Period established in the Day-Ahead Market for another Ancillary Service that meets the requirements for the affected Ancillary Service.
- (ii) If the affected market is an Hour-Ahead Market, the user rate for the affected Ancillary Service shall be set at the lowest capacity reservation price for an unaccepted qualified capacity bid in the Hour-Ahead Market for the same Settlement Period for that Ancillary Service or for another Ancillary Service that meets the requirements for the affected Ancillary Service. If there are no such unaccepted bids, the user rate for the affected Ancillary Service shall be the user rate for the same Ancillary Service in the Day-Ahead Market in the same Settlement Period.
- (c) With respect to each Settlement Period, in addition to the user rates determined in accordance with Sections 2.5.28.1 through 2.5.28.4 or Section 2.5.28(b), as applicable, each Scheduling Coordinator shall be charged an additional amount equal to its proportionate share, based on total purchases by Scheduling Coordinators of

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 129

Effective: October 13, 2000

Superseding Original Sheet No. 129

Regulation, Spinning Reserve, Non-Spinning Reserve and Replacement Reserve of the

amount, if any, by which (i) the total payments to Scheduling Coordinators pursuant to Section

2.5.27.1 through 2.5.27.4, for the Day-Ahead Market and Hour-Ahead Market and all Zones,

exceed (ii) the total amounts charged to Scheduling Coordinators pursuant to Section 2.5.28.1

through 2.5.28.4, for the Day-Ahead Market and Hour-Ahead Market and all Zones. If total

amounts charged to Scheduling Coordinators exceed the total payments to Scheduling

Coordinators, each Scheduling Coordinator will be refunded its proportionate share, based on

total purchases by Scheduling Coordinators of Regulation, Spinning Reserve, Non-Spinning

Reserve and Replacement Reserve.

2.5.28.1 Regulation. Regulation Up and Regulation Down charges shall be calculated

separately. The user rate per unit of purchased Regulation service for each Settlement Period

in the Day-Ahead Market for each Zone shall be calculated by dividing the total Regulation

capacity payments by the ISO's total MW purchases of Regulation for that Settlement Period for

that Zone which has not been self-provided by Scheduling Coordinators. The ISO will calculate

the user rate for Regulation Up in each Zone for each Settlement Period as:

RegRateUpDA (\$/MW) = AGCUpPayDA /AGCUpPurchDA

where:

AGCUpPayDA = Total Regulation Up payments for the Settlement Period in the Day-Ahead

Market for the Zone.

AGCUpPurchDA = the total ISO Regulation Up MW purchases in the Day-Ahead Market for the

Settlement Period for the Zone, excluding that which has been self-provided by Scheduling

Coordinators.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 130

Superseding Original Sheet No. 130

The ISO will calculate the user rate for Regulation Down in each Zone for each Settlement

Period as:

RegRateDownDA (\$/MW) = AGCDownPayDA /AGCDownPurchDA

where:

AGCDownPayDA = Total Regulation Down payments for the Settlement Period in the Day-

Ahead Market for the Zone.

AGCDownPurchDA = the total ISO Regulation Down MW purchases in the Day-Ahead Market

for the Settlement Period for the Zone, excluding that which has been self-provided by

Scheduling Coordinators.

For each Settlement Period, each Scheduling Coordinator shall pay to the ISO a sum

calculated as follows for each Zone:

RegRateUpDA * AGCUpOblig

where AGCUpOblig is the Scheduling Coordinator's obligation for Regulation Up in the Zone in

the Settlement Period for which it has not self-provided.

RegRateDownDA * AGCDownOblig

where AGCDownOblig is the Scheduling Coordinator's obligation for Regulation Down in the

Zone in the Settlement Period for which it has not self-provided.

2.5.28.2 Spinning Reserve. The user rate per unit of purchased Spinning Reserve for each

Settlement Period in the Day-Ahead Market for each Zone shall be calculated by dividing the

total capacity payments for Spinning Reserve by the ISO's total MW purchases of Spinning

Reserve for that Settlement Period for that Zone which has not

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 131

Effective: October 13, 2000

Superseding Original Sheet No. 131

been self-provided by Scheduling Coordinators. The ISO will calculate the user rate for

Spinning Reserve in each Zone for each Settlement Period as:

$$SpRateDA(\$/MW) = \frac{SpinPayDA}{SpinPurchDA}$$

where:

SpinPayDA = Total Spinning Reserve payments for the Settlement Period in the Market for the

Zone Day-Ahead.

SpinPurchDA = the total ISO Spinning Reserve MW purchases in the Day-Ahead Market for the

Settlement Period for the Zone, excluding that which has been self-provided by Scheduling

Coordinators.

For each Settlement Period, each Scheduling Coordinator shall pay to the ISO a sum

calculated as follows for each Zone:

SPRateDA * SpinOblig

where SpinOblig is the Scheduling Coordinator's obligation for Spinning Reserve in the Zone in

the Settlement Period for which it has not self-provided.

2.5.28.3 Non-Spinning Reserve. The user rate per unit of purchased Non-Spinning Reserve

for each Settlement Period in the Day-Ahead Market for each Zone shall be calculated by

dividing the total capacity payments for Non-Spinning Reserve by the ISO's total MW purchases

of Non-Spinning Reserve for that Settlement Period for that Zone which has not been self-

provided by Scheduling Coordinators. The ISO will calculate the user rate for Non-Spinning

Reserve in each Zone for each Settlement Period as:

 $NonSpRateDA(\$/MW) = \frac{NonSpinPayDA}{NonSpinPurchDA}$

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

First Revised Sheet No. 132

Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I Superseding Original Sheet No. 132

where:

NonSpinPayDA = Total Non-Spinning Reserve payments for the Settlement Period in the Day-

Ahead Market for the Zone.

NonSpinPurchDA = the total ISO Non-Spinning Reserve MW purchases for the Settlement

Period for the Zone, excluding that which has been self-provided by Scheduling Coordinators.

For each Settlement Period, each Scheduling Coordinator shall pay to the ISO a sum

calculated as follows for each Zone:

NonSpRateDA * NonSpinOblig

where NonSpinOblig is the Scheduling Coordinator's obligation for Non-Spinning Reserve in the

Zone in the Settlement Period for which it has not self-provided.

2.5.28.4 Replacement Reserve. The user rate per unit of Replacement Reserve obligation

for each Settlement Period t for each Zone x shall be as follows:

$$ReplRate_{_{xt}} = \frac{\left(PRepResDA_{_{xt}} * OrigReplReqDA_{_{xt}}\right) + \left(PRepResHA_{_{xt}} * OrigReplReqHA_{_{xt}}\right)}{OrigReplReqDA_{_{xt}} + OrigReplReqHA_{_{xt}}}$$

where

OrigRepIReqDA_{xt} = Replacement Reserve requirement net of self-provision in the Day-Ahead

Market before consideration of any substitutions pursuant to Section 2.5.3.6.

 $OrigRepIReqHA_{xt}$ = Incremental change in the Replacement Reserve requirement net of

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 133

Superseding Original Sheet No. 133

self-provision between the Day-Ahead Market and the Hour-Ahead Market before consideration

of any substitutions pursuant to Section 2.5.3.6.

PRepResDAxt is the Market Clearing Price for Replacement Reserve in the Day-Ahead Market

for Zone x in Settlement Period t.

PRepResHA_{xt} is the Market Clearing Price for Replacement Reserve in the Hour-Ahead Market

for Zone x in Settlement Period t.

For each Settlement Period t, each Scheduling Coordinator shall pay to the ISO a

sum calculated as follows for each Zonex:

ReplRate_{xt}*ReplOblig_{ixt}

where

 $ReplOblig_{jxt} = DevReplOblig_{jxt} + RemRepl_{jxt} - SelfProv_{jxt} + NetInterSCTrades_{jxt}$

DevReplObligixt is the Scheduling Coordinator's obligation for deviation Replacement Reserve

in Zone x in the Settlement Period t and RemReplixt is the Scheduling Coordinator's obligation

for remaining Replacement Reserve in Zone x for Settlement Period t.

SelfProv_{ixt} is Scheduling Coordinator's Replacement Reserve self-provision in Zone x for

Settlement Period t.

NetInterSCTrades_{jxt} is the sale of Replacement Reserve less the purchase of Replacement

Reserve through Inter-Scheduling Coordinator Trades by Scheduling Coordinator j in Zone x for

Settlement Period t.

Deviation Replacement Reserve for Scheduling Coordinator j in Zone x for Settlement Period t

is calculated as follows:

Effective: October 13, 2000

If $ReplObligTotal_{xt} > TotalDeviations_{xt}$ then:

$$DevReplOblig_{xjt} = \left[Max \left(0, \sum_{i} GenDev_{ijxt} \right) - Min \left(0, \sum_{i} LoadDev_{ijxt} \right) \right]$$

If $ReplObligTotal_{xt} < TotalDeviations_{xt}$ then:

$$DevReplOblig_{xjt} = \frac{ReplObligTotal_{xt}}{TotalDeviations_{xt}} * \left[Max \left(0, \sum_{i} GenDev_{ijxt} \right) - Min \left(0, \sum_{i} LoadDev_{ijxt} \right) \right]$$

where,

$$TotalDeviations_{xt} = \sum_{i} \left[Max \left(0, \sum_{i} GenDev_{ijxt} \right) - Min \left(0, \sum_{i} LoadDev_{ijxt} \right) \right]$$

 $GenDev_{ijxt}$ = The deviation between scheduled and actual Energy Generation for Generator i represented by Scheduling Coordinator j in Zone x during Settlement Period t as referenced in SABP Appendix D.

 $LoadDev_{ijxt}$ = The deviation between scheduled and actual Load consumption for resource i represented by Scheduling Coordinator j in Zone x during Settlement Period t as referenced in SABP Appendix D.

DevReplObligy is total deviation Replacement Reserve in Zone x for Settlement Period t.

 $ReplObligTotal_{xt}$ is total Replacement Reserve Obligation in Zone x for Settlement Period t.

Remaining Replacement Reserve for Scheduling Coordinator j in Zone x for Settlement Period t is calculated as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: Upon Written Notice Provided By The ISO To FERC and Market Participants

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 135 Superseding Original Sheet No. 135

$$RemRepl_{xjt} = \frac{MeteredDemand_{jxt}}{TotalMeteredDemand_{xt}} * Total Re m Re \ pl_{xt}$$

where:

 $MeteredDemand_{jxt}$ is the Scheduling Coordinator's total metered Demand excluding exports in Zone x for Settlement Period t.

 $Total Metered Demand_{xt}$ is total metered Demand excluding exports in Zone x for Settlement Period t.

 $TotalRemRepl_{xt} = Max[0,ReplObligTotal_{xt} + TotalSelfProv_{xt} - DevReplOblig_{xt}]$

2.5.28.5 Voltage Support. The short-term market Voltage Support user rate for Settlement Period t for Zone x shall be calculated as follows:

$$VSSTRate_{xt} = \frac{\sum_{i,j} VSST_{xijt}}{\sum_{j} QChargeVS_{xjt}}$$

 $VSST_{Xijt}$ = Voltage Support payment to Scheduling Coordinator j in respect of Generating Unit i in Zone x in the short-term market applicable to Settlement Period t.

 $QChargeVS_{xjt}$ = charging quantity for Voltage Support for Scheduling Coordinator j for Settlement Period t in Zone x equal to the total metered Demand in Zone x (including exports to neighboring Control Areas and excluding metered Demand inside an MSS) by Scheduling Coordinator j for Settlement Period t.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

The monthly long-term Voltage Support contract user rate for Settlement Period t for Zone x shall be calculated as follows:

$$VSLTRate_{xm} = \frac{\sum_{i,j} VSLT_{xijm}}{\sum_{jm} QChargeVS_{xjt}}$$

where:

 $VSLT_{xijm}$ = long-term Voltage Support contract payment to Scheduling Coordinator j for owner of Reliability Must-Run Unit i in Zone x for month m.

The short-term market Voltage Support charges for Settlement Period t payable by Scheduling Coordinator j will be calculated as follows:

$$VSSTCharge_{jt} = VSSTRate_{t} * QChargeVS_{jt}$$

where *VSSTCharge*_{jt} is the amount payable by Scheduling Coordinator j for short-term market Voltage Support for Settlement Period t.

VSSTRate, is the short-term market Voltage Support user rate for Settlement Period t.

The monthly long-term Voltage Support contract charge for month m payable by Scheduling Coordinator j will be calculated as follows:

$$VSLTCharge_m = VSLTRate_m * \sum_{m} QCharg eVS_{jt}$$

where *VSLTCharge_m* is the amount payable by Scheduling Coordinator j for long-term Voltage Support for month m.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 137

Superseding Original Sheet No. 137

VSLTRatem is the monthly long-term Voltage Support contract user rate charged by

the ISO to Scheduling Coordinators for month m.

2.5.28.6 Black Start.

QChargeBlackstart_{it} = charging quantity for Black Start for Scheduling Coordinator j for

Settlement Period t equal to the total metered Demand (excluding exports to neighboring

Control Areas and metered Demand of a MSS) by Scheduling Coordinator j for Settlement

Period t.

The Black Start Energy payment user rate for Settlement Period t will be calculated

as follows:

$$\sum_{i} BSEn_{ij}$$

$$BSRate_{t} = \frac{\displaystyle\sum_{i,j} BSEn_{ijt}}{\displaystyle\sum_{j} QChargeBlackstart_{jt}}$$

where BSEn_{ijt} is the ISO payment to Scheduling Coordinator j for owner of Reliability Must-Run

Unit (or to Black Start Generator j, as the case may be) for Generating Unit i providing Black

Start Energy in Settlement Period t.

The Black Start Energy user charge for Settlement Period t for Scheduling

Coordinator j will be calculated as follows:

BSCharge_{it} = BSRate_t * QChargeBlackStart_{it}

2.5.29 Public Dissemination of Information: Day-Ahead.

By 3:00 p.m. of the day preceding the Trading Day, the ISO shall make available to all Market

Participants the following information on the scheduling of Ancillary Services:

| Ancillary Service | Quantity Units | Period | Clearing |
|----------------------|----------------|--------|----------|
| | | | Prices |
| Regulation/AGC | MW | Hourly | \$/MW |
| Spinning Reserve | MW | Hourly | \$/MW |
| Non-Spinning Reserve | MW | Hourly | \$/MW |
| Replacement Reserve | MW | Hourly | \$/MW |
| Black Start | MW | Annual | \$/MW |

2.5.30 Communication Protocols.

Communications between the ISO and Scheduling Coordinators shall be as described below:

2.5.30.1 Information Transfer from Scheduling Coordinator to ISO. Unless otherwise agreed by the ISO, Scheduling Coordinators who wish to schedule or bid Ancillary Services to the ISO must submit the information by direct computer link. Scheduling Coordinators that wish to submit dynamic schedules or bids for Ancillary Services to the ISO must also comply with the applicable requirements of Sections 2.2.7.6, 2.5.6.2 and 2.5.7.4.2.

2.5.30.2 Submitting Information By Direct Computer Link. For Scheduling Coordinators submitting information by direct computer link, each such Scheduling Coordinator shall establish a network connection with the ISO through the WEnet network. This shall be a permanent link with the ISO. Link initialization procedures shall be necessary to establish the connection for the first time, and to re-establish the connection each time the connection is restored after a system or communication failure. In order to log in, each Scheduling Coordinator shall furnish the ISO with user ID and password.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 30, 2004 Effective: June 29, 2004

2.5.30.3 Information Transfer from ISO to Scheduling Coordinator. Unless otherwise agreed between a Scheduling Coordinator and the ISO, the ISO shall furnish scheduling information to Scheduling Coordinators by electronic transfer as described in Sections 6.1 and 6.2. If electronic data transfer is not available, the information may be furnished by facsimile. If it is not possible to communicate with the Scheduling Coordinator using the primary means of communication, an alternate means of communication shall be selected by the ISO.

2.6 Incorporation of the ISO Market Monitoring & Information Protocol

The ISO shall monitor the markets that it administers in order to identify and, where appropriate, institute corrective action to respond to the exercise of market power or other abuses of such markets in accordance with the ISO Market Monitoring & Information Protocol set forth in Appendix L, "ISO Protocols."

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Supersection Supersection of the control of the contr

Second Revised Sheet No. 140 Superseding First Revised Sheet No. 140

3. RELATIONSHIP BETWEEN ISO AND PARTICIPATING TOS.

3.1 Nature of Relationship.

Each Participating TO shall enter into a Transmission Control Agreement with the ISO. In

addition to converting Existing Rights in accordance with Section 2.4.4.2, and except as

provided in Section 3.1.3, New Participating TOs will be required to turn over Operational

Control of all facilities and Entitlements that: (1) satisfy the FERC's functional criteria for

determining transmission facilities that should be placed under ISO Operational Control; (2)

satisfy the criteria adopted by the ISO Governing Board identifying transmission facilities for

which the ISO should assume Operational Control; and (3) are the subject of mutual agreement

between the ISO and the Participating TOs. The ISO shall notify Market Participants when an

application has been received from a potential Participating TO and shall notify Market

Participants that a New Participating TO has executed the Transmission Control Agreement

and the date on which the ISO will have Operational Control of the transmission facilities.

3.1.1 In any year, a Participating TO applicant must declare its intent in writing to the ISO to

become a New Participating TO by January 1 or July 1, and provide the ISO with an

application within 15 days of such notice of intent. Applicable agreements will be negotiated

and filed with the Federal Energy Regulatory Commission as soon as possible for the New

Participating TO, such that the Agreements can be effective the following July 1 or January 1.

3.1.2 With respect to its submission of Schedules to the ISO, a New Participating TO shall

become a Scheduling Coordinator or obtain the services of a Scheduling Coordinator that has

been certified in accordance with Section 2.2.4, which Scheduling Coordinator shall not be the

entity's Responsible Participating TO in accordance with the Responsible Participating

Transmission Owner Agreement, unless mutually agreed, and shall operate in accordance with

the ISO Tariff and applicable

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004

Effective: November 1, 2004

agreements. The New Participating TO shall assume responsibility for paying all Scheduling Coordinators charges regardless of whether the New Participating TO elects to become a

Scheduling Coordinator or obtains the services of a Scheduling Coordinator.

3.1.3 Western Path 15 shall be required to turn over to ISO Operational Control only its

rights and interests in the Path 15 Upgrade and shall not be required to turn over to ISO

Operational Control Central Valley Project transmission facilities, Pacific AC Intertie

transmission facilities, California-Oregon Transmission Project facilities, or any other new

transmission facilities or Entitlements not related to the Path 15 Upgrade. For purposes of the

ISO Tariff, Western Path 15 shall be treated with respect to revenue recovery as a Project

Sponsor in accordance with Section 3.2.7.

3.1.4 The capacity provided to the ISO under the Transmission Exchange Agreement

originally accepted by FERC in Docket No. ER04-688 is deemed to be ISO Controlled Grid

facilities and is subject to all terms and conditions of the ISO Tariff.

3.2 Transmission Expansion.

A Participating TO shall be obligated to construct all transmission additions and upgrades that

are determined to be needed in accordance with the requirements of this Section 3.2 and

which: (1) are additions or upgrades to transmission facilities that are located within its PTO

Service Territory, unless it does not own the facility being upgraded or added and neither

terminus of such facility is located within its PTO Service Territory; or (2) are additions to

existing transmission facilities or upgrades to existing transmission facilities that it owns, that

are part of the ISO Controlled Grid, and that are located outside of its PTO Service Territory,

unless the joint-ownership arrangement, if any, does not permit. A Participating TO's obligation

to construct such transmission additions and upgrades shall be subject to: (1) its ability, after

making a good faith effort, to obtain all necessary approvals and property rights under

applicable federal, state, and local laws and (2) the presence of a cost recovery mechanism

with cost

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: January 10, 2005

Effective: January 1, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 141.00

Superseding Original Sheet No. 141.00

responsibility assigned in accordance with Section 3.2.7. The obligations of the Participating

TO to construct such transmission additions or upgrades will not alter the rights of any entity to

construct and expand transmission facilities as those rights would exist in the absence of the

TO's obligations under this ISO Tariff or as those rights may be conferred by the ISO or may

arise or exist pursuant to this ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: January 10, 2005 Effective: January 1, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 141A Superseding Original Sheet No. 141A

3.2.1 Determination of Need.

A Participating TO or any other Market Participant may propose a transmission system addition or upgrade. The ISO will determine that a transmission addition or upgrade is needed where it will promote economic efficiency or maintain System Reliability as set forth below.

3.2.1.1 Economically Driven Projects. The Participating TO and Market Participants shall provide the necessary assistance and information to the ISO, as part of the coordinated planning process, to enable the ISO to determine that a project is needed to promote economic efficiency, including, at the ISO's discretion, studies comporting with ISO guidelines that demonstrate whether the project will promote economic efficiency or the information the ISO requires to carry out its own studies for economically driven projects. The ISO shall treat market sensitive information provided to the ISO in accordance with this Section by Participating TOs, Project Sponsors and applicable Market Participants confidentially in accordance with Section 20.3 provided that such information is clearly marked "Confidential" at the time it is provided to the ISO. The determination that a transmission addition or upgrade is needed to promote economic efficiency shall be made in any of the following ways:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: June 1, 2003

- **3.2.1.1.1** If the Participating TO or any party questions the economic need for the project (except where the Project Sponsor commits to pay the full cost of construction) the proposal will be submitted to the ISO ADR Procedures for resolution.
- 3.2.1.1.2 Where a Project Sponsor other than the Participating TO commits to pay the full cost of construction of a transmission addition or upgrade and its operation, and demonstrates to the ISO financial capability to pay those costs, such commitment and demonstration shall be sufficient to demonstrate need to the ISO. To ensure that the Project Sponsor is financially able to pay the costs of the project to be constructed by the Participating TO, the Participating TO may require (1) a demonstration of creditworthiness (e.g. an appropriate credit rating), or (2) sufficient security in the form of an unconditional and irrevocable letter of credit or other similar security sufficient to meet its responsibilities and obligations for the full costs of the transmission addition or upgrade.
- 3.2.1.1.3 Where a Project Sponsor asserts that a transmission addition or upgrade is economically beneficial, but that Project Sponsor is unwilling to commit to pay the full cost of the addition or upgrade; where (1) the proposed transmission addition or upgrade was submitted to the Participating TO but was not included in the transmission expansion plan of that Participating TO in accordance with Section 3.2.2 or (2) the operation date of the planned expansion is not acceptable to the ISO or the Project Sponsor or (3) the Participating TO unreasonably delays implementing or subsequently decides not to proceed with the project, the Project Sponsor may submit its proposal to the ISO ADR Procedure for determination of need. A determination of need shall be made as follows:
- **3.2.1.1.3.1** The Project Sponsor shall include in its proposal: (1) a showing that the economic benefits of the proposed transmission addition or upgrade are expected to exceed its costs (giving consideration to any reasonable alternatives to the construction of transmission

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2003 Effective: June 1, 2003

Second Revised Sheet No. 143

FIRST REPLACEMENT VOLUME NO. I

additions or upgrades) using an economic analysis that comports with ISO guidelines, and (2) a statement of the proposed pricing methodology for the transmission upgrades or additions that the Project Sponsor elects in accordance with Section 3.2.7 of the ISO Tariff.

3.2.1.1.3.2 If neither any Market Participant nor the ISO disputes the Project Sponsor's showing, then the proposal is determined to be needed.

3.2.1.1.3.3 If any Market Participant or the ISO disputes the Project Sponsor's showing, the disputing Market Participant, the ISO, or the Project Sponsor may submit to resolution through the ISO ADR Procedure the issue of whether the transmission addition or upgrade is needed on the ground that its economic benefits exceed its costs. If a Market Participant fails to raise through the ISO ADR Procedure a dispute as to whether a proposed transmission addition or upgrade is needed, then the Market Participant shall be deemed to have waived its right to raise such dispute at a later date. The determination under the ISO ADR Procedure as to whether the transmission addition or upgrade is needed, including any determination by FERC or on appeal of a FERC determination in accordance with that process, shall be final.

3.2.1.2 Reliability Driven Projects. The ISO in coordination with the Participating TO, will identify the need for any transmission additions or upgrades required to ensure System Reliability consistent with all Applicable Reliability Criteria. In making this determination, the ISO, in coordination with the Participating TO and other Market Participants, shall consider lower cost alternatives to the construction of transmission additions or upgrades, such as acceleration or expansion of existing projects, demand-side management,

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: June 1, 2003

The Participating TO, in cooperation with the ISO, shall perform the necessary studies to determine the facilities needed to meet all Applicable Reliability Criteria. The Participating TO shall provide the ISO and other Market Participants with all information relating to a proposed transmission addition or upgrade that they may reasonably request (other than information available to them through the WECC or any other applicable regional organization) and shall, through the WECC or any other applicable regional organization coordinated planning processes, develop the scope of and assumptions for such studies that are acceptable to the ISO and those other Market Participants. The ISO shall be free to propose any transmission

remedial action schemes, constrained-on Generation, interruptible Loads or reactive support.

upgrades or additions it deems necessary to ensure System Reliability consistent with

Applicable Reliability Criteria, and, subject to appropriate appeals, the Participating TO shall be

obligated to construct such lines. After the ISO Operations Date, the ISO, in consultation with

Participating TOs and any affected UDCs and MSSs, will work to develop a consistent set of

Reliability Criteria for the ISO Controlled Grid which the Participating TOs will use in their

transmission planning and expansion studies or decisions.

3.2.2 Transmission Planning and Coordination.

The ISO shall actively participate with each Participating TO and the other Market Participants in the ISO Controlled Grid planning process in accordance with the terms of this ISO Tariff and the Transmission Control Agreement.

3.2.2.1 Each Participating TO with a PTO Service Territory shall develop annually a transmission expansion plan covering the next five years plus a ten-year case for the Loads that are geographically embedded within its PTO Service Territory and are within the ISO Control Area, even if such Loads are served by another Participating TO. Such Participating TO shall coordinate with the ISO and other Market Participants in the development of such plan. The Participating TO shall be responsible for ensuring that its transmission expansion plan meets all Applicable Reliability Criteria.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 8, 2004

Superseding First Revised Sheet No. 145

3.2.2.2 The ISO shall review the Participating TOs' transmission expansion plans for the PTO

Service Territory, whether or not such plans are subject to Section 3.2.2.1, to ensure that each

Participating TO's expansion plans meet the Applicable Reliability Criteria. The Participating

TO will provide the necessary assistance and information as part of the coordinated planning

process to the ISO to enable it to carry out its own studies for these purposes. If the ISO finds

that the Participating TO's plan or projects do not meet the Applicable Reliability Criteria, the

ISO will provide comments and the Participating TO will reassess its plans, as appropriate.

The ISO may also propose new projects or suggest project changes (e.g., timing, project size)

for consideration by the Participating TO. Changes or additions made by the ISO and accepted

by the TO will be included in the Participating TO's expansion plan. Changes or additions not

accepted in the coordinated planning process will be resolved through the ISO ADR Procedure.

3.2.2.3 The Participating TO will act as a Project Sponsor for Participating TO proposed

economic or reliability projects that are included in its expansion plan. The Participating TO

shall provide to the ISO any information that the ISO requires to enable the ISO to comply with

WECC and any other applicable regional coordination requirements pursuant to Section 3.2.6.

3.2.2.4 The ISO will be a member of the WECC and other applicable regional organizations

and participate in WECC's operation and planning committees, and in other applicable regional

coordinated planning processes. Neither the ISO nor any Participating TO nor any Market

Participant shall take any position before the WECC or a regional organization that is

inconsistent with a binding decision reached through the ISO ADR Procedure.

3.2.3 Studies to Determine Facilities to be Constructed.

Where a Participating TO is obligated to construct or expand facilities in accordance with this

ISO Tariff or where the ISO or any Market Participant requests that a Facility Study be

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 8, 2004

carried out, the Participating TO (in coordination with the ISO or the relevant Market
Participants as the case may require), shall perform the necessary study or studies to
determine the appropriate facilities to be constructed in accordance with the terms set forth in
the TO Tariff. The scope of and assumptions for any studies requested by a Project Sponsor of
a transmission addition or upgrade on economic grounds must be acceptable to the Project
Sponsors and the ISO. Any dispute relating to a Facility Study Agreement (including any
dispute over the scope of the study or its assumptions) shall be resolved through the ISO ADR

3.2.4 Operational Review.

Procedures.

The ISO will perform an operational review of all facilities that are to be connected to, or made part of, the ISO Controlled Grid to ensure that the facilities being proposed provide for acceptable operating flexibility and meet all its requirements for proper integration with the ISO Controlled Grid. If the ISO finds that such facilities do not provide for acceptable operating flexibility or do not adequately integrate with the ISO Controlled Grid, the Participating TO will reassess its determination of the facilities required to be constructed.

3.2.5 State and Local Approval and Property Rights.

3.2.5.1 The Participating TO shall be obligated to make a good faith effort to obtain all approvals and property rights under applicable federal, state and local laws that are necessary to complete the construction of transmission additions or upgrades required to be constructed in accordance with this ISO Tariff. This obligation includes the Participating TO's use of eminent domain authority, where provided by state law.

3.2.5.2 If the Participating TO cannot secure any such necessary approvals or property rights and consequently is unable to construct a transmission addition or upgrade, it shall

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2003 Effective: June 1, 2003

Second Revised Sheet No. 147 Superseding First Sheet No. 147

promptly notify the ISO and the Project Sponsor and shall comply with its obligations under the

TO Tariff to convene a technical meeting to evaluate alternative proposals. The ISO shall take

such action as it reasonably considers appropriate, in coordination with the Participating TO,

the Project Sponsor (if any) and other affected Market Participants, to facilitate the development

and evaluation of alternative proposals including, where possible, conferring on a third party the

right to build the transmission addition or upgrade.

3.2.5.3 Where it is possible for a third party to obtain all approvals and property rights under

applicable federal, state and local laws that are necessary to complete the construction of

transmission additions or upgrades required to be constructed in accordance with this ISO Tariff

(including the use of eminent domain authority, where provided by state law) the ISO may

confer on a third party the right to build the transmission addition or upgrade which shall enter

into the Transmission Control Agreement in relation to such transmission addition or upgrade.

3.2.6 WECC and Regional Coordination.

The Project Sponsor will have responsibility for completing any applicable WECC requirements

and other applicable regional coordination and rating study requirements to ensure that a

proposed transmission addition or upgrade meets regional planning requirements. The Project

Sponsor may request the Participating TO to perform this coordination on behalf of the Project

Sponsor at the Project Sponsor's expense.

3.2.7 Cost Responsibility for Transmission Additions or Upgrades.

Cost responsibility for transmission additions or upgrades constructed pursuant to this Section

3.2 (including the responsibility for any costs incurred under Section 3.2.6) shall be determined

as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: June 1, 2003

Effective: November 1, 2004

Superseding Second Revised Sheet No. 148

3.2.7.1 Where a Project Sponsor commits to pay the full cost of a transmission addition or

upgrade as set forth in Section 3.2.1.1.2, the full costs shall be borne by the Project Sponsor.

3.2.7.2 Where the need for a transmission addition or upgrade is determined by the ISO or as

a result of the ISO ADR Procedure as set forth in Section 3.2.1.1.3, the cost of the transmission

addition or upgrade shall be borne by the Participating TO that will be the owner of the

transmission addition or upgrade and shall be reflected in its Transmission Revenue

Requirement.

3.2.7.3 Provided that the ISO has Operational Control of the transmission upgrade or addition,

a Project Sponsor that does not recover the investment cost under a FERC-approved rate

through the Access Charge or a reimbursement or direct payment from a Participating TO shall

be entitled to receive:

(a) its share, as determined in subsection (d) below, of the Wheeling revenues calculated

in accordance with Section 7.1.4.3 that are attributable to the transmission addition or

upgrade, which shall be determined by using the capacity increase, if any, of a

Scheduling Point, to the extent such increase results from the addition or upgrade, as

the rating increase for purposes of subsection (d) below;

(b) its share, as determined in subsection (d) below, of the proceeds of the FTR auction for

FTRs defined on the Inter-Zonal Interface of which the transmission addition or

upgrade forms a part as set forth in Section 9.5.3, provided that the Project Sponsor

does not receive FTRs from the ISO in accordance with Section 9.4.3 of the ISO Tariff;

(c) and its share, as determined in subsection (d) below, of the Congestion revenues provided

as calculated pursuant to Section 7.3.1.6 on the Inter-Zonal Interface of which the

transmission addition or upgrade forms a part.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 148A Superseding Fourth Sub. Original Sheet No. 148A

Effective: November 1, 2004

(d) The Project Sponsor's share of Wheeling, Congestion and FTR auction revenues for

the upgraded transmission facility shall be the number that is determined by dividing

the number that is determined by subtracting the rating of the transmission facility

before the upgrade or addition from the new rating for the upgraded or additional

transmission facility by the new rating for the upgraded or additional transmission

facility. The Participating TO's share of Wheeling, Congestion and FTR auction

revenues for the upgraded or additional transmission facility shall be the number that is

determined by subtracting the Project Sponsor's share from one hundred percent

(100%). Such allocated shares shall become effective on the date the new rating takes

effect. The full amount of capacity added to the system will be as determined through

the regional reliability council process of the Western Electricity Coordinating Council

or its successor.

3.2.7.4 Once a New Participating TO has executed the Transmission Control Agreement and it

has become effective, the cost for New High Voltage Facilities for all Participating TOs shall be

included in the ISO Grid-wide component of the High Voltage Access Charge in accordance

with Schedule 3 of Appendix F, unless and with respect to Western Path 15 only, cost recovery

is provided in Section 3.2.7.3. The

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 24, 2004

the facility is geographically located.

Participating TO who is supporting the cost of the New High Voltage Facility shall include such costs in its High Voltage Transmission Revenue Requirement, regardless of which TAC Area

3.2.8 Ownership of and Charges for Expansion Facilities.

3.2.8.1 All transmission additions and upgrades constructed in accordance with this Section

3.2 shall form part of the ISO Controlled Grid and shall be operated and maintained by a

Participating TO in accordance with the Transmission Control Agreement.

3.2.8.2 Each Participating TO that owns or operates transmission additions and upgrades

constructed in accordance with this Section 3.2 shall provide access to them and charge for

their use in accordance with this ISO Tariff and its TO Tariff.

3.2.9 Expansion by "Local Furnishing" Participating TOs.

Notwithstanding any other provision of this ISO Tariff, a Local Furnishing Participating TO shall

not be obligated to construct or expand facilities, (including interconnection facilities as

described in Section 8 of the TO Tariff) unless the ISO or Project Sponsor has tendered an

application under FPA Section 211 that requests FERC to issue an order directing the Local

Furnishing TO to construct such facilities pursuant to Section 3.2 of the ISO Tariff. The Local

Furnishing TO shall, within 10 days of receiving a copy of the Section 211 application, waive its

right to a request for service under FPA Section 213(a) and to the issuance of a proposed order

under FPA Section 212(c). Upon receipt of a final order from FERC that is no longer subject to

rehearing or appeal, such Local Furnishing TO shall construct such facilities in accordance with

this Section 3.2.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2003 Effective: June 1, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 150

3.3 [Not Used]

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 151

[Page Not Used]

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

Original Sheet No. 152

[Page Not Used]

Original Sheet No. 153

[Page Not Used]

Original Sheet No. 154

[Page Not Used]

Original Sheet No. 155

[Page Not Used]

Original Sheet No. 156

[Page Not Used]

Original Sheet No. 157

[Page Not Used]

Original Sheet No. 158

[Page Not Used]

Original Sheet No. 159

[Page Not Used]

Original Sheet No. 160

[Page Not Used]

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Second Revised Sheet No. 161

FIRST REPLACEMENT VOLUME NO. I

Superseding First Revised Sheet No. 161

4. RELATIONSHIP BETWEEN ISO AND UDCS.

- 4.1 General Nature of Relationship Between ISO and UDCs.
- 4.1.1 The ISO shall not be obliged to accept Schedules, Adjustment Bids or bids for Ancillary Services which would require Energy to be transmitted to or from the Distribution System of a UDC directly connected to the ISO Controlled Grid unless the relevant UDC has entered into a UDC Operating Agreement. The UDC Operating Agreement shall require UDCs to comply with the applicable provisions of this Section 4 and any other expressly applicable Sections of this ISO Tariff and the ISO Protocols as these may be amended from time to time. The ISO shall maintain a pro forma UDC Operating Agreement available for UDCs to enter into with the ISO.
- **4.1.2** The ISO shall operate the ISO Controlled Grid, and each UDC shall operate its Distribution System at all times in accordance with Good Utility Practice and in a manner which ensures safe and reliable operation. The ISO shall, in respect of its obligations set

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: September 1, 2002

FIRST REPLACEMENT VOLUME NO. I

Superseding Original Sheet No. 162

forth in this Section 4, have the right by agreement to delegate certain operational

responsibilities to the relevant Participating TO or UDC pursuant to this Section 4. All

information made available to UDCs by the ISO shall also be made available to Scheduling

Coordinators. All information pertaining to the physical state or operation, maintenance and

failure of the UDC Distribution System affecting the operation of the ISO Controlled Grid that is

made available to the ISO by the UDC shall also be made available to Scheduling

Coordinators upon receipt of reasonable notice.

4.2 Coordinating Maintenance Outages of UDC Facilities.

Each UDC and the Participating TO with which it is interconnected shall coordinate their

Outage requirements that will have an effect on their transmission interconnection prior to the

submission by that Participating TO of its Maintenance Outage requirements under Section

2.3.3.

4.3 UDC Responsibilities.

Recognizing the ISO's duty to ensure efficient use and reliable operation of the ISO Controlled

Grid consistent with the Applicable Reliability Criteria, each UDC shall:

4.3.1 operate and maintain its facilities, in accordance with applicable safety and reliability

standards, regulatory requirements, applicable operating guidelines, applicable rates, tariffs,

statutes and regulations governing their provision of service to their End-Use Customers and

Good Utility Practice so as to avoid any material adverse impact on the ISO Controlled Grid;

4.3.2 provide the ISO Outage Coordination Office each year with a schedule of upcoming

maintenance that has a reasonable potential of impacting the ISO Controlled Grid in

accordance with Section 2.3.3.5 of this ISO Tariff; and

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

4.3.3 coordinate with the ISO, Participating TOs and Generators to ensure that ISO Controlled Grid Critical Protective Systems, including relay systems, are installed and maintained in order to function on a coordinated and complementary basis with UDCs, Generator's and Participating TO's protective systems.

4.4 System Emergencies.

- **4.4.1** In the event of a System Emergency, UDCs shall comply with all directions from the ISO concerning the management and alleviation of the System Emergency and shall comply with all procedures concerning System Emergencies set out in the ISO Protocols.
- **4.4.2** During a System Emergency, the ISO and UDCs shall communicate through their respective control centers and in accordance with procedures established in individual UDC operating agreements.

4.4.3 Under Frequency Load Shedding (UFLS).

- 4.4.3.1 Each UDC's agreement with the ISO shall describe the UFLS program for that UDC.
 The ISO and UDC shall review the UFLS program periodically to ensure compliance with Applicable Reliability Criteria.
- **4.4.3.2** The ISO shall perform periodic audits of each UDC's UFLS system to verify that the system is properly configured for each UDC.
- **4.4.3.3** The ISO will use its reasonable endeavors to ensure that UFLS is coordinated among the UDCs so that no UDC bears a disproportionate share of the ISO's UFLS program.
- **4.4.3.4** In compiling its UFLS program, the ISO, at its discretion, may also coordinate with other entities, review and audit their UFLS programs and systems as described in Section 4.4.3.1 to 4.4.3.3.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

4.4.4 The ISO shall have the authority to direct a UDC to disconnect Load from the ISO Controlled Grid if necessary to avoid an anticipated System Emergency or to regain operational control over the ISO Controlled Grid during an actual System Emergency. The ISO shall direct the UDCs to shed Load in accordance with the prioritization schedule developed pursuant to Section 2.3.2.6. When ISO Controlled Grid conditions permit restoration of Load, the ISO shall restore Load according to the prioritization schedule developed pursuant to Section 2.3.2.6 hereof.

4.5 Electrical Emergency Plan (EEP).

- 4.5.1 The ISO shall in accordance with Section 2.3.2.4 hereof implement the Electrical Emergency Plan in consultation with the UDCs or other entities, at the ISO's discretion, when Energy reserve margins are forecast to be at the levels specified in the plan.
- **4.5.2** Each UDC will notify its End-Use Customers connected to its Distribution System of any voluntary curtailments notified to the UDC by the ISO pursuant to the provisions of the EEP.

4.5.3 Load Shedding

- 4.5.3.1 A portion of the ISO forecast of Control Area Load for each Trading Day will be allocated to each UDC or MSS Service Area. The ISO will aggregate each Scheduling Coordinator's Day-Ahead Schedules to Load in each UDC or MSS Service Area and will compare those aggregated Load Schedules to the ISO's Control Area Load forecast of metered Demand for that UDC or MSS Service Area to determine if the Load in the UDC or MSS Service Area has a resource deficiency based on the Day-Ahead Schedules.
- **4.5.3.2** If the ISO forecasts in advance of the Hour-Ahead Market that Load curtailment will be necessary due to a resource deficiency, the ISO will identify any UDC or MSS Service Area that is resource deficient. The ISO will provide notice to all Scheduling Coordinators if one or more UDC or

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: September 1, 2002

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 164A

MSS is deficient. If Load curtailment is required to manage a System Emergency associated

with insufficient Hour-Ahead Schedules of resources, the ISO will determine the amount and

location of Load to be curtailed and will allocate a portion of that required Load curtailment to

each UDC or MSS Operator whose Service Area has been identified, based on Hour-Ahead

Schedules, as being resource-deficient based on the ratio of its resource deficiency to the total

Control Area resource deficiency. Each UDC or MSS Operator shall be responsible for

notifying its customers and Generators connected to its system of curtailments and service

interruptions.

4.5.3.3 If a Load curtailment is required to manage System Emergencies, in any circumstances

other than those described in Section 4.5.3.2, the ISO will determine the amount and location of

Load to be reduced and to the extent practicable, will allocate a portion to each UDC based on

the ratio of its Demand (at the time of the Control Area annual peak for the previous year) to

total Control Area annual peak Demand for the previous year taking into account system

considerations and the UDC's curtailment rights under their tariffs. Each UDC or MSS Operator

shall be responsible for notifying its customers and Generators connected to its system of

curtailments and service interruption.

4.6 System Emergency Reports: UDC Obligations.

4.6.1 Each UDC shall maintain all appropriate records pertaining to a System Emergency.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 15, 2002 Effective: September 1, 2002

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 165

Superseding Original Sheet No. 165

4.6.2 Each UDC shall cooperate with the ISO in the preparation of an Outage review

pursuant to Section 2.3.2.9.

4.7 Coordination of Expansion or Modifications to UDC Facilities.

Each UDC and the Participating TO with which it is interconnected shall coordinate in the

planning and implementation of any expansion or modifications of a UDC's or Participating TO's

system that will affect their transmission interconnection, the ISO Controlled Grid or the

transmission services to be required by the UDC. The Participating TO shall be responsible for

coordinating with the ISO.

4.8 Information Sharing.

4.8.1 System Planning Studies.

The ISO, Participating TOs and UDCs shall share information such as projected Load growth

and system expansions necessary to conduct necessary System Planning Studies to the extent

that these may impact the operation of the ISO Controlled Grid.

4.8.2 System Surveys and Inspections.

The ISO and each UDC shall cooperate with each other in performing system surveys and

inspections to the extent these relate to the operation of the ISO Controlled Grid.

4.8.3 Reports.

4.8.3.1 The ISO shall make available to the UDCs any public annual reviews or reports

regarding performance standards, measurements and incentives relating to the ISO Controlled

Grid and shall also make available, upon reasonable notice, any such reports that the ISO

receives from the Participating TOs. Each UDC shall make available to the ISO any public

annual reviews or reports regarding performance standards,

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 166

Effective: October 13, 2000

measurements and incentives relating to the UDC's distribution system to the extent these

relate to the operation of the ISO Controlled Grid.

4.8.3.2 The ISO and UDCs shall develop an operating procedure to record requests received

for Maintenance Outages by the ISO and the completion of the requested maintenance and

turnaround times.

4.8.3.3 The UDCs shall maintain records that substantiate all maintenance performed on UDC

facilities which are under the Operational Control of the ISO. These records shall be made

available to the ISO upon receipt of reasonable notice.

4.8.4 Installation of and Rights of Access to UDC Facilities.

4.8.4.1 Installation of Facilities.

4.8.4.1.1 Meeting Service Obligations. The ISO and the UDC shall each have the right on

reasonable notice to install or to have installed equipment (including metering equipment) or

other facilities on the property of the other, to the extent that such installation is necessary for

the installing party to meet its service obligations unless to do so would have a negative impact

on the reliability of the service provided by the party owning the property.

4.8.4.1.2 Governing Agreements for Installations. The ISO and the UDC shall enter into

agreements governing the installation of equipment or other facilities containing customary,

reasonable terms and conditions.

4.8.4.2 Access to Facilities.

The UDCs shall grant the ISO reasonable access to UDC facilities free of charge for purposes

of inspection, repair, maintenance, or upgrading of facilities installed by the ISO on the UDC's

system, provided that the ISO must provide reasonable advance notice of its

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

Original Sheet No. 167

intent to access UDC facilities and opportunity for UDC staff to be present. Such access shall

not be provided unless the parties mutually agree to the date, time and purpose of each access.

Agreement on the terms of the access shall not be unreasonably withheld.

4.8.4.3 Access During Emergencies.

Notwithstanding any provision in this Section 4 the ISO may have access, without giving prior

notice, to any UDC's equipment or other facilities during times of a System Emergency or where

access is needed in connection with an audit function.

4.9 UDC Facilities under ISO Control.

The ISO and each UDC shall enter into an agreement in relation to the operation and

maintenance of the UDC's facilities which are under the ISO's Operational Control.

5. RELATIONSHIP BETWEEN ISO AND GENERATORS.

The ISO shall not Schedule Energy or Ancillary Services generated by any Generating Unit

interconnected to the ISO Controlled Grid, or to the Distribution System of a Participating TO or

of a UDC otherwise than through a Scheduling Coordinator. The ISO shall not be obligated to

accept Schedules or Adjustment Bids or bids for Ancillary Services relating to Generation from

any Generating Unit interconnected to the ISO Controlled Grid unless the relevant Generator

undertakes in writing to the ISO to comply with all applicable provisions of this ISO Tariff as they

may be amended from time to time, including, without limitation, the applicable provisions of this

Section 5 and Section 2.3.2.

5.1 General Responsibilities.

5.1.1 Operate Pursuant to Relevant Provisions of ISO Tariff.

Participating Generators shall operate, or cause their facilities to be operated, in accordance

with the relevant provisions of this ISO Tariff, including, but not limited to, the

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 168

Effective: October 13, 2000

operating requirements for normal and emergency operating conditions specified in Section 2.3

and the requirements for the dispatch and testing of Ancillary Services specified in Section 2.5.

5.1.2 Operate Pursuant to Relevant Operating Protocols.

Participating Generators shall operate, or cause their Generating Units and associated facilities

to be operated, in accordance with the relevant operating protocols established by the ISO or,

prior to the establishment of such protocols, the operating protocols established by the TO or

UDC owning the facilities that interconnect with the Generating Unit of the Participating

Generator.

5.1.3 Actions for Maintaining Reliability of ISO Controlled Grid.

The ISO plans to obtain the control over Generating Units that it needs to control the ISO

Controlled Grid and maintain reliability by purchasing Ancillary Services from the market auction

for these services. When the ISO responds to events or circumstances, it shall first use the

generation control it is able to obtain from the Ancillary Services bids it has received to respond

to the operating event and maintain reliability. Only when the ISO has used the Ancillary

Services that are available to it under such Ancillary Services bids which prove to be effective in

responding to the problem and the ISO is still in need of additional control over Generating

Units, shall the ISO assume supervisory control over other Generating Units. It is expected that

at this point, the operational circumstances will be so severe that a real-time system problem or

emergency condition could be in existence or imminent.

Each Participating Generator shall take, at the direction of the ISO, such actions

affecting such Generator as the ISO determines to be necessary to maintain the reliability

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 169

Superceding First Revised Sheet No. 169

of the ISO Controlled Grid. Such actions shall include (but are not limited to):

(a) compliance with the ISO's Dispatch instructions including instructions to deliver

Ancillary Services in real time pursuant to the Final Day-Ahead Schedules and Final

Hour-Ahead Schedules;

(b) compliance with the system operation requirements set out in Section 2.3 of this ISO

Tariff;

(c) notification to the ISO of the persons to whom an instruction of the ISO should be

directed on a 24-hour basis, including their telephone and facsimile numbers; and

(d) the provision of communications, telemetry and direct control requirements, including

the establishment of a direct communication link from the control room of the Generator

to the ISO in a manner that ensures that the ISO will have the ability, consistent with

this ISO Tariff and the ISO Protocols, to direct the operations of the Generator as

necessary to maintain the reliability of the ISO Controlled Grid, except that a

Participating Generator will be exempt from ISO requirements imposed in accordance

with this subsection (d) with regard to any Generating Unit with a rated capacity of less

than 10 MW, unless that Generating Unit is certified by the ISO to participate in the

ISO's Ancillary Services and/or to submit Supplemental Energy bids.

5.1.4 Generators Connected to UDC Systems.

With regard to any Generating Unit directly connected to a UDC system, a Participating

Generator shall comply with applicable UDC tariffs, interconnection requirements and

generation agreements. With regard to a Participating Generator's Generating Units directly

connected to a UDC system, the ISO and the UDC will coordinate to develop procedures to

avoid conflicting ISO and UDC operational directives.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: April 13, 2001 Effective: January 1, 2001

First Revised Sheet No. 169A Superseding Original Sheet No. 169A

5.1.4.1 Exemption for Generating Units Less Than 1 MW

A Generator with a Generating Unit directly connected to a UDC system will be exempt from compliance with this Section 5 and with Section MP 2.3.5 of the Metering Protocol in relation to that Generating Unit provided that (i) the rated capacity of the Generating Unit is less than 1 MW, and (ii) the Generator does not use the Generating Unit to participate in the ISO's Ancillary Services and/or to submit Supplemental Energy bids. This exemption in no way affects the calculation of or any obligation to pay the appropriate charges or to comply with all the other applicable Sections of this ISO Tariff.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: April 13, 2001 Effective: January 1, 2001

5.1.5 Existing Contracts for Regulatory Must-Take Generation.

Notwithstanding any other provision of this ISO Tariff, the ISO shall discharge its responsibilities in a manner which honors any contractual rights and obligations of the parties to contracts, or final regulatory treatment, relating to Regulatory Must-Take Generation of which protocols or other instructions are notified in writing to the ISO from time to time and on reasonable notice.

5.2 Procurement of Reliability Must-Run Generation by the ISO.

- **5.2.1** A Reliability Must-Run Contract is a contract entered into by the ISO with a Generator which operates a Generating Unit giving the ISO the right to call on the Generator to generate Energy and, only as provided in this Section 5.2, or as needed for Black Start or Voltage Support required to meet local reliability needs, or to procure Ancillary Services from Potrero or Hunter's Point power plants to meet operating criteria associated with the San Francisco local reliability area, to provide Ancillary Services from the Generating Units as and when this is required to ensure that the reliability of the ISO Controlled Grid is maintained.
- **5.2.1.1** If the ISO, pursuant to Section 2.5.12(e), has elected to procure an amount of megawatts of its forecast needs for an Ancillary Service in the Hour-Ahead Markets and there is not an adequate amount of capacity bid into an Hour-Ahead Market for the ISO to procure such amount of megawatts of that Ancillary Service (excluding bids that exceed price caps imposed by the ISO or FERC), the ISO may call upon Reliability Must-Run Units under Must-Run Contracts to meet the remaining portion of that amount of megawatts for that Ancillary Service but only after accepting all available bids in the Hour-Ahead Market (including any unused bids that can be used to satisfy that particular Ancillary Services requirement under Section 2.5.3.6), except that the ISO shall not be required to accept bids that exceed price caps imposed by the ISO or the FERC.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

5.2.1.2 If, at any time after the issuance of Final Day-Ahead Schedules for the Trading Day –

(1) the ISO determines that it requires more of an Ancillary Service than it has procured;

(2) all additional Day-Ahead bids for that Ancillary Service that have not been withdrawn

(including any unused bids that can be used to satisfy that particular Ancillary Services

requirement under Section 2.5.3.6) have been selected pursuant to Section 2.5.21,

except that the ISO shall not be required to accept bids that exceed price caps imposed

by the ISO or the FERC;

(3) the ISO has notified Scheduling Coordinators of the circumstances existing in

paragraphs (1) and (2) of this Section 5.2.1.2; and

(4) after such notice, the ISO determines that a Bid Insufficiency condition exists in the

Hour-Ahead Market for the Settlement Period in which the ISO requires more of an

Ancillary Service;

the ISO may call upon Reliability Must-Run Units under Reliability Must-Run Contracts to meet

the additional needs in addition to any amounts that the ISO has called upon under Section

5.2.1.1. The ISO must provide the notice specified in paragraph (3) of this Section 5.2.1.2 as

soon as possible after the ISO determines that additional Ancillary Services are needed for

which bids are not available. The ISO may only determine that a Bid Insufficiency exists in the

Hour-Ahead Market after the close of the Hour-Ahead Market, unless an earlier determination is

required in order to accommodate the Reliability Must-Run Unit's operating constraints. For the

purposes of this Section, a Bid Insufficiency exists in an Hour-Ahead Market if, and only if -

(a) bids in the Hour-Ahead Market for the particular Ancillary Service (including any unused

bids that can be used to satisfy that particular Ancillary Services requirement under

Section 2.5.3.6) that remain after first procuring the megawatts of the Ancillary

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

Superseding Original Sheet No. 172

Service that the ISO had notified Scheduling Coordinators it would procure in the Hour-

Ahead Market pursuant to Section 2.5.12 ("remaining Ancillary Service requirement")

represent, in the aggregate, less than two times such remaining Ancillary Service

requirement; or

(b) there are less than two unaffiliated bidders to provide such remaining Ancillary Service

requirement.

If a Bid Insufficiency condition exists, the ISO may nonetheless accept available market

bids if it determines in its sole discretion that the prices bid and the supply curve created by the

bids indicate that the bidders were not attempting to exercise market power.

5.2.2 [Not Used]

5.2.3 The ISO will, subject to any existing power purchase contracts of a Generating Unit,

have the right at any time based upon ISO Controlled Grid technical analyses and studies to

designate a Generating Unit as a Reliability Must-Run Unit. A Generating Unit so designated

shall then be obligated to provide the ISO with its proposed rates for Reliability Must-Run

Generation for negotiation with the ISO. Such rates shall be authorized by FERC or the Local

Regulatory Authority, whichever authority is applicable.

5.2.4 [Not Used]-

5.2.5 On a yearly basis, the ISO will carry out technical evaluations based upon historic

patterns of the operation of the ISO Controlled Grid and the ISO's forecast requirements for

maintaining the reliability of the ISO Controlled Grid in the next year. The ISO will then

determine which Generating Units it requires to continue to be Reliability Must-Run Units, which

Generating Units it no longer requires to be Reliability Must-Run Units and which Generating

Units it requires to become the subject of a Reliability Must-Run Contract which had not

previously been so contracted to the ISO.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

First Revised Sheet No. 173 Superseding Original Sheet No. 173

5.2.6 A *pro forma* of the Reliability Must-Run Contract is attached as Appendix G. From the ISO Operations Date all Reliability Must-Run Units will be placed under the "As Called" conditions, but the parties may, pursuant only to the terms of the Reliability Must-Run Contract, Transfer any such unit to one of the alternative forms of conditions under specific circumstances. The ISO will review the terms of the applicable forms of agreement applying to each Reliability Must-Run Unit to ensure that the ISO will procure Reliability Must-Run Generation from the cheapest available sources and to maintain System Reliability. The ISO shall give notice to terminate Reliability Must-Run Contracts that are no longer necessary or can be replaced by less expensive and/or more competitive sources for maintaining the reliability of the ISO Controlled Grid.

Utility in accordance with Annex 1 to the ISO's Settlement and Billing Protocol an ISO Invoice in respect to those costs incurred under each Reliability Must-Run Contract that are payable to the ISO by such Responsible Utility or payable by the ISO to such Responsible Utility pursuant to Section 5.2.8. The ISO Invoices shall reflect all reductions or credits required or allowed under or arising from the Reliability Must-Run Contract or under this Section 5.2.7. The ISO Invoice shall separately show the amounts due for services from each RMR Owner. Each Responsible Utility shall pay the amount due under each ISO Invoice by the due date specified in the ISO Invoice, in default of which interest shall become payable at the interest rate provided in the Reliability Must-Run Contract from the due date until the date on which the amount is paid in full. For each Reliability Must-Run Contract, the ISO shall establish two, segregated commercial bank accounts under the "Facility Trust Account" referred to in Annex 1 to the ISO's Settlement and Billing Protocol and Article 9 of the Reliability Must-Run Contract. One commercial bank account, the "RMR Owner Facility Trust Account," shall be held in trust

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 26, 2000

by the ISO for the RMR Owner. The other commercial bank account, the "Responsible Utility Facility Trust Account," shall be held in trust by the ISO for the Responsible Utility. Payments received by the ISO from the Responsible Utility in connection with the Reliability Must-Run Contract, including payments following termination of the Reliability Must-Run Contract, will be deposited into the RMR Owner Facility Trust Account and payments from the ISO to the RMR Owner will be withdrawn from such account, in accordance with Section 5.2.7, Article 9 of the Reliability Must-Run Contract and Annex 1 to the ISO's Settlement and Billing Protocol. Any payments received by the ISO from the RMR Owner in connection with the Reliability Must-Run Contract will be deposited into the Responsible Utility Facility Trust Account. Any payments due to the Responsible Utility of funds received from the RMR Owner in connection with the Reliability Must-Run Contract will be withdrawn from the Responsible Utility Facility Trust Account, in accordance with this Section 5.27, Annex 1 to the ISO's Settlement and Billing Protocol and Article 9 of the Reliability Must-run Contract. Neither the RMR Owner Facility Trust Account nor the Responsible Utility Trust Account shall have other funds commingled in it an any time. The ISO shall not modify this Section 5.27 or Annex 1 to the ISO Settlement and billing Protocol as it applies to procedures for the billing, invoicing and payment of charges under Reliability Must-Run Contracts without the Responsible Utility's consent, provided, however, that no such consent shall be required with respect to any change in the method by which costs incurred by the ISO under RMR Contracts are allocated to or among Responsible Utilities.

5.2.7.1 Except where the Responsible Utility is also the RMR Owner, the Responsible Utility's payment of the ISO Invoice shall be made without offset, recoupment or deduction of any kind whatsoever. Notwithstanding the foregoing, if the ISO fails to deduct an amount required to be deducted under Section 5.2.7.1.1, the Responsible Utility may deduct such amount from payment otherwise due under such ISO Invoice.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 26, 2000

5.2.7.1.1 If the Responsible Utility disputes an ISO Invoice, Revised Estimated RMR Invoice, or Revised Adjusted RMR Invoice, or Final Invoice, it shall pay the ISO Invoice but may pay under protest and reserve its right to seek a refund, with interest, from the ISO. If resolution of the dispute results in an amount paid by the Responsible Utility under protest being due from the ISO to the Responsible Utility and from the RMR Owner to the ISO, and such amount was paid to the RMR Owner by the ISO, then such amount, with interest at the interest rate specified in the applicable Reliability Must-Run Contract from the date of payment until the date on which the amount is repaid in full, shall be refunded by the RMR Owner to the ISO and from the ISO to the Responsible Utility, pursuant to Article 9 of the Reliability Must-Run Contract and Annex 1 to the ISO's Settlement and Billing Protocol, by the RMR Owner's inclusion of such refund amount in the appropriate invoice. If the RMR Owner does not include such refund amount (including interest) in the appropriate invoice, then such refund amount shall be deducted by the ISO from the next succeeding amounts otherwise due from the Responsible Utility to the ISO and from the next succeeding amounts otherwise due from the ISO to the RMR Owner with respect to the applicable Reliability Must-Run Contract or, if such Contract has terminated, such amount shall be refunded by the ISO to the Responsible Utility; provided, however, that if and to the extent that such resolution is based on an error or breach or default of the RMR Owner's obligations to the ISO under the Reliability Must-Run Contract, then such refund obligation shall extend only to amounts actually collected by the ISO from the RMR Owner as a result of such resolution. If resolution of the dispute requires the ISO, but not the RMR Owner, to pay the Responsible Utility, then such award shall be recovered from any applicable insurance proceeds, provided that to the extent sufficient funds are not recoverable through insurance, the amount of the award (whether determined through settlement, or ADR or otherwise) shall be collected by the ISO pursuant to Section 13.5, and in any event, the award shall be paid by the ISO to the Responsible Utility pursuant to Section 13.5.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 26, 2000

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 175A

Effective: October 26, 2000

5.2.7.1.2 If the Responsible Utility disputes an ISO Invoice, a Revised Estimated Invoice, a

Revised Adjusted RMR Invoice, or a Final Invoice, or part thereof, based in whole or in part on

an alleged error by the RMR Owner or breach or default of the RMR Owner's obligations to the

ISO under the Reliability Must-Run Contract, the Responsible Utility shall notify the ISO of such

dispute within 12 months of its receipt of the applicable Revised Adjusted RMR Invoice or Final

Invoice from the ISO, except that the Responsible Utility may also dispute a Revised Estimated

RMR Invoice, Revised Adjusted RMR Invoice, or Final Invoice for the reasons set forth above in

this Section 5.2.7.1.2, within 60 days from the issuance of a final report with respect to an audit

of the RMR Owner's books and accounts allowed by a Reliability Must-Run Contract.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

5.2.7.1.3 If the Responsible Utility disputes an ISO Invoice, a Revised Estimated RMR Invoice, a Revised Adjusted RMR Invoice, or a Final Invoice, based in whole or in part on an alleged error by the ISO or breach or default of the ISO's obligations to the Responsible Utility, the Responsible Utility shall notify the ISO of such dispute prior to the later to occur of (i) the date 12 months following the date on which the ISO submitted such invoice to the Responsible Utility for payment or (ii) the date 60 days following the date on which a final report is issued in connection with an operational audit, pursuant to Section 12.2.2, of the ISO's performance of its obligations to Responsible Utilities under this Section 5.2.7 conducted by an independent third party selected by the ISO Governing Board and covering the period to which such alleged dispute relates. The ISO or any Responsible Utility shall have the right to request, but not to require, that the ISO Governing Board arrange for such an operational audit at any time.

5.2.7.1.4 Notwithstanding Section 13 of this ISO Tariff, any Responsible Utility dispute relating to an ISO Invoice, a Revised Estimated Invoice, a Revised Adjusted Invoice, a Final Invoice, or a RMR Charge, RMR Payment or RMR Refund as defined in Annex 1 to the Settlement and Billing Protocol, shall be resolved through the dispute resolution process specified in the relevant RMR Contract. If the Responsible Utility fails to notify the ISO of any dispute as provided above, it shall be deemed to have validated the invoice and waived its right to dispute such invoice.

5.2.7.2 The RMR Owner shall, to the extent set forth herein, be a third party beneficiary of, and have all rights that the ISO has under the ISO Tariff, at law, in equity or otherwise, to enforce the Responsible Utility's obligation to pay all sums invoiced to it in the ISO Invoices but not paid by the Responsible Utility, to the extent that, as a result of the Responsible Utility's failure to pay, the ISO does not Pay the RMR Owner on a timely basis amounts due under the Reliability Must-Run Contract. The RMR Owner's rights as a third party beneficiary shall be no greater than the ISO's rights and shall be subject to the dispute resolution process specified in the relevant RMR Contract. Either the ISO or the

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 26, 2000

Superseding Original Sheet No. 177

RMR Owner (but not both) will be entitled to enforce any claim arising from an unpaid ISO

Invoice, and only one party will be a "disputing party" under the dispute resolution process

specified in the relevant RMR Contract with respect to such claim so that the Responsible Utility

will not be subject to duplicative claims or recoveries. The RMR Owner shall have the right to

control the disposition of claims against the Responsible Utility for non-payments that result in

payment defaults by the ISO under a Reliability Must-Run Contract. To that end, in the event of

non-payment by the Responsible Utility of amounts due under the ISO Invoice, the ISO will not

take any action to enforce its rights against the Responsible Utility unless the ISO is requested

to do so by the RMR Owner. The ISO shall cooperate with the RMR Owner in a timely manner

as necessary or appropriate to most fully effectuate the RMR Owner's rights related to such

enforcement, including using its best efforts to enforce the Responsible Utility's payment

obligations if, as, to the extent, and within the time frame, requested by the RMR Owner. The

ISO shall intervene and participate where procedurally necessary to the assertion of a claim by

the RMR Owner.

5.2.7.3 If a Responsible Utility first executed a TCA after April 1, 1998 (a "New Responsible

Utility") and if:

(i) the senior unsecured debt of the New Responsible Utility is rated or becomes

rated at less than A- from Standard & Poor's ("S&P") or A3 from Moody's

Investment Services ("Moody's"), and

(ii) Such ratings do not improve to A- or better from S&P or A3 or better from

Moody's within 60 days,

the New Responsible Utility shall issue and confirm to the ISO an irrevocable and unconditional

letter of credit in an amount equal to three times the highest monthly payment invoiced by the

ISO to the New Responsible Utility (or the prior Responsible

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003 Utility) in connection with services under Reliability Must-Run Contracts in the last 3 months for which invoices have been issued. The letter of credit must be issued by a bank or other financial institution whose senior unsecured debt rating is not less than A from S&P and A2 from Moody's. The letter of credit shall be in such form as the ISO may reasonably require from time to time by notice to the New Responsible Utility and shall authorize the ISO or the Owner to draw on the letter of credit for deposit solely into the RMR Owner Facility Trust Account in an amount equal to any amount due and not paid by the Responsible Utility under the ISO Invoice. The security provided by the New Responsible Utility pursuant to this Section 5.2.7.3 is intended to cover the New Responsible Utility's outstanding liability for payments it is liable to make to the ISO under this Section 5.2.7, including monthly payments, any reimbursement for capital improvement, termination fees and any other payments to which the ISO is liable under Reliability Must-Run Contracts.

5.2.8 Responsibility for Reliability Must-Run Charge Except as otherwise provided in Section 5.2.8.1, the costs incurred by the ISO under each Reliability Must-Run Contract shall be payable to the ISO by the Responsible Utility in whose PTO Service Territory the Reliability Must-Run Generating Units covered by such Reliability Must-Run Contract are located or, where a Reliability Must-Run Generating Unit is located outside the PTO Service Territory of any Responsible Utility, by the Responsible Utility or Responsible Utilities whose PTO Service Territories are contiguous to the Service Area in which the Generating Unit is located, in proportion to the benefits that each such Responsible Utility receives, as determined by the ISO. Where costs incurred by the ISO under a Reliability Must-Run Contract are allocated among two or more Responsible Utilities pursuant to this section, the ISO will file the allocation under Section 205 of the Federal Power Act.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 21, 2004 Effective: May 8, 2004

Third Revised Sheet No. 179

FIRST REPLACEMENT VOLUME NO. I

5.2.8.1 Responsibility for Reliability Must-Run Charges Associated with SONGS. If the ISO procures Reliability Must-Run Generation from the San Onofre Nuclear Generation Station Units 2 or 3, it shall determine prior to the operation of such facilities as Reliability Must-Run Generation the appropriate allocation of associated charges, if any, among Responsible Utilities. The allocation of such charges shall be based on the reliability benefits that the ISO reasonably identifies through studies and analysis as accruing to the respective Service Areas of the Responsible Utilities.

- **5.2.9** The ISO may Dispatch an RMR Unit that has currently selected Condition 2 of its RMR Contract to provide Energy through an out-of-market transaction for reasons other than to manage Intra-Zonal Congestion or to address local reliability under the following conditions:
 - (1) The ISO projects that it will require Energy from the Condition 2 RMR Unit to (a) meet forecast Demand and operating reserve requirements or (b) manage Inter-Zonal Congestion;
 - (2) If ISO must Dispatch a Condition 2 RMR Unit to meet forecast Demand and operating reserve requirements, the ISO must first revoke or deny waivers of the must-offer obligation from all other Generating Units, including non-Condition 2 RMR Units and Generating Units not subject to an RMR Contract subject to the must-offer obligation and not on outage, except as set forth in item (5) below;
 - (3) If ISO must Dispatch a Condition 2 RMR Unit to manage projected Inter-Zonal Congestion, the ISO must first revoke or deny waivers of the must-offer obligation from all other Generating Units, including non-Condition 2 RMR Units and Generating Units not subject to an RMR Contract subject to the must-offer obligation, that are within the Congested Zone, except as set forth in item (5) below;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004 Effective: July 11, 2004

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 179.01

(4) Before Dispatching a Condition 2 RMR Unit in accordance with this Section 5.2.9,

the ISO must notify Market Participants of (a) the situation for which the ISO is

contemplating Dispatching a Condition 2 RMR Unit in accordance with this

Section 5.2.9, and (b) the date and time the ISO requires the Condition 2 RMR

Unit so Dispatched to be operating. The ISO shall provide such notice as far in

advance as practical and prior to directing the Condition 2 Unit to start up;

(5) The ISO does not have to revoke or deny a waiver to a Generating Unit (a)

subject to environmental limitations if doing so would violate such limitations, or

cause the Generating Unit to be unavailable in the future, or if the environmental

limitations currently restrict the availability or use of the Generating Unit; or (b) if

that Generating Unit would cause or exacerbate Congestion, Overgeneration or

other operational problem; or (c) if that Generating Unit is incapable of being

available for Dispatch in the required timeframe.

Notwithstanding anything to the contrary in the applicable RMR Contract, all MWh, start-ups

and service hours provided by a Generating Unit that has currently selected Condition 2 of its

RMR Contract pursuant to this Section 5.2.9 outside of the RMR Contract shall not be used to

determine future RMR Contract Annual Service Limits. Payment for Dispatches pursuant to this

Section 5.2.9 is governed by Section 11.2.4.2 of this Tariff.

5.3 Identification of Generating Units.

Each Generator shall provide data identifying each of its Generating Units and such information

regarding the capacity and the operating characteristics of the Generating Unit as may be

reasonably requested from time to time by the ISO.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004 Effective: July 11, 2004

Original Sheet No. 179.02

5.4 WECC Requirements.

5.4.1 Generator Performance Standard.

Participating Generators shall, in relation to each of their Generating Units, meet all applicable WECC standards including any standards regarding governor response capabilities, use of power system stabilizers, voltage control capabilities and hourly Energy delivery. Unless otherwise agreed by the ISO, a Generating Unit must be capable of operating at capacity registered in the ISO Controlled Grid interconnection data, and shall follow the voltage schedules issued by the ISO from time to time.

5.4.2 Reliability Criteria.

Participating Generators shall comply with the requirements of the WSCC Reliability Criteria Agreement, including the applicable WSCC Reliability Criteria set forth in Section IV of Annex A thereof. In the event that a Participating Generator fails to comply, it will be subject to the sanctions

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004 Effective: July 11, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 179A

Superseding First Revised Sheet No. 179A

applicable to such failure. Such sanctions shall be assessed pursuant to the procedures

contained in the WSCC Reliability Criteria Agreement. Each and all of the provisions of the

WSCC Reliability Criteria Agreement are hereby incorporated by reference into this Section

5.4.2 as though set forth fully herein, and Participating Generators shall for all purposes be

considered Participants as defined in that Agreement, and shall be subject to all of the

obligations of Participants, under and in connection with the WSCC Reliability Criteria

Agreement. The Participating Generators shall copy the ISO on all reports supplied to the

WECC in accordance with Section IV of Annex A of the WSCC Reliability Criteria Agreement.

5.4.3 Payment of Sanctions.

Each Participating Generator shall be responsible for payment directly to the WECC of any

monetary sanction assessed against that Participating Generator by the WECC pursuant to the

WSCC Reliability Criteria Agreement. Any such payment shall be made pursuant to the

procedures specified in the WSCC Reliability Criteria Agreement.

5.5 Outages.

5.5.1 Planned Maintenance.

Each Participating Generator shall comply with the applicable provisions of Section 2.3.3.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 29, 2001

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 180

Superseding First Revised Sheet No. 180

5.5.2 The ISO shall, on the basis of the information supplied by Participating Generators

under Section 5.5.1 and other information available to the ISO, prepare and publish on WEnet

forecast aggregate available Generation capacity and forecast Demand on an annual, quarterly

and monthly basis in accordance with the provisions of the ISO Outage Coordination Protocol.

In publishing these forecasts, the ISO shall identify any expected Congestion conditions caused

by planned Outages of Participating Generators.

5.5.3 Forced Outages.

Procedures equivalent to those set out in Section 2.3.3 shall apply to all Participating

Generators in relation to Forced Outages.

5.6 System Emergencies.

5.6.1 All Generating Units, System Units and System Resources that are owned or controlled

by a Participating Generator are (without limitation to the ISO's other rights

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 29, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Superseding Second Revised Sheet No. 181

Third Revised Sheet No. 181

FIRST REPLACEMENT VOLUME NO. I

under this ISO Tariff) subject to control by the ISO during a System Emergency and in

circumstances in which the ISO considers that a System Emergency is imminent or threatened.

The ISO shall, subject to Section 5.6.2, have the authority to instruct a Participating Generator

to bring its Generating Unit on-line, off-line, or increase or curtail the output of the Generating

Unit and to alter scheduled deliveries of Energy and Ancillary Services into or out of the ISO

Controlled Grid, if such an instruction is reasonably necessary to prevent an imminent or

threatened System Emergency or to retain Operational Control over the ISO Controlled Grid

during an actual System Emergency. The ISO shall have the authority to instruct an RMR Unit

whose owner has selected Condition 2 of its RMR Contract to start-up and change its output if

the ISO has reasonably used all other available and effective resources to prevent a threatened

System Emergency without declaring that a System Emergency exists. It the ISO so instructs a

Condition 2 RMR Unit, it shall compensate that unit in accordance with Section 11.2.4.2 and

allocate the costs in accordance with Section 11.2.4.2.1.1.

5.6.2 The ISO shall, where reasonably practicable, utilize Ancillary Services which it has the

contractual right to instruct and which are capable of contributing to containing or correcting the

actual, imminent or threatened System Emergency prior to issuing instructions to a Participating

Generator under Section 5.6.1.

5.6.3 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 11, 2004 Effective: July 11, 2004

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Third Revised Sheet No. 181A

Superseding Second Revised Sheet No. 181A

[Page Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: June 24, 2002 Effective: June 21, 2001

Fourth Revised Sheet No. 181B

Superseding Sub. Third Revised Sheet No. 181B

5.7 Interconnection of Generating Units and Generating Facilities to the ISO Controlled

Grid.

5.7.1 Applicability.

This Section 5.7 and the Standard Large Generator Interconnection Procedures (LGIP) or ISO Tariff

Appendix W, as applicable, shall apply to:

(a) each new Generating Unit that seeks to interconnect to the ISO Controlled Grid;

(b) each existing Generating Unit connected to the ISO Controlled Grid that will be modified with a

resulting increase in the total capability of the power plant;

(c) each existing Generating Unit connected to the ISO Controlled Grid that will be modified

without increasing the total capability of the power plant but has changed the electrical

characteristics of the power plant such that its re-energization may violate Applicable

Reliability Criteria; and

(d) each existing qualifying facility Generating Unit connected to the ISO Controlled Grid whose

total Generation was previously sold to a Participating TO or on-site customer but whose

Generation, or any portion thereof, will now be sold in the wholesale market, subject to Section

5.7.1.2 below.

5.7.1.1 The owner of a Generating Unit described in Section 5.7.1(a), (b), or (c), or its designee, shall

be an Interconnection Customer required to submit an Interconnection Request and comply with the

LGIP or ISO Tariff Appendix W, as applicable.

5.7.1.2 If the owner of a qualifying facility described in Section 5.7.1(d), or its designee, represents that

the total capability and electrical characteristics of the qualifying facility will be substantially unchanged,

then that entity must submit an affidavit to the ISO and the applicable Participating TO representing that

the total capability and electrical characteristics of the qualifying facility will remain substantially

unchanged. If there is any change to the total capability and electrical characteristics of the qualifying

facility, however, the affidavit shall include supporting information describing any such changes.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 30, 2005 Effective: July 1, 2005

FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 181C

Effective: July 1, 2005

Superseding Sub. First Revised Sheet No. 181C

The ISO and the applicable Participating TO shall have the right to verify whether or not the total

capability or electrical characteristics of the qualifying facility have changed or will change.

5.7.1.2.1 If the ISO and the applicable Participating TO confirm that the electrical

characteristics are substantially unchanged, then that request will not be placed into the

interconnection queue. However, the owner of the qualifying facility, or its designee, will be required

to execute either a Standard Large Generator Interconnection Agreement in accordance with Section

11 of the LGIP or an interconnection agreement in accordance with ISO Tariff Appendix W, as

applicable.

5.7.1.2.2 If the ISO and the applicable Participating TO cannot confirm that the total capability

and electrical characteristics are and will be substantially unchanged, then the owner of the qualifying

facility, or its designee, shall be an Interconnection Customer required to submit an Interconnection

Request and comply with either the LGIP or ISO Tariff Appendix W, as applicable.

5.7.2 Interconnections to the Distribution System.

Any proposed interconnection by the owner of a planned Generating Unit, or its designee, to connect

that Generating Unit to a Distribution System of a Participating TO will be processed, as applicable,

pursuant to the Wholesale Distribution Access Tariff or CPUC Rule 21, or other Local Regulatory

Authority requirements, if applicable, of the Participating TO; provided, however, that the owner of the

planned Generating Unit, or its designee, shall be required to mitigate any adverse impact on

reliability of the ISO Controlled Grid consistent with the Standard Large Generator Interconnection

Procedures. In addition, each Participating TO will provide to the ISO a copy of the system impact

study used to determine the impact of a planned Generating Unit on the Distribution System and the

ISO Controlled Grid pursuant to a request to interconnect under the applicable Wholesale Distribution

Access Tariff or CPUC Rule 21, or other Local Regulatory Authority requirements, if applicable.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 30, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Second Revised Sheet No. 181D

FIRST REPLACEMENT VOLUME NO. I

Superseding Sub. First Revised Sheet No. 181D

5.7.3 Maintenance of Encumbrances.

No new Generating Unit shall adversely affect the ability of the applicable Participating TO to honor its Encumbrances existing as of the time an Interconnection Customer submits its Interconnection Request to the ISO. The applicable Participating TO, in consultation with the ISO, shall identify any such adverse effect on its Encumbrances in the Interconnection System Impact Study performed under Section 7 of the LGIP or under Section 5.1 of ISO Tariff Appendix W, as applicable. To the extent the applicable Participating TO determines that the connection of the new Generating Unit will have an adverse effect on Encumbrances, the Interconnection Customer shall mitigate such adverse effect.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 30, 2005 Effective: July 1, 2005

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Substitute First Revised Sheet No. 181E

Superseding Original Sheet No. 181E

[PAGE NOT USED]

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Substitute First Revised Sheet No. 181F

Superseding Original Sheet No. 181F

[PAGE NOT USED]

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Substitute First Revised Sheet No. 181G Superseding Original Sheet No. 181G

[PAGE NOT USED]

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Second Revised Sheet No. 181H Superseding First Revised Sheet No. 181H FIRST REPLACEMENT VOLUME NO. I

[PAGE NOT USED]

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Second Revised Sheet No. 1811 Superseding First Revised Sheet No. 1811 FIRST REPLACEMENT VOLUME NO. I

[PAGE NOT USED]

FERC ELECTRIC TARIFF

Second Revised Sheet No. 181J

FIRST REPLACEMENT VOLUME NO. I

Superseding First Revised Sheet No. 181J

[PAGE NOT USED]

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 181K Superseding First Revised Sheet No. 181K

[PAGE NOT USED]

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Substitute First Revised Sheet No. 181L

Superseding Original Sheet No. 181L

[PAGE NOT USED]

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Substitute First Revised Sheet No. 181M Superseding Original Sheet No. 181M

[PAGE NOT USED]

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Substitute First Revised Sheet No. 181N Superseding Original Sheet No. 181N

[PAGE NOT USED]

Issued by: Charles F. Robinson, Vice President and General Counsel

Third Revised Sheet No. 182 Superseding Second Revised Sheet No. 182

5.8 Recordkeeping; Information Sharing.

FIRST REPLACEMENT VOLUME NO. I

5.8.1 Requirements for Maintaining Records.

Participating Generators shall provide to the ISO such information and maintain such records as are reasonably required by the ISO to plan the efficient use and maintain the reliability of the ISO Controlled Grid.

5.8.2 Providing Information to Generators.

The ISO shall provide to any Participating Generator, upon its request, copies of any operational assessments, studies or reports prepared by or for the ISO (unless such assessments studies or reports are subject to confidentiality rights or any rule of law that prohibits disclosure) concerning the operations of such Participating Generator's

Issued by: Charles F. Robinson, Vice President and General Counsel

Superseding Original Sheet No. 183

Generating Units, including, but not limited to, reports on major Generation Outages, available

transmission capacity, and Congestion.

5.8.3 Preparation of Reports on Major Incidents.

In preparing any report on a major incident the ISO shall have due regard to the views of any

Participating Generator involved or materially affected by such incident.

5.8.4 Sharing Information on Reliability of ISO Controlled Grid.

The ISO and each Participating Generator shall have the obligation to inform each other, as

promptly as possible, of any circumstance of which it becomes aware (including, but not limited

to, abnormal temperatures, storms, floods, earthquakes, and equipment depletions and

malfunctions and deviations from the Registered Data and operating characteristics) that is

reasonably likely to threaten the reliability of the ISO Controlled Grid or the integrity of the

Participating Generator's facilities. The ISO and each Participating Generator shall also inform

the other as promptly as possible of any incident of which it becomes aware (including, but not

limited to, equipment outages, over-loads or alarms) which, in the case of a Participating

Generator, is reasonably likely to threaten the reliability of the ISO Controlled Grid or, in the

case of the ISO, is reasonably likely to adversely affect the Participating Generator's facilities.

Such information shall be provided in a form and content which is reasonable in all the

circumstances and sufficient to provide timely warning to the other party of the potential impact.

5.9 Access Right.

A Participating Generator shall, at the request of the ISO and upon reasonable notice, provide

access to its facilities (including those relating to communications, telemetry and direct control

requirements) as necessary to permit the ISO or an ISO approved meter

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: May 11, 2001 Effective: May 29, 2001

Third Revised Sheet No. 184

Superseding Second Revised Sheet No. 184

inspector to perform such testing as is necessary (i) to test the accuracy of any meters upon

which the Participating Generator's compensation is based, or performance is measured, (ii) to

test the Participating Generator's compliance with any performance standards pursuant to

Section 5.4 of this ISO Tariff, or (iii) to obtain information relative to a Forced Outage.

5.10 Black Start Services.

5.10.1 All Participating Generators with Black Start Generating Units must satisfy technical

requirements specified by the ISO.

5.10.2 The ISO shall from time to time undertake performance tests, with or without prior

notification.

5.10.3 The ISO shall have the sole right to determine when the operation of Black Start

Generating Units is required to respond to conditions on the ISO Controlled Grid.

5.10.4 If the ISO has intervened in the market for Energy and/or Ancillary Services pursuant

to Section 2.3.2.3, the price paid by the ISO for Black Start services shall be sufficient to

permit the relevant Participating Generator to recover its costs over the period that it is directed

to operate by the ISO.

5.10.5 If a Black Start Generating Unit fails to achieve a Black Start when called upon by the

ISO, or fails to pass a performance test administered by the ISO, the Market Participant that

has contracted to supply Black Start service from the Generating Unit shall re-pay to the ISO

any reserve payment(s) that it has received since the administration of the last performance

test or the last occasion upon which it successfully achieved a Black Start when called upon by

the ISO, whichever is the shorter period.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 29, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Second Revised Sheet No. 184A

Superseding First Revised Sheet No. 184A

5.11 Must-Offer Obligations

5.11.1 Applicability

FIRST REPLACEMENT VOLUME NO. I

The requirements of Section 5.11 shall apply to (a) all Participating Generators, and (b) all

persons, regardless of whether the person is a "public utility" as defined in Section 201 of the

Federal Power Act, that own or control one or more non-hydroelectric Generating Units,

System Units or System Resources located in California from which energy or capacity is

either: (i) sold through any market operated by the ISO, or (ii) transmitted over the ISO

Controlled Grid. Each person described in this Section 5.11.1 is referred to in the ISO Tariff as

a "Must-Offer Generator." The requirements of this Section 5.11 shall apply to all non-

hydroelectric Generating Units located in California that are owned or controlled by a Must-

5ரிசே2் அவ்புகூடி Generation

For the purposes of this Section 5.11, a Must-Offer Generator's "Available Generation" from a

non-hydroelectric Generating Unit shall be: (a) the Generating Unit's maximum operating level

adjusted for any outages or reductions in capacity reported to the ISO in accordance with

Section 2.3 or 5.11.3 and for any limitations on the Generating Unit's operation under

applicable law, including contractual obligations, which shall be reported to the ISO, (b) minus

the Generating Unit's scheduled operating point as identified in the ISO's Final Hour-Ahead

Schedule, (c) minus the Generating Unit's capacity committed to provide Ancillary Services to

the ISO either through the ISO's Ancillary Services market or through self-provision by a

Scheduling Coordinator, and (d) minus the capacity of the Generating Unit committed to deliver

Energy or provide Operating Reserve to the Must-Offer Generator's Native Load.

5.11.3 Reporting Requirements for Non-Participating Generators

So that the ISO may determine the Available Generation of all Must-Offer Generators, Must-

Offer Generators that are not Participating Generators shall be required to file with the ISO, for

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: June 21, 2001

each non-hydroelectric Generating Unit located in California they own or control: (i) the Unit's minimum operating level; (ii) the Unit's maximum operating level; and (iii) the Unit's ramp rates at all operating levels; and (iv) such other information the ISO determines is necessary to determine available generation and to dispatch Must-Offer Generators. In addition, Must-Offer Generators that are not Participating Generators must, consistent with the notification obligations of Participating Generators and in order to comply with the intent of this Section 5.11, notify the ISO, as soon as practicable, of any Planned Maintenance Outages, Forced Outages, Force Majeure Event outages or any other reductions in their maximum operating levels.

5.11.4 Obligation To Offer Available Capacity

Except as set forth in Section 5.11.6, all Must-Offer Generators shall offer to sell in the ISO's Real Time Market for Imbalance Energy, in all hours, all their Available Generation as defined in Section 5.11.2.

5.11.5 Submission of Bids and Applicability of the Proxy Price

For each Operating Hour, Must-Offer Generators shall submit Supplemental Energy bids for all of their Available Generation to the ISO in accordance with Section 2.5.22.4. In addition, the ISO shall calculate for each gas-fired Must-Offer Generator, in accordance with Section 2.5.23, a Proxy Price for Energy.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 11, 2004 Effective: July 11, 2004

Superseding Sub. Ninth Revised Sheet No. 184C

If a Must-Offer Generator fails to submit a Supplemental Energy bid for any portion of its Available Generation for any Dispatch Interval, the unbid quantity of the Must-Offer Generator's Available Generation will be deemed by the ISO to be bid at the Must-Offer Generator's Proxy Price for that hour if: (i) the applicable Generating Unit is a gas-fired unit and (ii) the Must-Offer Generator has provided the ISO with adequate data in compliance with Sections 2.5.23.3.3 and 5.11.3 for the applicable Generating Unit. For all other Generating Units owned or controlled by a Must-Offer Generator, the unbid quantity of the Must-Offer Generator's Available Generation will be deemed by the ISO to be bid and settled in accordance with Section 11.2. In order to dispatch resources providing Imbalance Energy in proper merit order, the ISO will insert this unbid quantity into the Must-Offer Generator's Supplemental Energy bid curve above any lower-priced segments of the bid curve and below any higher-priced segments of the bid curve as necessary to maintain a non-decreasing bid curve over the entire range of the Must-Offer Generator's Available Generation.

5.11.6 Must-Offer Obligation Process

Must-Offer Generators may seek a waiver of the obligation to offer all available capacity, as set forth in Section 5.11.4 of this ISO Tariff, for one or more of their Generating Units.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004 Effective: Upon Notice After September 6, 2003

FERC ELECTRIC TARIFF

Substitute Third Revised Sheet No. 184C.01

FIRST REPLACEMENT VOLUME NO. I

Superseding Second Revised Sheet No. 184C.01

All Must-Offer Generators obligated under the must-offer obligation that have not submitted

Day-Ahead Energy Schedules will be deemed to have requested a waiver, either implicitly or

explicitly, of the obligation to offer all available capacity. If conditions permit, and at the ISO's

non-discriminatory and sole discretion, the ISO may grant waivers and allow a Must-Offer

Generator to remove one or more Generating Units from service.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004 Effective: July 11, 2004

FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Substitute Fifth Revised Sheet No. 184D

Superseding Fourth Revised Sheet No. 184D

The hours for which waivers are not granted shall constitute Waiver Denial Periods. A Waiver Denial Period shall be extended as necessary to accommodate Generating Unit minimum up and down times. Units shall be on-line in real time during Waiver Denial Periods, or they will be in violation of the mustoffer obligation. Exceptions shall be allowed for verified forced outages. The ISO may revoke waivers as necessary due to outages, changes in Load forecasts, or changes in system conditions. The ISO shall determine which waiver(s) will be revoked, and shall notify the relevant Scheduling Coordinator(s). The ISO shall inform a Must-Offer Generator that its Waiver request has been approved, disapproved or revoked, and shall provide the Must-Offer Generator with the reason(s) for the decision, which reasons shall be non-discriminatory. The ISO will: (1) notify Must-Offer Generators of the ISO decisions on pending Waiver requests received no later than 10:00 a.m. (beginning of Hour Ending 11) no later than 11:30 a.m. (middle of Hour Ending 12) on the day before the operating day for which the Waivers are requested; (2) at any time but no later than 11:30 a.m. on the following day, notify Must-Offer Generators of the ISO decisions on Waiver requests that were submitted to the ISO after 10:00 a.m. (beginning of Hour Ending 11) on the day before; (3) end Waiver Denial Periods at any time; and (4) revoke Waivers at any time, while making best attempts to revoke a Waiver at least 90 minutes prior to the time a unit would be required to be on-line generating at its Pmin.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004 Effective: July 11, 2004

FIRST REPLACEMENT VOLUME NO. I

Ninth Revised Sheet No. 184D.01 Superseding Sub. Eighth Revised Sheet No. 184D.01

5.11.6.1 Recovery of Minimum Load Costs By Must-Offer Generators

5.11.6.1.1 Eligibility

Except as set forth below, Generating Units shall be eligible to recover Minimum Load Costs during Waiver Denial Periods. Units from Must-Offer Generators that incur Minimum Load Costs during hours for which the ISO has granted to them a waiver shall not be eligible to recover such costs for such hours. When a Must-Offer Generator has a Final Hour-Ahead Energy Schedule, the Must-Offer Generator shall not be eligible to recover Minimum Load Costs for any such hours within a Waiver Denial Period. When, on a 10-minute Settlement Interval basis, a Must-Offer Generator generating at minimum load in compliance with the must-offer obligation, produces a quantity of Energy that varies from its minimum operating level by more than the Tolerance Band, the Must-Offer Generator shall not be eligible to recover Minimum Load Costs for any such Settlement Intervals during hours within a Waiver Denial Period. When, on a Settlement Interval basis, a Must-Offer Generator's resource produces a quantity of Energy above minimum load due to an ISO Dispatch Instruction, the Must-Offer Generator shall recover its Minimum Load Costs and its bid costs, as set forth in Section 11.2.4.1.1.1, for any such Settlement Intervals during hours within a Waiver Denial Period, irrespective of deviations outside of its Tolerance Band. Subject to the foregoing eligibility restrictions set forth in this section, the ISO shall guarantee recovery of the Minimum Load Costs of an otherwise eligible Must-Offer Generator for each Settlement Interval during hours within a Waiver Denial Period as follows: (1) First, ISO will pre-dispatch for real time the minimum load Energy from Must-Offer Generators that have been denied waivers for each hour within a Waiver Denial Period; (2) This minimum load Energy will be accounted as Instructed

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 24, 2004 Effective: Upon Notice After September 6, 2003

FIRST REPLACEMENT VOLUME NO. I

Superseding Eighth Revised Sheet No. 184E

Imbalance Energy for each Settlement Interval within the relevant hour and be settled at the Resource-Specific Settlement Interval Ex Post Price; (3) To the extent the Instructed Imbalance Energy payments are not sufficient to cover the generator's Minimum Load Cost as defined in Section 5.11.6.1.2 of this Tariff, the generator will also receive an uplift payment for its Minimum Load Cost compensation for the relevant eligible Settlement Intervals of hours during the Waiver Denial Period that the Generating Unit runs at minimum load in compliance with the must-offer obligation; and (4) To the extent the Generator is dispatched for real time Imbalance Energy above its minimum load for any Dispatch Interval within an hour during the Waiver Denial Period, the Generator will be eligible for Bid Cost Recovery, as set forth in Section 11.2.4.1.1.1.

Payments for Imbalance Energy Above the Minimum Operating Level for **Generating Units Eligible to Be Paid Minimum Load Costs**

When, on a Settlement Interval basis, a Must-Offer Generator's Generating Unit produces a quantity of Energy above the Generating Unit's minimum operating level due to an ISO Dispatch Instruction, the Must-Offer Generator shall recover its Minimum Load Costs and its bid costs, based on the ISO's instruction, as set forth in Section 11.2.4.1.1.1, for any such Settlement Intervals during hours within a Waiver Denial Period, irrespective of deviations outside of its Tolerance Band.

5.11.6.1.1.2 Payments for Imbalance Energy for the Minimum Operating Level for Generating **Units Eligible to Be Paid Minimum Load Costs**

A Generating Unit operating at or near its operating level during a Waiver Denial Period either (1) without a forward Schedule for its minimum operating level Energy or (2) with a Schedule to a specialpurpose Demand ID for the sole purpose of Scheduling the minimum operating level Energy shall be paid, in addition to being paid its Minimum Load Costs subject to eligibility as set forth in Section 5.11.6.1.1, an amount equal to the Resource Specific Settlement Interval Ex Post Price times the amount of Energy actually delivered.

5.11.6.1.2 **Minimum Load Costs**

The Minimum Load Costs shall be calculated as the sum, for all eligible hours in the Waiver Denial Period and Settlement Periods in which the unit generated in response to an ISO Dispatch Instruction,

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004 Effective: Upon Notice After September 6, 2003 FIRST REPLACEMENT VOLUME NO. I

Superseding Original Sheet No. 184E.01

of: 1) the product of the unit's average heat rate (as determined by the ISO from the data provided in accordance with Section 2.5.23.3.3) at the unit's relevant minimum operating level or Dispatchable minimum operating level as set forth in the ISO Master File or as amended through notification to the ISO via SLIC and the gas price determined by Equation C1-8 (Gas) of the Schedules to the Reliability Must-Run Contract for the relevant Service Area (San Diego Gas & Electric Company, Southern California Gas Company, or Pacific Gas and Electric Company), or, if the Must-Offer Generator is not served from one of those three Service Areas; and 2) the product of the unit's relevant minimum operating level or Dispatchable minimum operating level as set forth in the ISO Master File or as amended through notification to the ISO via SLIC; and \$6.00/MWh.

5.11.6.1.3 **Invoicing Minimum Load Costs**

The ISO shall determine each Scheduling Coordinator's Minimum Load Costs and make payments for these costs as part of the ISO's market settlement process. Scheduling Coordinators may

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004 Effective: Upon Notice After September 6, 2003 submit to the ISO data detailing the hours for which they are eligible to recover Minimum Load Costs. Scheduling Coordinators who elect to submit data on hours they are eligible to recover Minimum Load Costs must: 1) use the Minimum Load Cost invoice template posted on the ISO Home Page, and 2) submit the invoice on or before fifteen (15) Business Days following the last Trading Day in the month in which such costs were incurred, except that Scheduling Coordinators seeking reimbursement for Minimum Load Costs incurred between May 29, 2001, and June 30, 2002 must submit their data to the ISO by August 5, 2002.

5.11.6.1.4 Allocation of Minimum Load Costs

For each Settlement Interval, the ISO shall determine that the Minimum Load Costs for each unit operating during a Waiver Denial Period are due to (1) local reliability requirements, (2) zonal requirements, or (3) Control Area-wide requirements. For each such month, the ISO shall sum the Settlement Interval Minimum Load Costs and shall allocate those costs as follows:

In the Generating Unit was operating to meet local reliability requirements, the incremental locational cost shall be allocated to the Participating TO in whose PTO Service Territory the Generating Unit is located, or, where the Generating Unit is located outside the PTO Service Territory of any Participating TO, to the Participating TO or Participating TOs whose PTO Service Territory or Territories are contiguous to the Service Area in which the Generating Unit is located, in proportion to the benefits that each such Participating TO receives, as determined by the ISO. Where the costs allocated under this section are allocated to two or more Participating TOs, the ISO shall file the allocation under Section 205 of the Federal Power Act. For the purposes of this section, the incremental locational cost shall be the additional costs associated with committing and operating a particular unit or units to meet a local reliability requirement over the costs of a less expensive unit or units that would have been committed and operated absent the local reliability requirement. If a unit is committed in real-time for local reliability, its Minimum Load costs shall be considered incremental locational costs.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 11, 2004 Effective: Upon Notice by the ISO

Costs allocated under this part (1) shall be considered Reliability Services Costs.

- 2) if the Generating Unit was operating due to Inter-Zonal Congestion, the Minimum Load Costs shall be allocated on a monthly basis to each Scheduling Coordinator in the constrained Zone based on the ratio of that Scheduling Coordinator's monthly Demand to the sum of all Scheduling Coordinator's monthly Demand in that Zone;
- 3) if the Generating Unit was operating to satisfy an ISO Control Area-wide need, the ISO shall allocate the Minimum Load Costs in the following way:
 - a. first, to the monthly absolute total of all Net Negative Uninstructed Deviation (determined for each Settlement Interval based on Final Hour-Ahead Schedules) at a per-MWh rate that shall not exceed a figure that is determined by dividing the total Minimum Load Cost in that month by the sum of the minimum loads for Generating Units operating under Waiver Denial Periods in that month;
 - b. finally, all remaining costs not allocated per (a) shall be allocated to each Scheduling Coordinator in proportion to the sum of that Scheduling Coordinator's monthly Control Area Gross Load and Demand within California outside the ISO Control Area that is served by exports to the monthly sum of the ISO Control Area Gross Load and the projected Demand within California outside the ISO Control Area that is served by exports from the ISO Control Area of all Scheduling Coordinators.

5.11.6.1.5 Payment Of Available Capacity Under The Must-Offer Obligation

Available capacity that is required to be offered to the Real Time Market, if dispatched by the ISO, shall be settled as follows: the actual amount of the dispatched Energy shall be settled at the applicable Instructed Imbalance Energy Market Clearing Price. Minimum Load Cost compensation shall be paid for all otherwise eligible hours within the Waiver Denial Period, as

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: June 30, 2005 Effective: Upon Notice by the ISO

Original Sheet No. 184F.02

defined in Section 5.11.6.1.1, that the unit generated above minimum load in compliance with ISO Dispatch Instructions.

5.11.6.2 Criteria for Issuing Must-Offer Waivers

The ISO shall grant waivers so as to: 1) provide sufficient on-line generating capacity to meet operating reserve requirements; and 2) account for other physical operating constraints, including Generating Unit minimum up and down times. The ISO shall grant, deny or revoke waivers using a security-constrained unit commitment software application to minimize start-up and Minimum Load Costs.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 11, 2004 Effective: 10 Days After Notice by the ISO

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Fourth Revised Sheet No. 184G

FIRST REPLACEMENT VOLUME NO. I

Superseding Third Revised Sheet No. 184G

- 5.12 [Not Used]
- 5.13 Energy Bids.
- 5.13.1 Energy Bid Definition.

A single Energy Bid curve per resource per hour shall be used in: (a) the real-time Hourly Pre-Dispatch as set forth in Dispatch Protocol 8.6.3, and (b) Dispatch in the Real Time Markets. A corresponding operational ramp rate as provided for in SBP Section 6.5 shall be submitted along with the single Energy Bid curve and shall be used in determination of Dispatch Instructions pursuant to Section 2.5.22.6.1(c).

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

The Energy Bid shall be a staircase price (\$/MWh) versus quantity (MW) curve of up to 10 segments. The Energy Bid shall be submitted to the real-time Imbalance Energy market using the Supplemental Energy Bid template. The Energy Bid curve shall be monotonically increasing, i.e., the price of a subsequent segment shall be greater than the price of a previous segment. Subject to the foregoing, sellers may increase or decrease bids in the ISO Real Time Market for capacity associated with those parts of the bid curve that were not accepted in or before the Hour-Ahead Market. For capacity associated with those parts of the bid curve previously accepted in or before the Hour-Ahead Market, sellers may only submit lower bids in subsequent markets. Each Forbidden Operating Region must be represented by only one bid segment.

5.13.2 Energy Bid Submission.

Real Time Market. Bids shall be submitted for use in the real-time Hourly Pre-Dispatch in DP 8.6.3(j) and the Real-Time Economic Dispatch up to sixty-two (62) minutes prior to the Operating Hour. Resources required to offer their Available Generation in accordance with Section 5.11.4 shall be required to submit Energy Bids for 1) all of their Available Generation and 2) any Ancillary Services capacity awarded or self-provided in the Day-Ahead or Hour-Ahead Ancillary Services markets. In the absence of submitted bids, default bids will be used for resources required to offer their Available Generation in accordance with Section 5.11.4. Resources not required to offer their Available Generation in accordance with Section 5.11.4 that were awarded or self-provided Ancillary Services capacity must submit an Energy Bid for no less than the amount of awarded or self-provided Ancillary Services capacity.

Resources not required to offer their Available Generation in accordance with Section 5.11.4 may voluntarily submit Energy Bids. Submitted Energy Bids shall be subject to the Damage Control Bid Cap as set forth in Section 28.1 and to the Mitigation Measures set forth in Appendix A to the Market Monitoring and Information Protocol.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 8, 2005 Effective: April 9, 2005

FIRST REPLACEMENT VOLUME NO. I

Third Revised Sheet No. 1841 Superseding Second Revised Sheet No. 1841

Real-Time Energy Bid Partition. The portion of the single Energy Bid that corresponds to the high end of the resource's operating range, shall be allocated to any awarded or self-provided Ancillary Services in the following order from higher to lower capacity: (a) Regulation Up; (b) Spinning Reserve; (c) Non-Spinning Reserve; and (d) Replacement Reserve. For resources providing Regulation Up, the upper regulating limit shall be used if it is lower than the highest operating limit. The remaining portion of the Energy Bid (i.e. that portion not associated with capacity committed to provide Ancillary Services) shall constitute a Bid to provide Supplemental Energy.

5.13.3 Requirement to Submit Energy Bids For Awarded or Self-Provided Ancillary Services Capacity

Scheduling Coordinators for resources that have been awarded or self-provide Regulation Up, Spinning Reserve, Non-Spinning Reserve or Replacement Reserve capacity must submit a Supplemental Energy bid for at least all the awarded or self-provided Ancillary Services capacity. To the extent a Supplemental Energy bid is not so submitted for a gas-fired resource, the ISO shall calculate a Supplemental Energy bid in accordance with Section 2.5.23.3.4 and insert that bid into the real-time Imbalance Energy market. To the extent a Supplemental Energy bid is not so submitted for a non-gas-fired resource, the ISO shall insert a bid of \$0/MWh into the real-time Imbalance Energy market.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 30, 2002

Effective: October 13, 2000

6. TRANSMISSION SYSTEM INFORMATION AND COMMUNICATIONS.

6.1 WEnet.

6.1.1 The ISO shall engage the services of an Internet Service Provider (ISP) to establish,

implement and operate WEnet as a wide-band, wide-area backbone which is functionally

similar to the Internet.

6.1.2 The ISO shall provide non-discriminatory access to information concerning the status

of the ISO Controlled Grid by posting that information on the public access sites on WEnet.

6.1.2.1 WEnet will provide an interface for data exchange between the ISO and Scheduling

Coordinators who shall each have individually assigned login accounts on WEnet.

6.1.2.2 The ISO shall provide public information over WEnet which shall include, at a

minimum, but not limited to:

6.1.2.2.1 Advisory Information: The following may be provided over such time scales as the

ISO may in its discretion decide:

(a) Future planned transmission Outages;

(b) Generator Meter Multipliers.

6.1.2.2.2 Day-Ahead and Hour-Ahead Information:

(a) Date;

(b) Hour;

(c) Total forecast Demand by UDC;

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 186

Superseding Original Sheet No. 186

(d) Inter-Zonal Congestion price per Congested path; Total Regulation and Reserve

service capacity reservation cost by Zone;

(e) Total capacity of Inter-Zonal Interfaces; and

(f) Available capacity of Inter-Zonal Interfaces.

6.1.2.2.3 Ex Post Information:

(a) Date;

(b) Hour; and

(c) Hourly Ex Post Price.

6.1.2.3 WEnet shall be used by the ISO to post Usage Charges for Inter-Zonal Interfaces

within the ISO Controlled Grid.

6.1.2.4 WEnet shall serve as a bulletin board to enable Market Participants to inform one

another of scheduling changes and trades made.

6.1.2.5 WEnet may be used by the ISO to communicate operating orders to the Scheduling

Coordinators and other Market Participants, both in advance of actual operation and in real

time. Such orders may include but are not limited to:

(a) Notifying Scheduling Coordinators and other Market Participants to be on call to

provide Non-Spinning Reserve and Replacement Reserves and Black Start;

(b) Issuing start-up instructions;

(c) Stating the amount of Spinning Reserves to be carried;

(d) Requesting specific Ramping patterns;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 187

Superseding Original Sheet No. 187

(e) Indicating which Scheduling Coordinators and other Market Participants are to provide

Regulation;

(f) Specifying the minimum amount of unloaded capacity that must be maintained in order

to meet Regulation Requirements;

(g) Issuing shut-down instructions; and

(h) Specifying the voltage level and reactive reserve each Market Participant must

maintain.

6.1.2.6 WEnet shall be used by the ISO to provide information to Market Participants regarding

the ISO Controlled Grid. Such information may include but is not limited to:

(a) Voltage control parameters;

(b) ISO historical data for Congestion;

(c) Forecasts of Usage Charges; and

(d) Generation Meter Multipliers to support seven (7) day advance submission of

Schedules by Scheduling Coordinators. Additional Generation Meter Multipliers may

be published for different seasons and loading patterns.

6.2 Reliable Operation of the WEnet.

6.2.1 Market Participants shall arrange access to WEnet through the Internet Service

Provider.

.2.2 The ISO shall arrange for the Internet Service Provider to provide a pathway for public

Internet connectivity through the WEnet backbone to accommodate users other than Market

Participants without the need for a separate, dedicated user data link. This public Internet

connection may provide a reduced level of data exchange and reduced information concerning

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 188

Effective: October 13, 2000

the reliability and performance of the ISO Controlled Grid when compared to that provided to

Market Participants through dedicated user data links.

6.3 Information to be Provided By Connected Entities to the ISO.

6.3.1 Each Participating TO and Connected Entity shall provide to the ISO:

6.3.1.1 A single and an alternative telephone number and a single and an alternative facsimile

number by which the ISO may contact 24 hours a day a representative of the Participating TO

or Connected Entity in, or in relation to, a System Emergency;

6.3.1.2 The names or titles of the Participating TO's or Connected Entity's representatives who

may be contacted at such telephone and facsimile numbers.

6.3.2 Each representative specified pursuant to Section 6.3.1 shall be a person having

appropriate experience, qualification, authority, responsibility and accountability within the

Participating TO or the Connected Entity to act as the primary contact for the ISO in the event of

a System Emergency.

6.3.3 The details required under this Section 6.3 shall at all times be maintained up to date

and the Participating TO and the Connected Entity shall notify the ISO of any changes promptly

and as far in advance as possible.

6.4 Failure or Corruption of the WEnet.

The ISO shall, in consultation with Scheduling Coordinators, make provision for procedures to

be implemented in the event of a total or partial failure of WEnet or the material corruption of

data on WEnet and include these procedures in the ISO Protocols. The ISO shall ensure that

such alternative communications systems are tested periodically.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Substitute Second Revised Sheet No. 189

Superseding First Revised Sheet No. 189

6.5 Confidentiality.

All information posted on WEnet shall be subject to the confidentiality obligations contained in

Section 20.3 of this ISO Tariff.

6.6 Standards of Conduct.

The ISO and all Market Participants shall comply with their obligations, to the extent applicable,

under the standards of conduct set out in 18 C.F.R. §37.

7. TRANSMISSION PRICING.

7.1 Access Charges.

All Market Participants withdrawing Energy from the ISO Controlled Grid shall pay Access

Charges in accordance with this Section 7.1 and Appendix F, Schedule 3. Prior to the transition

date determined under Section 4 of Schedule 3 to Appendix F, the Access Charge for each

Participating TO shall be determined in accordance with the principles set forth in this Section

7.1 and in Section 5 of the TO Tariff. The Access Charge shall comprise two components,

which together shall be designed to recover each Participating TO's Transmission Revenue

Requirement. The first component shall be the annual authorized revenue requirement

associated with the transmission facilities and Entitlements turned over to the Operational

Control of the ISO by a Participating TO approved by FERC. The second component shall be

based on the Transmission Revenue Balancing Account (TRBA), which shall be designed to

flow through to the Participating TO's Transmission Revenue Credits calculated in accordance

with Section 5 of the TO Tariff and other credits identified in Sections 6 and 8 of Schedule 3 in

Appendix F of the ISO Tariff.

Commencing on the transition date determined under Section 4 of Schedule 3 to

Appendix F, the Access Charges shall be paid by any UDC or MSS Operator that is serving

Gross Load in a PTO Service Territory,

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 21, 2004 Effective: May 8, 2004

Superseding Second Revised Sheet No. 190

and shall consist, where applicable, of a High Voltage Access Charge, a Transition Charge and a Low Voltage Access Charge. High Voltage Access Charges and Low Voltage Access Charges shall each comprise two components, which together shall be designed to recover each Participating TO's High Voltage Transmission Revenue Requirement and Low Voltage Transmission Revenue Requirement, as applicable. The first component shall be based on the annual authorized Transmission Revenue Requirement associated with the high voltage or low voltage, as applicable, transmission facilities and Entitlements turned over to the ISO Operational Control by a Participating TO. The second component shall be the Transmission Revenue Balancing Account (TRBA), which shall be designed to flow through the Participating TO's Transmission Revenue Credits associated with the high voltage or low voltage, as applicable, transmission facilities and Entitlements and calculated in accordance with Section 5 of the TO Tariff and other credits identified in Section 6 and 8 of Schedule 3 of Appendix F of the ISO Tariff. Each Participating TO shall provide in its TO Tariff filing with FERC an appendix to such filing that states the Participating TO's High Voltage Transmission Revenue Requirement, its Low Voltage Transmission Revenue Requirement (if applicable) and its Gross Load used in developing the rate. The allocation of each Participating TO's Transmission Revenue Requirement between the High Voltage Transmission Revenue Requirement and the Low Voltage Transmission Revenue Requirement shall be undertaken in accordance with Section 11 of Schedule 3 of Appendix F. To the extent necessary, each Participating TO shall make conforming changes to its TO Tariff.

The applicable High Voltage Access Charge and the Transition Charge shall be paid to the ISO by each UDC and MSS Operator based on its Gross Load connected to a High Voltage Transmission Facility in a PTO Service Territory,

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 21, 2004 Effective: May 8, 2004

Superseding Original Sheet No. 190A

either directly or through intervening distribution facilities, but not through a Low Voltage

Transmission Facility. The applicable High Voltage Access Charge, the Transition Charge and

the Low Voltage Access Charge for the applicable Participating TO shall be paid by each UDC

and MSS Operator based on its Gross Load in the PTO Service Territory. The applicable High

Voltage Access Charge and Transition Charge shall be assessed by the ISO as a charge for

transmission service under this ISO Tariff, shall be determined in accordance with Schedule 3

of Appendix F, and shall include all applicable components of the High Voltage Access Charge

and Transition Charge set forth therein.

The Low Voltage Access Charge for each Participating TO is set forth in that

Participating TO's TO Tariff. Each Participating TO shall charge for and collect the Low Voltage

Access Charge, as provided in its TO Tariff. If a Participating TO is using the Low Voltage

Transmission Facilities of another Participating TO, such Participating TO shall also be

assessed the Low Voltage Access Charge of the other Participating TO by such other

Participating TO. The ISO shall provide to the applicable Participating TO a statement of the

amount of Energy delivered to each UDC and MSS Operator serving Gross Load that utilizes

the Low Voltage Transmission Facilities of that Participating TO on a monthly basis. If a UDC

or MSS Operator that is serving Gross Load in a PTO Service Territory has Existing Rights to

use another Participating TO's Low Voltage Transmission Facilities, such entity shall not be

charged the Low Voltage Access Charge for delivery of Energy to Gross Load for deliveries

using the Existing Rights. Each Participating TO shall recover Standby Transmission

Revenues directly from the Standby Service Customers of that Participating TO through its

applicable retail rates.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 21, 2004 Effective: May 8, 2004 CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 191 Superseding Original Sheet No. 191

7.1.1 Publicly Owned Electric Utilities Access Charge

Local Publicly Owned Electric Utilities whose transmission facilities are under ISO Operational Control shall file with the FERC their proposed High Voltage Transmission Revenue Requirements, and any proposed changes thereto, under procedures determined by the FERC to be applicable to such filings and shall give notice to the ISO and to all Scheduling Coordinators of any such filing. A prospective New Participating TO that is a Local Publicly Owned Electric Utility shall submit its first proposed High Voltage Transmission Revenue Requirement to the FERC and the ISO at the time the Local Publicly Owned Electric Utility submits its application to become a New Participating TO in accordance with the Transmission Control Agreement. Federal power marketing agencies whose transmission facilities are under ISO Operational Control shall develop their High Voltage Transmission Revenue Requirement pursuant to applicable federal laws and regulations.

Issued by: Charles F. Robinson, Vice President and General Counsel

Superseding Second Revised Sheet No. 192

The procedures for public participation in a federal power marketing agency's ratemaking process are posted on the federal power marketing agency's website. Each federal power marketing agency shall also post on its website the Federal Register Notices and FERC orders for rate making processes that impact the federal power marketing agency's High Voltage Transmission Revenue Requirement. At the time the federal power marketing agency submits its application to become a New Participating TO in accordance with the Transmission Control Agreement, it shall submit its first proposed High Voltage Transmission Revenue Requirement to the FERC and the ISO.

7.1.2 High Voltage Access Charge and Transition Charge Settlement. UDCs and MSS Operators serving Gross Load in a PTO Service Territory shall be charged on a monthly basis, in arrears, the applicable High Voltage Access Charge and Transition Charge. The High Voltage Access Charge and Transition Charge for a billing period is calculated by the ISO as the product of the applicable High Voltage Access Charge or Transition Charge, as applicable, and Gross Load connected to the facilities of the UDC and MSS Operator in the PTO Service Territory. The High Voltage Access Charge and Transition Charge are determined in accordance with Schedule 3 of Appendix F of the ISO Tariff. These rates may be adjusted from time to time in accordance with Schedule 3 to Appendix F. During the 10-year transition period described in Section 4 of Schedule 3 of Appendix F of the ISO Tariff, a UDC or MSS Operator that is also a Participating TO shall pay, or receive payment of, if applicable, the difference between (i) the High Voltage Access Charge and the Transition Charge applicable to its transactions as a UDC or MSS Operator; and (ii) the disbursement of High Voltage Access Charge revenues to which it is entitled pursuant to Section 7.1.3.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 21, 2004 Effective: May 8, 2004

7.1.3 Disbursement of High Voltage Access Charge and Transition Charge Revenues.

The ISO shall collect and pay, on a monthly basis, to Participating TOs all High Voltage Access Charge and Transition Charge revenues at the same time as other ISO charges and payments are settled. High Voltage Access Charge revenues received with respect to the High Voltage Access Charge and the Transition Charge shall be distributed to Participating TOs in accordance with Appendix F, Schedule 3, Section 10.

- 7.1.3.1 [Not Used]
- 7.1.3.2 [Not Used]
- 7.1.3.3 [Not Used]
- 7.1.3.4 [Not Used]
- 7.1.3.5 [Not Used]

7.1.4 Wheeling.

Any Scheduling Coordinator or other such entity scheduling a Wheeling transaction shall pay to the ISO the product of (i) the applicable Wheeling Access Charge, and (ii) the total hourly schedules of Wheeling in kilowatt-hours for each month at each Scheduling Point associated with that transaction. Schedules that include Wheeling transactions shall be subject to the Congestion Management procedures and protocols in accordance with Sections 7.2 and 7.3.

7.1.4.1 Wheeling Access Charge. The Wheeling Access Charge shall be determined by the TAC Area and transmission ownership or Entitlement, less all Encumbrances, associated with the Scheduling Point at which the Energy exits the ISO Controlled Grid. The Wheeling

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Third Revised Sheet No. 194

Superseding Second Revised Sheet No. 194

Access Charge for Scheduling Points contained within a single TAC Area, that are not joint facilities, shall be equal to the High Voltage Access Charge for the applicable TAC Area in accordance with Section 3 of Appendix F plus the applicable Low Voltage Access Charge if the Scheduling Point is on a Low Voltage Transmission Facility. Wheeling Access Charges shall not apply for Wheeling under a bundled non-economy Energy coordination agreement of a Participating TO executed prior to July 9, 1996.

7.1.4.2 Wheeling Over Joint Facilities. To the extent that more than one Participating TO owns or has Entitlement to transmission capacity, less all Encumbrances, exiting the ISO Controlled Grid at a Scheduling Point, the Scheduling Coordinator shall pay the ISO each month a rate for Wheeling at that Scheduling Point which reflects an average of the Wheeling Access Charge applicable to those Participating TOs, weighted by the relative share of such ownership or Entitlement to transmission capacity, less all Encumbrances, at such Scheduling Point. If the Scheduling Point is located at High Voltage Transmission Facilities, the Wheeling Access Charge will consist of a High Voltage Wheeling Access Charge component.

Additionally, if the Scheduling Point is located at Low Voltage Transmission Facilities, the applicable Low Voltage Wheeling Access Charge component will be added to the Wheeling Access Charge. The methodology for developing the weighted average rate for Wheeling at each Scheduling Point is set forth in Appendix H.

7.1.4.3 Disbursement of Wheeling Revenues. The ISO shall collect and pay to Participating TOs and other entities as provided in Section 3.2.7.3 all Wheeling revenues at the same time as other ISO charges and payments are settled. The ISO shall provide to the applicable Participating TO and other entities as provided in Section 3.2.7.3 a statement of the aggregate amount of Energy delivered to each Scheduling Coordinator using such Participating TO's Scheduling Point to allow for calculation of Wheeling revenue and auditing of disbursements. Wheeling revenues shall be disbursed by the ISO based on the following:

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

7.1.4.3.1 Scheduling Point with All Participating TOs in the Same TAC Area: With respect to revenues received for the payment of High Voltage Wheeling Access Charges for Wheeling to a Scheduling Point at which all of the facilities and Entitlements, less all Encumbrances, are owned by Participating TOs in the same TAC Area, Wheeling revenues shall be disbursed to each such Participating TO based on the ratio of each Participating TO's High Voltage Transmission Revenue Requirement to the sum of all such Participating TO's High Voltage Transmission Revenue Requirements. If the Scheduling Point is located at a Low Voltage Facility, revenues received with respect to Low Voltage Wheeling Access Charges for Wheeling to that Scheduling Point shall be disbursed to the Participating TOs that own facilities and Entitlements making up the Scheduling Point in proportion to their Low Voltage Transmission Revenue Requirements. Additionally, if a Participating TO has a transmission upgrade or addition that was funded by a Project Sponsor, the Wheeling revenue allocated to such Participating TO shall be disbursed as provided in Section 3.2.7.3.

7.1.4.3.2 Scheduling Point without All Participating TOs in the Same TAC Area:

With respect to revenues received for the payment of Wheeling Access Charges for Wheeling to a Scheduling Point at which the facilities and Entitlements, less all Encumbrances, are owned by Participating TOs in different TAC Areas, Wheeling revenues shall be disbursed to such Participating TOs as follows. First, the revenues shall be allocated between such TAC Areas in proportion to the ownership and Entitlements of transmission capacity, less all Encumbrances, at the Scheduling Point of the Participating TOs in each such TAC Area. Second, the revenues thus allocated to each TAC Area shall be disbursed among the Participating TOs in the TAC Area in accordance with Section 7.1.4.3.1.

7.1.4.4 Information Required from Scheduling Coordinators. Scheduling
Coordinators that schedule Wheeling Out or Wheeling Through transactions to a Bulk Supply
Point, or other point of interconnection between the ISO Controlled Grid and the transmission

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 196 Superseding Original Sheet No. 196

system of a Non-Participating TO, that are located within the ISO Control Area, shall provide the ISO, within 5 days from the end of the calendar month to which the relevant Trading Day relates, details of such transactions scheduled by them (other than transactions scheduled pursuant to Existing Contracts) sorted by Bulk Supply Point or point of interconnection for each Settlement Period (including kWh scheduled). The ISO shall use such information, which may be subject to review by the ISO, to settle Wheeling Access Charges and payments. The ISO shall publish a list of the Bulk Supply Points or interconnection points to which this Section 7.1.4.4 applies together with details of the electronic form and procedure to be used by Scheduling Coordinators to submit the required information on the ISO "Home Page".

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 197

7.1.5 Unbundled Retail Transmission Rates.

The Access Charge for unbundled retail transmission service provided to End-Users by a FERC-jurisdictional electric utility Participating TO shall be determined by the FERC and submitted to the ISO for information only. For a Local Publicly Owned Electric Utility, retail transmission service rates shall be determined by the Local Regulatory Authority and submitted to the ISO for information only.

7.1.6 [Not Used]

7.1.6.1 Tracking Account. If the Access Charge rate methodology implemented pursuant to Section 7.1 results in Access Charge rates for any Participating TO which are different from those in effect prior to the ISO Operations Date, an amount equal to the difference between the new rates and the prior rates for the remainder of the period, if any, during which a cost recovery plan established pursuant to Section 368 of the California Public Utilities Code (as added by AB 1890) is in effect for such Participating TO shall be recorded in a tracking account. The balance of that tracking account will be recovered from customers and paid to the appropriate Participating TO after termination of the cost recovery plan set forth in Section 368 of California Public Utilities Code (as added by AB 1890). The recovery and payments shall be based on an amortization period not exceeding three years in the case of electric corporations regulated by the CPUC or five years for Local Publicly Owned Electric Utilities.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 198 Superseding First Revised Sheet No. 198

7.1.6.2 Addition of New Facilities After ISO Implementation. The costs of transmission

facilities placed in service after the ISO Operations Date shall be recovered consistent with the

cost recovery determinations made pursuant to Section 3.2.7.

7.1.6.3 Effect on Tax-Exempt Status. Nothing in this Section shall compel any Participating

TO to violate any restrictions applicable to facilities financed with tax-exempt bonds or

contractual restrictions and covenants regarding the use of transmission facilities.

7.2 Zonal Congestion Management.

7.2.1 The ISO Will Perform Congestion Management.

7.2.1.1 Transmission Congestion. Congestion occurs when there is insufficient

transfer capacity to simultaneously implement all of the Preferred Schedules that Scheduling

Coordinators submit to the ISO.

7.2.1.2 Zone-Based Approach. The ISO will use a Zone-based approach to manage

Congestion. A Zone is a portion of the ISO Controlled Grid within which Congestion is

expected to occur infrequently or have relatively low Congestion Management costs. Inter-

Zonal Interfaces consist of transmission facilities that are expected to have relatively high

Congestion Management costs. For these interfaces, allocation of usage based on the value

placed on these interfaces by the Scheduling Coordinators will increase efficient use of the

ISO Controlled Grid.

7.2.1.3 Types of Congestion. Congestion that occurs on Inter-Zonal Interfaces is referred to

as "Inter-Zonal Congestion." Congestion that occurs due to transmission system Constraints

within a Zone is referred to as "Intra-Zonal Congestion."

Issued by: Charles F. Robinson, Senior Regulatory Counsel

Superseding Second Revised Sheet No. 199

7.2.1.4 Elimination of Potential Transmission Congestion. The ISO's Day-Ahead and

Hour-Ahead scheduling procedures will eliminate potential Inter-Zonal Congestion by:

7.2.1.4.1 scheduling the use of Inter-Zonal Interfaces by the Scheduling Coordinators who

place the highest value on those rights, based on the Adjustment Bids that are submitted by

Scheduling Coordinators; and

7.2.1.4.2 rescheduling Scheduling Coordinators' resources (but so that Intra-Zonal

transmission limits are not violated) using the Adjustment Bids that are submitted by Scheduling

Coordinators.

7.2.1.5 Elimination of Real-Time Inter-Zonal Congestion. In its management of Inter-

Zonal Congestion in real time, the ISO will issue Dispatch Instructions as necessary to relieve

Inter-Zonal Congestion by Dispatching Generation or Demand, as necessary, based on the

Energy Bids in accordance with Dispatch Protocol Section 8.3.

7.2.2 General Requirements for the ISO's Congestion Management. The ISO's

Congestion Management in the Day-Ahead Market and Hour-Ahead Market shall:

7.2.2.1 only operate if the Scheduling Coordinators do not eliminate Congestion voluntarily;

7.2.2.2 adjust the Schedules submitted by Scheduling Coordinators only as necessary to

alleviate Congestion;

7.2.2.3 maintain separation between the resource portfolios of different Scheduling

Coordinators, by not arranging any trades between Scheduling Coordinators as part of the

Inter-Zonal Congestion Management process;

Effective: October 13, 2000

7.2.2.4 for Inter-Zonal Congestion Management, suggest, but not require, rescheduling within Scheduling Coordinators' portfolios of Schedules to produce a feasible Schedule by the

conclusion of the scheduling procedure;

7.2.2.5 [Not Used]

7.2.2.6 publish information and, if requested by Scheduling Coordinators will provide a

mechanism to facilitate voluntary trades among Scheduling Coordinators;

7.2.2.7 [Not Used]

7.2.2.8 adjust the Schedules submitted by Scheduling Coordinators on the basis of any price

information voluntarily submitted through their Adjustment Bids; and

7.2.2.9 for the hours when the ISO applies its Inter-Zonal Congestion Management apply the

same Usage Charge to all Scheduling Coordinators for their allocated share of the Inter-Zonal

Interface capacity.

7.2.3 Use of Computational Algorithms for Congestion Management and Pricing.

The ISO will use computer optimization algorithms to implement its Congestion Management

process.

7.2.4 Adjustment Bids Will Be Used by the ISO to Manage Congestion.

7.2.4.1 Uses of Adjustment Bids by the ISO.

7.2.4.1.1 The ISO shall use the Adjustment Bids, in both the Day-Ahead Market and the

Hour-Ahead Market, to schedule Inter-Zonal Interface capacity to those Scheduling

Coordinators which value it the most and to reflect the Scheduling Coordinators' implicit values

for Inter-Zonal Interface capacity.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Superseding Second Revised Sheet No. 201

7.2.4.1.2 The Adjustment Bids will be used by the ISO to determine the marginal value

associated with each Congested Inter-Zonal Interface.

7.2.4.1.3 [Not used]

7.2.4.1.4 The ISO shall use Energy Bids from Generating Units and from other resources in

the ISO's real-time system operation, for increasing resources' output for Intra-Zonal

Congestion Management to decrement Generation in order to accommodate Overgeneration

conditions, including Reliability Must-Run Generation which the ISO requests under Reliability

Must-Run Contracts.

7.2.4.1.5 To facilitate trades amongst Scheduling Coordinators, the ISO will develop

procedures to publish Adjustment Bids of those Scheduling Coordinators who authorize the

publication of their identity and/or Adjustment Bids. Scheduling Coordinators will then be able

to utilize this information to conduct trades to aid Congestion Management.

7.2.4.2 Submission of Adjustment Bids.

7.2.4.2.1 Each Scheduling Coordinator is required to submit a preferred operating point for

each of its resources. However, a Scheduling Coordinator is not required to submit an

Adjustment Bid for a resource.

7.2.4.2.2 The minimum MW output level specified for a resource, which may be zero MW,

and the maximum MW output level specified for a resource must be physically realizable by

the resource.

7.2.4.2.3 The Scheduling Coordinator's preferred operating point for each resource must be

within the range of the Adjustment Bids.

7.2.4.2.4 Adjustment Bids can be revised by Scheduling Coordinators after the Day-Ahead

Market has closed for consideration in the Hour-Ahead Market and, after the Hour-

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003 Ahead Market has closed, for consideration in the Real Time Market provided that, if the ISO has accepted all, or a portion of, an offered Adjustment Bid, the Scheduling Coordinator is obligated to provide the relevant capacity increase or decrease to the ISO at the price of the

accepted Adjustment Bid.

7.2.4.2.5 During the ISO's Day-Ahead scheduling process, the MW range of the Adjustment

Bid, but not the price values, may be changed.

7.2.4.2.6 An Adjustment Bid shall constitute a standing offer to the ISO until it is withdrawn.

7.2.4.2.7 The ISO may impose additional restrictions and bidding activity rules on the form

of Adjustment Bids, the updating of Adjustment Bids, and the Scheduling Coordinator that may

submit Adjustment Bids in connection with inter-Scheduling Coordinator trades, as needed, to

ensure that the ISO's computational algorithms can operate reliably and produce efficient

outcomes.

7.2.5 Inter-Zonal Congestion Management.

7.2.5.1 The scheduling procedures in the Day-Ahead Market and Hour-Ahead Market will first

ascertain, through power flow calculations, whether or not Inter-Zonal Congestion would exist if

all of the Preferred and Revised Schedules submitted by the Scheduling Coordinators were

accepted by the ISO. If no Inter-Zonal Congestion would exist, then all Inter-Zonal Interface

uses will be accepted and the Usage Charges will be zero.

7.2.5.2 The purpose of Inter-Zonal Congestion Management is to allocate the use of, and

determine the marginal value of, active Inter-Zonal Interfaces. Inter-Zonal Congestion

Management will comply with the requirements stated in Sections 7.2.2, 7.2.4 and 7.2.5.

FIRST REPLACEMENT VOLUME NO. I

7.2.5.2.1 Inter-Zonal Congestion Management will keep each Scheduling Coordinator's portfolio of Generation and Demand (i.e., the Scheduling Coordinator's Preferred Schedule) separate from the portfolios of the other Scheduling Coordinators, as the ISO adjusts the Schedules to alleviate Inter-Zonal Congestion.

7.2.5.2.2 If Congestion would exist on one or more active Inter-Zonal Interfaces, then the ISO shall execute its Inter-Zonal Congestion Management algorithms to determine a set of tentative (in the Day-Ahead procedure) allocations of Inter-Zonal Interface rights and tentative (in the Day-Ahead procedure) Usage Charges, where the Usage Charges will be calculated as the marginal values of the Congested Inter-Zonal Interfaces. The marginal value of a Congested Inter-Zonal Interface is calculated by the ISO's computer optimization algorithm to equal the total change in Redispatch costs (based on the Adjustment Bids) that would result if the interface's scheduling limit was increased by a small increment.

7.2.5.2.3 As part of the Day-Ahead scheduling procedure, but not the Hour-Ahead scheduling procedure, Scheduling Coordinators will be given the opportunity to adjust their Preferred Schedules (including the opportunity to make trades amongst one another) and to submit Revised Schedules to the ISO, in response to the ISO's Suggested Adjusted Schedules and prices for Inter-Zonal Interfaces.

7.2.5.2.4 If the ISO receives any Revised Schedules it will execute its Inter-Zonal Congestion Management algorithms using revised Preferred Schedules, to produce a new set of allocations and prices.

7.2.5.2.5 All of the ISO's calculations will treat each Settlement Period independently of the other Settlement Periods in the Trading Day.

7.2.5.2.6 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

Superseding Third Sub. First Revised Sheet No. 204

7.2.5.2.7 If inadequate Adjustment Bids have been submitted to schedule Inter-Zonal

Interface capacity on an economic basis and to the extent that scheduling decisions cannot be

made on the basis of economic value, the ISO will allocate the available Inter-Zonal Interface

capacity to Scheduling Coordinators in proportion to their respective proposed use of that

capacity as indicated in their Schedules and shall curtail scheduled Generation and Demand to

the extent necessary to ensure that each Scheduling Coordinator's Schedule remains balanced.

7.2.5.2.8 The ISO will publish information prior to the Day-Ahead Market, between the

iterations of the Day-Ahead Market, and prior to the Hour-Ahead Market, to assist the

Scheduling Coordinators to construct their Adjustment Bids so as to actively participate in the

management of Congestion and the valuation of Inter-Zonal Interfaces. This information may

include the ISO's most-current information regarding: potentially Congested paths, projected

transmission uses, projected hourly Loop Flows across Inter-Zonal Interfaces, scheduled line

Outages, forecasts of expected system-wide Load, the ISO's Ancillary Services requirements,

Generation Meter Multipliers, and power flow outputs.

7.2.5.2.9 The ISO will also publish information, once it is available, regarding tentative prices

for the use of Inter-Zonal Interfaces, and Generation shift factors for the use of Inter-Zonal

Interfaces, which indicate the relative effectiveness of Generation shifts in alleviating Congestion.

7.2.6 **Intra-Zonal Congestion Management.**

Any Generating Unit dispatched to manage Intra-Zonal Congestion shall: (1) if dispatched to

increase its output, be paid the greater of its bid price (or mitigated bid if applicable) or the

relevant Market Clearing Price; (2) if dispatched to decrease its output, be charged the lesser of

its decremental reference price of the relevant Market Clearing Price. The ISO shall not re-

dispatch MSS resources to manage Intra-Zonal congestion as set forth in this section 7.2.6, as

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 25, 2005 Effective: August 18, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 204.01

provided for in the MSS Agreement. The ISO shall treat hydroelectric resources the same as

MSS resources for purposes of managing Intra-Zonal congestion under this Section 7.2.6.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 25, 2005 Effective: August 18, 2004

Substitute Second Revised Sheet No. 204A Superseding First Revised Sheet No. 204A

7.2.6.1 Decremental Bids. With regard to decremental bids, if Final Hour-Ahead Schedules cause Congestion on the Intra-Zonal interface, the ISO shall, after Dispatching available and effective Reliability Must-Run Units to manage the Congestion, apply the decremental reference prices determined by the independent entity that determines the reference prices for the Automatic Mitigation Procedure (AMP) as described in Appendix A to the Market Monitoring and Information Protocol. The ISO shall Dispatch Generating Units according to the decremental reference prices thus established, the resource's effectiveness on the Congestion, and other relevant factors such as Energy limitations, existing contractual restrictions, and Regulatory Must-Run or Regulatory Must-Take status, to alleviate the Congestion after Final Hour-Ahead Schedules are issued. Where the ISO must reduce a Generating Unit's output, the ISO shall Dispatch Generating Units according to the decremental reference prices and not according to Adjustment Bids or Supplemental Energy Bids to alleviate Intra-Zonal Congestion. No Generating Unit shall be Dispatched below its minimum operating level or above its maximum operating level. No Reliability Must-Run Unit shall be Dispatched below the operating level determined by the ISO as necessary to maintain reliability. If Congestion still exists after all Generating Units are Dispatched to their minimum operating levels, the ISO shall instruct Generating Units to shut off in merit order based on their total shut-down costs, beginning with the most expensive unit, where such shut-down costs include the lesser of the cost to start up the Generating Unit or to keep the Generating Unit warm for each Generating Unit with a non-zero Final Day-Ahead Schedule for Energy for the next day. Units shut off due to Congestion as set forth in this Section 7.2.6.1 shall be charged the lesser of the decremental reference price for the operating range between zero MW output and the unit's minimum operating level or the relevant Market Clearing Price.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 16, 2004 Effective: August 18, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Substitute Original Sheet No. 204A.01

Effective: August 18, 2004

its next day's Energy Schedules, the ISO shall charge the Scheduling Coordinator for that

Generating Unit the lesser of the decremental reference price or the Market Clearing Price at
the operating level set forth in the relevant Energy Schedule for any deviation from the next

If a Generating Unit shut down according to this Section 7.2.6.1 cannot start up in time to meet

day's Final Day-Ahead Schedules for Energy caused by such shut-down. Charges set forth in

this Section 7.2.6.1 shall not apply to (1) Reliability Must-Run Units operating solely under their

Reliability Must-Run Contracts or (2) units operating during a Waiver Denial Period in

accordance with the must-offer obligation.

The ISO shall apply the decremental reference prices to thermal Generating Units and to non-thermal Generating Units. If a Generating Unit is instructed by the ISO to shut down to manage Intra-Zonal Congestion, and is subsequently re-started, the Owner of that Generating Unit may invoice the ISO for the lesser of (1) the Start-Up Costs incurred and (2) the costs of keeping the Generating Unit warm to meet its Energy Schedules as set forth in Section

2.5.23.3.7.6.

If the ISO Dispatches System Resources or Dispatchable Loads to alleviate Intra-Zonal Congestion, the ISO shall Dispatch those resources in merit order according to the resource's Day-Ahead or Hour-Ahead Adjustment Bid or Imbalance Energy bid.

The ISO shall only Redispatch Regulatory Must-Take or Regulatory Must-Run Generation,

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 16, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Third Revised Sheet No. 204B Superseding Second Revised Sheet No. 204B

FIRST REPLACEMENT VOLUME NO. I Superseding Second Revised Sheet No. 204B

Intermittent Resources, or Qualifying Facilities to manage Intra-Zonal Congestion after

Redispatching all other available and effective generating resources, including Reliability Must-

Run Units.

7.2.6.1.1 Decremental Bid Reference Levels. Decremental bid reference levels shall be

determined for use in managing Intra-Zonal Congestion as set forth above in Section 7.2.6.1.

(a) Determination. Decremental bid reference levels shall be determined by applying the

following steps in order as needed:

1. Excluding proxy bids, mitigated bids, and bids used out of merit order for

managing Intra-Zonal Congestion, the accepted decremental bid, or the

lower of the mean or the median of a resource's accepted decremental bids

if such a resource has more than one accepted decremental bid in

competitive periods over the previous 90 days for peak and off-peak

periods, adjusted for daily changes in fuel prices using the gas price

determined by Equation C1-8 (Gas) of the Schedules to the Reliability Must-

Run Contract for the relevant Service Area (San Diego Gas & Electric

Company, Southern California Edison Company, or Pacific Gas and Electric

Company), or, if the resource is not served from one of those three Service

Areas, from the nearest of those three Service Areas. There will be a six-

day time lag between when the gas price used in the daily gas index is

determined and when the daily gas index based on that gas price can be

calculated. For the purposes of this Section 7.2.6.1.1, to determine

whether accepted decremental bids over the previous 90 days were

accepted during competitive periods, the independent entity

responsible for determining reference prices will apply a test to the

Effective: One Day After Notice to Market

prior 90-day period. The test will require that the ratio of a unit's

accepted out-of-sequence decremental bids

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: February 17, 2005

Participants

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

First Revised Sheet No. 204B.01 Superseding Original Sheet No. 204B.01

FIRST REPLACEMENT VOLUME NO. I

(MWh) for the prior 90 days to its total accepted decremental bids (MWh) for the prior 90 days be less than 50 percent. If this ratio is greater or equal to 50%, accepted decremental bids will be determined to have been accepted in non-competitive periods and cannot be used to determine the decremental reference price. This test would be applied each day on a rolling 90-day basis. One ratio would be calculated for each unit with no differentiation for various output segments on the unit. Accepted and justified decremental bids below the applicable

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: February 17, 2005 Effective: One Day After Notice to Market Participants

FIRST REPLACEMENT VOLUME NO. I

soft cap, as set forth in Section 28.1.3 of this Tariff, will be included in the

calculation of reference prices;

2. A level determined in consultation with the Market Participant submitting

the bid or bids at issue, provided such consultation has occurred prior to

the occurrence of the conduct being examined, and provided the Market

Participant has provided sufficient data in accordance with specifications

provided by the independent entity responsible for determining reference

prices;

3. 90 percent of the unit's default Energy Bid determined monthly as set forth

in Section 5.11.5 (based on the incremental heat rate submitted to the

independent entity responsible for determining reference prices, adjusted

for gas prices determined according to paragraph (a)(1) above, and the

variable O&M cost on file with the independent entity responsible for

determining reference prices, or the default O&M cost of \$6/MWh);

4. 90 percent of the mean of the economic Market Clearing Prices for the

units' relevant location during the lowest-priced 25 percent of the hours

that the unit was dispatched or scheduled over the previous 90 days for

peak and off-peak periods, adjusted for changes in fuel prices determined

according to paragraph (a)(1) above; or

5. If sufficient data do not exist to calculate a reference level on the basis of

the first, second, or fourth methods and the third method is not applicable

or an attempt to determine a reference level in consultation with a Market

Participant has not been successful, the independent entity responsible for

determining reference prices shall determine a reference level on the basis

of:

i. the independent entity's estimated costs of an electric facility,

taking into account available operating costs data, opportunity

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: February 14, 2005 Effective: One Day After Notice to Market Participants

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 204D

cost, and appropriate input from the Market Participant, and the

best information available to the independent entity; or

ii. an appropriate average of competitive bids of one or more similar

electric Facilities.

(b) Monotonicity.

The decremental bid reference levels (\$/MWh bid price) for the different bid segments

of each resource shall be made monotonically non-decreasing by the independent

entity responsible for determining reference prices by proceeding from the highest MW

bid segment moving through each lower MW bid segment. The reference level of

each succeeding bid segment, moving from right to left in order of decreasing

operating level, shall be the lower of the reference level of the preceding bid segment

or the reference level determined according to paragraph (a) above.

7.2.6.1.2 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 17, 2004 Effective: May 30, 2003

Third Revised Sheet No. 205

FIRST REPLACEMENT VOLUME NO. I

7.2.6.1.3 [Not Used]

7.2.6.1.4 [Not Used]

7.2.6.1.5 [Not Used]

7.2.6.1.6 [Not Used]

7.2.6.2 Incremental Bids. With regard to incremental bids, except as provided in

Sections 5.2, 7.2.6.1 and 11.2.4.2, the ISO will perform Intra-Zonal Congestion Management in

real time using available Imbalance Energy bids, based on their effectiveness and in merit

order, to minimize the cost of alleviating Congestion. In the event no Imbalance Energy bids

are available, the ISO will exercise its authority to direct the Redispatch of resources as

allowed under the Tariff, including Section 2.4.4.

7.2.6.3 Cost of Intra-Zonal Congestion Management. The net of the amounts paid by

the ISO to the Scheduling Coordinators and the amounts charged to the Scheduling

Coordinators will be calculated and charged to all Scheduling Coordinators through a Grid

Operations Charge, as described in Section 7.3.2.

7.2.7 Creation, Modification and Elimination of Zones.

7.2.7.1 Active Zones. The Active Zones are as set forth in Appendix I to this ISO Tariff.

7.2.7.2 Modifying Zones. The ISO shall monitor usage of the ISO Controlled Grid to

determine whether new Zones should be created, or whether existing Zones should be

eliminated, in accordance with the following procedures.

7.2.7.2.1 If over a 12-month period, the ISO finds that within a Zone the cost to alleviate the

Congestion on a path is equivalent to at least 5 percent of the product of the rated capacity of

the path and the weighted average High Voltage Access Charge and Low

Voltage Access Charge, as applicable, of the Participating TOs, the ISO may announce its intention to create a new Zone. In making this calculation, the ISO will only consider periods of normal operations. A new Zone will become effective 90 days after the ISO Governing Board

has determined that a new Zone is necessary.

7.2.7.2.2 The ISO may, at its own discretion, shorten the 12-month and 90-day periods for

creating new Zones if the ISO Governing Board determines that the planned addition of new

Generation or Load would result in Congestion that would meet the criterion specified in

Section 7.2.7.2.1.

7.2.7.2.3 [Not Used]

7.2.7.2.4 If a new transmission project or other factors will eliminate Congestion between

existing Zones, the ISO may modify or eliminate those Zones at its discretion.

7.2.7.2.5 The ISO may change the criteria for establishing or modifying Zone boundaries,

subject to regulatory approval by the FERC.

7.2.7.3 Active and Inactive Zones.

7.2.7.3.1 An Active Zone is one for which a workably-competitive Generation market exists

on both sides of the relevant Inter-Zonal Interface for a substantial portion of the year so that

Congestion Management can be effectively used to manage Congestion on the relevant Inter-

Zonal Interface. Pending the ISO's determination of the criteria for defining "workable

competitive generation markets", the Inactive Zones will, as an interim measure, be those

specified in Section 7.2.7.3.4.

7.2.7.3.2 The Congestion Management described in this Section 7.2, and the Usage

Charges stemming from the application of these procedures, shall not apply to Inter-Zonal

Effective: October 13, 2000

Interfaces with Inactive Zones.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

Superseding Original Sheet No. 207

First Revised Sheet No. 207

7.2.7.3.3 [Not Used]

FIRST REPLACEMENT VOLUME NO. I

7.2.7.3.4 The initial inactive Inter-Zonal Interfaces are the interface between the San

Francisco Zone and the remainder of the ISO Controlled Grid, and the interface between the

Humboldt Zone and the remainder of the ISO Controlled Grid. The initial Inactive Zones are

the San Francisco Zone and the Humboldt Zone.

7.2.7.3.5 The determination of whether a new Zone or an existing Inactive Zone should

become an Active Zone and the determination of whether a workably-competitive Generation

market exists for a substantial portion of the year, shall be made by the ISO Governing Board,

using the same approval criteria as are used for the creation or modification of Zones. The

ISO Governing Board shall adopt criteria that defines a "workably competitive Generation"

market. The ISO Governing Board will review the methodology used for the creation or

modification of Zones (including Active Zones and Inactive Zones) on an annual basis and

make such changes as it considers appropriate.

7.3 Usage Charges and Grid Operations Charges.

7.3.1 Usage Charges for Inter-Zonal Congestion.

The Usage Charge is used by the ISO to charge Scheduling Coordinators for the use of

Congested Inter-Zonal Interfaces. Subject to Section 2.4.4.4.1, the Usage Charge shall be

paid by all Scheduling Coordinators that use a Congested Inter-Zonal Interface. If a

Scheduling

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 9, 2004 Effective: May 8, 2004

Coordinator uses more than one Congested Inter-Zonal Interface, it will pay a Usage Charge for each Congested Inter-Zonal Interface that it uses.

7.3.1.1 Calculation and Allocation of Usage Charge. Those Scheduling Coordinators who are permitted by the ISO to use a Congested Inter-Zonal Interface will pay a Usage Charge. The Usage Charge is determined using Inter-Zonal Congestion Management described in Section 7.2.5, and is calculated as the hourly marginal value of an incremental kW of Inter-Zonal Interface capacity (in cents per kWh). The same Usage Charge will be used to compensate Scheduling Coordinators who, in effect, create transmission capacity through counter Schedules on Congested Inter-Zonal Interfaces.

7.3.1.2 Calculation of Marginal Value of an Inter-Zonal Interface. The marginal value of an Inter-Zonal Interface is the basis for the Usage Charge associated with the scheduled use of the Inter-Zonal Interface. This price is calculated from the Adjustment Bids of the Scheduling Coordinators and the ISO's computer optimization algorithms, using the procedures described in Section 7.2.

- **7.3.1.2.1** The price used to determine the Usage Charge will be the Day-Ahead price for those scheduling in the Day-Ahead Market, or the Hour-Ahead price for those Schedules submitted after the Day-Ahead Market closed.
- **7.3.1.2.2** The Day-Ahead prices are calculated based on the Adjustment Bids of the Scheduling Coordinators who participate in the Day-Ahead Market. These Day-Ahead prices are used to calculate Usage Charges for Schedules accepted in the Day-Ahead Market.
- **7.3.1.2.3** The Hour-Ahead prices are calculated based on Adjustment Bids submitted or otherwise still in effect after the Day-Ahead procedures have concluded. These prices are applied to all Schedules for the use of the Congested Inter-Zonal Interfaces that have been

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 209 Superseding Original Sheet No. 209

Effective: October 13, 2000

submitted and accepted after the ISO's Day-Ahead scheduling and Congestion Management

have concluded.

7.3.1.3 Default Usage Charge. If inadequate or unusable Adjustment Bids have been

submitted to the ISO to enable the ISO's Congestion Management to schedule Inter-Zonal

Interface capacity on an economic basis, then the ISO will calculate and impose a default

Usage Charge, in accordance with Sections 7.3.1.3.1 through 7.3.1.3.4.

7.3.1.3.1 The default Usage Charge will be calculated within a range having an absolute

floor of \$0/MWh and an absolute ceiling of \$500/MWh; provided that the ISO may vary the

floor within the absolute limits, with day-prior notice (e.g., applicable to next day's Day-Ahead

Market) to Scheduling Coordinators, and vary the ceiling within the absolute limits, with at least

seven (7) days notice to Scheduling Coordinators.

7.3.1.3.2 The default Usage Charge will be calculated, in accordance with this Section

7.3.1.3, by applying a pre-set adder, ranging from \$0/MWh to \$99/MWh, to the highest

incremental Adjustment Bid used, less the applicable decremental Adjustment Bid used;

provided that in all cases where there are insufficient decremental Adjustment Bids or no

decremental Adjustment Bids available, in the exercise of mitigating Congestion, the applicable

decremental price will be set equal to \$0/MWh; provided, further, that the ISO may vary the

pre-set adder with day-prior notice to Scheduling Coordinators (e.g., applicable to next day's

Day-Ahead Market).

7.3.1.3.3 Upon the ISO Operations Date, and until such time as the ISO determines

otherwise, the ceiling price for the default Usage Charge will be set at \$250/MWh; the floor

price for the default Usage Charge will be set at \$30/MWh; and the pre-set adder that is to be

applied in accordance with Section 7.3.1.3.2 will be set at \$0/MWh.

Issued by: Charles F. Robinson, Senior Regulatory Counsel

Issued on: March 11, 2004

7.3.1.3.4 The ISO will develop and implement a procedure for posting default Usage Charges on the WEnet or ISO Home Page.

7.3.1.3.5 If the Congestion Management software is not capable of calculating the default Usage Charge upon the ISO Operations Date in accordance with Sections 7.3.1.3.1 through 7.3.1.3.4, the ISO will establish a fixed default Usage Charge within the absolute limits of \$0/MWh and \$500/MWh, which may be changed by the ISO with day-prior notice. Initially, the default Usage Charge would be capped at \$100/MWh. As soon as tested and available, the ISO will implement the Congestion Management software to calculate the default Usage Charge in accordance with Sections 7.3.1.3.1 through 7.3.1.3.4 after giving at least seven (7) days notice to Scheduling Coordinators, by way of a notice posted on the ISO Internet "Home Page" at http://www.caiso.com or such other Internet address as the ISO may publish from time to time.

7.3.1.4 Determination of Usage Charges to be Paid by Scheduling Coordinator. All Scheduling Coordinators whose Schedules requiring use of a Congested Inter-Zonal Interface have been accepted by the ISO, shall pay a Usage Charge for each hour for which they have been scheduled to use the Inter-Zonal Interface. The amount payable shall be the product of the Usage Charge referred to in Section 7.3.1.2 for the particular hour, multiplied by the Scheduling Coordinator's scheduled flows (in kW) and capacity, if any, reserved for Ancillary Services over the Inter-Zonal Interface for that particular hour.

7.3.1.5 Determination of Usage Charges to be Paid to Scheduling Coordinators Who Counter-Schedule.

7.3.1.5.1 Scheduling Coordinators who in effect create additional Inter-Zonal Interface transmission capacity on Congested Inter-Zonal Interfaces will receive from the ISO a Usage

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Superseding Substitute Third Revised Sheet No. 211

Fourth Revised Sheet No. 211

FIRST REPLACEMENT VOLUME NO. I

Charge for each hour they have counter-scheduled on the Congested Inter-Zonal Interfaces.

The amount payable shall be the product of the Usage Charge referred to in Section 7.3.1.2 for that particular hour, multiplied by the Scheduling Coordinator's scheduled flows.

7.3.1.5.2 If a Scheduling Coordinator fails to provide the scheduled flows in a counter

direction, it must reimburse the ISO for the ISO's costs of buying or selling Imbalance Energy in

each of the Zones affected by the non-provided scheduled flows in a counter direction, at the

ISO's Zonal Imbalance Energy prices. That is, for any Scheduling Coordinator that does not

produce, in real time, the amount of Energy scheduled in the Day-Ahead Market or Hour-Ahead

Market will be deemed to have purchased/sold the amount of Energy under/over produced in the

real-time imbalance market at the real-time price.

7.3.1.6 ISO Disbursement of Net Usage Charge Revenues. The ISO will determine the net

Usage Charges on an interface-by-interface basis by subtracting the Usage Charge fees paid to

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: June 1, 2003 CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Superseding Substitute Original Sheet No. 211A

First Revised Sheet No. 211A

FIRST REPLACEMENT VOLUME NO. I

Scheduling Coordinators from the Usage Charge fees paid by Scheduling Coordinators. The net

Usage Charge revenues collected by the ISO for each Inter-Zonal Interface shall be, subject to

the provisions of Section 7.3.1.7 of the ISO Tariff, paid to: (i) FTR Holders, in accordance with

Section 9.6; and (ii) to the extent not paid to FTR Holders, to Participating TOs who own the Inter-

Zonal Interfaces and Project Sponsors as provided in Section 3.2.7.3. If a New Participating TO

has received FTRs, pursuant to Section 9.4.3, over an Inter-Zonal Interface, the MW of FTRs

received shall not be eligible for the disbursement of Usage Charge revenues under part (ii) of

this section. Participating TOs will credit in turn the Usage Charge revenue to their Transmission

Revenue Balancing Accounts, or, for those Participating TOs that do not have such accounts, to

their Transmission Revenue Requirements.

7.3.1.7 ISO Debit of Net Usage Charge Revenues. If, after the issuance of Final Day-Ahead

Schedules by the ISO, (a) Participating TOs instruct the ISO to reduce interface limits based on

operating conditions or (b) an unscheduled transmission Outage occurs and as a result of either

of those events, Congestion is increased and Available Transfer

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 5, 2005 Effective: July 5, 2005

FIRST REPLACEMENT VOLUME NO. I

Capacity is decreased in the Inter-Zonal Interface in the Hour-Ahead Market, the ISO shall: (1) charge each Participating TO and Project Sponsor(s) as provided in Section 3.2.7.3, and FTR Holder with an amount equal to its proportionate share, based on its financial entitlement to Usage Charges in the Day-Ahead Market in accordance with Section 7.3.1.6, of the product of (i) the Usage Charge in the Day-Ahead Market and (ii) the reduction in Available Transfer Capacity across the Inter-Zonal Interface in the direction of the Congestion (such amount due to the Participating TOs to be debited by them in turn from their Transmission Revenue Balancing Accounts or, for those Participating TOs that do not have such accounts, to their Transmission Revenue Requirements); (2) charge each Scheduling Coordinator with its proportionate share, based on Schedules in the Day-Ahead Market across the Inter-Zonal Interface in the direction of the Congestion, of the difference between the amount charged to Participating TOs and Project Sponsors as provided in Section 3.2.7.3, and FTR Holders under clause (1) and the Usage Charges in the Hour-Ahead Market associated with the reduced Available Transfer Capacity across the Congested Inter-Zonal Interface; and (3) credit each Scheduling Coordinator whose Schedule in the Hour-Ahead Market for the transfer of Energy across the Congested Inter-Zonal Interface was adjusted due to the reduction in Available Transfer Capacity an amount equal to the product of the adjustment (in MW) and the Usage Charge in the Hour-Ahead Market (in\$/MW).

The ISO will issue a notice to Scheduling Coordinators of the operating hour, and extent, for which the derate will apply in the relevant Hour-Ahead Markets. The timing and form of such notices shall be set forth in ISO procedures.

7.3.2 Grid Operations Charge for Intra-Zonal Congestion.

Scheduling Coordinators whose resources are Redispatched by the ISO, in accordance with Intra-Zonal Congestion Management as set forth in Section 7.2.6, will be paid or charged as set forth in Settlements and Billing Protocol Appendix B. The net

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 30, 2003

Superseding Substitute First Revised Sheet No. 213

Redispatch cost will be recovered for each Settlement Period through the Grid Operations
Charge, which shall be paid to the ISO by all Scheduling Coordinators in proportion to their
metered Demands within the Zone with Intra-Zonal Congestion, and scheduled exports from
the Zone with Intra-Zonal Congestion to a neighboring Control Area, provided that, with respect
to Demands within an MSS in the Zone and scheduled exports from the MSS to a neighboring
Control Area, a Scheduling Coordinator shall be required to pay Grid Operations Charges only
with respect to Intra-Zonal Congestion, if any, that occurs on an interconnection between the
MSS and the ISO Controlled Grid, and with respect to Intra-Zonal Congestion that occurs within
the MSS, to the extent the Congestion is not relieved by the MSS Operator.

7.4 Transmission Losses.

7.4.1 Obligation to Provide for Transmission Losses.

Each Scheduling Coordinator shall ensure that it schedules sufficient Generation to meet both its Demand and Transmission Losses responsibilities as determined in accordance with this Section 7.4. Scheduling Coordinators for Generators, System Units and System Resources are responsible for their respective proportion of Transmission Losses as determined in accordance with Section 7.4.2. For each Final Hour-Ahead Schedule, each Scheduling Coordinator representing Generators, dynamically scheduled System Resources or System Units shall elect through the flag described in SBP Section 2.1.1 to either: 1) generate sufficient additional energy to meet its respective Transmission Losses or 2) be financially responsible for its respective transmission loss obligation based on the Imbalance Energy procured on its behalf by the ISO. Scheduling Coordinators for non-dynamically scheduled System Resources may self-provide transmission losses by scheduling an additional balanced quantity of Energy, both Supply and Demand, equal to their expected transmission loss obligation above their committed delivery quantities in their Hour-Ahead Schedules. In the ISO Imbalance Energy market, all Scheduling

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 213.00

Coordinators for Generators, System Units, and System Resources must be financially responsible for all respective Transmission Losses associated with their respective Imbalance Energy Dispatch Instructions in real time, based on the Imbalance Energy procured on their behalf by the ISO. A Scheduling Coordinator for an MSS Operator that has elected

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004 Effective: Upon Notice After September 6, 2003

to follow Load will be responsible for its transmission loss obligation pursuant to Sections 23.12.1 and 23.16.4.

7.4.1.1 Settlement of Transmission Loss Obligations.

For a Scheduling Coordinator that elects to not or may not, self-provide for its transmission loss obligation, the ISO will procure Imbalance Energy on the Scheduling Coordinator's behalf for each relevant Dispatch Interval and explicitly settle its transmission loss obligation for each applicable Settlement Interval. For a resource under an ISO Dispatch Instruction for Imbalance Energy, transmission loss obligations shall be settled at the Resource-Specific Settlement Interval Ex Post Price. For a resource not under an ISO Dispatch Instruction for Imbalance Energy, transmission loss obligations shall be settled at the simple average of the two applicable Dispatch Interval Ex Post Prices as defined in Section 2.5.23.2.1. Allocation of transmission loss obligation settlement shall be treated consistent with Instructed Imbalance Energy pursuant to Section 11.2.4.2.1.

7.4.2 Determination of Transmission Losses.

The total Demand that may be served by a Generating Unit, in a given hour, taking account of Transmission Losses, is equal to the product of the total Metered Quantity of that Generating Unit in that hour and the Ex Post Generation Meter Multiplier calculated by the ISO in the hour for that Generator location except in accordance with Section 7.4.3. The Ex Post Generation Meter Multiplier shall be greater than one (1) where the Generating Unit's contribution to the ISO Controlled Grid reduces Transmission Losses and shall be less than one (1) where the Generating Unit's contribution to the system increases Transmission Losses. All Generating Units supplying Energy to the ISO

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

FIRST REPLACEMENT VOLUME NO. I

Controlled Grid at the same electrical bus shall be assigned the same Ex Post Generation

Meter Multiplier.

7.4.2.1 Procedures for Calculating Generation Meter Multiplier.

7.4.2.1.1 By 6:00 p.m. two days preceding a Trading Day, the ISO will calculate, and post on

WEnet, an estimated Generation Meter Multiplier for each electrical bus at which one or more

Generating Units may supply Energy to the ISO Controlled Grid. The Generation Meter

Multipliers shall be determined utilizing the Power Flow Model based upon the ISO's forecasts

of total Demand for the ISO Controlled Grid and Demand and Generation patterns throughout

the ISO Controlled Grid. The ISO shall continuously update the data to be used in calculating

the Generation Meter Multipliers to reflect changes in system conditions on the ISO Controlled

Grid, and the ISO shall provide all Scheduling Coordinators with access to such data. The ISO

shall not be required to determine new Generation Meter Multipliers for each hour; the ISO will

determine the appropriate period for which each set of Generation Meter Multipliers will apply,

which period may vary based upon the expected frequency and magnitude of changes in

system conditions on the ISO Controlled Grid.

7.4.2.1.2 The ISO will calculate the Ex Post Generation Meter Multiplier for each electrical

bus at which one or more Generating Units may supply Energy to the ISO Controlled Grid. The

Ex Post Generation Meter Multipliers shall be determined utilizing the Power Flow Model based

upon the ISO's total Demand for the ISO Controlled Grid and Demand and Generation patterns

throughout the ISO Controlled Grid. The ISO's total Demand shall be determined using real-

time power flow data based on a state-estimation result.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After October 13, 2000

Effective: January 1, 2001

FIRST REPLACEMENT VOLUME NO. I

7.4.2.2 Methodology for Calculating Generation Meter Multiplier. The ISO shall calculate

the Generation Meter Multiplier for each Generating Unit location in a given hour by subtracting

the Scaled Marginal Loss Rate from 1.0.

7.4.2.2.1 The Scaled Marginal Loss Rate for a given Generating Unit location in a given

hour shall equal the product of (i) the Full Marginal Loss Rate for each Generating Unit location

and hour, and (ii) the Loss Scale Factor for such hour.

7.4.2.2.2 The ISO shall calculate the Full Marginal Loss Rate for each Generating Unit

location for an hour by utilizing the Power Flow Model to calculate the effect on total

Transmission Losses for the ISO Controlled Grid of injecting an increment of Generation at

each such Generating Unit location to serve an equivalent incremental MW of Demand

distributed on a pro-rata basis throughout the ISO Controlled Grid.

7.4.2.2.3 The ISO shall determine the Loss Scale Factor for an hour by determining the ratio

of forecast Transmission Losses to the total Transmission Losses which would be collected if

Full Marginal Loss Rates were applied to each Generating Unit in that hour.

7.4.3 In the event that the Power Flow Model fails to determine Ex Post GMMs, for example

if GMMs are outside the range of reasonability (typically 0.8 to 1.1), the ISO will use Default

GMMs in their place.

7.5 FERC Annual Charges.

7.5.1 Obligation for FERC Annual Charges.

7.5.1.1 Each Scheduling Coordinator shall be obligated to pay for the FERC Annual Charges

for its use of the ISO Controlled Grid to transmit electricity, including any use of the ISO

Controlled Grid through Existing Contracts scheduled by the Scheduling Coordinator. Any

FERC Annual Charges to be assessed by FERC against the ISO for such use of the ISO

Controlled Grid shall

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000

determined in accordance with this Section 7.5. Such assessment shall be levied monthly against

all Scheduling Coordinators based upon each Scheduling Coordinator's metered Demand and

be assessed against Scheduling Coordinators at the FERC Annual Charge Recovery Rate, as

exports.

7.5.1.2 Scheduling Coordinators may elect, each year, to pay the FERC Annual Charges assessed

against them by the ISO either on a monthly basis or an annual basis. Scheduling Coordinators that

elect to pay FERC Annual Charges on a monthly basis shall make payment for such charges within

five (5) Business Days after issuance of the monthly invoice. The FERC Annual Charges will be

issued to Market Participants once a month, on the first business day after the final market and Grid

Management Charge invoices are issued for the trade month. Once the final FERC Annual Charge

Recovery Rate is received from FERC in the Spring/Summer of the following year, a supplemental

invoice will be issued. Scheduling Coordinators that elect to pay FERC Annual Charges on an

annual basis shall make payment for such charges within five (5) Business Days after the ISO

issues such supplemental invoice. Scheduling Coordinators that elect to pay FERC Annual Charges

on an annual basis shall maintain either an Approved Credit Rating, as defined with respect to either

payment of the Grid Management Charge, or payment of other charges, or shall maintain security in

accordance with Section 2.2.3.2.

7.5.2 FERC Annual Charge Trust Account.

All funds collected by the ISO for FERC Annual Charges shall be deposited in the FERC Annual

Charge Trust Account. The FERC Annual Charge Trust Account shall be an interest-bearing

account separate from all other accounts maintained by the ISO, and no other funds shall be

commingled in it at any time. The ISO shall disburse funds from the FERC Annual Charge Trust

Account in order to pay the FERC any and all FERC Annual Charges assessed against the ISO.

7.5.3 Determination of the FERC Annual Charge Recovery Rate.

7.5.3.1 The FERC Annual Charge Recovery Rate shall be set at the projected total FERC Annual

Charge obligation with regard to transactions on the ISO Controlled Grid during the year

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: June 10, 2003 Effective: August 9, 2003

in which the FERC Annual Charge Recovery Rate is collected, adjusted for interest projected to be earned on the monies in the FERC Annual Charge Trust Account ("Annual Charge Obligation"), divided by the projected Demand and exports during that year for all entities subject to assessment of FERC Annual Charges by the ISO ("Annual Charge Demand"). The FERC Annual Charge Recovery Rate for the period from January 1, 2001 until the first adjustment of the FERC Annual Charge Recovery Rate goes into effect shall be posted on the ISO Home Page at least fifteen (15) days in advance of the date on which the initial rate will go into effect.

- **7.5.3.2** The ISO may adjust the FERC Annual Charge Recovery Rate on a quarterly basis, as necessary, to reflect the net effect of the following:
- the difference, if any, between actual Annual Charge Demand and projected AnnualCharge Demand during the year-to-date;
- (b) the difference, if any, between the projections of the Annual Charge Obligation and the Annual Charge Demand upon which the charge for the year is based and the ISO's most current projections of those values, provided that the projection of the Annual Charge Obligation may only be adjusted on an annual basis for changes in the Federal Energy Regulatory Commission's budget for its electric regulatory program or changes in the projected total transmission volumes subject to assessment of FERC Annual Charges;
- (c) the difference, if any, between actual and projected interest earned on funds in the FERC Annual Charge Trust Account; and
- (d) any positive or negative balances of funds collected for FERC Annual Charges in a previous year after all invoices for FERC Annual Charges for that year have been paid by the ISO, other than those that are addressed through the mechanism described in

Section 7.5.3.4.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000 Effective: January 1, 2001

7.5.3.3 The adjusted FERC Annual Charge Recovery Rate shall take effect on the first day of the calendar quarter. The ISO shall publish all data and calculations used by the ISO as a basis for such an adjustment on the ISO Home Page at least fifteen (15) days in advance of the date on which the new rate shall go into effect.

7.5.3.4 If the FERC Annual Charges assessed by FERC against the ISO for transactions on the ISO Controlled Grid during any year exceed or fall short of funds collected by the ISO for FERC Annual Charges with respect to that year by a range of 10% or less, the ISO shall take such under- or over-recovery into account through an adjustment to the FERC Annual Charge Recovery Rate in accordance with Section 7.5.3.2. Any deficiency of available funds necessary to pay for any assessment of FERC Annual Charges payable by the ISO may be covered by an advance of funds from the ISO's Grid Management Charge, provided any such advanced funds will be repaid. If the ISO's collection of funds for FERC Annual Charges with respect to any year results in an under- or over-recovery of greater than 10%, the ISO shall either assess a surcharge against all active Scheduling Coordinators for the amount under-recovered or shall issue a credit to all active Scheduling Coordinators for the amount over-recovered. Such surcharge or credit shall be allocated among all active Scheduling Coordinators based on the percentage of each active Scheduling Coordinators metered Demand and exports during the relevant year. For purposes of this section, an "active Scheduling Coordinator" shall be a Scheduling Coordinator certified by the ISO in accordance with Section 2.2 of this ISO Tariff at the time the ISO issues a surcharge or credit under this section. The ISO will issue any surcharges or credits under this section within 60 days of receiving a FERC Annual Charge assessment from the FERC.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000 Effective: January 1, 2001

Original Sheet No. 215D

7.5.4 Credits and Debits of FERC Annual Charges Collected from Scheduling Coordinators.

In addition to the surcharges or credits permitted under Sections 7.5.3 or 11.6.3.3 of this ISO Tariff, the ISO shall credit or debit, as appropriate, the account of a Scheduling Coordinator for any over- or under-assessment of FERC Annual Charges that the ISO determines occurred due to the error, omission, or miscalculation by the ISO or the Scheduling Coordinator.

- 8. GRID MANAGEMENT CHARGE.
- 8.1 ISO's Obligations.
- 8.1.1 FERC's Uniform System of Accounts.

The ISO shall maintain a set of financial statements and records in accordance with the FERC's Uniform System of Accounts.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000 Effective: January 1, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 216 Superseding Original Sheet No. 216

Effective: January 1, 2001

8.1.2 [Not Used]

8.2 Costs Included in the Grid Management Charge.

8.2.1 [Not Used]

8.2.2 Operating Costs.

Budgeted annual operating costs, which shall include all staffing costs including remuneration

of contractors and consultants, salaries, benefits and any incentive programs for employees,

costs of operating, replacing and maintaining ISO systems, lease payments on facilities and

equipment necessary for the ISO to carry out its business, and annual costs of financing the

ISO's working capital and other operating costs ("Operating Costs").

8.2.3 Financing Costs.

The financing costs that are approved by the ISO Governing Board, including capital

expenditures that may be financed over such period as the ISO Governing Board shall decide.

Financing Costs shall also include the ISO start up and development costs standing to the

credit of the ISO Memorandum Account plus any additional start up or development costs

incurred after the date of Resolution E-3459 (July 17, 1996), plus any additional capital

expenditure incurred by the ISO in 1998 ("Start Up and Development Costs"). The amortized

amount to be included in the Grid Management Charge shall be equal to the amount necessary

to amortize fully all Start Up and Development Costs over a period of five (5) years, or such

longer period as the ISO Governing Board shall decide ("Financing Costs").

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: November 1, 2000

Effective: January 1, 2004

Superseding Third Revised Sheet No. 217

8.2.4 Operating and Capital Reserves Cost.

The budgeted annual cost of pay-as-you-go capital expenditures and reasonable coverage of

debt service obligations. Such reserves shall be utilized to minimize the impact of any variance

between forecast and actual costs throughout the year ("Operating and Capital Reserves

Costs").

8.3 Allocation of the Grid Management Charge Among Scheduling Coordinators.

The costs recovered through the Grid Management Charge shall be allocated to the eight

service charges that comprise the Grid Management Charge. If the ISO's revenue requirement

for any service charge changes from the most recent FERC-approved revenue requirement for

that service charge, the costs recovered through that service charge shall be delineated in a

filing to be made at FERC as set forth in Section 8.4. The eight service charges are as follows:

(1) Core Reliability Services - Demand Charge,

(2) Core Reliability Services – Energy Exports Charge

(3) Energy Transmission Services Net Energy Charge,

(4) Energy Transmission Services Uninstructed Deviations Charge,

(5) Forward Scheduling Charge,

(6) Congestion Management Charge,

(7) Market Usage Charge, and

(8) Settlements, Metering, and Client Relations Charge.

The eight charges shall be levied separately monthly in arrears on all Scheduling Coordinators

based on the billing determinants specified below for each charge in accordance with formulae

set out in Appendix F, Schedule 1, Part A of this Tariff, subject to the requirements set out in

Appendix F, Schedule 1, Part F of this Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Fourth Revised Sheet No. 217A Superseding Third Revised Sheet No. 217A

FIRST REPLACEMENT VOLUME NO. I

8.3.1 Core Reliability Services – Demand Charge.

The Core Reliability Services - Demand Charge for a Scheduling Coordinator's Load that is not associated with Energy Exports is calculated using the Scheduling Coordinator's metered noncoincident peak hourly Demand during the month (in megawatts) less the volume of Energy Exports included in the Scheduling Coordinator's non-coincident peak hourly Demand for the month, if any; provided that if the Scheduling Coordinator's metered non-coincident peak hour during the month occurs during the hours ending 0100 through 0600, or during the hours ending 2300 through 2400 the rate shall be sixty-six (66) percent of the standard CRS rate. The standard rate for the Core Reliability Services - Demand Charge is determined by dividing the GMC costs allocated to this service category, including a specified percentage of the costs for the Settlements, Metering, and Client Relations Charge determined to be in excess of what is recovered by that charge, by the total of the forecasted metered non-coincident peak hourly Demand for all months during the year (excluding the portion of such Demand associated with Energy Exports, if any), reduced by thirty-four (34) percent of the sum of all Scheduling Coordinators' metered non-coincident peak hour during the month occurs between the hour ending 2300 and the hour ending 0600, according to the formula in Appendix F, Schedule 1,

Part A of this Tariff.

Core Reliability Services – Energy Exports Charge,

The Core Reliability Services - Energy Exports Charge for the load associated with a Scheduling Coordinator's Energy Exports is calculated using the Scheduling Coordinator's metered volume of Energy Exports (in megawatt-hours); The rate for the Core Reliability Services – Energy Exports Charge is determined by dividing the GMC costs allocated to the Core Reliability Services service category, including a specified percentage of the costs for the

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2004 Effective: January 1, 2004 CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Second Revised Sheet No. 217A.01

Superseding First Revised Sheet No. 217A.01

Settlements, Metering, and Client Relations Charge determined to be in excess of what is

recovered by that charge, according to the formula in Appendix F, Schedule 1, Part A of this

Tariff.

8.3.3 Energy Transmission Services Net Energy Charge.

The Energy Transmission Services Net Energy Charge for each Scheduling Coordinator is

calculated using that Scheduling Coordinator's Metered Control Area Load (in megawatt-hours).

The rate for the Energy Transmission Services Net Energy Charge is determined by dividing

the GMC costs allocated to this service category, including a specified percentage of the costs

for the Settlements, Metering, and Client Relations Charge determined to be in excess of what

is recovered by that charge, by the total forecasted Metered Control Area Load, according to

the formula in Appendix F, Schedule 1, Part A of this Tariff.

8.3.4 Energy Transmission Services Uninstructed Deviations Charge.

The Energy Transmission Services Uninstructed Deviations Charge for each Scheduling

Coordinator is calculated using that Scheduling Coordinator's net uninstructed deviations by

Settlement Interval. The rate for the Energy Transmission Services Uninstructed Deviations

Charge is determined by dividing the GMC costs allocated to this service category, including a

specified percentage of the costs for the Settlements, Metering, and Client Relations Charge

determined to be in excess of what is recovered by that charge, by the total forecasted net

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2004 Effective: January 1, 2004

Second Revised Sheet No. 217A.02

Superseding First Revised Sheet No. 217A.02

uninstructed deviations by Settlement Interval according to the formula in Appendix F, Schedule

1, Part A of this Tariff.

8.3.5 Forward Scheduling Charge.

The Forward Scheduling Charge for each Scheduling Coordinator is calculated using the sum

of that Scheduling Coordinator's Final Hour-Ahead Schedules, including all awarded Ancillary

Services bids, with a value other than 0.03 MW. The Forward Scheduling Charge attributable

to Final Hour-Ahead Schedules for Inter-Scheduling Coordinating Energy and Ancillary Service

Trades for each Scheduling Coordinator is fifty (50) percent of the standard Forward Scheduling

Charge. The rate for the Forward Scheduling Charge is determined by dividing the GMC costs

allocated to this service category, including a specified percentage of the costs for the

Settlements, Metering, and Client Relations Charge determined to be in excess of what is

recovered by that charge, by the total forecasted Final Hour-Ahead Schedules and awarded

Ancillary Service bids submitted to the ISO, according to the formula in Appendix F, Schedule 1,

Part A of this Tariff.

8.3.6 Congestion Management Charge.

The Congestion Management Charge for each Scheduling Coordinator is calculated as the

product of the rate for the Congestion Management Charge and the absolute value of the net

scheduled inter-zonal flow (excluding flows pursuant to Existing Contracts) per path for that

Scheduling Coordinator. The rate for the Congestion Management Charge is determined by

dividing the GMC costs allocated to this service category, including a specified percentage of

the costs for the Settlements, Metering, and Client Relations Charge determined to be in

excess of what is recovered by that charge, by the total forecasted inter-zonal scheduled flow

(excluding flows pursuant to Existing Contracts) per path in MWh, according to the formula in

Appendix F, Schedule 1, Part A of this Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2004 Effective: January 1, 2004

8.3.7 Market Usage Charge.

The Market Usage Charge for each Scheduling Coordinator is calculated using the absolute value of the Scheduling Coordinator's market purchases and sales of Ancillary Services, Supplemental Energy, Instructed Imbalance Energy, and net Uninstructed Imbalance Energy (with uninstructed deviations being netted by Settlement Interval). The rate for the Market Usage Charge is determined by dividing the GMC costs allocated to this service category, including a specified percentage of the costs for the Settlements, Metering, and Client Relations Charge determined to be in excess of what is recovered by that charge, by the total forecasted number of market purchases and sales, according to the formula in Appendix F, Schedule 1, Part A of this Tariff.

8.3.8 Settlements, Metering, and Client Relations Charge.

The Settlements, Metering, and Client Relations Charge for each Scheduling Coordinator is fixed at \$500.00 per month, per Scheduling Coordinator ID with an invoice value other than \$0.00 in the current trade month, as indicated in Appendix F, Schedule 1, Part A of this Tariff. Excess GMC costs related to the provision of these services that are not recovered through this charge are allocated to the other GMC service categories as specified above and in Appendix F, Schedule 1, Part E of this Tariff.

8.4 Calculation and Adjustment of the Grid Management Charge.

The eight charges set forth in Section 8.3 that comprise the Grid Management Charge shall be calculated through the formula set forth in Appendix F, Schedule 1, Part A of this Tariff. The formula set forth in Appendix F, Schedule 1, Part C of this Tariff sums the Operating Costs (less any available expense recoveries), Financing Costs, and Operating and Capital Reserves Costs associated with each of the eight ISO service charges to obtain a total revenue requirement. This revenue requirement is allocated among the eight charges of the GMC

through the application of the factors specified in Appendix F, Schedule 1, Part E of this Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2004 Effective: January 1, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Third Revised Sheet No. 217B

Effective: January 1, 2004

Superseding Second Revised Sheet No. 217B

The revenue requirement for each service then shall be divided by the forecast annual or

periodic billing determinant volume to obtain a rate for each service, which will be payable by

Scheduling Coordinators as set forth in Section 8.3. The rates so established will be adjusted

annually, through the operation of the formula set forth in Appendix F, Schedule 1, Part A of this

Tariff. The ISO shall post on its website each year, before the adjusted rates go into effect, as

described in Appendix F, Schedule 1, Part D of this Tariff, data showing the rates adjusted to

reflect any change in the annual revenue requirement, variance between forecast and actual

costs for the previous year or period, or any surplus revenues from the previous year or period

(as defined in Section 8.5), or the inability to recover from a Scheduling Coordinator its share of

the Grid Management Charge, or any under-achievement of a forecast of the billing determinant

volumes used to establish the rates. The circumstances under which the ISO is permitted to

put the adjusted rates into effect without submitting a filing to the FERC are described in

Appendix F, Schedule 1, Part D of this Tariff. Appendix F, Schedule 1, Part B of this Tariff sets

forth the conditions under which a quarterly adjustment to the Grid Management Charge will be

made.

8.4.1 Credits and Debits of the Grid Management Charge.

In addition to the adjustments permitted under Section 11.6.3.3, the ISO shall credit or debit, as

appropriate, the account of a Scheduling Coordinator for any overpayment or underpayment of

the Grid Management Charge that the ISO determines occurred due to error, omission, or

miscalculation by the ISO or the Scheduling Coordinator.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Fifth Revised Sheet No. 218 FIRST REPLACEMENT VOLUME NO. I

Superseding Fourth Revised Sheet No. 218

8.5 **Operating and Capital Reserves Account.**

Revenues collected to fund the ISO financial operating reserves shall be deposited in an Operating and Capital Reserves Account until such account reaches a level specified by the ISO Governing Board. The Operating and Capital Reserves Account shall be calculated separately for each GMC service category (Core Reliability Services - Demand, Core Reliability Services – Energy Export, Energy Transmission Services – Net Energy, Energy Transmission Services – Uninstructed Deviations, Forward Scheduling, Congestion Management, Market Usage, and Settlements, Metering and Client Relations). The allocation factors, reassignments and reallocations specified in Schedule 1, Parts E and F, will be accounted for in the development of the Operating and Capital Reserves Account for each component. If the Operating and Capital Reserves Account as calculated for such service category is fully funded, surplus funds will be considered an offset to the revenue requirement of the next fiscal year.

8.6 Transition Mechanism.

During the ten-year transition period described in Section 4 of Schedule 3 to Appendix F, the Original Participating TOs collectively shall pay to the ISO each year an amount equal to, annually, for all New Participating TOs, the amount, if any, by which the New Participating TO's cost of Existing High Voltage Facilities associated with Gross Loads in the PTO Service Territory of the New Participating TO is increased by the implementation of the High Voltage Access Charge described in Schedule 3 to Appendix F. Responsibility for such payments shall be allocated to Original Participating TOs in

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2004 Effective: January 1, 2004 CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Second Revised Sheet No. 219

FIRST REPLACEMENT VOLUME NO. I

Superseding First Revised Sheet No. 219

accordance with Schedule 3 to Appendix F. Amounts payable by Original Participating TOs

under this section shall be recoverable as part of the Transition Charge calculated in

accordance with Schedule 3 of Appendix F. Amounts received by the ISO under this section

shall be disbursed to New Participating TOs with Existing High Voltage Facilities based on the

ratio of each New Participating TO's net increase in costs in the categories described in the first

sentence of this section, to the sum of the net increases in such costs for all New Participating

TOs with Existing High Voltage Facilities.

9. FIRM TRANSMISSION RIGHTS

9.1 General

9.1.1 Commencing in 2000, on the effective date established by the ISO Governing Board,

the ISO shall make FTRs available in the amounts determined in accordance with Section 9.3,

with the rights and other characteristics described in Sections 9.2, 9.6, 9.7 and 9.8, and through

the processes described in Section 9.4. Proceeds of the ISO's auction of FTRs shall be

distributed as described in Section 9.5. The owners of FTRs shall be entitled to share in Usage

Charge revenues associated with Inter-Zonal Congestion in accordance with Section 9.6, and

to scheduling priority in the event of Congestion in the Day-Ahead Market, as described in

Section 9.7. For the purpose of Section 9, the term "Zone" shall be construed to mean both

"Zone" and "Scheduling Point."

9.2 Characteristics of Firm Transmission Rights

9.2.1 Each FTR shall be defined by a transmission path from an originating Zone to a

contiguous receiving Zone. Each FTR shall entitle the FTR Holder to a share of Usage

Charges attributable to Inter-Zonal Congestion for transfers on that path from the designated

originating Zone to the designated receiving Zone in accordance with Section 9.6. An FTR is a

right in one direction only. An FTR Holder shall not be entitled to share in (i) Usage Charges

attributable to Inter-Zonal Congestion from the designated receiving Zone to the designated

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: June 1, 2003

Original Sheet No. 220

Effective: October 13, 2000

originating Zone; or (ii) Usage Charges payable in accordance with Section 7.3.1.5.1 to a

Scheduling Coordinator that counter-schedules from the designated originating Zone to the

designated receiving Zone.

9.2.2 The ISO Governing Board shall, from time to time, approve the amount of FTRs to be

auctioned for each FTR Market and the ISO shall publish this information on the ISO Home

Page at least thirty (30) days prior to the auction. The ISO may issue FTRs in one or more

auctions in any year so long as the total FTRs for any interface do not exceed the maximum

amount permitted in Section 9.3.

9.2.2.1 Should the ISO create additional Zones or otherwise change the ISO's defined Inter-

Zonal Interface, and if such changes would affect outstanding FTRs, such changes will not take

effect prior to the expiration date of any such outstanding FTRs. The ISO shall also publish an

announcement of any such pending changes on the ISO Home Page and WEnet at least thirty

(30) days prior to the applicable FTR auction.

9.2.2.2 Any additional FTRs auctioned as a result of changes in the ISO's defined Inter-Zonal

Interfaces shall not affect the rights associated with existing FTRs.

9.2.3 Each FTR shall be issued in the denomination of 1 MW. The initial release of FTRs

shall start with the hour beginning at 12:00 a.m., on February 1, 2000 and end with the hour

beginning at 11:00 p.m., on March 31, 2001. An FTR shall not afford the FTR Holder any right

to share in Usage Charges attributable to Inter-Zonal Congestion occurring in any hour before

or after the term of the FTR.

9.2.4 The portion of the Usage Charges to which the FTR Holder is entitled shall be

determined in accordance with Section 9.6.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

- 9.2.5 FTR Holders shall be entitled to priority in the scheduling of Energy in the Day-Ahead
 Market as specified in Section 9.7.
- **9.2.6** Any entity, with the exception of the ISO, shall be eligible to acquire FTRs by participating in the ISO's auction of FTRs, as described in Section 9.4, or by purchasing FTRs in secondary markets. To participate in the ISO's auction of FTRs, an entity must either be a certified Scheduling Coordinator or have met financial requirements equivalent to the financial certification criteria required of all Scheduling Coordinators. An entity may not acquire FTRs with a total value that exceeds the financial security proved by that entity to the ISO. In addition, an FTR Bidder must have, or have access to, the necessary technical equipment to participate in the electronic auction.
- 9.2.7 All entities which acquire FTRs by participating in the ISO's auction of FTRs, as described in Section 9.4, directly from the ISO pursuant to Section 9.4.3, or by purchasing FTRs in secondary markets, must register as an FTR Holder with the ISO. To complete this registration, the FTR Holder must notify the ISO, through the form specified for that purpose by the ISO, of all Affiliates of the FTR Holder that are themselves FTR Holders or Market Participants. The requirement that an FTR Holder notify the ISO of all Affiliates that are FTR Holders or Market Participants is continuing for as long as the FTR Holder owns FTRs, and FTR Holders must provide the ISO with supplemental notification concerning FTR Holders and/or Market Participants that become affiliated with the FTR Holder or Affiliates that subsequently become FTR Holders or Market Participants in order to satisfy this requirement.

9.3 Maximum Number of Firm Transmission Rights

9.3.1 On each Inter-Zonal Interface and direction combination for which FTRs are issued, the ISO shall issue a number of FTRs that is less than or equal to the difference between:

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 222 Superseding Original Sheet No. 222

esting of the interfere in the direction from the

(i) The WECC approved path rating of the interface in the direction from the

originating Zone to the receiving Zone or, if the interface has not received a

WECC approved rating, a rating determined by a methodology that is consistent

with the WECC's rating methodology; and

(ii) The portion of the transfer capability of the interface available for transmission

scheduling under Existing Contracts as Existing Rights.

and ensures the ISO's ability to honor all of its FTRs simultaneously under normal operating

conditions.

9.4 Issuance of Firm Transmission Rights by the ISO

9.4.1 The ISO shall make FTRs available by conducting an annual primary auction of FTRs,

commencing approximately two months before the beginning of the term of the FTRs; provided;

however that for the initial FTR release, the primary auction shall be as determined by the ISO

Governing Board. The auction of FTRs shall be a simultaneous multi-round, clearing price

auction conducted separately and independently, as set forth in Section 9.4.2, for each FTR

Market. In addition, if the ISO Governing Board decides to make available, between annual

auctions, FTRs in addition to those that were purchased in the last annual auction, the ISO may

conduct additional auctions of such FTRs in accordance with Section 9.4.2. The term of such

FTRs shall only be for the remaining duration of the FTR term defined for the primary auction

applicable to the year during which they were issued.

9.4.2 The ISO shall conduct the auction of FTRs through the following procedures:

9.4.2.1 At least thirty (30) days prior to the scheduled start of the auction, the ISO shall post on

the ISO Home Page the following information:

Issued by: Charles F. Robinson, Vice President and General Counsel

- (i) the number of FTRs to be issued for each FTR Market;
- (ii) the starting bid price at which FTRs will be made available in each FTR Market in the first round of the auction, which price will be set in each FTR Market at a level equal to the greater of (a) \$100 per MW-year; (b) twenty (20) percent of the ratio of the net Usage Charges collected by the ISO with respect to that FTR Market in the most recent twelve-month period for which data are available to the total MW-years of Energy scheduled over the Inter-Zonal Interface in the relevant direction during that period; or (c) twenty (20) percent of the ration of the net Grid Operation Charges (for new Inter-Zonal Interfaces that previously were transmission paths within a Zone) collected by the ISO in the most recent twelve-month period for which data are available to the total MW-years of Energy scheduled over the transmission paths in the relevant direction during that period, provided that, if data are available for only a portion of the twelve-month period, such data shall be used on annualized basis;
- (iii) the formula through which the ISO will determine how much to adjust the price of FTRs in each FTR Market for subsequent rounds of the auction, including the initial coefficients to be used in the formula and the range over which the coefficients may be adjusted in accordance with Section 9.4.2.3;

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

- (iv) the date and time prior to the commencement of the auction by which each entity desiring to bid on FTRs must have satisfied the necessary financial requirements as outlined in Section 9.2.6;
- (v) the specifications for the technical equipment necessary to participate in the auction, which will be conducted electronically, the date and time by which bids must be submitted in the first round of the auction, which shall be the same for all FTR Markets, and the form and format in which bids must be submitted; and
- (vi) a schedule for the conduct of subsequent rounds of the auction, including the interval between rounds of the auction and the anticipated duration of the auction.
- 9.4.2.2 On or before the date specified in Section 9.4.2.1(v), any entity desiring to obtain FTRs in the ISO's auction must submit, via equipment satisfying the technical requirements specified in accordance with Section 9.4.2.1(v), a bid for each FTR Market in which the entity desires to participate, specifying the number of FTRs the entity is willing to purchase at the price specified in Section 9.4.2.1(ii). All individual bids will remain confidential throughout all rounds of the auction in each FTR Market. Once submitted to the ISO, a bid for FTRs in any round of an auction may not be cancelled or rescinded by the FTR Bidder. The ISO shall announce simultaneously to all FTR Bidders the total quantity of FTRs for which valid bids are submitted for each FTR Market.
- 9.4.2.3 In each round of the auction following the first round, the ISO will increase the price at which FTRs are made available in each FTR Market in accordance with the formula posted in accordance with Section 9.4.2.1(iii), or in accordance with any adjustment to the coefficients in that formula that is announced by the ISO to the FTR Bidders at least one round in advance of the round for which the adjustment is made. Price increases need not be uniform for all FTR Markets.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 225 Superseding Original Sheet No. 225

In the case of an FTR Market in which the demand for FTRs in the preceding round is less than or

equal to the quantity of FTRs being made available, the price shall not increase and the auction

for that FTR Market shall close. After each round of the auction, the ISO shall announce

simultaneously to all FTR Bidders the total quantity of FTRs for which valid bids were submitted in

each FTR Market, whether the auction for each FTR Market is closed, and, the revised prices for

the following round of the auctions that remain open. Within the timeframe set by the ISO in

accordance with Section 9.4.2.1(vi), each FTR Bidder may submit bids for the quantity of FTRs it

desires to purchase in each FTR Market at the revised price, provided that an FTR Bidder may not

bid for a number of FTRs in an FTR Market that exceeds the total number of FTRs in that FTR

Market for which that entity submitted bids in the preceding round of the auction. The ISO shall

conduct subsequent rounds of the auction in each FTR Market until the demand for FTRs in the

FTR Market is less than or equal to the quantity of FTRs being made available, at which point the

auction shall be closed in that FTR Market.

9.4.2.4 Subject to Section 9.4.2.5, each successful FTR Bidder shall receive a number of

FTRs in each FTR Market equal to the number of FTRs for which it bid in the last round of the

auction for that FTR Market.

9.4.2.5 For any FTR Market in which, when the auction has closed, the number of FTRs being

made available exceeds the demand for FTRs in that FTR Market in the last round of the auction,

each FTR Bidder shall be awarded a number of FTRs determined in accordance with the following

formula, provided that, if the number of FTRs that would be awarded under the formula to an FTR

Bidder that did not submit a bid in the last round of the auction is less than five percent (5%) of the

initial bid submitted by that FTR Bidder for the FTR Market, that FTR Bidder shall have the option

of declining the award of FTRs resulting from the formula:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: October 13, 2000

$$N = B + [(R / TR) * D]$$

where

- N = The total number of FTRs awarded to an FTR Bidder for an FTR Market, which shall be in whole MWs and shall not exceed the number of FTRs for which that FTR Bidder bid in the round preceding the final round of the auction;
- B = The number of FTRs for which an FTR Bidder bid in the final round of the auction for the FTR Market in accordance with Section 9.4.2.4 (or zero, if the FTR Bidder did not bid in that round);
- R = The difference between the number of FTRs for which the FTR Bidder bid in the round preceding the final round of the auction and B, but not less than zero;
- TR = The total of the demand reductions (R) for all FTR

 Bidders that submitted bids in the last round of the auction (treating the failure by an FTR Bidder to submit a bid as a bid of zero); and
- D = The difference between the total demand for FTRs in the final round of the auction and the quantity of FTRs being made available for the FTR Market.
- 9.4.2.6 The price of FTRs in an FTR Market shall be the last price at which the demand for FTRs in the FTR Market exceeded or equaled the quantity of FTRs being made available pursuant to Section 9.4.2.1(i), except that, if the demand for FTRs in an

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

9.4.2.7

Fourth Revised Sheet No. 227

Superseding Third Revised Sheet No. 227

FTR Market in the first round of the auction was less than the quantity of FTRs being made available for that FTR Market, the price of FTRs in that FTR Market shall be the first round price and each FTR Bidder in that FTR Market will receive a number of FTRs equal to the quantity of bids they submitted in the first round. Any remaining FTRs in that

FTR Market will not be awarded in that auction.

Each FTR Bidder shall pay the ISO an amount equal to the sum, for all FTR Markets, of the products of the FTR price in each FTR Market (determined in accordance with Section

9.4.2.6) and the total quantity of FTRs awarded to that FTR Bidder in that FTR Market

(determined in accordance with Section 9.4.2.4 or Section 9.4.2.5, as applicable). FTR Bidders

shall pay the amount determined in accordance with the foregoing sentence within ten (10)

Business Days of receiving an invoice from the ISO by making payment to the ISO Clearing

Account in accordance with Section 11.10. If the FTR Bidder fails to make timely payment of the

full amount due, the ISO may enforce any guarantee, letter of credit or other credit support

provided by the defaulting FTR Bidder in accordance with Section 9.2.6 and, if the ISO is required

to institute proceedings to collect any unpaid amount, the defaulting FTR Bidder shall pay Interest

on the unpaid amount for the period from the Payment Date until the date on which payment is

remitted to the ISO Clearing Account.

9.4.2.8 The ISO shall post on the ISO Home Page the prices at which FTRs are sold in each

FTR Market through the primary auction.

9.4.3 For the ten-year transition period described in Section 4 of Schedule 3 to Appendix F,

a New Participating TO that has an obligation to serve Load shall receive FTRs for Inter-Zonal

Interfaces to which the transmission facilities and Converted Rights for Inter-Zonal Interfaces that

the New Participating TO turns over to the ISO's Operational Control give it transmission rights.

provided such transmission facilities are Existing High Voltage Facilities. The amount of FTRs will

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 5, 2005 Effective: July 5, 2005 FIRST REPLACEMENT VOLUME NO. I

be determined when the Transmission Control Agreement is executed and shall be commensurate with the transmission capacity the New Participating TO is turning over to ISO Operational Control. The ISO will submit to FERC in the transmittal letter for the amendment to the Transmission Control Agreement regarding each New Participating TO the amount of FTRs allocated to such New Participating TO. The amount of FTRs that has been determined will not be effective until after FERC issues an order concerning the amendment required by this section.

No additional FTRs will be issued to New Participating TOs for building High Voltage Transmission Facilities after they become Participating TOs. FTRs issued in accordance with this section shall entitle the FTR Holder to receive Usage Charge revenues and to priority in the scheduling of Energy in the Day-Ahead Market in accordance with the provisions of the ISO Tariff. FTRs associated with Converted Rights shall terminate on the earlier of termination of the Existing Contract or the end of the ten-year transition period.

- 9.5 Distribution of Auction Revenues Received by the ISO for Firm Transmission Rights
- **9.5.1** For each Inter-Zonal Interface and direction for which an FTR is defined, the total proceeds received by the ISO through the auction described in Section 9.4 shall be allocated and paid by the ISO to the Participating TO that is entitled in accordance with Section 7.3.1.6 to receive Usage Charge revenues with respect to the corresponding Inter-Zonal Interface. Each Participating TO shall credit its FTR auction proceeds against its high voltage TRBA if the FTR is for a High Voltage Transmission Facility or against its low voltage TRBA if the FTR is a for a Low Voltage Transmission Facility.
- **9.5.2** In the event the transmission facilities or rights making up an Inter-Zonal Interface with respect to which FTRs are defined are owned by more than one Participating TO, the proceeds of the auction of such FTRs shall be allocated to those Participating TOs who auction FTRs in proportion to the FTRs associated with their Inter-Zonal Interface as of the date of the FTR auction compared to all FTRs auctioned for such Inter-Zonal Interface.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 5, 2005 Effective: July 5, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 228.01

9.5.3 In the event the transmission facilities or rights making up an Inter-Zonal Interface with respect to which FTRs are defined have been upgraded resulting in increased transmission capacity on the Inter-Zonal Interface, and the costs of construction and operation were paid for by a Project Sponsor pursuant to Section 3.2.7.1 and were not included in the ISO's transmission Access Charge or a reimbursement or direct payment from a Participating TO, the proceeds of the auction of such

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 5, 2005 Effective: July 5, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 228A

Superseding Original Sheet No. 228A

FTRs shall be allocated to the Project Sponsors according to the allocated shares determined as

set forth in Section 3.2.7.3 (d).

9.6 Distribution of Usage Charges to FTR Holders

9.6.1 The FTR Holder shall be entitled to receive from the ISO a portion of the total Congestion

revenues related to Inter-Zonal Congestion calculated by the ISO in the Day-Ahead Market and

collected by the ISO with respect to the Inter-Zonal Interface and direction combination for which

the FTR was defined. This portion equals the Usage Charge calculated by the ISO in the Day-

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2003 Effective: June 1, 2003

FIRST REPLACEMENT VOLUME NO. I

Ahead Market for the transfer of 1 MW from the originating Zone to the receiving Zone during each hour in which Usage Charges apply, multiplied by the number of FTRs owned by that FTR Holder, subject to adjustment in accordance with Section 9.6.3.

9.6.2 In addition, an FTR Holder shall be entitled to receive a portion of the additional net Usage Charges related to Inter-Zonal Congestion calculated by the ISO in the Hour-Ahead Market and collected by the ISO with respect to the Inter-Zonal Interface and direction combination for which the FTR was defined. The FTR Holder shall receive a portion of the net Usage Charges in the Hour-Ahead Market proportionate to the share of the Usage Charges it received in the Day-Ahead Market in accordance with Section 9.6.1.

- 9.6.3 When the Day-Ahead scheduling capability of an Inter-Zonal Interface and direction is less than its scheduling capacity, determined in accordance with Section 9.3, prior to the Day-Ahead Market, the entitlements of FTR Holders associated with that FTR Market to Usage Charge revenues shall not be reduced until and unless the entitlements of Participating TOs associated with that FTR Market to Usage Charge revenues in accordance with Section 7.3.1.6 have been reduced to zero. In that event, the financial entitlements associated with the corresponding FTRs shall be multiplied by a factor equal to the amount of scheduling capability available to holders of the remaining FTRs divided by the number of such FTRs. When the Day-Ahead scheduling capability of an Inter-Zonal Interface and direction is greater than its scheduling capacity, determined in accordance with Section 9.3, prior to the Day-Ahead Market, the entitlements of FTR Holders associated with that FTR Market to Usage Charge revenues shall not be increased.
- **9.6.4** When the Congestion Usage Charges calculated and collected by the ISO from the Hour-Ahead Market with respect to transfers across an Inter-Zonal Interface in a particular direction result in a net obligation to the ISO, in the circumstances described in Section 7.3.1.7, the

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 230

Superseding Original Sheet No. 230

provisions of this Section 9.6 shall continue to apply, and FTR Holders shall be required to pay the

ISO these amounts.

9.6.5 The ISO will calculate the Congestion Usage Charge revenues to be credited or debited to

the account of each FTR Holder on an hourly basis. Such calculation will identify the Inter-Zonal

Interface and direction to which each credit or debit applies.

9.7 Scheduling Priority of FTR Holders

9.7.1 FTRs will not affect the ISO's dispatch and operation of the ISO Controlled Grid except

that each FTR Holder will have a priority, as described in this Section 9.7, for the scheduling of

Energy in the Day-Ahead Market when an Inter-Zonal Interface experiences Inter-Zonal

Congestion in the direction for which its FTR is defined. Any FTRs not used in Preferred

Schedules in the Day-Ahead Market for any hour have no scheduling priority for that hour in the

Trading Day. FTR Holders shall have no scheduling priority in the Hour-Ahead Market or in real-

time operations.

9.7.2 When Inter-Zonal Congestion is experienced or projected to be experienced in the Day-

Ahead Market, the ISO shall first attempt to relieve the Inter-Zonal Congestion using Adjustment

Bids submitted by Scheduling Coordinators in accordance with Section 7.2.4.

9.7.2.1 If the ISO is unable to relieve the Day-Ahead Inter-Zonal Congestion using Adjustment

Bids, then the ISO will allocate Day-Ahead inter-zonal transmission capacity first to Schedules of

Market Participants that are using Existing Contract rights that have higher scheduling priority than

Converted Rights capacity and second to Market Participants who hold FTRs and have indicated

to the ISO that they wish to exercise their scheduling priority option. The ISO will allocate any

remaining transmission capacity to remaining Market Participants' Schedules pro rata.

9.7.3 When the scheduling capability of an Inter-Zonal Interface is less than or greater than its

normal scheduling capability prior to the Day-Ahead Market, as described in Section 9.6.3, the

priority scheduling rights of FTR Holders, as described in Section 9.7.2, shall remain constant (in

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Sheet No. 231 Superseding Original Sheet No. 231

MWs) to the extent that the total scheduling rights of FTR Holders do not exceed the total Interface scheduling capability of the associated Inter-Zonal Interface after adjustments have been made for transmission capacity allocated to Existing Contract rights that have higher scheduling priority than Converted Rights. If the total Interface scheduling capability, adjusted for transmission capacity allocated to Existing Contract rights that have higher scheduling priority than Converted Rights, is less than the total of all scheduling capability represented by FTR Holders who have chosen to exercise the FTR scheduling priority option, scheduling capability shall be allocated to FTR Holders pro rata.

9.7.4 The scheduling priority of FTR Holders:

(i) Shall not apply in the Hour-Ahead Market or in real-time dispatch and operation of

the ISO Controlled Grid;

(ii) Shall not apply to any transfer of Energy other than a transfer across the Inter-

Zonal Interface in the direction for which the FTR was defined during the hour or

hours during which the circumstances described in Section 9.7.2.1 apply; and

(iii) Shall not be transferable, except in connection with a transfer of the FTR that is

registered with the ISO, as described in Section 9.8.

9.8 Assignment of Firm Transmission Rights

9.8.1 An FTR may be assigned, sold, or otherwise transferred by the FTR Holder to any entity

eligible to be an FTR Holder in full MW increments, either for the entire term of the FTR or for any

portion of that term providing, however, that any such transfer shall be in full hour increments that

correspond to the FTR issued to the FTR Holder. All FTRs that are so assigned, sold, or

otherwise transferred by the FTR Holder are subject to the terms and conditions for FTRs

approved by FERC and set forth in the ISO Tariff. Both the FTR Holder of record and the entity to

which the FTRs have been transferred shall register the transfer of the FTR with the ISO by

Issued by: Charles F. Robinson, Vice President and General Counsel

notifying the ISO through the form specified for that purpose by the ISO, and within the number of Business Days following the transfer published by the ISO on the ISO Home Page and WEnet but no later than such time as the ISO shall specify before the deadline applicable to scheduling Energy in the Day-Ahead Market, of (i) the identity of the FTR Holder of record; (ii) the identity of the entity to which the FTRs have been transferred; (iii) the quantity and identification numbers of the FTRs being transferred; (iv) the portion of the term of the FTR for which they are transferred; (v) the price at which the FTRs are being transferred; and (vi) whether the transfer of FTRs is subject to any conditions. The entity to which the FTRs have been transferred must also notify the ISO of all entities with which the transferee is affiliated that are FTR Holders or Market Participants as defined in the ISO Tariff, pursuant to Section 9.2.7. After the ISO receives such notices, the transferee shall be considered the FTR Holder of record with respect to the portion of the term of the FTR that is transferred. In order to use the Scheduling Priority of an FTR, pursuant to Section 9.7, an FTR must be registered with the ISO.

- **9.8.2** The ISO shall publish on the ISO Home Page such information concerning the concentration of ownership of FTRs in each FTR Market as determined by the ISO Governing Board from time to time.
- 9.8.3 To facilitate the operation of secondary markets in FTRs, the ISO shall post on WEnet and the ISO Home Page: (i) the identity of entities that hold FTRs that have been registered with the ISO, together with the quantity of FTRs held by such entities in each FTR Market and the path rating of the interface; and (ii) the name and a contact telephone number or telecopy number of any entity that operates a secondary market in FTRs and that requests the ISO to post such information. The ISO shall also post the prices at which FTRs are transferred through secondary market transactions and shall indicate whether such transfers are conditional.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Superseding Substitute First Revised Sheet No. 233

Second Revised Sheet No. 233

10. METERING.

10.1 Applicability.

Unless otherwise expressly stated to the contrary, the requirements set forth in these Sections 10.1 to

10.5 inclusive apply only to ISO Metered Entities.

10.2 **Responsibilities of ISO Metered Entities**

10.2.1 **Duty to Provide Meter Data.**

ISO Metered Entities shall ensure that Meter Data from their meters directly connected to the ISO

Controlled Grid or at interconnections thereto, including interconnections between utility Service Areas

which have separate UFE calculations, is made available to the ISO revenue Meter Data acquisition

and processing system in accordance with the requirements of these Sections 10.1 to 10.5 and the

ISO metering protocols. Pursuant to this obligation, the ISO shall establish revenue metering

protocols for such ISO Metered Entities.

10.2.2 **Duty to Install and Maintain Meters.**

The ISO may require ISO Metered Entities to install, at their cost, additional meters and relevant

metering system components, including real-time metering, at ISO specified Meter Points or other

locations as deemed necessary by the ISO, in addition to those connected to or existing on the ISO

Controlled Grid at the ISO Operations Date, including requiring the metering of transmission interfaces

connecting Zones. In directing the addition of meters and metering system components that would

impose increased costs on an ISO Metered Entity, the ISO shall give due consideration to whether the

expected benefits of such equipment are sufficient to justify such increased costs. ISO Metered

Entities, at their cost, shall install and maintain, or cause to be installed and maintained, metering

equipment and associated communication devices at ISO designated Meter Points to meet the

requirements of this Section 10 and the ISO metering protocols. Nothing in this Section 10 shall

preclude ISO Metered Entities from installing additional meters, instrument transformers and

associated communications facilities at their own cost.

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004 Effective: November 23, 2002

First Revised Sheet No. 234 Superseding Original Sheet No. 234

10.2.3 Metering Standards.

Each ISO Metered Entity shall ensure that each of its meters used to provide Meter Data to the

ISO complies with the meter standards and accuracy requirements for meters set forth in

Appendix J and the ISO metering protocols.

10.2.4 Certification of Meters.

Each ISO Metered Entity that makes Meter Data available to the ISO shall ensure that

metering facilities used to produce such Meter Data have been certified by the ISO as meeting

the requirements of these Sections 10.1 to 10.5 and the ISO metering protocols. Certification

of the relevant metering facilities shall only be provided upon the production of such evidence

as the ISO may reasonably require to demonstrate that the facilities in question have been

documented, inspected and successfully tested by the ISO or an ISO Authorized Inspector for

conformance to the standards and accuracy requirements referred to in Appendix J and the

ISO metering protocols. Meters of End-Use ISO Metered Entities in place as of the ISO

Operations Date are deemed to be certified as in compliance with Appendix J and such End-

Users shall not be required to enter into meter service agreements with the ISO provided that

their Scheduling Coordinators have entered into a meter service agreement with the ISO. ISO

certification pursuant to this Section 10.2.4 shall not relieve the ISO Metered Entity from the

obligation to ensure that its metering facilities continue to remain in compliance with the

requirements of these Sections 10.1 to 10.5 and the ISO metering protocols.

10.2.5 Metering Communications.

The ISO's revenue meter data acquisition and processing system shall collect and process

Meter Data made available by ISO Metered Entities pursuant to meter service

Issued by: Charles F. Robinson, Vice President and General Counsel

agreements. Meter Data for ISO Metered Entities shall be made available to the ISO's revenue meter data acquisition and processing system either directly by the ISO Metered Entity or via a central data server which collects Meter Data for various ISO Metered Entities provided that the central data server does not aggregate or adjust that Meter Data. Meter Data on the ISO's revenue meter data acquisition and processing system may be accessed from the system's database by the ISO Settlement system, other ISO application programs, relevant Scheduling Coordinators and other authorized users as identified in the relevant meter service agreement ("other authorized users") subject to the ISO being satisfied that access by such authorized users will not adversely effect the security of data held by the ISO. ISO Metered Entities shall ensure that their metering facilities are compatible with the ISO revenue meter data acquisition and processing system for these purposes. The ISO may, at its discretion, exempt an ISO Metered Entity from the requirement to make Meter Data directly available to the ISO's revenue meter data acquisition and processing system, for example, where the installation of communication links is unnecessary, impracticable or uneconomic. The ISO shall maintain the revenue meter data acquisition and processing system and remedy any faults occurring in such system. ISO Metered Entities shall ensure compliance with the metering protocols to be established by the ISO pursuant to Section 10.2.1. Scheduling Coordinators and other authorized users requiring Settlement Quality Meter Data for ISO Metered Entities they schedule or supply may obtain such data by polling the revenue meter data acquisition and processing system via WEnet in accordance with the ISO metering protocol. Scheduling Coordinators and other authorized users shall not poll the ISO revenue meter data acquisition and processing system for any other purpose, unless specifically authorized in their meter service agreement. If any Scheduling Coordinator does not have the ability to poll the ISO's revenue meter data acquisition and processing system as at the ISO

Issued by: Charles F. Robinson, Vice President and General Counsel

Operations Date, that Scheduling Coordinator shall have a period of up to 12 months from the ISO Operations Date in which to install the necessary equipment to enable it to poll directly the ISO revenue meter data acquisition and processing system. During the period in which a Scheduling Coordinator is unable to poll directly the ISO revenue meter data acquisition and processing system, that Scheduling Coordinator will be responsible for providing the ISO with Settlement Quality Meter Data in accordance with the ISO metering protocols.

10.2.6 Access to Meter Data.

The ISO has complete authority over all rights of access to (and has authority to deny access to) the ISO's revenue meter data acquisition and processing system including servers (where used), interface equipment, and software needed to collect the relevant information for Settlement, billing and related purposes. Each Market Participant acknowledges this ISO authority as a condition of ISO Controlled Grid service and participation. For ISO Metered Entities, authority over the sealing of meters, and all related metering facilities, shall reside solely with the ISO for all ISO designated Meter Points, regardless of any remote electronic access that an ISO Metered Entity or its Scheduling Coordinator may have provided to third parties, except as otherwise may be required by law, FERC, any Local Regulatory Authority or other provision of this ISO Tariff. Meter Data supplied by an ISO Metered Entity shall be made available by the ISO to the Scheduling Coordinator representing such ISO Metered Entity and the other authorized users identified in its Meter Service agreement, but shall not be disclosed to any other third party except as may otherwise be required by law, FERC, any Local Regulatory Authority or other provision of this ISO Tariff. Access by third parties other than authorized users to Meter Data held by the ISO shall be coordinated through the Scheduling Coordinator

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

representing the relevant ISO Metered Entity that supplied the data and shall not be obtained directly from the ISO on any basis including, without limitation, by the polling of the ISO's revenue meter data acquisition and processing system via WEnet.

10.3 Meter Service Agreements for ISO Metered Entities.

10.3.1 Requirement for Meter Service Agreements.

The ISO shall establish meter service agreements with ISO Metered Entities for the collection of Meter Data. Such agreements shall specify that ISO Metered Entities shall make available to the ISO's revenue meter data acquisition and processing system, Meter Data meeting the requirements of these Sections 10.1 to 10.5 inclusive and the ISO metering protocols. The meter service agreement and the ISO metering protocols shall specify the format of Meter Data to be submitted, which shall be identified by TO, Distribution System, Zone, ISO Controlled Grid interface point and other information reasonably required by the ISO. Meter service agreements will identify other authorized users which are allowed to access the Settlement Quality Meter Data held by the ISO. The ISO will ensure that the relevant UDCs and TOs are included as other authorized users.

10.3.2 Security and Meter Data Validation Procedures.

The meter service agreement for each ISO Metered Entity and the ISO metering protocols shall set out, in such detail as the ISO may deem necessary, the Meter Data security and validation procedures that the ISO shall apply to the Meter Data made available by each ISO Metered Entity. The ISO may base the security and validation procedures on historical data or an appropriate alternative data source. The ISO shall correct or replace or cause to be corrected or replaced inaccurate or missing data. The procedure may

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 238

Superseding Original Sheet No. 238

include data correction and substitution algorithms which shall estimate, substitute and flag

such inaccurate or missing data. Any necessary correction or replacement shall be approved

by the ISO prior to the data being sent to the ISO Settlement system. Security and validation

measures for existing Tie Point Meters shall be consistent with existing arrangements with the

operators in adjacent Control Areas. Any additional measures or changes to the existing

arrangements shall only be implemented upon mutual agreement of the ISO and the operator

in the adjacent Control Area.

10.3.3 Availability of Meter Data.

The meter service agreement and the ISO metering protocols shall set out the ISO's

requirements with regard to the frequency which it requires Meter Data to be made available to

the ISO revenue meter data acquisition and processing system.

10.3.4 Failure to Achieve Required Standards.

Meter service agreements shall set out appropriate measures and rights the ISO may exercise

upon any failure by the other party to meet the requirements for meter standards and accuracy

set out in these Sections 10.1 to 10.5 inclusive.

10.3.5 ISO Imposed Penalties and Sanctions

The ISO shall have the authority to impose penalties and sanctions, including but not limited to

suspension of trading rights, if an ISO Metered Entity provides fraudulent metering data to the

ISO. Such penalties shall be approved by FERC.

10.4 Low Side Metering.

Generators may, with the prior written approval of the ISO, install meters at the low voltage

side of the connecting transformer. Such approval shall be given only if the ISO is satisfied

that adequate accuracy and security of Meter Data obtained can be assured.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 239

Effective: October 13, 2000

Meter service agreements related to Generators utilizing low voltage side metering shall set out

ISO approved transformer loss correction factors to be applied by the Generator. The ISO has

the sole authority to require and approve any and all other relevant metering system correction

factors associated with an ISO Metered Entity.

10.5 Audit, Testing Inspection and Certification Requirements.

10.5.1 ISO Metered Entity Certification Testing and Audits.

ISO Metered Entities are subject to ISO audit, testing and certification requirements for their

entire metering system(s), including all relevant communication facilities and instrument

transformers.

10.5.2 Exemptions from ISO Metering Standards

The ISO has the authority to grant exemptions from certain ISO metering standards for an ISO

Metered Entity provided the ISO annually publishes details of the criteria the ISO will use when

considering an application for an exemption and details of specific exemptions which are

available. An ISO Metered Entity with an interim exemption shall provide site specific

Settlement Quality Meter Data to the ISO in accordance with its meter service agreement and

the ISO metering protocols. A Generator connected directly to a UDC Distribution System and

that sells its entire output to the UDC in which the Generator is located is not subject to the

audit, testing or certification requirements of the ISO.

10.6 Metering for Scheduling Coordinator Metered Entities.

10.6.1 Applicability.

The requirements set forth in this Section 10.6 shall apply only to Scheduling Coordinators

representing Scheduling Coordinator Metered Entities.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

10.6.2 Responsibilities of Scheduling Coordinators and the ISO.

10.6.2.1 Duty to Provide Meter Data.

Scheduling Coordinators shall provide the ISO with Settlement Quality Meter Data for all of the Scheduling Coordinator Metered Entities served by the Scheduling Coordinator no later than the day specified in Section 10.6.3. Settlement Quality Meter Data for Scheduling Coordinator Metered Entities shall be either (1) an accurate measure of the actual consumption of Energy by each Scheduling Coordinator Metered Entity in each Settlement Period, or (2) for Scheduling Coordinator Metered Entities connected to a UDC Distribution System and meeting that Distribution System's requirement for load profiling eligibility, a profile of that consumption derived directly from an accurate cumulative measure of the actual consumption of Energy over a known period of time and an allocation of that consumption to Settlement Periods using the applicable Approved Load Profile.

10.6.2.2 Loss Factors. Where a Scheduling Coordinator Metered Entity is connected to a UDC's Distribution System, the responsible Scheduling Coordinator shall adjust the Meter Data by an estimated Distribution System loss factor to derive an equivalent ISO Controlled Grid level measure. Such estimated Distribution System loss factors shall be approved by the relevant Local Regulatory Authority prior to their use. The Scheduling Coordinator shall aggregate its equivalent ISO Controlled Grid-level Meter Data for Scheduling Coordinator Metered Entities in accordance with the ISO metering protocols and submit this data to the ISO in accordance with the ISO metering protocols.

10.6.2.3 Scheduling Coordinators shall be responsible for obtaining all necessary authorizations from Local Regulatory Authorities having jurisdiction over the use of profiled Meter Data in any Settlement process in which load profiles are used to allocate consumption to Settlement Periods.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

Effective: February 27, 2001

Superseding Original Sheet No. 241

10.6.2.4 Communication of Meter Data. Each Scheduling Coordinator shall submit

Settlement Quality Meter Data for Scheduling Coordinator Metered Entities to the ISO in

accordance with the ISO metering protocols.

10.6.3 Timing of Meter Data Submission.

Scheduling Coordinators shall submit either hourly time-stamped Settlement Quality Meter

Data for Scheduling Coordinator Metered Entities or profiled cumulative Settlement Quality

Meter Data to the ISO for each Settlement Period in a Trading Day within forty-five (45)

calendar days of that Trading Day.

10.6.4 Meter Standards.

Each Scheduling Coordinator, in conjunction with the relevant Local Regulatory Authority, shall

ensure that each of its Scheduling Coordinator Metered Entities connected to and served from

the Distribution System of a UDC shall be metered by a revenue meter complying with any

standards of the relevant Local Regulatory Authority or, if no such standards have been set by

that Local Regulatory Authority, the metering standards set forth in Appendix J and the ISO

metering protocols.

10.6.5 Access to Meter Data.

The ISO has complete authority over rights of access to (and has authority to deny access to)

its revenue meter data acquisition and processing system including servers (where used),

interface equipment, and software needed to accept Settlement Quality Meter Data from

Scheduling Coordinator Metered Entities for Settlement, billing and related purposes. Each

Scheduling Coordinator, on behalf of itself and Market Participants that it serves or represents,

acknowledges this ISO authority as a condition of access to the ISO Controlled Grid.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000

10.6.6 Collection of Meter Data.

10.6.6.1 Responsibility of Scheduling Coordinators. Each Scheduling Coordinator

shall be responsible for the collection of Meter Data from the Scheduling Coordinator Metered

Entities it represents and for ensuring that the Settlement Quality Meter Data supplied to the

ISO meets the requirements of this Section 10.6 and the ISO metering protocols.

10.6.6.2 Certification of Meters. Scheduling Coordinators shall ensure that revenue

meters and related metering facilities of those Scheduling Coordinator MeteredEntities whom

they represent are certified in accordance with any certification criteria prescribed by the

relevant Local Regulatory Authority or, if no such criteria have been prescribed by that Local

Regulatory Authority, certified in accordance with the ISO metering protocols. Scheduling

Coordinators shall upon request of the ISO supply promptly copies of all certificates issued by

the relevant Regulatory Authority. The End Use Meter of an ISO Metered Entity or a

Scheduling Coordinator Metered Entity in place as of the ISO Operations Date is deemed to be

certified as in compliance with Appendix J. Once certified, meters for Scheduling Coordinator

Metered Entities need not be recertified provided such meters are maintained so as to meet

the standards and accuracy requirements prescribed by any relevant Local Regulatory

Authority or, if no such standards have been prescribed by that Local Regulatory Authority,

such requirements as referred to in Appendix J and the ISO metering protocols.

Recertification is not required by the ISO upon an election by a Scheduling Coordinator

Metered Entity to change its Scheduling Coordinator from which it takes service.

10.6.7 Meter Service Agreements for Scheduling Coordinator Metered Entities.

10.6.7.1 Requirement for Meter Service Agreements. The ISO shall enter into meter

service agreements with Scheduling Coordinators responsible for providing

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

Settlement Quality Meter Data for Scheduling Coordinator Metered Entities to the ISO. Such agreements shall specify that Scheduling Coordinators require their Scheduling Coordinator Metered Entities to adhere to the meter requirements set forth in this Section 10.6.

- 10.6.7.2 [Not Used]
- 10.6.7.3 [Not Used]

10.6.7.4 Approval by Local Regulatory Authority of Security and Validation

Procedures. Scheduling Coordinators shall be responsible for obtaining any necessary approval of the relevant Local Regulatory Authority to its proposed security, validation, editing and estimation procedures.

10.6.7.5 UDC and TO Agreements. Each Scheduling Coordinator shall be responsible for obtaining any necessary consent from the UDCs on whose Distribution Systems or the Participating TOs on whose transmission facilities the Scheduling Coordinator has Scheduling Coordinator Metered Entities as is necessary to give effect to the procedures governing Meter Data validation and security and inspection and testing of metering facilities. Scheduling Coordinators must verify with the relevant UDC the identity of each Scheduling Coordinator Metered Entity they represent and must notify the UDC of any discrepancies of which they become aware.

10.6.7.6 [Not Used]

10.6.7.7 Scheduling Coordinator Metered Entity Certification, Testing and Audit.

Subject to any Local Regulatory Authority requirements, the ISO reserves the right to inspect, test and otherwise audit the entire metering systems of the Scheduling Coordinator Metered Entity connected to the ISO Controlled Grid, from the Meter Data server to the metering system(s), and such systems shall be subject to ISO audits and

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

Superseding Original Sheet No. 244

Effective: October 13, 2000

tests. However, only the Meter Data server supplying the ISO is subject to ISO certification

requirements.

The Scheduling Coordinator or its designated representative shall provide the ISO with

all such information, assistance and cooperation the ISO reasonably requires in order to

conduct such inspections, tests and audits.

10.6.7.8 Failure to Achieve Required Standards. Subject to any Local Regulatory

Authority requirements, meter service agreements shall set out appropriate measures and

rights the ISO may exercise upon any failure by the other party to meet the requirements for

meter standards and accuracy set out in this Section 10.6.

10.6.8 Data Access.

Meter Data of a Scheduling Coordinator Metered Entity remains the property of that Scheduling

Coordinator Metered Entity and shall be made available to third parties only with its express

permission or as otherwise required by law or provided for in this ISO Tariff. The ISO shall be

granted access to Meter Data of Scheduling Coordinator Metered Entities obtained by

Scheduling Coordinators.

10.6.9 Exemptions from ISO Metering Standards

The ISO has the authority to grant exemptions from certain ISO metering standards for

Scheduling Coordinator Metered Entities that are subject to ISO metering standards provided

the ISO annually publishes details of the criteria the ISO will use when considering an

application for an exemption and details of specific exemptions which are available.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 245

Effective: October 13, 2000

11. ISO SETTLEMENTS AND BILLING.

11.1 **Settlement Principles.**

11.1.1 The ISO shall calculate, account for and settle transactions in accordance with the

following principles:

11.1.2 The ISO shall be responsible for calculating Settlement balances for all transactions

carried out by Scheduling Coordinators on the ISO Controlled Grid in each Settlement Period;

11.1.3 The ISO shall carry out all Settlements in accordance with Meter Data provided

pursuant to the requirements of Section 10 of this ISO Tariff;

11.1.4 The ISO shall create and maintain computer back-up systems, including off-site

storage of all necessary computer hardware, software, records and data at an alternative

location that, in the event of a Settlement system breakdown at the primary location of the day-

to-day operations of the ISO, could serve as an alternative location for day-to-day Settlement

operations within a reasonable period of time; and

11.1.5 The ISO shall retain all Settlement data records for a period which, at least, allows for

the re-run of data as required by this ISO Tariff and any adjustment rules of the Local

Regulatory Authority governing the Scheduling Coordinators and their End-Use Customers;

11.1.6 The ISO shall settle the following charges in accordance with Section 11.2 of this ISO

Tariff:

(1) Grid Management Charge;

(2) Grid Operations Charge;

(3) Ancillary Services charges;

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

Superseding Third Revised Sheet No. 246

(4) Imbalance Energy charges;

(5) Usage Charges;

(6) High Voltage Access Charges and Transition Charges;

(7) Wheeling Access Charges;

(8) Voltage Support and Black Start charges; and

(9) Reliability Must-Run Charges; and

(10) Default Interest Charges.

11.2 Calculations of Settlements.

The ISO shall calculate, account for and settle the following charges in accordance with this

ISO Tariff.

11.2.1 Grid Management Charge.

The Grid Management Charge will be levied in accordance with Section 8 of this ISO Tariff.

11.2.2 Grid Operations Charge.

The Grid Operations Charge will be levied in accordance with Section 7.3.2 of this ISO Tariff.

11.2.3 Ancillary Services

The ISO shall calculate, account for and settle charges and payments for Ancillary Services as

set out in Sections 2.5.27.1 to 4, and 2.5.28.1 to 4 of this ISO Tariff.

11.2.4 Imbalance Energy.

The ISO shall calculate, Dispatch and account for Imbalance Energy for each Dispatch Interval

and settle Imbalance Energy in the Real Time Market for each Settlement Interval for the

relevant Zone or Scheduling Point within the ISO Controlled

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Fourth Revised Sheet No. 246A

Superseding Third Revised Sheet No. 246A

Grid. Imbalance Energy is the difference between the Metered Quantity and the Energy that

corresponds to the Final Hour-Ahead Schedule. Instructed Imbalance Energy is the portion of

Imbalance Energy that is produced or consumed due to Dispatch Instructions. The Instructed

Imbalance Energy will be calculated based on all Dispatch Instructions taking into account

applicable ramp rates and time delays. All Dispatch Instructions shall be deemed delivered.

The remaining Imbalance Energy constitutes Uninstructed Imbalance Energy, and will be

calculated based on the difference between the Metered Quantity and the Generator's

Dispatched Operating Point.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: Upon Written Notice Provided By The ISO to FERC and Market Participants

Superseding First Revised Sheet No. 247.01

11.2.4.1 Net Settlements for Uninstructed Imbalance Energy.

Uninstructed Imbalance Energy attributable to each Demand Take-Out Point, Generating Unit, System Unit or System Resource for which a Scheduling Coordinator has a Final Hour-Ahead Schedule or Metered Quantity, for each Settlement Interval, shall be deemed to be sold or purchased, as the case may be, by the ISO and charges or payments for Uninstructed Imbalance Energy shall be settled by debiting or crediting, as the case may be, the Scheduling Coordinator with an amount for each Settlement Interval in accordance with Section 2.5.23.2.1. Positive or negative Uninstructed Imbalance Energy as described in SABP Appendix D. Section 2.1.1 shall be paid or charged the Resource-Specific Settlement Interval Ex Post Price or the Zonal Settlement Interval Ex Post Price, as the case may be.

11.2.4.1.1 Settlement for Instructed Imbalance Energy

Instructed Imbalance Energy attributable to each Scheduling Coordinator in each Settlement Interval shall be deemed to be sold or purchased, as the case may be, by the ISO and charges or payments for Instructed Imbalance Energy shall be settled by debiting or crediting, as the case may be, the Scheduling Coordinator with an amount for each Settlement Interval in accordance with Section 2.5.23.

11.2.4.1.1.1 Bid Cost Recovery for Generating Units, System Units, Dynamically Scheduled System Resources, and Curtailable Demand.

The ISO shall determine, for each Trading Day, for each Generating Unit, System Unit, dynamically scheduled System Resource, and Curtailable Demand, Dispatched in the Real Time Market pursuant to Section 2.5.22, whether there exists a surplus or deficit in that resource's recovery of its Energy Bid costs, that are less than or equal to the Maximum Bid Level, through Instructed Imbalance Energy credits, as set forth in Section 11.2.4.1.1. This determination of market revenue surplus or deficit shall be calculated as the difference between: 1) the Instructed Imbalance Energy payment as based on the

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

Superseding Substitute Original Sheet No. 247.02

relevant Resource-Specific Settlement Interval Ex Post Price and 2) the resource's Energy Bid cost for each Settlement Interval. Bid cost recovery payment will be based on Settlement Intervals in which the resource: 1) did not recover its Energy Bid costs, and 2) generated or consumed an amount of Energy resulting from any Dispatch Instructions pursuant to Section 2.5.22. These Settlement Intervals will be netted against all Settlement Intervals in which the Instructed Imbalance Energy payments to the resource exceeded its Energy Bid costs. The resulting total bid cost recovery payment is then divided equally amongst the same Settlement Intervals to yield a per-Settlement Interval bid cost recovery payment. Payments for unrecovered bid costs for portions of Energy associated with bids above the Maximum Bid Level will not be netted with other surpluses or deficits and are subject to recall if the such bids above have not been adequately justified pursuant to Section 28.1.2. Energy Bid cost recovery associated with Residual Energy as provided for in Section 2.5.22.6.4 shall be based on the Energy Bids for the previous or next operating hour, whichever the case may be, upon which the Dispatch Instruction was based.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

Fifth Revised Sheet No. 247.03 Superseding Substitute Fourth Revised Sheet No. 247.03

Effective: October 1, 2005

FIRST REPLACEMENT VOLUME NO. I

11.2.4.1.1.2 Bid Cost Recovery for System Resources

The ISO shall settle predispatched Energy from System Resources based on each resource's Energy Bid costs for each Settlement Interval, for each System Resource submitting bids in the Real Time Market pursuant to Section 2.5.22. This Energy bid cost settlement shall be calculated as set forth in Sections D 2.1.2 and D 2.6.3 in Appendix D of the Settlements and Billing Protocol. Bid cost settlement shall apply to both incremental and decremental predispatched Energy.

An uplift payment will be made as necessary for each Settlement Interval to assure that the System Resource recovers its Energy Bid costs for the quantity of Energy delivered. Payments for un-recovered bid costs for portions of Energy associated with bids above the Maximum Bid Level are subject to recall if such bids have not been adequately justified pursuant to Section 28.1.2.

The settlement methodology set forth in this section will continue in effect until such time as the ISO implements a methodology for settling bids from System Resources as part of its Market Redesign and Technology Upgrade process.

11.2.4.1.2 Penalties for Uninstructed Imbalance Energy

Effective December 1, 2004, the ISO shall not charge any Uninstructed Deviation Penalties pursuant to this Section 11.2.4.1.2 until FERC issues an order authorizing the ISO to charge Uninstructed Deviation Penalties pursuant to this section. Beginning with Settlement Statements for the first Trading Day for which FERC authorizes the ISO to charge Uninstructed Deviation Penalties pursuant to this section, the ISO shall charge Scheduling Coordinators Uninstructed Deviation Penalties for Uninstructed Imbalance Energy resulting from resource deviations outside a Tolerance Band from their Dispatch Operating Point, for dispatched resources, or their Final Hour-Ahead Schedule otherwise. The Dispatch Operating Point will take into account the expected Ramping of a resource as it moves to a new Hour-Ahead Schedule at the top of each hour and as it responds to Dispatch Instructions. The Uninstructed Deviation Penalty will be applied as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 1, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 247.04

a) The Uninstructed Deviation Penalty for negative Uninstructed Imbalance Energy will be calculated and assessed in each Settlement Interval. The Uninstructed Deviation Penalty for positive Uninstructed Imbalance Energy will be calculated and assessed in each Settlement Interval in which the ISO has not declared a staged System Emergency;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 1, 2005 Effective: October 1, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

Fifth Revised Sheet No. 247A Superseding Fourth Revised Sheet No. 247A

b) The Uninstructed Deviation Penalty will apply to pre-Dispatched bids from non-dynamically scheduled System Resources identified, when such a pre-Dispatch Instruction is issued more than 40 minutes prior to the relevant Operating Hour, subject to the following conditions: i) The Uninstructed Deviation Penalty will only apply to the pre-Dispatched amount of the bid that is declined or not delivered, ii) the Uninstructed Deviation Penalty will not apply to a portion of a pre-Dispatched bid that is subsequently not delivered at the direction of a Control Area, including the ISO, due to a curtailment of transmission capability or to prevent curtailment of native firm load occurring subsequent to issuing the pre-Dispatch Instruction, iii) the Uninstructed Deviation Penalty will not apply to uninstructed energy resulting from declining subsequent intra-hour Dispatch Instructions. Dynamically scheduled System Resources, to the extent they deviate from their Final Hour-Ahead Schedule plus any real-time Dispatch Instructions, will be subject to the Uninstructed Deviation Penalty;

- c) The Uninstructed Deviation Penalty will not apply to Load or Curtailable Demand;
- d) [Not Used]

FIRST REPLACEMENT VOLUME NO. I

- e) The Uninstructed Deviation Penalty will not apply to Regulatory Must-Run Generation or Participating Intermittent Resources that meet the scheduling obligations established in the Eligible Intermittent Resources Protocol. No other applicable charges will be affected by this exemption. The Uninstructed Deviation Penalty also will not apply to Qualifying Facilities (QFs), including those that are dynamically scheduled, that have not executed a Participating Generator Agreement (PGA), pending resolution of QF-PGA issues at FERC;
- f) For the Scheduling Coordinator of an MSS that has elected to follow the MSS Load and associated Transmission Losses pursuant to Section 23.12, the deviation penalties in Sections 23.12.2.1 and 23.12.2.2 will apply. For the Scheduling Coordinator of an MSS

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

Superseding Substitute Second Revised Sheet No. 247B

that has not elected to follow the MSS Load, the Uninstructed Deviation Penalties in this Section 11.2.4.1.2 will apply:

- g) The Uninstructed Deviation Penalty will apply to Generating Units providing Regulation and dynamically scheduled System Resources providing Regulation to the extent that uninstructed deviations from such resources exceed each resource's actual Regulation range plus the applicable Tolerance Band. Resources providing Regulation and generating within their relevant Regulating range (or outside their relevant Regulating range as a direct result of ISO control or instruction) will be deemed to have zero deviations for purposes of the Uninstructed Deviation Penalty.
- h) The Uninstructed Deviation Penalty will be calculated and assessed for each resource individually, except that as specified in this Section, uninstructed deviations from individual resources may be aggregated. Uninstructed deviations can be aggregated for resources that: 1) are represented by the same Scheduling Coordinator, 2) are connected to the same ISO Controlled Grid bus and voltage level, and 3) are not Reliability Must Run Condition 2 resources. The ISO will consider, on a case-by-case basis, requests to aggregate uninstructed deviations amongst resources represented by the same Scheduling Coordinator based on an ISO review of impact on the ISO Controlled Grid. The ISO may temporarily suspend any aggregation as needed to ensure reliability. The applicable Pmax of aggregated groups of resources will exclude units that are not operating:
- i) [Not Used]
- j) [Not Used]
- k) The Uninstructed Deviation Penalty will not apply when the Zonal Settlement Interval Ex Post Price is negative or zero;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Substitute Fifth Revised Sheet No. 247C

FIRST REPLACEMENT VOLUME NO. I

Superseding Substitute Fourth Revised Sheet No. 247C

The Uninstructed Deviation Penalty for positive Uninstructed Imbalance Energy will be the amount of the Uninstructed Imbalance Energy in excess of the Tolerance Band multiplied by a price equal to 100% of the corresponding Zonal Settlement Interval Ex Post Price. The net effect of the Uninstructed Deviation Penalty and the Settlement for positive Uninstructed Imbalance Energy beyond the Tolerance Band will be that the ISO will not pay for such Energy;

- m) The Uninstructed Deviation Penalty for negative Uninstructed Imbalance Energy will be the amount of the Uninstructed Imbalance Energy in excess of the Tolerance Band multiplied by a price equal to 50% of the corresponding Zonal Settlement Interval Ex Post Price;
- n) The Uninstructed Deviation Penalty will not apply to deviations from Energy delivered as part of a scheduled test so long as the test has been scheduled by the Scheduling Coordinator with the ISO or the ISO has initiated the test for the purposes of validating unit performance;
- o) The Uninstructed Deviation Penalty shall not apply to any excess Energy delivered from or any shortfall of Energy not delivered from an out-of-market (OOM) transaction involving a Generating Unit or a System Unit unless the ISO and the supplier have agreed upon the time of, duration of, and the amount of Energy to be delivered in the OOM transaction and the ISO reflects the OOM transaction in its real-time Expected Energy calculations. The Uninstructed Deviation Penalty shall apply to Energy outside the Tolerance Band from firm OOM transactions with dynamically scheduled System Resources to the extent the agreed-to Energy is not delivered or over-delivered, and to any Energy from non-dynamically scheduled System Resources to the extent the agreed-to Energy is not delivered if that over- or under-delivery was due to action taken

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 247C.00

by or not taken by the System Resource and not the result of action taken by a Control
Area operator due to a curtailment of firm transmission capability or to prevent
curtailment of native firm load occurring subsequent to the OOM transaction;

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Superseding Second Revised Sheet No. 247C.01

Third Revised Sheet No. 247C.01

Imbalance Energy will be exempted from the Uninstructed Deviation Penalty if the Generating Unit or dynamically scheduled System Resource was physically incapable of delivering the expected Energy, provided that the Generating Unit or dynamically scheduled System Resource had notified the ISO within 30 minutes of the onset of an event that prevents the resource from performing its obligations. A Generating Unit or dynamically scheduled System Resource must notify ISO operations staff of its reasons for failing to deliver the expected Energy in accordance with Section 2.3.3.9.5 and must provide information to the ISO that verifies the reason the resource failed to comply with the Dispatch instruction within 48 hours of the operating hour in which the instruction is issued;

- q) Adjustments to any Generating Unit, Curtailable Demand and System Resource Final Hour-Ahead Schedules made in accordance with the terms of Existing Contracts shall not be subject to Uninstructed Deviation Penalties.
- r) Any changes made to Schedules prior to the ISO issuing Final Hour-Ahead Schedules shall not be subject to Uninstructed Deviation Penalties.
- s) Uninstructed Deviation Penalties shall not be charged to any deviation from a Dispatch Instruction that does not comply with the requirements set forth in the Dispatch Protocol.

Issued by: Charles F. Robinson, Vice President and General Counsel

- the portion of above-MCP costs that would otherwise be assigned pro rata to all Scheduling Coordinators in that Settlement Interval pursuant to Section 11.2.4.2.2.

 Any remaining portion of amounts collected as Uninstructed Deviation Penalties after satisfying these sequential commitments shall be treated in accordance with SABP 6.5.2.
- u) Condition 2 RMR Units shall be exempt from Uninstructed Deviation Penalties.
- V) The Uninstructed Deviation Penalty shall not apply to positive Uninstructed Imbalance Energy attributable to operation below the Generating Unit's minimum operating level from the time the Generating Unit synchronizes to the grid to the earlier of (1) the Settlement Interval in which the Generating Unit produces a quantity of Energy that represents an average rate of delivery over such Settlement Interval in excess of the Generating Unit's minimum operating level plus the applicable Tolerance Band, or (2) the first Settlement Interval after the expiration of a period of time that begins at the end of the Settlement Interval in which the Generating Unit synchronizes to the grid and ends after the Generating Unit's maximum start-up time as specified in the Master File. The Uninstructed Deviation Penalty shall not apply to any positive Uninstructed Imbalance Energy attributable to operation below the Generating Unit's minimum operating level for a duration equal to the time specified in the Generating Unit's Resource Data Template for the Generating Unit to disconnect from the grid after reaching its minimum operating level following either (1) the last Settlement Interval of an hour in which the Generating Unit had a non-zero Final Hour-Ahead Schedule or (2) the Settlement Interval in which the Generating Unit is expected to reach its minimum operating level based on the applicable ramp rate when the ISO instructed the Generating Unit to shut down. The amount of Uninstructed Imbalance Energy

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 1, 2004 Effective: Upon Notice

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 247D.01

exempted from the Uninstructed Deviation Penalty shall not exceed the amount of the Generating Unit's minimum operating level plus the applicable Tolerance Band.

(w) UDP shall not apply to deviations by a Generating Unit that are attributable to any automatic response to a system disturbance in accordance with Applicable Reliability Criteria.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 1, 2004 Effective: Upon Notice

11.2.4.2 Payment Options for ISO Dispatch Orders

With respect to all resources which have not bid into the Imbalance Energy or Ancillary Services markets but which have been dispatched by the ISO to avoid an intervention in market operations, to prevent or relieve a System Emergency, or to satisfy a locational requirement, the ISO shall calculate, account for and, if applicable, settle deviations from the Final Schedule submitted on behalf of each such resource, with the relevant

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 1, 2002 Effective: October 1, 2002

Superseding First Revised Sheet No. 248

Scheduling Coordinator for each Settlement Period for each such resource by application of either of the following payment options described below. For resources subject to a Reliability Must-Run Contract, the ISO will dispatch such resources according to the terms of the RMR Contract, except as provided for below. In circumstances where an RMR Unit would be used to resolve Intra-Zonal Congestion and there are no such RMR Units available, a resource may be called upon and paid under this Section to resolve the Intra-Zonal Congestion.

By December 31 of each year for the following calendar year, each Scheduling Coordinator for a resource shall select one of the following payment options for each resource it schedules:

- (a) the Uninstructed Imbalance Energy charge price as calculated in accordance with Section 2.5.23.2.2 (i.e., using the Hourly Ex Post Price) or
- (b) a calculated price:
 - (i) for decremental dispatch orders that is an Energy payment to the ISO that is equal to the Market Clearing Price for the relevant Settlement Period for the applicable Energy market less verifiable daily gas imbalance charges, if any, that are solely attributable to the ISO's Dispatch Instruction and that the Scheduling Coordinator or Generator was not able to eliminate or reduce despite the application of best efforts, if the Scheduling Coordinator provides the resource's daily gas imbalance charges to the ISO within thirty (30) Business Days from the Settlement Period for which the resource is dispatched; and
 - (ii) for incremental dispatch orders is the sum of: 1) a capacity payment equal to the average Day-Ahead Market prices for Spinning Reserve and Non-Spinning Reserve for the three (3)

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 11, 2004 Effective: July 11, 2004

Superseding Third Revised Sheet No. 249

most recent similar days for the same Settlement Period for which the resource is dispatched; 2) an Energy payment equal to the average calculated using the ISO Real Time Market Energy prices for the three (3) most recent similar days for the same Settlement Period for which the resource is dispatched; 3) such resource's verifiable Start-Up Costs, if the start-up was solely attributable to the ISO's Dispatch Instruction and if the Scheduling Coordinator provides the resource's Start-Up Costs to the ISO within thirty (30) Business Days from the Settlement Period for which the resource is dispatched; and 4) verifiable daily gas imbalance charges, if any, that are solely attributable to the ISO's Dispatch Instruction and that the Scheduling Coordinator or Generator was not able to eliminate or reduce despite the application of best efforts, if the Scheduling Coordinator provides the resource's daily gas imbalance charges to the ISO within thirty (30) Business Days from the Settlement Period for which the resource is dispatched. References to "similar days" in this Section refer to Business Days when the resource is dispatched on a Business Day and otherwise to days that are not Business Days.

To the extent a Scheduling Coordinator does not specify a payment option, the ISO will apply the payment provisions of the payment option described in Section 11.2.4.2(a).

If the ISO Dispatches an RMR Unit that has selected Condition 2 of its RMR Contract to start-up or provide energy other than a start-up or energy requested pursuant to the RMR Contract, as provided in Section 5.2.9 of the ISO Tariff, the ISO shall pay as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004 Effective: July 11, 2004

- (a) if the Owner has elected Option A of Schedule G, two times the start-up cost specified in Schedule D to the applicable RMR Contract for any start-up incurred, and 1.5 times the rate specified in Equation 1a or 1b below times the amount of energy delivered in response to the ISO's instruction;
- (b) if the Owner has elected Option B of Schedule G, three times the start-up cost specified in Schedule D to the applicable RMR Contract for any start-up incurred, and the rate specified in Equation 1a or 1b below times the amount of energy delivered in response to the ISO's instruction.

Equation 1a

Energy Price (
$$\$/MWh$$
) = $(AX^3 + BX^2 + CX + D) * P * E$ + Variable O&M Rate

Equation 1b

Energy Price (
$$\$/MWh$$
) = A * (B + CX + De^{FX}) * P * E + Variable O&M Rate

Where:

- for Equation 1a, A, B, C, D and E are the coefficients given in Table C1-7a of the applicable RMR Contract;
- for Equation 1b, A, B, C, D, E and F are the coefficients given in Table C1-7b of the applicable RMR Contract;
- X is the Unit output level during the applicable settlement period, MWh;
- P is the Hourly Fuel Price as calculated by Equation C1-8 in Schedule C using the Commodity Prices in accordance with the applicable RMR Contract;
- Variable O&M Rate (\$/MWh): as shown on Table C1-18 of the applicable RMR Contract.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004 Effective: July 11, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Substitute First

FIRST REPLACEMENT VOLUME NO. I

Substitute First Revised Sheet No. 249B Superseding Sub. Original Sheet No. 249B

11.2.4.2.1 Allocation of Costs Resulting From Dispatch Instructions

Pursuant to Section 11.2.4.1, the ISO may, at its discretion, Dispatch any Participating

Generator, Participating Load and dispatchable System Resource that has not bid into the

Imbalance Energy or

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004 Effective: Upon Notice After September 6, 2003

Ancillary Services markets, to avoid an intervention in market operations or to prevent or relieve a System Emergency. Such Dispatch may result from, among other things, planned and unplanned transmission facility Outages; bid insufficiency in the Ancillary Services and real-time Energy markets; and location-specific requirements of the ISO. The cost associated

with each Dispatch instruction is broken into two components:

a) the portion of the Energy payment at or below the Market Clearing Price ("MCP") for

the Settlement Interval, and

b) the portion of the Energy payment above the MCP, if any, for the Settlement Interval.

For each Settlement Interval, costs above the MCP incurred by the ISO for such Dispatch instructions necessary as a result of a transmission facility Outage or in order to satisfy a location-specific requirement in that Settlement Interval shall be payable to the ISO by the Participating Transmission Owner in whose PTO Service Territory the transmission facility is located or the location-specific requirement arose. The costs incurred by the ISO for such Dispatch instructions for reasons other than for a transmission facility Outage or a location-

11.2.4.2.1.1 Allocation of Costs from Out-Of-Market calls to Condition 2 RMR Units

specific requirement will be recovered in the same way as for Instructed Imbalance Energy.

All costs associated with energy provided by a Condition 2 RMR Unit operating other than according to a dispatch notice issued under the RMR Contract shall be allocated in accordance with Section 11.2.4.2.1. Until either the RMR Contract Counted MWh, Counted Service Hours or Counted Start-ups exceed the relevant RMR Contract Service Limit, any cost incurred for energy provided under the RMR Contract above the rate specified in equation 1a or 1b as set forth in Section 11.2.4.2 shall be allocated in accordance with Section 11.2.4.2.1, not to the Responsible Utility.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Substitute First Revised Sheet No. 250.00

FIRST REPLACEMENT VOLUME NO. I

Superseding Sub. Original Sheet No. 250.00

Start-Up Costs for Condition 2 RMR Units providing service outside the RMR Contract, and any

additional Start-Up Cost associated with a Condition 2 RMR Unit providing service under the

RMR Contract when the unit's total service has exceeded an RMR Contract Service Limit but

neither the RMR Contract Counted MWh, Counted Service Hours or Counted Start-ups have

exceeded the applicable RMR Contract Service Limit, shall be invoiced in accordance with

Section 2.5.23.3.7.6 and collected in accordance with Section 2.5.23.3.7.1.

11.2.4.2.2 Allocation of Above-MCP Costs For Accepted Bids

For each Settlement Interval, the at or below-MCP costs incurred as a result of accepted bids

in the ISO Imbalance Energy Markets shall be allocated in accordance with 11.2.4.1.

Allocation of above-MCP costs for accepted bids in the ISO Imbalance Energy Markets shall be

in accordance with this Section 11.2.4.2.2 as follows.

11.2.4.2.2.1 Allocation of Bid Costs Above the Maximum Bid Level

For each Settlement Interval, costs that are both above the MCP and above the Maximum Bid

Level, incurred by the ISO as a result of Instructed Imbalance Energy and Dispatch instructions

for reasons other than for a transmission facility Outage or a location-specific requirement shall

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 10, 2004 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 250.01 Superseding Original Sheet No. 250.01

be charged to Scheduling Coordinators as follows in a three-step process. First, each Scheduling Coordinator's charge shall be the lesser of:

- (a) the pro rata share of the total costs that are both above the MCP and above the Maximum Bid Level based upon the ratio of each Scheduling Coordinator's Net Negative Uninstructed Deviations to the total system Net Negative Uninstructed Deviations; or
- (b) the amount obtained by multiplying the Scheduling Coordinator's Net Negative Uninstructed Deviation for each Settlement Interval and a weighted average price. The weighted average price is equal to the total costs that are both above the MCP and above the Maximum Bid Level divided by the MWh delivered as a result of ISO instructions with a cost component above the MCP.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

FIRST REPLACEMENT VOLUME NO. I

Second, any remaining unallocated costs shall be reduced pursuant to Section 11.2.4.1.2.

Third, any remaining unallocated costs shall be allocated amongst all Scheduling Coordinators

in that Settlement Interval pro rata based on their metered Demand, including exports.

A Scheduling Coordinator shall be exempt from the first allocation step of costs that are both

above the MCP and above the Maximum Bid Level in a Settlement Interval if the Scheduling

Coordinator has sufficient incremental Energy bids from physically available resources in the

Imbalance Energy market to cover its Net Negative Uninstructed Deviation in the given

Settlement Interval and the prices of such Energy bids do not exceed the applicable Maximum

Bid Level as set forth in Section 28.1.2 of this Tariff.

11.2.4.2.2.2 Allocation of Bid Costs Above-MCP and Below the Maximum Bid Level

For each Settlement Interval, the total unrecovered costs pursuant to Section 11.2.4.1.1.1 that

are above the MCP and below the Maximum Bid Level for each Trading Day will be allocated

pro-rata to each Scheduling Coordinator based on its metered Demand. For a Scheduling

Coordinator of an MSS Operator that has elected to follow Load, allocation of such

unrecovered costs will be based on net metered Demand.

11.2.4.3 Unaccounted For Energy (UFE)

For settlement purposes, UFE is treated as Imbalance Energy. For each Settlement Interval,

the ISO will calculate UFE on the ISO Controlled Grid, for each utility Service Area for which

separate UFE calculation is performed. The UFE will be settled as Imbalance Energy at the

Zonal Settlement Interval Ex Post Price. UFE attributable to meter measurement errors, load

profile errors, Energy theft, and distribution loss deviations will be allocated to each Scheduling

Coordinator based on the ratio of their metered Demand (including exports to neighboring

Control Areas) within the relevant utility Service Area to total metered Demand within the utility

Service Area.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

Superseding First Revised Sheet No. 250B

Second Revised Sheet No. 250B

FIRST REPLACEMENT VOLUME NO. I

11.2.4.4 High Voltage Access Charges and Transition Charges will be levied in accordance with Section 7.1 of this ISO Tariff and Appendix F, Schedule 3.

11.2.4.5 **Participating Intermittent Resources**

11.2.4.5.1 **Uninstructed Energy and Transmission Losses by Participating**

Intermittent Resources

Uninstructed Imbalance Energy associated with deviations by a Participating Intermittent Resource and Transmission Losses shall be settled as provided in this Section 11.2.4.5.1 for every Settlement Period in which such Participating Intermittent Resource meets the scheduling requirements established in the ISO Protocols. In each Settlement Period such requirements are met, the Participating Intermittent Resource shall be exempt from the charges (payments) for Uninstructed Imbalance Energy. Instead, the net Uninstructed Imbalance Energy in each Settlement Interval, together with the transmission loss obligation calculated in accordance with Section 7.4.1.1, shall be assigned to a deviation account specific to each Participating Intermittent Resource. The net balance in each deviation account at the end of each calendar month shall be paid (or charged) to the Scheduling Coordinator for the associated Participating Intermittent Resource at the average price specified in Section 2.5.23.2.3 of the ISO Tariff. If the above-referenced scheduling requirements for Participating Intermittent Resources are not met, then charges (payments) for Uninstructed Imbalance Energy during such Settlement Periods shall be determined in accordance with Section 11.2.4.1.

11.2.4.5.2 **Adjustment of Other Charges Related to Participating Intermittent** Resources

Charges pursuant to Section 2.5.28.4 or Section 11.2.4.2.2 to Scheduling Coordinators representing Participating Intermittent Resources shall exclude the effect of uninstructed deviations by Participating Intermittent Resources that have scheduled in accordance with the ISO Protocols. The amount of such adjustments shall be accumulated and settled as provided in Section 11.2.4.5.3.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

11.2.4.5.3 Allocation of Costs From Participating Intermittent Resources

The charges (payments) for Uninstructed Imbalance Energy that would have been calculated if the Settlement Interval deviations by each Participating Intermittent Resource were priced at the appropriate Dispatch Interval Ex Post Price shall be assigned to a monthly balancing account for all Participating Intermittent Resources in the ISO Control Area. The balance in such account at the end of each month shall be netted against the aggregate payments (charges) by Scheduling Coordinators on behalf of Participating Intermittent Resources pursuant to Section 11.2.4.5.1. The resulting balance, together with the adjustments to charges in each Settlement Interval or Settlement Period pursuant to Section 11.2.4.5.2 shall be assigned to each Scheduling Coordinator in the same proportion that such Scheduling Coordinator's aggregate Net Negative Uninstructed Deviations in that month bears to the aggregate Net Negative Uninstructed Deviations for all Scheduling Coordinators in the Control Area in that month.

11.2.4.5.4 Payment of Forecasting Fee

A fee to defray the costs of the implementation of the forecasting service for Participating Intermittent Resources shall be assessed to Scheduling Coordinators for Participating Intermittent Resources as specified in Schedule 4 of Appendix F.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

Original Sheet No. 251

11.2.4.6 [Not Used]

11.2.5 Usage Charges.

Usage Charges will be levied in accordance with Section 7.3.1 of this Tariff.

11.2.6 Wheeling Through and Wheeling Out Transactions.

The ISO shall calculate, account for and settle charges and payments for Wheeling Through

and Wheeling Out transactions in accordance with Section 7.1.4 of this Tariff.

11.2.7 Voltage Support and Black Start Charges.

The ISO shall calculate, account for and settle charges and payments for Voltage Support and

Black Start as set out in Sections 2.5.27.5, 2.5.27.6, 2.5.28.5 and 2.5.28.6 of this ISO Tariff.

11.2.8 Reliability Must-Run Charges

The ISO shall calculate and levy the charges for Reliability Must-Run Contract costs in

accordance with Section 5.2.7 of this ISO Tariff.

11.2.9 Neutrality Adjustments

The ISO shall be authorized to levy additional charges or payments as special adjustments in

regard to:

(a) amounts required to round up any invoice amount expressed in dollars and cents to the

nearest whole dollar amount in order to clear the ISO Clearing Account. These

charges will be allocated amongst Scheduling Coordinators over an interval

determined by the ISO and pro rata based on metered Demand (including exports)

during that interval;

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

- (b) amounts in regard to penalties which may be levied by the ISO in accordance with the ISO Tariff. These charges will be levied on the Market Participants liable for payment of the penalty;
- amounts required to reach an accounting trial balance of zero in the course of the Settlement process in the event that the charges calculated as due from ISO Debtors are lower than payments calculated as due to the ISO Creditors for the same Trading Day. These charges will be allocated amongst the Scheduling Coordinators who traded on that Trading Day pro rata to their metered Demand (including exports) in MWh of Energy for that Trading Day. In the event that the charges due from ISO Debtors are higher than the payments due to ISO Creditors, the ISO shall allocate a payment to the Scheduling Coordinators who traded on that Trading Day pro rata to their metered Demand (including exports) in MWh of Energy for that Trading Day;
- (d) amounts required with respect to payment adjustments for regulating Energy as calculated in accordance with Section 2.5.27.1. These charges will be allocated amongst the Scheduling Coordinators who traded on that Trading Day pro rata to their metered Demand (excluding exports) in MWh for that Trading Day; and
- (e) awards payable by or to the ISO pursuant to good faith negotiations or ISO ADR Procedures that the ISO is not able to allocate to or to collect from a Market Participant or Market Participants in accordance with Section 13.5.3. These charges will be allocated amongst Scheduling Coordinators over an interval determined by the ISO and pro rata based on metered Demand (including exports) during that interval.
- **11.2.9.1** The total annual charges levied under Section 11.2.9 shall not exceed \$0.095/MWh, applied to Gross Loads in the ISO Control Area and total exports from the ISO

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000 Effective: February 27, 2001

Effective: October 31, 2002

Controlled Grid, unless: (a) the ISO Governing Board reviews the basis for the charges above

that level and approves the collection of charges above that level for a defined period; and (b)

the ISO provides at least seven days' advance notice to Scheduling Coordinators of the

determination of the ISO Governing Board.

11.2.10 Payments Under Section 2.3.5.1 Contracts

The ISO shall calculate and levy charges for the recovery of costs incurred under

contracts entered into by the ISO under the authority granted in Section 2.3.5.1 in accordance

with Section 2.3.5.1.8 of this ISO Tariff.

11.2.11 FERC Annual Charge Recovery Rate

The ISO shall calculate and levy the rates for recovery of FERC Annual Charges in accordance

with Section 7.5 of this ISO Tariff.

11.2.12 [Not Used]

11.2.13 Emissions and Start-Up Fuel Cost Charges

The ISO shall calculate, account for and settle charges and payments for Emissions Costs and

Start-Up Fuel Costs in accordance with Sections 2.5.23.3.6 and 2.5.23.3.7 of this ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 29, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Fourth Revised Sheet No. 253A

Superseding Third Revised Sheet No. 253A

11.2.14 The ISO shall calculate, charge and disburse all collected default Interest in

accordance with the ISO Tariff Settlement and Billing Protocol Sections 2, 5, and 6.

11.3 Billing and Payment Process.

11.3.1 The billing and payment process shall be based on the issuance of Preliminary and

Final Settlement Statements for each Settlement Period in each Trading Day.

11.3.2 Payment for the charges referred to in Section 11.1.6 of the ISO Tariff (except for the

charges payable under long-term contracts) for each Trading Day in each calendar month shall

be made five (5) Business Days after issuance of the Preliminary Settlement Statement for the

last day of the relevant calendar month. Payment for adjustments will be made five (5)

Business Days after issuance of the Final Settlement Statement for the last day of the relevant

month. Payments for FERC Annual Charges will be made in accordance with Section 7.5 of

this ISO Tariff.

11.3.3 [Not used]

11.3.4 [Not used]

11.4 General Principles for Production of Settlement Statements.

11.4.1 Basis of Settlement. The basis of each Settlement Statement shall be the debiting

or crediting of an account in the name of the relevant Scheduling

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: August 9, 2003

Original Sheet No. 254

Effective: October 13, 2000

Coordinator in the general ledger set up by the ISO to reflect all transactions, charges or

payments settled by the ISO.

11.4.2 Right to Dispute.

All Scheduling Coordinators shall have the right to dispute any item or calculation set forth in any

Preliminary Settlement Statement in accordance with this ISO Tariff.

11.4.3 Data Files.

Settlement Statements relating to each Scheduling Coordinator shall be accompanied by a data

file of supporting information that includes the following for each Settlement Period of the

Trading Day on a Zone-by-Zone basis:

(a) the aggregate quantity (in MWh) of Energy supplied or withdrawn by the Metered

Entities represented by the Scheduling Coordinator;

(b) the aggregate quantity (in MW) and type of Ancillary Services capacity provided or

purchased;

(c) the relevant prices that the ISO has applied in its calculations;

(d) details of the Scheduled quantities of Energy and Ancillary Services accepted by the

ISO in the Day-Ahead Market and the Hour-Ahead Market;

(e) details of Imbalance Energy and penalty payments; and

(f) detailed calculations of all fees, charges and payments allocated amongst Scheduling

Coordinators and each Scheduling Coordinator's share.

11.5 Calculation in the Event of Lack of Meter Data for the Balancing of Market

Accounts.

Settlements shall not be cleared for final processing until the accounting trial balance is zero. In

order to publish a Settlement Statement, the ISO may use estimated, disputed or

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

First Revised Sheet No. 255

calculated Meter Data. When actual verified Meter Data is available and all of the disputes raised by Scheduling Coordinators during the validation process described in Section 11.7 of this ISO Tariff have been determined, the ISO shall recalculate the amounts payable and receivable by the affected Scheduling Coordinators or by all Scheduling Coordinators, if applicable, as soon as reasonably practical and shall show any required adjustments as a debit or credit in the next Settlement Statement.

11.6 Settlements Cycle.

FIRST REPLACEMENT VOLUME NO. I

11.6.1 Timing of the Settlements Process.

11.6.1.1 The ISO shall provide to each Scheduling Coordinator for validation a Preliminary Settlement Statement of charges payable to or owed by the Scheduling Coordinator within thirty-eight (38) Business Days of the relevant Trading Day, covering all Settlement Periods in that Trading Day.

11.6.1.2 Each Scheduling Coordinator shall have a period of eight (8) Business Days from the issuance of a Preliminary Settlement Statement during which it may review the Preliminary Settlement Statement and notify the ISO of any errors. No later than fifty-one (51) Business Days after the Trading Day to which it relates, the ISO shall issue a Final Settlement Statement to each Scheduling Coordinator for that Trading Day.

11.6.1.3 Each Scheduling Coordinator shall have a period of ten (10) Business Days from the issuance of the Final Settlement Statement during which it may review the Incremental Changes on the Final Settlement Statement and notify the ISO of any errors. No later than twenty-five (25) Business Days from the date of issuance of the Final Settlement Statement, the ISO shall incorporate any required corrections in a subsequent Preliminary Settlement Statement.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

Effective: Upon notice

11.6.2 Basis for Billing and Payment.

The Preliminary and the Final Settlement Statements shall constitute the basis for billing and

associated automatic funds transfers in accordance with this ISO Tariff. The Preliminary

Settlement Statement shall constitute the basis for billing and associated automatic funds

transfers for all charges in the first instance. The Final Settlement Statement shall constitute

the basis for billing and associated automatic funds transfers for adjustments to charges set

forth in the Preliminary Settlement Statement. Each Scheduling Coordinator shall pay any net

debit and shall be entitled to receive any net credit shown in an invoice on the Payment Date,

whether or not there is any dispute regarding the amount of the debit or credit.

11.6.2.1 Elimination of Invoices under \$10.00.

Preliminary and final invoices either due to or from any Market Participant for amounts less

than \$10.00 will be adjusted to \$0.00 and no amount will be due to or from that Market

Participant for that invoice.

11.6.3 Settlement Statement Re-runs and post final adjustments.

The ISO is authorized to perform Settlement Statement Re-runs following approval of the ISO

Governing Board. A request to perform a Settlement Statement Re-run may be made at any

time by a Scheduling Coordinator by notice in writing to the ISO Governing Board. The ISO

Governing Board shall, in considering whether to approve a request for a Settlement Statement

Re-run, determine in its reasonable discretion, whether there is good cause to justify the

performance of a Settlement Statement Re-run.

11.6.3.1 If a Settlement Statement Re-run is ordered by the ISO Governing Board, the

ISO shall arrange to have the Settlement Statement Re-run carried out as soon as is

reasonably practicable following the ISO Governing Board's order, subject to the availability of

staff and computer time, compatible software, appropriate data and other resources.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 257

Superseding First Revised Sheet No. 257

11.6.3.2 The cost of a Settlement Statement Re-run shall be borne by the Scheduling

Coordinator requesting it, unless the Settlement Statement Re-run was needed due to a clerical

oversight or error on the part of the ISO staff.

11.6.3.3 Where a Settlement Statement Re-run indicates that the accounts of Scheduling

Coordinators should be debited or credited to reflect alterations to Settlements previously made

under this ISO Tariff, for those Scheduling Coordinators affected by the statement re-run, the ISO

shall reflect the amounts to be debited or credited in the next Preliminary Settlement Statements that

it issues following the Settlement Statement Re-run to which the provisions of this Section 11 apply.

11.6.3.4 Reruns, post closing adjustments and the financial outcomes of Dispute Resolution

may be invoiced separately from monthly market activities. The ISO shall provide a market notice at

least 30 days prior to such invoicing identifying the components of such invoice.

11.7 Confirmation and Validation.

11.7.1 Confirmation.

It is the responsibility of each Scheduling Coordinator to notify the ISO if it fails to receive a

Preliminary Settlement Statement or a Final Settlement Statement on the date specified for the

publication of such Settlement Statement in the ISO Payments Calendar. Each Scheduling

Coordinator shall be deemed to have received its Settlement Statement on the dates specified,

unless it notifies the ISO to the contrary.

11.7.2 Validation.

Each Scheduling Coordinator shall have the opportunity to review the terms of the Preliminary

Settlement Statements that it receives. The Scheduling Coordinator shall be deemed to have

validated each Preliminary Settlement Statement unless it has raised a dispute or reported an

exception within eight (8) Business Days from the date of issuance. Once validated, a Preliminary

Settlement Statement shall be binding on the Scheduling

Coordinator to which it relates, unless the ISO performs a Settlement re-run pursuant to Section 11.6.3 of this ISO Tariff.

11.7.3 Validation of Final Settlement Statements.

Each Scheduling Coordinator shall have the opportunity to review the Incremental Changes that appear on the Final Settlement Statement that it receives. The Scheduling Coordinator shall be deemed to have validated the Incremental Changes on each Final Settlement Statement unless it has raised a dispute or reported an exception regarding those Incremental Changes within ten (10) Business Days from the date of issuance. Once validated, the Incremental Changes on the Final Settlement Statement shall be binding on the Scheduling Coordinator to which it relates, unless the ISO performs a Settlement re-run pursuant to Section 11.6.3 of this ISO Tariff.

11.7.4 Recurring disputes or exceptions.

A Scheduling Coordinator may request the ISO to treat as recurring a dispute or exception raised in accordance with Sections 11.7.2 and 11.7.3 above, if a dispute or exception would apply to subsequent Preliminary and Final Settlement Statements. The ISO shall make a determination on such a request within five (5) Business Days of receipt. To preserve its right to dispute an item, a Scheduling Coordinator must continue to raise a dispute or report an exception until it is notified by the ISO that the ISO agrees to treat the dispute or exception as recurring. If the ISO grants a request to treat a dispute or exception as recurring, the dispute raised or exception reported by the Scheduling Coordinator shall be deemed to apply to every subsequent Preliminary and Final Settlement Statement provided to the Scheduling Coordinator from the date that the ISO grants the request for recurrent treatment until: a) ninety (90) days have elapsed, unless the ISO indicates a different expiration date on its response to the request, in which case

Issued by: Roger Smith, Senior Regulatory Counsel

the expiration date stated by the ISO, in its response or b) the dispute or exception is resolved,

whichever is shorter.

11.8 Payment Procedures.

11.8.1 All Payments to Be Made Through the ISO.

All Scheduling Coordinators shall discharge their obligations to pay the amounts owed by them

and shall receive payments of all amounts owed to them under this ISO Tariff only through the

ISO.

11.8.2 Accounts to be Established.

The ISO shall establish and operate the following accounts:

11.8.2.1 An ISO Clearing Account to and from which all payments are made;

11.8.2.2 An ISO Reserve Account from which any debit balances on the ISO Clearing

Account at the close of banking business on each Business Day shall be settled or reduced in

accordance with this ISO Tariff. The ISO shall use the security provided by a Scheduling

Coordinator pursuant to Section 2.2.3.2 of this ISO Tariff, if necessary, to clear any debit

balances on the ISO Reserve Account that may arise as a result of that Scheduling

Coordinator's failure to pay an amount due under this ISO Tariff.

11.8.2.3 Such other accounts as the ISO deems necessary or convenient for the

purpose of efficiently implementing the funds transfer system under this ISO Tariff.

11.8.3 Declaration of Trust.

All ISO Accounts established pursuant to Section 11.8.2 of this ISO Tariff shall be opened and

operated by the ISO on trust for ISO Creditors, in accordance with this ISO Tariff. Each such

account shall be maintained at a bank or other financial institution in California and shall bear a

name indicating that it is a trust account.

Issued by: Roger Smith, Senior Regulatory Counsel

First Revised Sheet No. 260

Superseding Original Sheet No. 260

11.8.4 No Co-Mingling.

The ISO shall not co-mingle any funds standing to the credit of an ISO Account with its other

funds and shall promptly withdraw any amounts paid into an ISO Account representing

amounts paid for the account of the ISO.

11.9 Invoices.

The ISO shall prepare and send to each Scheduling Coordinator two invoices for each calendar

month. The first invoice will be based on the Preliminary Settlement Statments and the second

invoice will be based on the Final Settlement Statement(s). Each invoice will show amounts

which are to be paid by or to each Scheduling Coordinator, the Payment Date, being the date

on which such amounts are to be paid or received and details of the ISO Clearing Account to

which any amounts owed by Scheduling Coordinators are to be paid. Reruns, post closing

adjustments and the financial outcomes of Dispute Resolution may be invoiced separately from

monthly market activities. The ISO shall provide a market notice at least 30 days prior to such

invoicing identifying the components of such invoice.

11.10 Instructions for Payment.

Each Scheduling Coordinator shall remit to the ISO Clearing Account the amount shown on the

invoice as payable by that Scheduling Coordinator for value not later than 10:00 a.m. on the

Payment Date.

11.11 ISO's Responsibilities.

On the due date for payment of amounts shown in an invoice, the ISO shall ascertain whether

all amounts required to be remitted to the ISO Clearing Account have been credited to it. If

any such amount has not been so credited, it shall ascertain which Scheduling Coordinators

have failed to pay the amount owed by them and it may take steps to recover any overdue

amount.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 15, 2003 Effective: November 14, 2003 or upon Order by FERC

FIRST REPLACEMENT VOLUME NO. I

11.12 Non-payment by a Scheduling Coordinator.

If a Scheduling Coordinator becomes aware that a payment for which it is responsible will not be

remitted to the ISO Clearing Account on time, it shall immediately notify the ISO of the fact and

the reason for the non-payment. If the Scheduling Coordinator fails to pay any sum to the ISO

when due and the ISO is unable to enforce any guarantee, letter of credit or other credit support

provided by the defaulting Scheduling Coordinator, the Scheduling Coordinator shall pay interest

on the overdue amount for the period from the Payment Date to the date on which the payment

is remitted to the ISO Clearing Account.

11.13 Payment to ISO Creditors.

The ISO shall calculate the amounts available for distribution to ISO Creditors on the Payment

Date and shall give irrevocable instructions to the ISO Bank to remit from the ISO Clearing

Account to the relevant Settlement Accounts maintained by the ISO Creditors, the aggregate

amounts determined by the ISO to be available for payment to ISO Creditors for value by close

of business on the Payment Date if no ISO Debtors are in default. If an ISO Debtor is in default

and until all defaulting amounts have been collected, the ISO shall make payments as soon as

practical within five (5) business days of the collection date posted in the ISO Payments

Calendar. If required, the ISO shall instruct the ISO Bank to transfer amounts from the ISO

Reserve Account to enable the ISO Clearing Account to clear.

11.14 Using the ISO Reserve Account.

The ISO Reserve Account shall be available to the ISO for the purpose of providing funds to

clear the ISO Clearing Account in the event that there are insufficient funds in the ISO Clearing

Account to pay ISO Creditors. If the ISO Reserve Account is drawn upon, the ISO shall as soon

as possible thereafter take any necessary steps against the defaulting Scheduling Coordinator,

including making any calculations or taking any other appropriate action, to replenish the ISO

Issued by: Charles F. Robinson, Senior Regulatory Counsel

Issued on: June 10, 2003 Effective: August 9, 2003

Superseding Substitute First Revised Sheet No. 262

Reserve Account including drawing on any credit support provided by the defaulting Scheduling

Coordinator pursuant to Section 2.2.3.2 of this ISO Tariff or serving demands on any defaulting

Scheduling Coordinators with an Approved Credit Rating.

11.15 Prohibition on transfers.

The ISO shall at no time instruct the ISO Bank to transfer any sum from an ISO Account to

another account (not being an ISO Account) unless that account is a Settlement Account or the

amount is owed to the ISO under this ISO Tariff.

11.16 **Alternative Payment Procedures.**

11.16.1 Pro Rata Reduction to Payments.

If it is not possible to clear the ISO Clearing Account on a Payment Date because of an

insufficiency of funds available in the ISO Reserve Account or by enforcing any guarantee,

letter of credit or other credit support provided by a defaulting Scheduling Coordinator, the ISO

shall reduce payments to all ISO Creditors proportionately to the net amounts payable to them

on the relevant Payment Date to the extent necessary to clear the ISO Clearing Account. The

ISO shall account for such reduction in the ISO ledger accounts as amounts due and owing by

the non-paying ISO Debtor to each ISO Creditor whose payment was so reduced. The

provisions of this section shall not apply to non-payment of any penalty amount that a

Scheduling Coordinator has disputed and FERC has specifically authorized the Scheduling

Coordinator to net its payment to the ISO by the amount of the penalty in question in

accordance with EP 9.3, in which case the non-payment amount will be allocated exclusively to

the ISO penalty trust account and not allocated to ISO Creditors.

11.16.2 Payment of Defaulted Receivables.

Collections of defaulted receivables (other than Interest) will be distributed pro rata to ISO

Creditors for the month of default.

Original Sheet No. 262.01

(1) If the total collected in that closing related to the past due trade month is less than \$5,000, then the funds shall accumulate in an Interest-bearing account until either: (a) the account exceeds \$5,000, (b) there have been no distributions from the account for six months, or (c) all defaults for that month have been collected exclusive of any bankruptcy defaults.

Issued by: Charles F. Robinson

Issued on: May 20, 2004 Effective: Upon Commission Approval

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Substitute Original Sheet No. 262A

Effective: August 9, 2003

(2) If all ISO Creditors for that trade month have been paid, then the proceeds will be paid pro

rata to the ISO Creditors in the oldest unpaid trade month.

(3) This provision is also applicable to the amounts netted against ISO Creditor balances

related to prior defaulted receivables.

(4) All defaulted receivables disbursed under this Section shall be disbursed in accordance

with the timeframes set forth in Section 11.13.

11.17 [DELETED]

11.18 Payment Errors.

11.18.1 Overpayments.

If for any reason, including the negligence of the ISO Bank or the ISO, an ISO Creditor

receives an overpayment on any Payment Date, the ISO Creditor shall within two (2) Business

Days from the date of receipt of the funds into its Scheduling Coordinator

Issued by: Charles F. Robinson Issued on: January 15, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 263

Effective: August 9, 2003

Superseding Original Sheet No. 263

Settlement Account, notify the ISO of the amount of the overpayment and shall forthwith pay

the overpayment into an ISO Account specified by the ISO.

11.18.2 Repayment of Overpayment.

If prior to an ISO Creditor notifying the ISO of the overpayment, the ISO receives notice (from

the ISO Bank or otherwise) of the overpayment, the ISO shall within two (2) Business Days

notify the recipient of the overpayment. The ISO shall be responsible for payment to those

entitled to the sum which has been overpaid.

11.18.3 Underpayments.

If for any reason, including the negligence of the ISO Bank or the ISO, an ISO Creditor

receives on the relevant Payment Date an underpayment, the ISO Creditor shall within two (2)

Business Days from receipt into its Settlement Account, notify the ISO of the amount of the

underpayment, and the ISO after consultation with the ISO Bank, shall use all reasonable

endeavors to identify such entity as shall have received any corresponding overpayment and

promptly correct the underpayment. If, by reason of negligence, the ISO holds or has under its

control after five (5) Business Days from receipt in the ISO Clearing Account amounts which it

ought properly to have paid to ISO Creditors, such ISO Creditors shall be entitled to interest on

such amounts, for such period as the ISO improperly holds or has such amounts under its

control.

11.19 Defaults.

Each ISO Creditor shall give notice to the ISO before instituting any action or proceedings in

any court against an ISO Debtor to enforce payments due to it.

Issued by: Charles F. Robinson, Vice President and General Counsel

11.20 Proceedings to Recover Overdue Amounts.

11.20.1 Proceedings Brought by the ISO.

Without prejudice to the right of any Scheduling Coordinator to bring such proceedings as it sees fit in connection with matters related to the recovery of amounts owed to it, the ISO may bring proceedings against any Scheduling Coordinator on behalf of those Scheduling Coordinators who have indicated to the ISO their willingness for the ISO first so to act, for the recovery of any amounts due by that Scheduling Coordinator, if the ISO has first reached agreement with the Scheduling Coordinators as to the appropriate remuneration, is indemnified to its reasonable satisfaction and receives such security as it may reasonably request against all costs, claims, expenses (including legal fees) and liabilities which it will or may sustain or

11.20.2 Evidence of Unpaid Amount.

incur in complying with such instructions.

The ISO shall, on request, certify in writing the amounts owed by an ISO Debtor that remain unpaid and the ISO Creditors to whom such amounts are owed and shall provide certified copies of the relevant Preliminary and Final Settlement Statements, invoices and other documentation on which the ISO's certificate was based to the ISO Debtor and the relevant ISO Creditors. An ISO certificate given under this Section 11.20.2 may be used as prima facie evidence of the amount due by an ISO Debtor to ISO Creditors in any legal proceedings.

11.21 Data Gathering and Storage.

11.21.1 Required Capabilities.

The ISO shall ensure that the Settlement process shall contain, at a minimum, the following data gathering and storage capabilities:

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 265

Effective: October 13, 2000

Superseding Original Sheet No. 265

(a) the accurate, time-sequenced, end-to-end traceability of the Settlements process so

that Scheduling Coordinators and Participating TOs can fully verify their Settlement

Statements;

(b) the ability to specify and accept data that is specifically needed for audit trail

requirements; and

(c) the archiving of Meter Data, Settlement runs and other information used to prepare

Settlement Statements to be consistent with the time frame required to re-run the

Settlement process by state laws and the rules of the Local Regulatory Authority.

11.21.2 Data Dissemination.

Data shall not be disseminated by the ISO except as permitted in this ISO Tariff.

11.22 Confidentiality.

The ISO shall implement and maintain a system of communications with Scheduling

Coordinators that includes the strict use of passwords for access to data to ensure compliance

with Section 20.3.

11.23 Communications.

Preliminary Settlement Statements, Final Settlement Statements and invoices will be

considered issued to ISO Creditors or ISO Debtors when released by the ISO via direct

computer link. If there is a failure of a communication system and it is not possible to

communicate by electronic means, then the ISO or ISO Creditor or ISO Debtor, as the case

may be, shall communicate by facsimile but only if the recipient is first advised by telephone to

expect the facsimile.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: October 13, 2000

11.24 ISO Payments Calendar.

11.24.1 Preparation.

No later than 31 October in each year, the ISO shall publish an ISO Payments Calendar

showing, for the period from 1 January to 31 December in the next succeeding year (both dates

inclusive), the dates on which Settlement Statements shall be published by the ISO and the

Payment Dates on which the ISO will pay the Participating TO the Wheeling revenues

allocated to them pursuant to Section 7.1.4.3 of this ISO Tariff.

11.24.2 Distribution.

Any ISO Payments Calendar prepared pursuant to this Section 11.24 shall be distributed

promptly to each Scheduling Coordinator, each Participating TO, the ISO Bank, the ISO Audit

Committee and the ISO Governing Board and shall be published on WEnet.

12. AUDITS.

12.1 Materials Subject to Audit.

The ISO's financial books, cost statements, accounting records and all documentation

pertaining to its operation as a state chartered independent institution which controls the

operation of the ISO Controlled Grid to ensure open, non-discriminatory transmission access to

all Market Participants and promotes the efficient use and reliable operation of the ISO

Controlled Grid in accordance with this ISO Tariff, are subject to audit in the manner prescribed

below:

12.2 ISO Audit Committee.

The ISO Governing Board shall have overall audit responsibility for the ISO. The ISO Audit

Committee shall make recommendations to the ISO Governing Board in relation to the

approval, initiation and scheduling of the following audits:

Issued by: Roger Smith, Senior Regulatory Counsel

12.2.1 Certified Financial Statement Audit.

Each year, an audit by an external independent certified public accounting firm shall be performed. This audit will be conducted in accordance with generally accepted auditing standards to verify that the ISO's financial statements are in compliance with generally accepted accounting principles and fairly present, in all material respects, the financial position, results of operation and cash flows for the audit period. The audit report will be addressed to the ISO Governing Board, copies will be provided to the ISO Audit Committee, and, upon

request, to Market Participants.

12.2.2 Operations Audit.

Each year, an independent accounting firm shall review the ISO management's compliance with its operations policies and procedures. The ISO Audit Committee will appoint an independent firm to do this audit. This audit may also include material issues raised by Market Participants and approved by the ISO Audit Committee for inclusion in the audit scope. The audit report will be addressed to the ISO Governing Board, copies provided to the ISO Audit Committee, and upon request, to Market Participants.

12.2.3 Code of Conduct Audits.

On a periodic basis, but not less than once a year, an independent accounting firm shall conduct a management review of governors, officers, employees, substantially full-time consultants, or contractors of the ISO for compliance with the ISO Code of Conduct to ensure adherence to the highest standards of lawful and ethical conduct in their activities. The audit report shall be addressed to the ISO Audit Committee with copies provided to the ISO Governing Board and, upon request, to Market Participants.

Issued by: Roger Smith, Senior Regulatory Counsel

12.2.4 Interim Audits.

At such other intervals agreed upon by a majority of the ISO Audit Committee members, audits

may be undertaken for specific issues and concerns of Market Participants that the ISO Audit

Committee believes, at its sole discretion, to be of significant and critical magnitude to the ISO.

Such audits will be conducted by an independent accounting firm. The costs of such an audit

will be borne by the requesting Market Participant(s), unless the ISO Audit Committee

determines otherwise. Interim audits will be conducted during normal business hours, after

reasonable notice has been given to the ISO, and in accordance with the guidelines to be

established by the ISO Audit Committee.

12.3 Audit Results.

Exceptions identified as a result of an audit will be reviewed with the ISO Audit Committee.

The results of the audits and actions to be taken by the ISO as a result of the audit shall be

mailed to Market Participants upon request.

12.4 Availability of Records.

The ISO will provide full and complete access to all financial books, cost statements.

accounting records, and all documentation pertaining to the requirements of the specific audits

being performed. Records relating to audits will be retained until the records retention

requirements of the ISO are satisfied or until the audit issues are fully resolved, whichever is

the later. The right of access to records does not require the creation of new records, reports,

studies, or evaluations not already available.

12.5 Confidentiality of Information.

All proprietary information obtained through any audits will remain strictly confidential. All

auditors shall sign a confidentiality agreement prior to being accepted as auditors by the ISO

Audit Committee.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

Effective: October 13, 2000

12.6 Payments.

Any payments agreed to between Market Participants and the ISO as a result of an audit, or directed by FERC, or disclosed by the ISO in reviews of its own books and records shall include interest computed at the rate calculated in accordance with the methodology specified for interest on refunds in FERC's regulations at 18 C.F.R § 35.19(a)(2)(iii) (as amended from

time to time) from the due date to the date such adjustments are due.

13. DISPUTE RESOLUTION.

13.1 Applicability.

13.1.1 General Applicability.

Except as limited below or otherwise as limited by law (including the rights of any party to file a complaint with FERC under the relevant provisions of the FPA), the ISO ADR Procedures shall apply to all disputes between parties which arise under the ISO Documents except where the decision of the ISO is stated in the provisions of this ISO Tariff to be final. The ISO ADR Procedures shall not apply to:

13.1.1.1 Disputes arising under contracts which pre-date the ISO Operations Date,

except as the disputing parties may otherwise agree;

13.1.1.2 Disputes as to whether rates and charges set forth in this ISO Tariff are just

and reasonable under the FPA.

13.1.2 Disputes Involving Government Agencies.

13.1.2.1 If a party to a dispute is a government agency the procedures herein which provide for the resolution of claims and arbitration of disputes are subject to any limitations imposed on the agency by law, including but not limited to the authority of the agency to effect

a remedy. If the governmental agency is a federal entity, the procedures $% \left(\frac{1}{2}\right) =\frac{1}{2}\left(\frac{1}{2}\right) =\frac{$

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 270

Effective: October 13, 2000

herein shall not apply to disputes involving issues arising under the United States Constitution.

13.1.3 Injunctive and Declaratory Relief.

Where the court having jurisdiction so determines, use of the ISO ADR Procedures shall not be

a condition precedent to a court action for injunctive relief nor shall the provisions of California

Code of Civil Procedures sections 1281 et seq. apply to such court actions.

13.2 Negotiation and Mediation.

13.2.1 Negotiation.

The ISO and Market Participants (party or parties) shall make good-faith efforts to negotiate

and resolve any dispute between them arising under ISO Documents prior to invoking the ISO

ADR Procedures outlined herein. Each party shall designate an individual with authority to

negotiate the matter in dispute to participate in such negotiations.

13.2.2 Statement of Claim.

In the event a dispute is not resolved through such good-faith negotiations, any one of the

parties may submit a statement of claim, in writing, to each other disputing party, the ISO ADR

Committee, and the ISO Governing Board, which submission shall commence the ISO ADR

Procedures. The statement of claim shall set forth in reasonable detail (i) each claim, (ii) the

relief sought, including the proposed award, if applicable, (iii) a summary of the grounds for

such relief and the basis for each claim, (iv) the parties to the dispute, and (v) the individuals

having knowledge of each claim. The other parties to the dispute shall similarly submit their

respective statements of claim within fourteen (14) days of the date of the initial statement of

claim or such longer period as the chair of the ISO ADR Committee may permit following an

application by the responding party. If any responding party

Issued by: Roger Smith, Senior Regulatory Counsel

Effective: October 13, 2000

wishes to submit a counterclaim in response to the statement of claim, it shall be included in

such party's responsive statement of claim. A summary of the statements of claim shall be

published by the ISO in the ISO newsletter or WEnet, and any other method adopted by the

ISO ADR Committee. No Market Participant shall be considered as having received notice of

a claim decided or relief granted by a decision made under these procedures unless the

summary of the statements of claim published by the ISO includes such claim or relief.

13.2.3 Selection of Mediator.

After submission of the statements of claim, the parties may request mediation, if at least 75%

of the disputing parties so agree, except that where a dispute involves three parties, at least

two of the parties must agree to mediation. If the parties agree to mediate, the chair of the ISO

ADR Committee shall distribute to the parties by facsimile or other electronic means a list

containing the names of at least seven prospective mediators with mediation experience, or

with technical or business experience in the electric power industry, or both, as he or she shall

deem appropriate to the dispute. The parties shall either agree upon a mediator from the list

provided or from any alternative source, or alternate in striking names from the list with the last

name on the list becoming the mediator. The first party to strike off a name from the list shall

be determined by lot. The parties shall have seven days from the date of receipt of the ISO

ADR Committee chair's list of prospective mediators to complete the mediator selection

process and appoint the mediator, unless the time is extended by mutual agreement. The

mediator shall comply with the requirements of Section 13.3.2.

13.2.4 Mediation.

The mediator and representatives of the disputing parties, with authority to settle the dispute,

shall within fourteen (14) days after the mediator's date of appointment schedule a

Issued by: Roger Smith, Senior Regulatory Counsel

Effective: October 13, 2000

Superseding Original Sheet No. 272

date to mediate the dispute. Matters discussed during the mediation shall be confidential and

shall not be referred to in any subsequent proceeding. With the consent of all disputing parties,

a resolution may include referring the dispute directly to a technical body (such as a WECC

technical advisory panel) for resolution or an advisory opinion, or referring the dispute directly

to FERC. The ISO shall publish notice of the referral of the dispute in the ISO newsletter or

WEnet, and any other method adopted by the ISO ADR Committee.

13.2.5 Demand for Arbitration.

If the disputing parties have not succeeded in negotiating a resolution of the dispute within

thirty (30) days of the initial statement of claim or, if within that period the parties agreed to

mediate, within thirty (30) days of the parties first meeting with the mediator, such parties shall

be deemed to be at impasse and any such disputing party may then commence the arbitration

process, unless the parties by mutual agreement agree to extend the time. A party seeking

arbitration shall provide notice of its demand for arbitration to the other disputing parties, the

ISO ADR Committee and the ISO Governing Board, which shall publish notice of such demand

in the ISO newsletter or electronic bulletin board, and any other method adopted by the ISO

ADR Committee.

13.3 Arbitration.

13.3.1 Selection of Arbitrator.

13.3.1.1 Disputes Under \$1,000,000. Where the total amount of claims and

counterclaims in controversy is less than \$1,000,000 (exclusive of costs and interest), the

disputing parties shall select an arbitrator from a list containing the names of at least 10

qualified individuals supplied by the ISO ADR Committee, or if the ISO is a party to the

dispute, the names of at least ten (10) qualified individuals supplied by the American

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Arbitration Association within 14 days following submission of the demand for arbitration. If the parties cannot agree upon an arbitrator within the stated time, they shall take turns striking names from the list of proposed arbitrators. The first party to strike-off a name shall be determined by lot. This process shall be repeated until one name remains on the list, and that individual shall be the designated arbitrator.

13.3.1.2 Disputes of \$1,000,000 or Over. Where the total amount of claims and counterclaims in controversy is \$1,000,000 or more (exclusive of interest and costs), the disputing parties may agree on any person to serve as a single arbitrator, or shall endeavor in good faith to agree on a single arbitrator from a list of ten (10) qualified individuals provided by the ISO ADR Committee, or if the ISO is a party to the dispute, the names of at least ten (10) qualified individuals supplied by the American Arbitration Association within fourteen (14) days following submission of the demand for arbitration. If the parties are unable to agree on a single arbitrator within the stated time, the party or parties demanding arbitration, and the party or parties responding to the demand for arbitration, shall each designate an arbitrator. Each designation shall be from the ISO ADR Committee list of arbitrators no later than the tenth (10th) day thereafter. The two arbitrators so chosen shall then choose a third arbitrator.

13.3.2 Disclosures Required of Arbitrators.

The designated arbitrator(s) shall be required to disclose to the parties any circumstances which might preclude him or her from rendering an objective and impartial determination. Each designated arbitrator shall disclose:

- **13.3.2.1** Any direct financial or personal interest in the outcome of the arbitration;
- **13.3.2.2** Any information required to be disclosed by California Code of Civil Procedure Section 1281.9.; and

Issued by: Roger Smith, Senior Regulatory Counsel

13.3.2.3 Any existing or past financial, business, professional, or personal interest that are likely to affect impartiality or might reasonably create an appearance of partiality or bias. The designated arbitrator shall disclose any such relationships that he or she personally has with any party or its counsel, or with any individual whom they have been told will be a witness. They should also disclose any such relationship involving members of their families or their current employers, partners, or business associates. All designated arbitrators shall make a reasonable effort to inform themselves of any interests or relationships described above. The obligation to disclose interests, relationships, or circumstances that might preclude an arbitrator from rendering an objective and impartial determination is a continuing duty that requires the arbitrator to disclose, at any stage of the arbitration, any such interests, relationships, or circumstances that arise, or are recalled or discovered. If, as a result of the continuing disclosure duty, an arbitrator makes a disclosure which is likely to affect his or her partiality, or might reasonably create an appearance of partiality or bias or if a party independently discovers the existence of such circumstances, a party wishing to object to the continuing use of the arbitrator must provide written notice of its objection to the other parties within ten (10) days of receipt of the arbitrator's disclosure or the date of a party's discovery of the circumstances giving rise to that party's objection. Failure to provide such notice shall be deemed a waiver of such objection. If a party timely provides a notice of objection to the continuing use of the arbitrator the parties shall attempt to agree whether the arbitrator should be dismissed and replaced in the manner described in Section 13.3.1. If within ten (10) days of a party's objection notice the parties have not agreed how to proceed the matter shall be referred to the ISO ADR Committee for resolution.

Issued by: Roger Smith, Senior Regulatory Counsel

13.3.3 Arbitration Procedures.

The ISO ADR Committee shall compile and make available to the arbitrator and the parties standard procedures for the arbitration of disputes, which procedures (i) shall include provision, upon good cause shown, for intervention or other participation in the proceeding by any party whose interests may be affected by its outcome, (ii) shall conform to the requirements specified herein, and (iii) may be modified or adopted for use in a particular proceeding as the arbitrator deems appropriate, in accordance with Section 13.3.4. The procedures adopted by the ISO ADR Committee shall be based on the latest edition of the American Arbitration Association Commercial Arbitration Rules, to the extent such rules are not inconsistent with this Section 13. Except as provided herein, all parties shall be bound by such procedures.

13.3.4 Modification of Arbitration Procedures.

In determining whether to modify the standard procedures for use in the pending matter, the arbitrator shall consider (i) the complexity of the dispute, (ii) the extent to which facts are disputed, (iii) the extent to which the credibility of witnesses is relevant to a resolution, (iv) the amount in controversy, and (v) any representations made by the parties. Alternatively, the parties may, by mutual agreement, modify the standard procedures. In the event of a disagreement between the arbitrator and the agreement of the parties regarding arbitration procedures to be utilized, the parties' agreement shall prevail.

13.3.5 Remedies.

13.3.5.1 Arbitrator's Discretion. The arbitrator shall have the discretion to grant the relief sought by a party, or determine such other remedy as is appropriate, unless the parties agree to conduct the arbitration "baseball" style. Unless otherwise expressly limited herein, the arbitrator shall have the authority to award any remedy or relief available

Issued by: Roger Smith, Senior Regulatory Counsel

from FERC, or any other court of competent jurisdiction. Where any ISO Document leaves any matter to be agreed between the parties at some future time and provides that in default of agreement the matter shall be referred to the ISO ADR Procedures, the arbitrator shall have authority to decide upon the terms of the agreement which, in the arbitrator's opinion, it is reasonable that the parties should reach, having regard to the other terms of the ISO Document concerned and the arbitrator's opinion as to what is fair and reasonable in all the circumstances.

13.3.5.2 "Baseball" Arbitration. If the parties agree to conduct the arbitration "baseball" style, the parties shall submit to the arbitrator and exchange with each other their last best offers in the form of the award they consider the arbitrator should make, not less than seven (7) days in advance of the date fixed for the hearing, or such other date as the arbitrator may decide. If a party fails to submit its last best offer in accordance with this Section, that party shall be deemed to have accepted the offer proposed by the other party. The arbitrator shall be limited to awarding only one of the proposed offers, and may not determine an alternative or compromise remedy.

13.3.6 Summary Disposition.

The procedures for arbitration of a dispute shall provide a means for summary disposition of a demand for arbitration, or a response to a demand for arbitration, that in the reasoned opinion of the arbitrator does not have a good faith basis in either law or fact. If the arbitrator determines that a demand for arbitration or response to a demand for arbitration does not have a good faith basis in either law or fact, the arbitrator shall have discretion to award the costs of the time, expenses, and other charges of the arbitrator to the prevailing party. A determination made under this Section is subject to appeal pursuant to Section 13.4.

Issued by: Roger Smith, Senior Regulatory Counsel

Effective: October 13, 2000

13.3.7 Discovery Procedures.

The procedures for the arbitration of a dispute shall include adequate provision for the

discovery of relevant facts, including the taking of testimony under oath, production of

documents and other things, the presentation of evidence, the taking of samples, conducting of

tests, and inspection of land and tangible items. The nature and extent of such discovery shall

be determined as provided herein and shall take into account (i) the complexity of the dispute,

(ii) the extent to which facts are disputed, (iii) the extent to which the credibility of witnesses is

relevant to a resolution, and (iv) the amount in controversy. The forms and methods for taking

such discovery shall be as described in the Federal Rules of Civil Procedure, except as

modified pursuant to Section 13.3.4.

13.3.8 Evidentiary Hearing.

The arbitration procedures shall provide for an evidentiary hearing, with provision for the cross-

examination of witnesses, unless all parties consent to the resolution of the matter on the basis

of a written record. The forms and methods for taking evidence shall be determined by the

arbitrator(s) and modified pursuant to Section 13.3.4. The arbitrator may require such written

or other submissions from the parties as he or she may deem appropriate, including

submission of direct and rebuttal testimony of witnesses in written form. The arbitrator may

exclude any evidence that is irrelevant, immaterial, unduly repetitious or prejudicial, or

privileged. The arbitrator shall compile a complete evidentiary record of the arbitration which

shall be available to the parties on its completion upon request.

13.3.9 Confidentiality.

Subject to the other provisions of this ISO Tariff, any party may claim that information

contained in a document otherwise subject to discovery is "Confidential" if such

Issued by: Roger Smith, Senior Regulatory Counsel

information would be so characterized under the Federal Rules of Evidence. The party making such claim shall provide to the arbitrator in writing the basis for its assertion. If the claim of confidentiality is confirmed by the arbitrator, he or she shall establish requirements for the protection of such documents or other information designated as "Confidential" as may be reasonable and necessary to protect the confidentiality and commercial value of such information. Any party disclosing information in violation of these provisions or requirements established by the arbitrator, unless such disclosure is required by federal or state law or by a court order, shall thereby waive any right to introduce or otherwise use such information in any judicial, regulatory, or other legal or dispute resolution proceeding, including the proceeding in

13.3.10 Timetable.

which the information was obtained.

Promptly after the appointment of the arbitrator, the arbitrator shall set a date for the issuance of the arbitration decision, which shall be no later than six months (or such date as the parties and the arbitrator may agree) from the date of the appointment of the arbitrator, with other dates, including the dates for an evidentiary hearing or other final submissions of evidence, set in light of this date. The date for the evidentiary hearing or other final submission of evidence shall not be changed, absent extraordinary circumstances. The arbitrator shall have the power to impose sanctions, including dismissal of the proceeding, for dilatory tactics or undue delay in completing the arbitration proceedings.

13.3.11 **Decision.**

13.3.11.1 Except as provided below with respect to "baseball" style arbitration, the arbitrator shall issue a written decision granting the relief requested by one of the parties, or such other remedy as is appropriate, if any, and shall include findings of fact and law. The arbitration decision shall be based on (i) the evidence in the record, (ii) the terms of

Issued by: Roger Smith, Senior Regulatory Counsel

Effective: October 13, 2000

the relevant ISO Documents, (iii) applicable United States federal law, including the FPA and

any applicable FERC regulations and decisions, and international treaties or agreements as

applicable, and (iv) applicable state law. Additionally, the arbitrator may consider relevant

decisions in previous arbitration proceedings. A summary of the disputed matter and the

arbitrator's decision shall be published in an ISO newsletter or electronic bulletin board and any

other method adopted by the ISO ADR Committee, and maintained by the ISO ADR

Committee.

13.3.11.2 In arbitration conducted "baseball" style, the arbitrator shall issue a written decision

adopting one of the awards proposed by the parties, and shall include findings of fact and law.

The arbitration decision shall be based on (i) the evidence in the record, (ii) the terms of the

relevant ISO Documents, (iii) applicable United States federal law, including the FPA and any

applicable FERC regulations and decisions, and international treaties or agreements as

applicable, and (iv) applicable state law. If the arbitrator concludes that no proposed award is

consistent with the factors enumerated in (i) through (iv) above, or addresses all of the issues

in dispute, the arbitrator shall specify how each proposed award is deficient and direct that the

parties submit new proposed awards that cure the identified deficiencies. A summary of the

disputed matter and the arbitrator's decision shall be published in an ISO newsletter or

electronic bulletin board, and any other method adopted by the ISO ADR Committee. An

award shall not be deemed to be precedential.

13.3.11.3 Where a panel of arbitrators is appointed pursuant to Section 13.3.1.2, a majority

of the arbitrators must agree on the decision.

13.3.12 Compliance.

Unless the arbitrator's decision is appealed under Section 13.4, the disputing parties shall, upon

receipt of the decision, immediately take whatever action is required to comply with

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 280

Effective: October 13, 2000

the award to the extent the award does not require regulatory action. An award that is not

appealed shall be deemed to have the same force and effect as an order entered by the FERC

or any court of competent jurisdiction.

13.3.13 Enforcement.

Following the expiration of the time for appeal of an award pursuant to Section 13.4.3, any

party may apply to FERC or any court of competent jurisdiction for entry and enforcement of

judgment based on the award.

13.3.14 Costs.

The costs of the time, expenses, and other charges of the arbitrator shall be borne by the

parties to the dispute, with each side on an arbitrated issue bearing its pro-rata share of such

costs, and each party to an arbitration proceeding bearing its own costs and fees. If the

arbitrator determines that a demand for arbitration or response to a demand for arbitration was

made in bad faith, the arbitrator shall have discretion to award the costs of the time, expenses,

and other charges of the arbitrator to the prevailing party. Notwithstanding the above, at the

discretion of the arbitrator, the winning party in any dispute which has resulted in the

enforcement of an important right affecting the public interest shall not be required to pay any

of the costs of the arbitrator and may recover such of its own reasonable attorney fees, expert

witness fees and other reasonable costs from the losing party to the dispute if (a) a significant

benefit, whether pecuniary or non-pecuniary, has been conferred on the general public, (b) the

necessity and financial burden of private enforcement are such as to make the award

appropriate, and (c) such fees should not, in the interest of justice, be paid out of the recovery.

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 281

13.4 Appeal of Award.

13.4.1 Basis for Appeal.

A party may apply to the FERC or any court of competent jurisdiction to hear an appeal of an

arbitration award only upon the grounds that the award is contrary to or beyond the scope of the

relevant ISO Documents, United States federal law, including, without limitation, the FPA, and

any FERC regulations and decisions, or state law. Appeals shall, unless otherwise ordered by

FERC or the court of competent jurisdiction, conform to the procedural limitations set forth in

this Section 13.4.

13.4.2 Appellate Record.

The parties intend that FERC or the court of competent jurisdiction should afford substantial

deference to the factual findings of the arbitrator. No party shall seek to expand the record

before the FERC or court of competent jurisdiction beyond that assembled by the arbitrator,

except (i) by making reference to legal authority which did not exist at the time of the

arbitrator's decision, or (ii) if such party contends the decision was based upon or affected by

fraud, collusion, corruption, misconduct or misrepresentation.

13.4.3 Procedures for Appeals.

13.4.3.1 If a party to an arbitration desires to appeal an award, it shall provide a notice

of appeal to the ISO Governing Board, all parties and the arbitrator within 14 days following the

date of the award. The appealing party must likewise provide notice to the ISO ADR

Committee, which shall publish notice of the appeal in an ISO newsletter or on WEnet, and any

other method adopted by the ISO ADR Committee.

Within ten (10) days of the filing of the notice of appeal, the appealing party must file an

appropriate application, petition or motion with the FERC to trigger review under the FPA

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 282

Effective: October 13, 2000

or with a court of competent jurisdiction. Such filing shall state that the subject matter has

been the subject of an arbitration pursuant to the relevant ISO Document.

13.4.3.2 Within 30 days of filing the notice of appeal (or such period as FERC or the

court of competent jurisdiction may specify) the appellant shall file the complete evidentiary

record of the arbitration and a copy of the award with FERC or with the court of competent

jurisdiction. The appellant shall serve copies of a description of all materials included in the

submitted evidentiary record.

13.4.4 Award Implementation.

Implementation of the award shall be deemed stayed pending an appeal unless and until, at the

request of a party, the FERC or the court of competent jurisdiction to which an appeal has been

filed, issues an order dissolving, shortening, or extending such stay. However, a summary of

each appeal shall be published in an ISO newsletter or electronic bulletin board, and any other

method adopted by the ISO ADR Committee.

13.4.5 Judicial Review of FERC Orders.

FERC orders resulting from appeals shall be subject to judicial review pursuant to the FPA.

13.5 Allocation of Awards Payable by or to the ISO.

13.5.1 Allocation of an Award.

If the ISO must pay an award to a party pursuant to good faith negotiations or the ISO ADR

Procedures, the ISO will recover the amount of the award from Market Participants and

Scheduling Coordinators. If the ISO receives an award from a party pursuant to good faith

negotiations or the ISO ADR Procedures, the ISO will flow back the amount of the award to

Market Participants and Scheduling Coordinators.

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 283

Effective: October 26, 2000

13.5.2 Timing of Adjustments.

Upon determination that an award is payable by or to the ISO pursuant to good faith

negotiations or the ISO ADR Procedures, the ISO shall calculate the amounts payable to and

receivable from the party, Market Participants, and Scheduling Coordinators, as soon as

reasonably practical, and shall show any required adjustments as a debit or a credit in a

subsequent Preliminary Settlement Statement or, in the case of an amount payable by the ISO

to a party, as soon as the ISO and that party may agree.

13.5.3 Method of Allocation.

13.5.3.1 **Allocation to Market Participants.**

The ISO will use best efforts to determine which Market Participant(s) is or are responsible for

and/or benefit from payment of an award by or to the ISO and to allocate receipt of or payment

for the award equitably to such Market Participant(s). In undertaking the allocation, the ISO

shall consider the extent of a Market Participant's participation in affected markets and the ISO

Tariff in effect on the applicable Trading Day(s), and may consider any other relevant factor,

including but not limited to, applicable contracts.

13.5.3.2 Residual Amounts.

Any awards for which the ISO is unable to identify Market Participants in accordance with

13.5.3.1 and any award amounts that the ISO is unable to collect that are not covered by

Section 11.16.1 will be allocated to all Scheduling Coordinators through Neutrality Adjustments.

Issued by: Roger Smith, Senior Regulatory Counsel

14. LIABILITY AND INDEMNIFICATION.

14.1 Liability for Damages.

Except as provided for in Section 13.3.14, the ISO shall not be liable in damages to any Market

Participant for any losses, damages, claims, liability, costs or expenses (including legal

expenses) arising from the performance or non-performance of its obligations under this ISO

Tariff, including but not limited to any adjustments made by the ISO in Inter-Scheduling

Coordinator Trades, except to the extent that they result from negligence or intentional

wrongdoing on the part of the ISO.

14.2 Exclusion of Certain Types of Loss.

The ISO shall not be liable to any Market Participant under any circumstances for any

consequential or indirect financial loss including but not limited to loss of profit, loss of earnings

or revenue, loss of use, loss of contract or loss of goodwill except to the extent that it results

from except to the extent that it results from negligence or intentional wrongdoing on the part of

the ISO.

14.3 Market Participant's Indemnity.

Each Market Participant, to the extent permitted by law, shall indemnify the ISO and hold it

harmless against all losses, damages, claims, liabilities, costs or expenses (including legal

expenses) arising from any act or omission of the Market Participant except to the extent that

they result from the ISO's default under this ISO Tariff or negligence or intentional wrongdoing

on the part of the ISO or of its officers, directors or employees.

Issued by: Roger Smith, Senior Regulatory Counsel

Original Sheet No. 284A

14.4 Potomac Economics, Ltd. Limitation Of Liability.

Potomac Economics, Ltd. shall not be liable in damages to any Market Participant for any losses, damages, claims, liability, costs or expenses (including legal expenses) arising from its calculation of reference levels under its Consultant Agreement with the ISO dated as of September 3, 2002, except to the extent that they result from negligence or intentional wrongdoing of Potomac Economics, Ltd.

Issued by: Charles F. Robinson, Vice President and General Counsel

UNCONTROLLABLE FORCES.

15.1 An Uncontrollable Force means any act of God, labor disturbance, act of the public enemy, war, insurrection, riot, fire, storm, flood, earthquake, explosion, any curtailment, order, regulation or restriction imposed by governmental, military or lawfully established civilian authorities or any other cause beyond the reasonable control of the ISO or Market Participant which could not be avoided through the exercise of Good Utility Practice. Neither the ISO nor a Market Participant will be considered in default of any obligation under this ISO Tariff if prevented from fulfilling that obligation due to the occurrence of an Uncontrollable Force.

Market Participant from performing any of its obligations under this ISO Tariff, the affected entity shall (i) if it is the ISO, immediately notify the Market Participants in writing of the occurrence of such Uncontrollable Force and, if it is a Market Participant, immediately notify the ISO in writing of the occurrence of such Uncontrollable Force, (ii) not be entitled to suspend performance of its obligations under this ISO Tariff in any greater scope or for any longer duration than is required by the Uncontrollable Force, (iii) use its best efforts to mitigate the effects of such Uncontrollable Force, remedy its inability to perform and resume full performance of its obligations hereunder, (iv) in the case of the ISO, keep the Market Participants apprised of such efforts, and in the case of the Market Participants, keep the ISO apprised of such efforts, in each case on a continual basis and (v) provide written notice of the resumption of its performance of its obligations hereunder.

Notwithstanding any of the foregoing, the settlement of any strike, lockout or labor dispute constituting an Uncontrollable Force shall be within the sole discretion of the entity involved

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 286

Effective: October 13, 2000

in such strike, lockout or labor dispute and the requirement that an entity must use its best

efforts to mitigate the effects of the Uncontrollable Force and/or remedy its inability to perform

and resume full performance of its obligations hereunder shall not apply to strikes, lockouts, or

labor disputes.

16. ISO GRID OPERATIONS COMMITTEE; CHANGES TO ISO PROTOCOLS.

16.1 ISO Grid Operations Committee.

The ISO Grid Operations Committee shall coordinate activities relating to the ISO Controlled

Grid and shall consider suggestions for changes to the ISO Protocols in accordance with the

procedures set out in Article IV, Section 4 of the ISO's bylaws.

16.2 ISO Protocol Amendment Process

The ISO Governing Board shall establish an ISO Protocol amendment process in order to

ensure that all affected parties have an opportunity to participate. Under that process, the ISO

shall file for acceptance at the FERC any amendment to an ISO Protocol that is on file with the

FERC.

16.3 Market Surveillance: Changes to Operating Rules and Protocols

The ISO shall keep the operation of the markets that it administers under review to determine

whether changes in its operating rules or ISO Protocols would improve the efficiency of those

markets or prevent the exercise of market power by any Market Participant; and it shall institute

necessary changes in accordance with this Section 16. The details of the ISO Market

Monitoring and Information Protocol are set forth in Appendix L, "ISO Protocols".

Issued by: Roger Smith, Senior Regulatory Counsel

Effective: October 13, 2000

17. ASSIGNMENT.

Obligations and liabilities under this ISO Tariff and any SC Agreement or other agreements

giving contractual effect to this ISO Tariff shall be binding on the successors and assigns of the

parties to such agreements. No assignment of any SC Agreement or other agreements giving

contractual effect to this ISO Tariff shall relieve the original party from its obligations or

liabilities to the ISO under this ISO Tariff or any such agreement arising or accruing due prior

to the date of assignment.

18. TERM AND TERMINATION.

18.1 This ISO Tariff, shall become effective on the date it is permitted to become effective

by the FERC.

18.2 This ISO Tariff shall terminate upon approval of termination by the ISO Governing

Board in accordance with the bylaws of the ISO and receipt of any necessary regulatory

approval from FERC.

19. REGULATORY FILINGS.

Any amendment or other modification of any provision of this ISO Tariff must be in writing and

approved by the ISO Governing Board in accordance with the bylaws of the ISO. Any such

amendment or modification shall be effective upon the date it is permitted to become effective

by FERC. Nothing contained herein shall be construed as affecting, in any way, the right of the

ISO to furnish its services in accordance with this ISO Tariff, or any tariff, rate schedule or SC

Agreement which results from or incorporates this ISO Tariff, unilaterally to make an

application to FERC for a change in rates, terms, conditions, charges, classifications of service,

SC Agreement, rule or regulation under FPA Section 205 and pursuant to the FERC's rules and

regulations promulgated thereunder. Nothing contained in this ISO Tariff or any SC Agreement

shall be construed as affecting the ability

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 288

Effective: October 13, 2000

of any Market Participant receiving service under this ISO Tariff to exercise its rights under

Section 206 of the FPA and FERC's rules and regulations thereunder.

20. MISCELLANEOUS.

20.1 Notice.

20.1.1 Effectiveness.

Any notice, demand, or request in accordance with this ISO Tariff, unless otherwise provided in

this ISO Tariff or in any ISO Protocol, shall be in writing and shall be deemed properly served,

given, or made: (a) upon delivery if delivered in person, (b) five (5) days after deposit in the

mail if sent by first class United States mail, postage prepaid, (c) upon receipt of confirmation

by return facsimile if sent by facsimile, or (d) upon delivery if delivered by prepaid commercial

courier service.

20.1.2 Addresses.

Notices to the ISO shall be sent to such address as shall be notified by the ISO to Market

Participants from time to time. Notices issued by the ISO to any Scheduling Coordinator shall

be delivered to the address of the Scheduling Coordinator included in the SC Application Form.

Notices to any Market Participant other than a Scheduling Coordinator shall be delivered by the

ISO to the address given to it by the Market Participant. The ISO and any Market Participant

may at any time change their address for notice by notifying the other party in writing.

20.1.3 Notice of Changes in Operating Rules and Protocols.

The ISO shall give all Market Participants notice of at least thirty (30) days of any changes or

proposed changes in its operating rules, procedures and protocols, unless: (1) a different

notice period is specified by state or Federal law or (2) the change is reasonably required to

address an emergency affecting the ISO Controlled Grid or its operations, in

Issued by: Roger Smith, Senior Regulatory Counsel

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 289 Superseding Original Sheet No. 289

which case the ISO shall give Market Participants as much notice as is reasonably practicable.

Any notices issued under this provision shall be delivered in accordance with the procedures

set out in Section 20.1 of this ISO Tariff and, in the case of the ISO Protocols, Section 16.2 of

this ISO Tariff.

20.2 Waiver.

Any waiver at any time by the ISO or any Market Participant of its rights with respect to any

default under this ISO Tariff, or with respect to any other matter arising in connection with this

ISO Tariff, shall not constitute or be deemed a waiver with respect to any subsequent default or

other matter arising in connection with this ISO Tariff. Any delay short of the statutory period of

limitations in asserting or enforcing any right shall not constitute or be deemed a waiver.

20.3 Confidentiality.

20.3.1 ISO

The ISO shall maintain the confidentiality of all of the documents, data and information

provided to it by any Market Participant that are treated as confidential or commercially

sensitive under Section 20.3.2; provided, however, that the ISO need not keep confidential:

(1) information that is explicitly subject to data exchange through WEnet pursuant to Section 6

of this ISO Tariff; (2) information that the ISO or the Market Participant providing the

information is required to disclose pursuant to this ISO Tariff, or applicable regulatory

requirements (provided that the ISO shall comply with any applicable limits on such

disclosure); or (3) information that becomes available to the public on a non-confidential basis

(other than as a result of the ISO's breach of this ISO Tariff).

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 290

Superseding First Revised Sheet No. 290

20.3.2 Confidential Information

The following information provided to the ISO by Scheduling Coordinators shall be treated by

the ISO as confidential:

(a) individual bids for Supplemental Energy;

(b) individual Adjustment Bids for Congestion Management which are not designated by

the Scheduling Coordinator as available;

(c) individual bids for Ancillary Services;

(d) transactions between Scheduling Coordinators;

(e) individual Generator Outage programs unless a Generator makes a change to its

Generator Outage program which causes Congestion in the short term (i.e. one month

or less), in which case, the ISO may publish the identity of that Generator;

(f) Demand Forecast and other hourly data provided by Scheduling Coordinators to the

ISO pursuant to Section 2.2.12.3.

20.3.3 Other Parties

No Market Participant shall have the right hereunder to receive from the ISO or to review any

documents, data or other information of another Market Participant to the extent such

documents, data or information is to be treated as in accordance with Section 20.3.2; provided,

however, a Market Participant may receive and review any composite documents, data, and

other information that may be developed based upon such confidential documents, data, or

information, if the composite document does not disclose such confidential data or information

relating to an individual Market Participant and provided, however, that the ISO may disclose

information as provided for in its bylaws.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 22, 2005

Effective: September 23, 2005

Original Sheet No. 291

20.3.4 Disclosure

Notwithstanding anything in this Section 20.3 to the contrary,

- (a) The ISO: (i) shall publish individual bids for Supplemental Energy, individual bids for Ancillary Services, and individual Adjustment Bids, provided that such data are published no sooner than six (6) months after the Trading Day with respect to which the bid or Adjustment Bid was submitted and in a manner that does not reveal the specific resource or the name of the Scheduling Coordinator submitting the bid or Adjustment Bid, but that allows the bidding behavior of individual, unidentified resources and Scheduling Coordinators to be tracked over time; and (ii) may publish data sets analyzed in any public report issued by the ISO or by the Market Surveillance Committee, provided that such data sets shall be published no sooner than six (6) months after the latest Trading Day to which data in the data set apply, and in a manner that does not reveal any specific resource or the name of any Scheduling Coordinator submitting bids or Adjustment Bids included in such data sets.
- (b) If the ISO is required by applicable laws or regulations, or in the course of administrative or judicial proceedings, to disclose information that is otherwise required to be maintained in confidence pursuant to this Section 20.3, the ISO may disclose such information; provided, however, that as soon as the ISO learns of the disclosure requirement and prior to making suchdisclosure, the ISO shall notify any affected Market Participant of the requirement and the terms thereof. The Market Participant may, at its sole discretion and own cost, direct any challenge to or defense against the disclosure requirement and the ISO shall cooperate with such affected Market Participant to the maximum extent practicable to minimize the disclosure of the information consistent with applicable

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

law. The ISO shall cooperate with the affected Market Participant to obtain proprietary or confidential treatment of confidential information by the person to whom such information is disclosed prior to any such disclosure.

- (c) The ISO may disclose confidential or commercially sensitive information, without notice to an affected Market Participant, in the following circumstances:
 - (i) If the FERC, or its staff, during the course of an investigation or otherwise, requests information that is confidential or commercially sensitive. In providing the information to FERC or its staff, the ISO shall take action consistent with 18 C.F.R. §§ 1b.20 and 388.112, and request that the information be treated as confidential and non-public by the FERC and its staff and that the information be withheld from public disclosure. The ISO shall provide the requested information to the FERC or its staff within the time provided for in the request for information. The ISO shall notify an affected Market Participant within a reasonable time after the ISO is notified by FERC or its staff that a request for disclosure of, or decision to disclose, the confidential or commercially sensitive information has been received, at which time the ISO and the affected Market Participant may respond before such information would be made public; or
 - (ii) In order to maintain reliable operation of the ISO Control Area, the ISO may share critical operating information, system models, and planning data with other WECC Reliability Coordinators, who have executed the Western Electricity Coordinating Council Confidentiality Agreement for Electric System Data, or are subject to similar confidentiality requirements; or
 - (iii) In order to maintain reliable operation of the ISO Control Area, the ISO may share individual Generating Unit Outage information with the operations engineering and/or the outage coordination division(s) of other Control Area

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2005 Effective: June 29, 2005

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 292.01

Effective: June 29, 2005

Superseding Original Sheet No. 292.01

operators, Participating TOs, MSS Operators and other transmission system

operators engaged in the operation and maintenance of the electric supply

system whose system is significantly affected by the Generating Unit and who

have executed the Western Electricity Coordinating Council Confidentiality

Agreement for Electric System Data.

20.4 Staffing and Training To Meet Obligations.

The ISO shall engage sufficient staff to perform its obligations under this ISO Tariff in a

satisfactory manner consistent with Good Utility Practice. The ISO shall make its own

arrangements for the engagement of all staff and labor necessary to perform its obligations

hereunder and for their payment. The ISO shall employ (or cause to be employed) only

persons who are appropriately qualified, skilled and experienced in their respective trades or

occupations. ISO employees and contractors shall abide by the ISO Code of Conduct for

employees contained in the ISO bylaws and approved by FERC.

20.5 Accounts and Reports.

The ISO shall notify Market Participants of any significant change in the accounting treatment

or methodology of any costs or any change in the accounting procedures, which is expected to

result in a significant cost increase to any Market Participant. Such notice shall be given at the

earliest possible time, but no later than, sixty (60) days before implementation of such change.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 292A

20.6 Titles.

The captions and headings in this ISO Tariff are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the rates, terms, and conditions of this ISO

Tariff.

20.7 Applicable Law and Forum.

This ISO Tariff shall be governed by and construed in accordance with the laws of the State of California, except its conflict of laws provisions. Market Participants irrevocably

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 31, 2003 Effective: May 30, 2003

consent that any legal action or proceeding arising under or relating to this ISO Tariff to which the ISO ADR Procedures do not apply, shall be brought in any court of the State of California or any federal court of the United States of America located in the State of California. Market Participants irrevocably waive any objection that they may have now or in the future to said courts in the State of California as the proper and exclusive forum for any legal action or proceeding arising under or related to this ISO Tariff.

20.8 Consistency with Federal Laws and Regulations

- (a) Nothing in the Tariff shall compel any person or federal entity to: (1) violate federal statutes or regulations; or (2) in the case of a federal agency, to exceed its statutory authority, as defined by any applicable federal statutes, regulations, or orders lawfully promulgated thereunder. If any provision of this Tariff is inconsistent with any obligation imposed on any person or federal entity by federal law or regulation to that extent, it shall be inapplicable to that person or federal entity. No person or federal entity shall incur any liability by failing to comply with a Tariff provision that is inapplicable to it by reason of being inconsistent with any federal statutes, regulations, or orders lawfully promulgated thereunder; provided, however, that such person or federal entity shall use its best efforts to comply with the Tariff to the extent that applicable federal laws, regulations, and orders lawfully promulgated thereunder permit it to do so.
- (b) If any provision of this Tariff requiring any person or federal entity to give an indemnity or impose a sanction on any person is unenforceable against a federal entity, the ISO shall submit to the Secretary of Energy or other appropriate Departmental Secretary a report of any circumstances that would, but for this provision, have rendered a federal entity liable to indemnify any person or incur a sanction and may request the Secretary of Energy or other appropriate

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 294

Superseding Original Sheet No. 294

Departmental Secretary to take such steps as are necessary to give effect to any

provisions of this Tariff that are not enforceable against the federal entity.

(c) To the extent that the ISO suffers any loss as a result of being unable to enforce any

indemnity as a result of such enforcement being in violation of federal laws or

regulations to which it is entitled under the Tariff under this Section or otherwise, it

shall be entitled to recover such loss through the Grid Management Charge.

21. GENERATION METER MULTIPLIERS.

21.1 Temporary Simplification Relating to GMM Loss Factors.

Notwithstanding any other provision in the ISO Tariff, including the ISO Protocols, in

determining whether a Schedule is a Balanced Schedule, no allowance shall be made for

Transmission Losses (i.e. the Generation Meter Multiplier shall be set at 1.0) for all Scheduling

Coordinators.

21.2 Application.

Notwithstanding any other provision in this Tariff, including the ISO Protocols, the temporary

simplification measure specified in this Section 21 shall have effect until discontinued by a

Notice of Full-Scale Operations issued by the Chief Executive Officer of the ISO.

21.2.1 Pursuant to Subsections 21.3.1 and 21.3.2, the Chief Executive Officer of the ISO shall

give notice to all Scheduling Coordinators that such Scheduling Coordinators shall use

forecasted Generation Meter Multipliers, as published by the ISO, in their Schedules. Such

notice shall be given only after the Chief Executive Officer determines that the ISO is capable

of accepting Schedules using the forecasted Generation Meter Multipliers without adversely

affecting operations or reliability.

.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 295

Effective: October 13, 2000

Superseding Original Sheet No. 295

21.2.2 [Not used]

21.3 **Notices of Full-Scale Operations.**

21.3.1 When the Chief Executive Officer of the ISO determines that the ISO is capable of

implementing this Tariff, including the ISO Protocols, without modification in accordance with a

temporary simplification measure specified in this Section 21, he shall issue a notice ("Notice

of Full-Scale Operations") and shall specify the relevant temporary simplification measure and

the date on which it will permanently cease to apply, which date shall be not less than seven (7)

days after the Notice of Full-Scale Operations is issued.

21.3.2 A Notice of Full-Scale Operations shall be issued when it is posted on the ISO Internet

"Home Page," at http://www.caiso.com or such other Internet address as the ISO may publish

from time to time.

22. SCHEDULE VALIDATION TOLERANCES.

22.1 Temporary Simplification of Schedule Validation Tolerances.

Notwithstanding any other provision in the ISO Tariff, including the ISO Protocols, a Schedule

shall be treated as a Balanced Schedule when aggregate Generation, adjusted for

Transmission Losses, is within 20 MW of aggregate Demand, or such lower amount, greater

than 1 MW, as may be established from time to time by the ISO. The ISO may establish the

Schedule validation tolerance level at any time, between a range from 1 MW to 20 MW, by

giving seven days' notice published on the ISO's "Home Page," at

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 296

Effective: October 13, 2000

http://www.caiso.com or such other Internet address as the ISO may publish from time to time.

22.2 Application.

Notwithstanding any other provision in this Tariff, including the ISO Protocols, the temporary

simplification measure specified in this Section 22 shall have effect until discontinued by a

Notice of Full-Scale Operations issued by the Chief Executive Officer of the ISO.

22.3 Notices of Full-Scale Operations.

22.3.1 When the Chief Executive Officer of the ISO determines that the ISO is capable of

implementing this Tariff, including the ISO Protocols, without modification in accordance with a

temporary simplification measure specified in this Section 22, he shall issue a notice ("Notice

of Full-Scale Operations") and shall specify the relevant temporary simplification measure and

the date on which it will permanently cease to apply, which date shall be not less than seven (7)

days after the Notice of Full-Scale Operations is issued.

22.3.2 A Notice of Full-Scale Operations shall be issued when it is posted on the ISO Internet

"Home Page," at http://www.caiso.com or such other Internet address as the ISO may publish

from time to time.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Second Revised Sheet No. 297

FIRST REPLACEMENT VOLUME NO. I

Superseding First Revised Sheet No. 297

23 METERED SUBSYSTEMS

23.1 General Nature of Relationship Between ISO and MSS

- An entity that is determined by the ISO to qualify as a Metered Subsystem and that undertakes in writing to the ISO to comply with all applicable provisions of the ISO Tariff as specified in that written agreement as they may be amended from time to time, including, without limitation, the applicable provisions of this Section 23, shall be considered an MSS Operator and shall have the rights and obligations set forth in this Section 23. The ISO shall not be obligated to accept Schedules, Adjustment Bids or bids for Ancillary Services which would require Energy to be transmitted to or from a Metered Subsystem unless the written undertaking of the MSS Operator of the Metered Subsystem has become effective.
- 23.2 Coordination of Operations. Each MSS Operator shall operate its MSS at all times in accordance with Good Utility Practice and Applicable Reliability Criteria, including WECC and NERC criteria, and in a manner which ensures safe and reliable operation. All information pertaining to the physical state or operation, maintenance and failure of the MSS affecting the operation of the ISO Control Area that is made available to the ISO by the MSS Operator shall also be made available to Scheduling Coordinators, provided that the ISO shall provide reasonable notice to the MSS Operator. The ISO shall not be required to make information available to the MSS Operator other than information that is made available to Scheduling Coordinators.
- 23.3 Coordinating Maintenance Outages of MSS Facilities. Each MSS Operator shall make appropriate arrangements to coordinate Outages of Generating Units in accordance with Section 5. Each MSS Operator shall make appropriate arrangements to coordinate Outages of transmission facilities forming part of its MSS that will have an effect, or are reasonably likely to have an effect, on any interconnection between the MSS and the system of a Participating

TO.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: September 1, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 297A

prior to the submission by that Participating TO of its Maintenance Outage requirements under Section 2.3.3. The ISO will coordinate Outages of other Participating TOs transmission facilities that may affect the MSS.

23.4 MSS Operator Responsibilities.

The MSS Operator's written undertaking to the ISO shall obligate the MSS Operator to comply with all provisions of the ISO Tariff, as amended from time to time, applicable to the UDCs, including, without limitation, the applicable provisions of Section 4 and Section 2.3.2. In addition, recognizing the ISO's responsibility to promote the efficient use and reliable operation of the ISO Controlled Grid and the Control Area consistent with the Applicable Reliability Criteria, each MSS Operator shall:

23.4.1 operate and maintain its facilities, in accordance with applicable safety and reliability standards, regulatory requirements, applicable operating guidelines, applicable rates, tariffs, statutes and regulations governing their provision of service to their End-Use Customers and Good Utility Practice so as to avoid any material adverse impact on the ISO Controlled Grid, it being understood that, if the MSS Operator does not so operate and maintain its facilities and the ISO concludes, after notice is provided to the MSS Operator, that such failure impairs or threatens to impair the reliability of the ISO Controlled Grid, the ISO may suspend MSS status, in accordance with this Section 23, until the MSS Operator demonstrates the ability and willingness to so operate and maintain its facilities;

provide the ISO Outage Coordination Office each year with a schedule of upcoming maintenance of facilities forming part of the MSS that will affect or is reasonably likely to affect the ISO Controlled Grid in accordance with Section 2.3.3.5;

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 297B

Superseding Original Sheet No. 297B

23.4.3 coordinate with the ISO, Participating TOs and Generators to ensure that ISO

Controlled Grid Critical Protective Systems, including relay systems, are installed and

maintained in order to function on a coordinated and complementary basis with the protective

systems of the MSS, Participating TOs and Generators and notify the ISO as soon as is

reasonably possible of any condition of which it becomes aware that may compromise the ISO

Controlled Grid Protective Systems;

23.4.4 be responsible for any Reliability Must-Run Generation and Voltage Support

required for reliability of the MSS, including the responsibility for any costs of such Reliability

Must-Run Generation, and Voltage Support and may satisfy this requirement through

Generating Units owned by the MSS or under contract to the MSS;

23.4.5 be responsible for Black Start requirements for reliability of the MSS, however,

if the MSS can self-provide this requirement, the MSS shall not pay its pro rata share of the

Black Start requirement in accordance with Section 2.5.28.6; and

23.4.6 be responsible for Intra-Zonal Congestion Management and transmission line

Outages within or at the boundary of the MSS, and all associated costs and not responsible for

Intra-Zonal Congestion Management elsewhere in the Zone except to the extent that a

Scheduling Coordinator is delivering Energy to or from the MSS.

23.5 Scheduling by or on behalf of a MSS Operator. All Schedules submitted on behalf

of an MSS Operator for the delivery of Energy and Ancillary Services to Loads connected to

the MSS and for the delivery of Energy and Ancillary Services from Generating Units forming

part of the MSS or System Units shall be submitted by a Scheduling Coordinator that complies

with all applicable provisions of the ISO Tariff, which Scheduling Coordinator may be the MSS

Operator,

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: September 1, 2002

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 297C

Superseding Original Sheet No. 297C

provided that the MSS Operator complies with all applicable requirements for Scheduling

Coordinators. A Scheduling Coordinator shall separately identify Schedules that it submits on

behalf of an MSS Operator.

23.5.1 Without limiting the foregoing, the Scheduling Coordinator for the MSS must

submit gross generation information for the System Unit, Generating Unit, and information

regarding imports, exports and Gross Loads to the ISO in the format and in accordance with

the timelines applicable to other Scheduling Coordinators.

23.5.2 The Scheduling Coordinator for the MSS will designate, in discrete quantities

and with prices for both Ancillary Services and Energy: (1) Schedules in Day-Ahead and Hour-

Ahead Energy markets (including Schedules for internal Generation and internal Demand

within the MSS), (2) bids or self-provided Schedules for Regulation, Spinning Reserve, Non-

Spinning Reserve, and Replacement Reserve capacity and associated bid Energy,

(3) Adjustment Bids, (4) Supplemental Energy bids, or (5) any feasible combination thereof.

23.6 System Emergencies.

23.6.1 In the event a System Emergency occurs or the ISO determines that a System

Emergency is threatened or imminent, each MSS Operator shall comply with all directions from

the ISO concerning the avoidance, management and alleviation of the System Emergency and

shall comply with all procedures concerning System Emergencies set forth in the ISO Tariff.

23.6.2 During a System Emergency, the ISO and the MSS Operator shall

communicate through their respective control centers and in accordance with procedures

established in the agreement through which the MSS Operator undertakes to the ISO to comply

with the provisions of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: September 1, 2002

23.6.3 The ISO has authority to suspend MSS control and direct, via communications with the MSS Operator, the operation of Generating Units within the MSS, including Generating Units that may comprise a System Unit, if such control is necessary to maintain ISO Controlled Grid reliability.

23.7 Under Frequency Load Shedding (UFLS).

- 23.7.1 Each agreement through which the MSS Operator undertakes to the ISO to comply with the provisions of the ISO Tariff shall describe the UFLS program for that MSS.

 The ISO and MSS Operator shall review the UFLS program periodically to ensure compliance with Applicable Reliability Criteria.
- 23.7.2 The ISO shall perform periodic audits of each MSS's UFLS system to verify that the system is properly configured for each MSS.
- 23.7.3 The ISO will use its reasonable endeavors to ensure that UFLS is coordinated among all MSSs and UDCs so that no MSS or UDC bears a disproportionate share of the ISO's UFLS program.
- 23.7.4 In compiling its UFLS program, the ISO, at its discretion, may also coordinate with other entities, review and audit their UFLS programs and systems as described in Sections 23.7.1 to 23.7.3 and Sections 4.4.3.1 to 4.4.3.3, inclusive.
- 23.7.5 The ISO shall have the authority to direct a MSS Operator to disconnect Load from the ISO Controlled Grid if necessary to avoid an anticipated System Emergency or to regain operational control over the ISO Controlled Grid during an actual System Emergency. The ISO shall direct the MSS Operator to shed Load in accordance with the prioritization schedule developed pursuant to Sections 2.3.2.6 and 4.5. When ISO Controlled Grid conditions

Issued by: Charles F. Robinson, Vice President and General Counsel

permit restoration of Load, the ISO shall restore Load according to the prioritization schedule developed pursuant to Section 2.3.2.6 hereof. The MSS Operator shall restore Load internal to the MSS.

23.8 Electrical Emergency Plan (EEP).

- 23.8.1 The ISO shall in accordance with Section 2.3.2.4 hereof implement the Electrical Emergency Plan in consultation with the MSS Operator or other entities, at the ISO's discretion, when Energy reserve margins are forecast to be at the levels specified in the plan.
- **23.8.2** Each MSS Operator will notify its End-Use Customers connected to the MSS's Distribution System of any voluntary curtailments notified to the MSS Operator by the ISO pursuant to the provisions of the EEP.
- 23.8.3 If a Load curtailment is required to manage System Emergencies, the ISO will determine the amount and location of Load to be reduced pursuant to Section 4.5. Each MSS Operator shall be responsible for notifying its customers and Generators connected to its system of curtailments and service interruption.

23.9 System Emergency Reports: MSS Obligations.

- **23.9.1** Each MSS Operator shall maintain all appropriate records pertaining to a System Emergency.
- **23.9.2** Each MSS Operator shall cooperate with the ISO in the preparation of an Outage review pursuant to Section 2.3.2.9.

23.10 Coordination of Expansion or Modifications to MSS Facilities.

Each MSS Operator and any Participating TO with which its system is interconnected, if applicable, shall coordinate in the planning and implementation of any expansion or

Issued by: Charles F. Robinson, Vice President and General Counsel

modifications of a MSS's or Participating TO's system that will affect their transmission interconnection, the ISO Controlled Grid or the transmission services to be required by the MSS Operator. The MSS Operator and any Participating TO with which the MSS is interconnected shall be responsible for coordinating with the ISO.

23.11 Ancillary Service Obligations for MSS.

23.11.1 Ancillary Service obligations will be allocated to the Scheduling Coordinator scheduling Load within a MSS in accordance with the ISO Tariff. The ISO shall have the right to call upon Ancillary Service capacity self-provided by a Scheduling Coordinator for an MSS or procured by the ISO from such Scheduling Coordinator in accordance with the ISO Tariff. The Scheduling Coordinator representing the MSS Operator may bid or self-provide Ancillary Services from a System Unit or from individual Generating Units or Participating Loads in the MSS. Alternatively, the Scheduling Coordinator representing the MSS may purchase Ancillary Services from the ISO or third parties to meet all or part of its Ancillary Service obligations in accordance with the ISO Tariff.

23.11.2 If the MSS Operator desires to follow internal Load with a System Unit or Generating Units in the MSS, and also to provide Regulation to the ISO, the MSS must provide adequate telemetry consistent with the ISO Tariff and all applicable standards to allow performance in response to ISO AGC signals to be measured at the interconnection of the MSS to the ISO Controlled Grid.

23.12 Load Following

23.12.1 The MSS Operator may operate a System Unit or Generating Units in the MSS to follow its Load, provided that: (a) the Scheduling Coordinator for the MSS Operator shall remain responsible for purchases of Imbalance Energy in accordance with the ISO Tariff if the

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 297G Superseding Original Sheet No. 297G

MSS Operator does not operate its System Unit or Generating Units and schedule imports into the MSS, to match the metered Demand in the MSS and exports from the MSS; and (b) if the deviation between the Generation in the MSS and imports into the MSS and metered Demand in the MSS and exports from the MSS exceeds a deviation band equal to three percent (3%) of the lesser of the MSS Operator's metered or Hour-Ahead scheduled Demand and exports from the MSS, adjusted for Forced Outages and any ISO directed firm Load Shedding for the MSS's portfolio as a whole (the "Deviation Band"), then the Scheduling Coordinator for the MSS Operator shall pay the additional amounts specified in Section 23.12.2. The Scheduling Coordinator for an MSS Operator that chooses to follow its Load in accordance with this Section 23.12 shall provide sixty (60) days advance notice to the ISO. If the Scheduling Coordinator later desires not to follow the Load of the MSS Operator, the Scheduling Coordinator shall provide sixty (60) days advance notice to the ISO that it will no longer follow Load.

- 23.12.2 Under the circumstances described in Section 23.12.1, the Scheduling Coordinator for an MSS Operator shall pay amounts based on a price that is the effective weighted average Ex Post Price applicable to the MSS's Scheduling Coordinator for the billing interval (the "Deviation Price"). The revenue received from these payments will be used as an off-set to the ISO's Grid Management Charge. The payments due from a Scheduling Coordinator will be calculated as follows:
- 23.12.2.1 If the metered Generation resources and imports into the MSS exceed the metered Demand and exports from the MSS, and Energy expected to be delivered by the Scheduling Coordinator for the MSS in response to the ISO's Dispatch instructions and/or Regulation set-point signals issued by the ISO's AGC by more than the Deviation Band, then the Scheduling Coordinator for the MSS Operator will pay the ISO an amount equal to one hundred percent (100%) of the product of the Deviation Price and the amount of the Imbalance Energy that is supplied in excess of the Deviation Band.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: September 1, 2002

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 297H Superseding Substitute Original Sheet No. 297H

23.12.2.2 If metered Generation resources and imports into the MSS are

insufficient to meet the metered Demand and exports from the MSS, and Energy expected to

be delivered by the Scheduling Coordinator for the MSS in response to the ISO's Dispatch

instructions and/or Regulation set-point signals issued by the ISO's AGC by more than the

Deviation Band, then the Scheduling Coordinator for the MSS Operator shall pay the ISO an

amount equal to the product of the Deviation Price and two hundred percent (200%) of the

shortfall that is outside of the Deviation Band, in addition to the Imbalance Energy charges that

may be applicable under the ISO Tariff.

23.12.3 If the ISO is charging Grid Management Charges for uninstructed deviations,

and the Scheduling Coordinator for the MSS has uninstructed deviations associated with Load

following from the MSS's resources, then the ISO will net the Generation and imports into the

MSS to match the Demand and exports out of the MSS, and will not assess GMC associated

with uninstructed deviations for such portion of Energy that is used to match MSS Demand and

net exports.

23.12.3.1 If Generation, above the amount to cover Demand and exports, was

sold into the ISO's Imbalance Energy market, then the Scheduling Coordinator for the MSS will

be charged GMC associated with uninstructed deviations for this quantity.

23.12.3.2 If insufficient Generation and imports was available to cover Demand

and exports, and the Scheduling Coordinator for the MSS purchased Imbalance Energy from

the ISO's market, then such Scheduling Coordinator will be charged GMC associated with

uninstructed deviations for this quantity.

23.12.3.3 Only GMC associated with uninstructed deviations (the Ancillary

Services and Real-Time Energy Operations Charge (ASREO)) will be treated on a net basis.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: September 1, 2002

First Revised Sheet No. 2971 Superseding Substitute Original Sheet No. 2971

FIRST REPLACEMENT VOLUME NO. I

GMC for Control Area Services (CAS) will be charged based on Gross Load and exports out of

the MSS. The Scheduling Coordinator for the MSS Operator will be assessed the GMC

Congestion Management Charge (CONG) in accordance with Section 8.3. Ancillary Service

bids accepted by the ISO and Instructed Energy will be assessed the GMC ASREO.

23.13 Information Sharing.

23.13.1 System Planning Studies and Forecasts.

The ISO, the MSS Operator and Participating TOs shall share information such as projected

Load growth and system expansions necessary to conduct necessary system planning studies

to the extent that these may impact the operation of the ISO Control Area. Each MSS

Operator shall provide to the ISO annually its ten-year forecasts of Demand growth, internal

Generation, and expansion of or replacement for any transmission facilities that are part of the

MSS that will or may significantly affect any point of interconnection between the MSS and the

ISO Controlled Grid. Such forecasts shall be provided on the date that UDCs are required to

submit forecasts to the ISO under Section 4.8.1. Each MSS Operator or each Scheduling

Coordinator for an MSS Operator shall also submit weekly and monthly peak Demand

Forecasts in accordance with the ISO's protocols.

23.13.2 System Surveys and Inspections.

The ISO and each MSS Operator shall cooperate with each other in performing system surveys

and inspections to the extent these relate to the operation of the ISO Control Area.

23.13.3 Reports.

23.13.3.1 The ISO shall make available to each MSS Operator any public annual

reviews or reports regarding performance standards, measurements and incentives relating to

the ISO

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: September 1, 2002 Controlled Grid and shall also make available, upon reasonable notice, any such reports that the ISO receives from Participating TOs. Each MSS Operator shall make available to the ISO any public annual reviews or reports regarding performance standards, measurements and incentives relating to the MSS's Distribution System to the extent these relate to the operation of the ISO Controlled Grid.

- 23.13.3.2 The ISO and the MSS Operators shall develop an operating procedure to record requests received for Maintenance Outages by the ISO and the completion of the requested maintenance and turnaround times.
- 23.13.3.3 Each MSS Operator shall promptly provide such information as the ISO may reasonably request concerning the MSS Operator's operation of the MSS to enable the ISO to meet its responsibility under the ISO Tariff to conduct reviews and prepare reports following major Outages. Where appropriate, the ISO will provide appropriate assurances that the confidentiality of commercially sensitive information shall be protected. The ISO shall have no responsibility to prepare reports on Outages that affect customers on the MSS, unless the Outage also affects customers connected to the system of another entity within the ISO Control Area. The MSS Operator shall be solely responsible for the preparation of any reports required by any governmental entity or the WECC with respect to any Outage that affects solely customers on the MSS.
- 23.13.3.4 Reliability Information. Each MSS Operator shall inform the ISO, and the ISO shall inform each MSS Operator, in each case as promptly as possible, of any circumstance of which it becomes aware (including, but not limited to, abnormal temperatures, storms, floods, earthquakes, and equipment depletions and malfunctions and deviations from Registered Data and operating characteristics) that is reasonably likely to threaten the reliability of the ISO

Issued by: Charles F. Robinson, Vice President and General Counsel

Superseding Original Sheet No. 297K

Controlled Grid or the integrity of the MSS respectively. Each MSS Operator and the ISO each

shall also inform the other as promptly as possible of any incident of which it becomes aware

(including, but not limited to, equipment outages, over-loads or alarms) which, in the case of

the MSS Operator, is reasonably likely to threaten the reliability of the ISO Controlled Grid, or,

in the case of the ISO, is reasonably likely to adversely affect the MSS. Such information shall

be provided in a form and content which is reasonable in all the circumstances, sufficient to

provide timely warning to the entity receiving the information of the threat and, in the case of

the ISO, not unduly discriminatory with respect to the ISO's provision of similar information to

other entities.

23.13.3.5 Forms. The ISO shall, in consultation with MSS Operators, jointly develop

and, as necessary, revise, any necessary forms and procedures for collection, study, treatment,

and transmittal of system data, information, reports and forecasts.

23.14 Installation of and Rights of Access to MSS Facilities.

23.14.1 Installation of Facilities.

23.14.1.1 Meeting Service Obligations.

The ISO and each MSS Operator shall each have the right, if mutually agreed, on reasonable

notice to install or to have installed equipment (including metering equipment) or other facilities

on the property of the other, to the extent that such installation is necessary for the installing

party to meet its service obligations unless to do so would have a negative impact on the

reliability of the service provided by the party owning the property.

23.14.1.2 Governing Agreements for Installations.

The ISO and the MSS Operator shall enter into agreements governing the installation of

equipment or other facilities containing customary and reasonable terms and conditions.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: September 1, 2002

FIRST REPLACEMENT VOLUME NO. I

23.14.2 Access to Facilities.

Each MSS Operator shall grant the ISO reasonable access to MSS facilities free of charge for

Original Sheet No. 297L

purposes of inspection, repair, maintenance, or upgrading of facilities installed by the ISO on

the MSS's system, provided that the ISO must provide reasonable advance notice of its intent

to access MSS facilities. Such access shall not be provided unless the parties mutually agree

to the date, time and purpose of each access. Agreement on the terms of the access shall not

be unreasonably withheld.

23.14.3 Access During Emergencies.

Notwithstanding any provision in this Section 23, the ISO may have access, without giving prior

notice, to any MSS Operator's equipment or other facilities during times of a System

Emergency or where access is needed in connection with an audit function.

23.15 MSS System Unit

23.15.1 A MSS Operator may aggregate one or more Generating Units and/or Participating

Loads as a System Unit. Except as specifically provided in the agreement referred to in

Section 23.1.1, all provisions of the ISO Tariff applicable to Participating Generators and to

Generating Units (and, if the System Unit includes a Load, to Participating Loads), shall apply

fully to the System Unit and the Generating Units and/or Loads included in it. The MSS

Operator's written undertaking to the ISO in accordance with Section 23.1.1 shall obligate the

MSS Operator to comply with all provisions of the ISO Tariff, as amended from time to time,

applicable to the System Unit, including, without limitation, the applicable provisions of Section

5 and Section 2.3.2. In accordance with Section 5.1.3, the ISO will obtain control over the

System Unit, not the individual Generating Unit, except for Regulation, to comply with Section

5.

Issued by: Charles F. Robinson, Vice President and General Counsel

23.15.2 Without limiting the generality of Section 23.15.1, a MSS Operator that owns or has an entitlement to a System Unit:

23.15.2.1 is required to have a direct communication link to the ISO's EMS satisfying the requirements applicable to Generating Units owned by Participating Generators, or Participating Loads, as applicable, for the System Unit and the individual resources that make up the System Unit;

23.15.2.2 shall provide resource-specific information regarding the Generating Units and Loads comprising the System Unit to the ISO through telemetry to the ISO's EMS;

23.15.2.3 shall obtain ISO certification of the System Unit's Ancillary Service capabilities in accordance with Section 2.5.6 and 2.5.24 before the Scheduling Coordinator representing the MSS may self-provide its Ancillary Service obligations or bid into the ISO's markets from that System Unit;

23.15.2.4 shall provide the ISO with control over the AGC of the System Unit, if the System Unit is supplying Regulation to the ISO or is designated to self-provide Regulation; and

23.15.2.5 shall install ISO certified meters on each individual resource or facility that is aggregated to a System Unit.

23.15.3 Subject to Section 23.15.5, the ISO shall have the authority to exercise control over the System Unit to the same extent that it may exercise control pursuant to the ISO Tariff over any other Participating Generator, Generating Unit or, if applicable, Participating Load, but the ISO shall not have the authority to direct the MSS Operator to adjust the operation of the individual resources that make up the System Unit to comply with directives issued with respect to the System Unit.

Issued by: Charles F. Robinson, Vice President and General Counsel

23.15.5 When and to the extent that Energy from a System Unit is scheduled to provide for the needs of Loads within the MSS and is not being bid to the ISO's Ancillary Service or Supplemental Energy markets, the ISO shall have the authority to dispatch the System Unit only to avert or respond to a circumstance described in the third sentence of Section 5.1.3 or, pursuant to Section 5.6, to a System Emergency.

23.16 MSS Settlements

- 23.16.1 The ISO will assess the Scheduling Coordinator for the MSS the neutrality adjustments and Existing Contracts cash neutrality charges pursuant to Section 11.2.9 (or collect refunds therefore) based on the net metered Demand and exports of the MSS.
- 23.16.2 If the ISO is charging Scheduling Coordinators for summer reliability or demand programs, the MSS Operator may petition the ISO for an exemption of these charges. If the MSS Operator provides documentation to the ISO by November 1 of any year demonstrating that the MSS Operator has secured generating capacity for the following calendar year at least equal to one hundred and fifteen percent (115%), on an annual basis, of the peak Demand responsibility of the MSS Operator, the ISO shall grant the exemption. Eligible generating capacity for such a demonstration may include on-demand rights to Energy, peaking resources, and Demand reduction programs. The peak Demand responsibility of the MSS Operator shall be equal to the annual peak Demand Forecast of the MSS Load plus any firm power sales by the MSS Operator, less interruptible Loads, and less any firm power purchases. Firm power for the purposes of this Section 23.16.2 shall be Energy that is intended to be available to the purchaser without being subject to interruption or curtailment by the supplier except for Uncontrollable Forces or emergency. To the extent that the MSS Operator demonstrates that it has secured generating capacity in accordance with this Section 23.16.2, the Scheduling

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 2970 Superseding First Revised Sheet No. 2970

Coordinator for the MSS Operator shall not be obligated to bear any share of the ISO's costs for any summer Demand reduction program or for any summer reliability Generation procurement program pursuant to ISO Tariff Section 2.3.5.1.8 for the calendar year for which the demonstration is made.

23.16.3 If the ISO is compensating Generating Units for Emissions Costs, Start-Up Fuel Costs and Minimum Load Costs, and if MSS Operator charges the ISO for the Emissions Costs, Start-Up Fuel Costs and Minimum Load Costs, of the Generating Units serving the Load of the MSS, then the Scheduling Coordinator for the MSS shall bear its proportionate share of the total amount of those costs incurred by the ISO based on the MSS gross metered Demand and exports and the Generating Units shall be made available to the ISO through the submittal of Supplemental Energy bids. If the MSS Operator chooses not to charge the ISO for the Emissions Costs, Start-Up Fuel Costs and Minimum Load Costs of the Generating Units serving the Load of the MSS, then the Scheduling Coordinator for the MSS shall bear its proportionate share of the total amount of those costs incurred by the ISO based on the MSS's net metered Demand and exports. The MSS Operator shall make the election whether to charge the ISO for these costs on an annual basis on November 1 for the following calendar year.

23.16.4 The Scheduling Coordinator for the MSS shall be responsible for Transmission
Losses, in accordance with the ISO Tariff, only within the MSS, at any points of interconnection
between the MSS and the ISO Controlled Grid, and for the delivery of Energy to the MSS or from the
MSS, provided the MSS Operator fulfills its obligation to provide for Transmission Losses on the
transmission facilities forming part of the MSS. A Generation Meter Multiplier shall be assigned to the
Generating Units on the MSS at the Points of Interconnection for use of the ISO Controlled Grid. That
GMM shall be 1.0 for all Generating Units within the MSS that are located at or behind a Point of
Interconnection, to the extent that the Load at the Point of Interconnection for that portion of the MSS
exceeds the amount of Generation produced by the Generating Units connected to that portion of the
MSS, except that a GMM shall be calculated by the ISO for

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 297P Superseding Original Sheet No. 297P

Energy produced pursuant to a Dispatch instruction from the ISO.

23.16.5 If the MSS Operator has elected to follow its Load in accordance with Section

23.12, then the MSS is not eligible to receive bid cost recovery as provided for in Section

11.2.4.1.1.1 and the Scheduling Coordinator for the MSS shall be allocated costs associated

with bid cost recovery on a net Metered Demand basis. If the MSS Operator has elected to not

follow its Load in accordance with Section 23.12, then the MSS is eligible to receive bid cost

recovery as provided for in Section 11.2.4.1.1.1, if applicable, subject to resource-specific

performance review, and the Scheduling Coordinator for the MSS shall be allocated costs

associated with bid cost recovery on a gross metered Demand basis.

24. [NOT USED]

25. [NOT USED]

26. TEMPORARY CHANGES TO ANCILLARY SERVICES PENALTIES

26.1 Application and Termination

The temporary change, respecting Ancillary Services penalties, set out in Section 26.2 shall

continue in effect until such time as the Chief Executive Officer of the ISO issues a Notice of

Full-Scale Operations, posted on the ISO Internet "Home Page", at http://www.caiso.com, or

such other Internet address as the ISO may publish from time to time, specifying the date on

which this Section 26 shall cease to apply, which date shall be not less than seven (7) days

after the Notice of Full-Scale Operations is issued.

26.2 For so long as this Section 26.2 remains in effect, Scheduling Coordinators shall not be

liable for the penalties specified in Section 2.5.26 of the ISO Tariff if, as a result of limitations

associated with the ISO's Congestion Management software, the scheduled output of the

resource from which the Scheduling Coordinator has committed to provide an Ancillary Service

is adjusted by the ISO to a level that conflicts with the Scheduling Coordinator's Ancillary

Service capacity commitments, thereby resulting in a failed availability test.

27. TEMPORARY RULE LIMITING ADJUSTMENT BIDS APPLICABLE TO DISPATCHABLE LOADS AND EXPORTS

27.1 Application and Termination

The temporary change limiting Adjustment Bids for Dispatchable Loads and exports set out in Section 27.2 shall continue in effect until such time as the Chief Executive Officer of the ISO posts a notice ("Notice of Full-Scale Operations"), on the ISO Home Page specifying the date on

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Fifth Revised Sheet No. 298 Superseding Fourth Revised Sheet No. 298

which this Section 27 shall cease to apply, which date shall not be less than seven (7) days after the Notice of Full-Scale Operations is posted.

27.2 For so long as this Section 27.2 remains in effect, Scheduling Coordinators shall continue to be allowed to specify Adjustment Bids for Dispatchable Loads and exports, conditioned on the rule that the last segment of the Adjustment Bid (i.e., the maximum MW value) must equal the preferred MW operating point specified for the Dispatchable Load or export.

28. RULES LIMITING CERTAIN ENERGY AND ANCILLARY SERVICE BIDS

28.1 Damage Control Bid Cap

- 28.1 Notwithstanding any other provision of this ISO Tariff, Damage Control Bid Cap provisions of Section 28.1.2 and 28.1.3 shall apply to the ISO's Energy and Ancillary Service capacity markets.
- 28.1.2 Maximum Bid Level. The maximum bid level shall be \$250/MWh. Market

 Participants may submit bids above \$250/MWh, however, any accepted bids above this cap are not eligible to set the Market Clearing Price and are subject to cost-justification and refund.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 29, 2002 Effective: October 30, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 298A Superseding Second Revised Sheet No. 298A

28.1.3 Negative Decremental Energy Bids

Negative decremental Energy bids into the ISO Markets less than -\$30/MWh (minus thirty dollars per MWh) shall not be eligible to set any Market Clearing Price and, if Dispatched, shall be paid as bid. If the ISO Dispatches a bid below -\$30/MWh, the supplier must submit a detailed breakdown of the component costs justifying the bid to the ISO and to the Federal Energy Regulatory Commission no later than seven (7) days after the end of the month in which the bid was submitted. The ISO will treat such information as confidential and will apply the procedures in Section 20.3.4 of this ISO Tariff with regard to requests for disclosure of such information. The ISO shall pay suppliers for amounts in excess of \$-30/MWh after those amounts have been justified.

- 29. [NOT USED]
- 30. YEAR 2000 COMPLIANCE

30.1 Y2K Compliance

"Y2K Compliance" or "Y2K Compliant" means hardware, software, firmware, or other systems or processes (hereafter "systems and processes") that correctly manage, calculate, compare and sequence date data from, into and between the 20th and 21st centuries, including leap year calculations, without human intervention. Y2K Compliant systems and processes must utilize input and output date formats that are compatible with the ISO's systems and processes, must conform to the International Organization for Standardization ISO 8601:1988 standards for representation of dates and must not cause incorrect date calculations.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 30, 2002

30.2 Responsibility for Y2K Compliance

It is the sole responsibility of each Market Participant or other entity that interfaces with the ISO's systems and processes to ensure that the entity's interfacing systems or processes are Y2K Compliant. The ISO will provide joint Y2K test opportunities to ensure interoperability between the ISO systems and external systems that interface with the ISO (e.g., Scheduling Coordinators, and other entities). This proactive test program is an opportunity to minimize the possibilities of transmitting Y2K related erroneous data to the ISO. Participation in this testing program is voluntary, and not a requirement.

30.3 Disconnection of Non-Y2K Compliant Systems and Processes

In order to protect and maintain the integrity of the ISO's systems and processes, the ISO shall have the authority to immediately disconnect the systems or processes of any Scheduling Coordinator or other entity that is believed by the ISO to be passing Y2K related erroneous data; i.e., data from systems and processes that do not meet the Section 30.1 standards for Y2K Compliance. The ISO will immediately notify the disconnected Scheduling Coordinator or other entity of the reason for the action taken by the ISO. The ISO shall permit such Scheduling Coordinator or other entity to reestablish interfaces with the ISO after receiving and approving documented test results showing that the disconnected systems or processes are Y2K Compliant and would not otherwise adversely affect the ISO's systems and processes. The ISO will review and approve or reject documented test results within two (2) Business Days of their receipt. The ISO will reconnect the entity within one (1) Business Day of the ISO's approval.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 1, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 299A

31. RELATIONSHIP BETWEEN ISO AND SUDCS.

31.1 General Nature of Relationship Between ISO and SUDCs.

31.1.1 The ISO shall not be obliged to accept Schedules, Adjustment Bids or bids for Ancillary

Services which would require Energy to be transmitted to or from the Distribution System of a SUDC

directly connected to the ISO Controlled Grid unless the relevant SUDC has entered into a SUDC

Operating Agreement. The SUDC Operating Agreement shall require SUDCs to comply with the

applicable provisions of this Section 31 and any other expressly applicable Sections of this ISO Tariff

and the ISO Protocols, as they may be amended from time to time. The ISO shall maintain a pro

forma SUDC Operating Agreement available for SUDCs to enter into with the ISO.

31.1.2 The ISO shall operate the ISO Control Area and the ISO Controlled Grid and each SUDC shall

operate its Distribution System at all times in accordance with Good Utility Practice and in a manner

which ensures safe and reliable operation. The ISO shall, in respect of its obligations set forth in this

Section 31, have the right by mutual agreement to delegate certain operational responsibilities to the

relevant Participating TO or SUDC pursuant to this Section 31. All information made available to

SUDCs by the ISO shall also be made available to Scheduling Coordinators. Any information,

pertaining to the physical state, operation, maintenance or failure of the SUDC Distribution System that

may cause a material adverse affect to the operation of the ISO Controlled Grid, that is made available

to the ISO by the SUDC shall also be made available to Scheduling Coordinators upon receipt of

reasonable notice.

31.2 Coordinating Maintenance Outages of SUDC Facilities.

Each SUDC and the Participating TO with which it is interconnected shall coordinate their Outage

requirements with respect to their transmission interconnection facilities prior to the submission by that

Participating TO of its maintenance Outage requirements under Section 2.3.3.

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 299B

31.3 SUDC Responsibilities.

Recognizing the ISO's duty to ensure efficient use and reliable operation of the ISO Control Area and

the ISO Controlled Grid consistent with the Applicable Reliability Criteria, each SUDC shall:

31.3.1 operate and maintain its Distribution System in accordance with applicable reliability

standards, statutes and regulations, and Good Utility Practice so as to avoid any material adverse

impact on the reliability of the ISO Control Area and the ISO Controlled Grid;

31.3.2 provide the ISO Outage Coordination Office each year with a schedule of upcoming

maintenance on its transmission interconnection facilities with the ISO Controlled Grid that has a

reasonable potential of causing a material adverse impact to the reliability of the ISO Controlled Grid.

31.4 System Emergencies.

31.4.1 In the event of a System Emergency, SUDCs shall comply with all directions from the ISO

concerning the management and alleviation of the System Emergency and shall comply with all

procedures concerning SUDCs for System Emergencies set out in the individual SUDC Operating

Agreements.

31.4.2 During a System Emergency, the ISO and SUDCs shall communicate in accordance with

procedures established in individual SUDC operating agreements.

31.5 Load Reduction.

31.5.1 If the ISO declares a Stage 1 System Emergency, the SUDC shall use any reasonably

available local communication infrastructure to request that its customers curtail their electricity usage.

The SUDC shall not be called separately in Stage 3 System Emergencies to manually shed Load.

Load restoration of any voluntary Load reduction will occur once the ISO declares that a System

Emergency no longer exists.

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 299C

31.5.2 If the Participating TO sheds the SUDC Load associated with the Participating TO's

transmission facilities, the Participating TO will provide timely information and work with the SUDC

regarding SUDC Load restoration.

31.6 System Emergency Reports: SUDC Obligations.

31.6.1 Each SUDC shall maintain all appropriate records pertaining to a System Emergency in

accordance with the SUDC's then-existing record retention practice or policy, provided the records are

kept for a minimum of six (6) years.

31.6.2 In accordance with its SUDC Operating Agreement, each SUDC shall provide available

information to the ISO regarding the ISO's preparation of an Outage review.

31.7 Coordination of Expansion or Modifications to SUDC Facilities.

Each SUDC and the Participating TO with which it is interconnected shall coordinate in the planning

and implementation of any expansion or modifications of a SUDC's or Participating TO's system that

will materially affect the reliability of their transmission interconnection facilities, the ISO Controlled

Grid or the transmission services to be required by the SUDC. The Participating TO shall be

responsible for coordinating with the ISO.

31.8 Information Sharing.

31.8.1 System Planning Studies.

The ISO, Participating TOs and SUDCs shall share available information such as projected SUDC

Load growth and SUDC system expansions necessary for the ISO or the Participating TOs to conduct

necessary system planning studies to the extent that such SUDC Load growth or SUDC system

expansions will materially impact the operation of the ISO Control Area and the ISO Controlled Grid.

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 299D

31.8.2 System Surveys and Inspections.

The ISO, each UDC and each SUDC shall cooperate, to the extent economically feasible for the

SUDC, in performing system surveys and inspections regarding the operation of the ISO Control Area

and the ISO Controlled Grid.

31.8.3 Reports.

31.8.3.1 The ISO shall make available to the SUDCs any public annual reviews or reports

regarding performance standards, measurements and incentives relating to the ISO Control Area and

the ISO Controlled Grid and shall also make available, upon reasonable notice, any such reports that

the ISO receives from the Participating TOs. Each SUDC shall make available to the ISO upon

request any public annual reviews or reports regarding performance standards, measurements and

incentives relating to the SUDC's Distribution System to the extent these relate to the operation of the

ISO Control Area and the ISO Controlled Grid.

31.8.3.2 The ISO and SUDCs shall develop an operating procedure for the ISO to record

requests received from the SUDC for Maintenance Outages and the completion of the requested

maintenance and turnaround times.

31.9 Installation of Equipment on and Rights of Access to SUDC Facilities.

31.9.1 Installation of Facilities.

The ISO and the SUDC shall each have the right on reasonable notice to install or to have installed

equipment (including metering equipment) or other facilities on the property of the other, to the extent

that such installation is necessary for the installing party to meet its service obligations unless to do so

would have a negative impact on the reliability of the service provided by the party owning the

property. The ISO and the SUDC shall enter into agreements governing the installation of such

equipment or other facilities containing customary, reasonable terms and conditions.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 25, 2005

Effective: May 26, 2005

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 299E

31.9.2 Access to Facilities.

The SUDCs shall grant, free of charge, the ISO reasonable access to SUDC facilities for purposes of

inspection, repair, maintenance, or upgrading of facilities installed by the ISO on the SUDC's system,

provided that the ISO must provide reasonable advance notice of its intent to access SUDC facilities

and opportunity for SUDC staff to be present. Such access shall not be provided unless the parties

mutually agree to the date, time and purpose of each access. Agreement on the terms of the access

shall not be unreasonably withheld.

31.9.3 Access During Emergencies.

Notwithstanding any provision in this Section 31 the ISO may have access, without giving prior notice,

to any SUDC's equipment or other facilities during times of a System Emergency.

31.9.4 Access For Audit Functions.

Notwithstanding any provision in this Section 31 the ISO may have access, without giving prior notice,

to any SUDC's equipment or other facilities where the ISO has a reasonable basis to believe the SUDC

has failed to comply with the SUDC Operating Agreement, applicable ISO Tariff or ISO Protocol

provisions and access is required to conduct an audit to gather relevant facts.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 300

ISO TARIFF APPENDIX A

Master Definitions Supplement

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000 CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Substitute Thir

FIRST REPLACEMENT VOLUME NO. I

Substitute Third Revised Sheet No. 301 Superseding Second Revised Sheet No. 301

Access Charge

A charge paid by all UDCs and MSS Operators with Gross Load in a PTO Service Territory, as set forth in Section 7.1. The Access Charge includes the High Voltage Access Charge, the Transition Charge and the Low Voltage Access Charge. The Access Charge will recover the Participating TO's Transmission

Revenue Requirement in accordance with Appendix F,

Schedule 3.

Active Zone

The Zones so identified in Appendix I to the ISO Tariff.

Adjustment Bid

A bid in the form of a curve defined by (i) the minimum MW

output to which a Scheduling Coordinator will permit a resource

(Generating Unit or Dispatchable Load) included in its Schedule

or, in the case of an inter-Scheduling Coordinator trade,

included in its Schedule or the Schedule of another Scheduling

Coordinator, to be redispatched by the ISO; (ii) the maximum

MW output to which a Scheduling Coordinator will permit the

resource included in its Schedule or, in the case of an inter-

Scheduling Coordinator trade, included in its Schedule or the

Schedule of another Scheduling Coordinator, to be redispatched

by the ISO; (iii) up to a specified number of MW values in

between; (iv) a preferred MW operating point; and (v) for the

ranges between each of the MW values greater than the

preferred operating point, corresponding prices (in \$/MWh) for

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 21, 2004 Effective: May 8, 2004

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Administrative Price

Substitute Second Revised Sheet No. 302 Superseding First Revised Sheet No. 302

which the Scheduling Coordinator is willing to increase the output of the resource and sell Energy from that resource to the ISO (or, in the case of a Dispatchable Load, decrease the Demand); and (vi) for the ranges between each of the MW values less than the preferred operating point, corresponding prices (in \$/MWh) for which the Scheduling Coordinator is willing to decrease the output of the resource and purchase Energy from the ISO at the resource's location (or, in the case of a Dispatchable Load, increase the Demand). This data for an

Adjustment Bid must result in a monotonically increasing curve.

The price set by the ISO in place of a Market Clearing Price when, by reason of a System Emergency, the ISO determines

that it no longer has the ability to maintain reliable operation of

the ISO Controlled Grid relying solely on the economic Dispatch

of Generation. This price will remain in effect until the ISO

considers that the System Emergency has been contained and

corrected.

Adverse System Impact The negative effects due to technical or operational limits on

conductors or equipment being exceeded that may compromise

the safety and reliability of the electric system.

Affected System An electric system other than the ISO Controlled Grid that may

be affected by the proposed interconnection, including the

Participating TOs' electric systems that are not part of the ISO

Controlled Grid.

Affected System Operator The entity that operates an Affected System.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Substitute Original Sheet No. 302A

Affiliate

An entity, company or person that directly, or indirectly through one or more intermediaries, controls, or is controlled by, or is under common control with the subject entity, company, or person.

AGC (Automatic Generation Control)

Generation equipment that automatically responds to signals from the ISO's EMS control in real time to control the power output of electric generators within a prescribed area in response to a change in system frequency, tie-line loading, or the relation of these to each other, so as to maintain the target system frequency and/or the established interchange with other areas within the predetermined limits.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 303 Superseding First Revised Sheet No. 303

A Notice issued by the ISO when the operating requirements of

the ISO Controlled Grid are marginal because of Demand

exceeding forecast, loss of major Generation, or loss of

transmission capacity that has curtailed imports into the ISO

Control Area, or if the Hour-Ahead Market is short on

scheduled Energy and Ancillary Services for the ISO Control

Area.

Ancillary Services Regulation, Spinning Reserve, Non-Spinning Reserve,

Replacement Reserve, Voltage Support and Black Start

together with such other interconnected operation services as

the ISO may develop in cooperation with Market Participants to

support the transmission of Energy from Generation resources

to Loads while maintaining reliable operation of the ISO

Controlled Grid in accordance with Good Utility Practice.

<u>Ancillary Service Provider</u> A Participating Generator or Participating Load who is eligible

to provide an Ancillary Serviced.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: January 1, 2002

FERC ELECTRIC TARIFF Second Revised Sheet No. 303A

FIRST REPLACEMENT VOLUME NO. I

Superseding First Revised Sheet No. 303A

Applicable Reliability

<u>Criteria</u>

The reliability standards established by NERC, WECC, and

Local Reliability Criteria as amended from time to time,

including any requirements of the NRC.

Applicants Pacific Gas and Electric Company, San Diego Gas & Electric

Company, and Southern California Edison Company and any

others as applicable.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: January 1, 2004 CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
First Revised Sheet No. 304
FIRST REPLACEMENT VOLUME NO. I
Superseding Original Sheet No. 304

Approved Credit Rating

With respect to whether security must be posted for payment of the Grid Management Charge:

- (a) A short-term taxable commercial paper debt rating of not less than any one of the following: (i) A1 by Standard and Poor's Corporation; (ii) F1 by Fitch Ratings; or (iii) P1 by Moody's Investors Service. This rating shall be an issuer, or counterpart rating, without the benefit of credit enhancement.
- (b) A short-term tax exempt commercial paper debt rating of not less than any one of the following: (i) A1 by Standard and Poor's Corporation; (ii) V1 by Fitch Ratings; or (iii) VMIG1 by Moody's Investors Service. This rating shall be an issuer, or counterparty rating, without the benefit of credit enhancement.

With respect to whether security must be posted for payment of all charges other than the Grid Management Charge:

- (c) A short-term tax exempt commercial paper debt rating of not less than any one of the following: (i) A2 by Standard and Poor's Corporation; (ii) F2 by Fitch Ratings; or (iii) P2 by Moody's Investors Service. This rating shall be an issuer, or counterparty rating, without the benefit of credit enhancement.
- (d) A short-term tax exempt commercial paper debt rating of not less than any one of the following: (i) A2 by Standard and Poor's Corporation; (ii) V2 by Fitch Ratings; or (iii) VMIG2 by Moody's Investors Service. This rating shall be an issuer, or counterparty rating, without the benefit of credit

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

enhancement.

(e) A long-term debt rating of not less than any one of the following: (i) A- by Standard and Poor's Corporation; (ii) A- by

Fitch Ratings; or (iii) A3 by Moody's Investors Service. This

rating shall be an issuer, or counterparty rating, without the

benefit of credit enhancement.

With respect to whether security must be posted for payment of

all charges:

(f) A federal agency shall be deemed to have an Approved

Credit Rating if its financial obligations under

the ISO Tariff are backed by the full faith and credit of the

United States.

(g) A California state agency shall be deemed to have an

Approved Credit Rating if its financial obligations under the ISO

Tariff are backed by the full faith and credit of the State of

California.

(h) Another credit rating approved by the ISO Governing

Board.

Approved Load Profile Local Regulatory Authority approved Load profiles applied to

cumulative End-Use Meter Data in order to allocate

consumption of Energy to Settlement Periods.

Approved Maintenance

Outage

A Maintenance Outage which has been approved by the ISO

through the ISO Outage Coordination Office.

Automatic Mitigation Procedure (AMP)

The market power mitigation procedure described in MMIP

Appendix A.

FERC ELECTRIC TARIFF
Third Revised Sheet No. 306

FIRST REPLACEMENT VOLUME NO. I Superseding Second Revised Sheet No. 306

Available Transfer

Capacity

For a given transmission path, the capacity rating in MW of the

path established consistent with ISO and WECC transmission

capacity rating guidelines, less any reserved uses applicable to

the path.

Balanced Schedule A Schedule shall be deemed balanced when Generation,

adjusted for Transmission Losses equals forecast Demand with

respect to all entities for which a Scheduling Coordinator

schedules.

Balancing Account An account set up to allow periodic balancing of financial

transactions that, in the normal course of business, do not

result in a zero balance of cash inflows and outflows.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

FERC ELECTRIC TARIFF
Fourth Revised Sheet No. 307

FIRST REPLACEMENT VOLUME NO. I Superseding Third Revised Sheet No. 307

Black Start The procedure by which a Generating Unit self-starts without

an external source of electricity thereby restoring power to the

ISO Controlled Grid following system or local area blackouts.

Black Start Generator

A Participating Generator in its capacity as party to an Interim

Black Start Agreement with the ISO for the provision of Black

Start services, but shall exclude Participating Generators in

their capacity as providers of Black Start services under their

Reliability Must-Run Contracts.

Bulk Supply Point A UDC metering point.

Business Day Monday through Friday, excluding federal holidays and the

day after Thanksgiving Day.

<u>C.F.R.</u> Code of Federal Regulations.

<u>Calendar Day</u> Any day including Saturday, Sunday or a federal holiday.

<u>Circular Schedule</u> A Schedule or set of Schedules that creates a closed loop of

Energy Schedules between the ISO Controlled Grid and one or

more other Control Areas that do not have a source and sink in

separate Control Areas, which includes Energy scheduled in a

counter direction over a Congested Inter-Zonal Interface

through two or more Scheduling Points. A closed loop of

Energy Schedules that includes a transmission segment on the

Pacific DC Intertie shall not be a Circular Schedule because

such a Schedule directly changes power flows on the network

and can mitigate Congestion between SP15 and NP15. This

definition of a Circular Schedule does not apply to the

circumstance in which a Scheduling Coordinator submits a

Schedule that is an amalgam of different Market Participants'

separate but simultaneously submitted Schedules.

<u>Clustering</u> The process whereby a group of Interconnection Requests is

Issued by: Charles F. Robinson, Vice President and General Counsel

studied together, instead of serially, for the purpose of conducting the Interconnection System Impact Study.

<u>Commercial Operation</u> The status of a Generating Unit at a Generating Facility that

has commenced generating electricity for sale, excluding

electricity generated during Trial Operation.

Commercial Operation
Date

The date on which a Generating Unit at a Generating Facility commences Commercial Operation as agreed to by the applicable Participating TO and the Interconnection Customer pursuant to Appendix E to the Standard Large Generator Interconnection Agreement.

Congestion A condition that occurs when there is insufficient Available

Transfer Capacity to implement all Preferred Schedules simultaneously or, in real time, to serve all Generation and Demand. "Congested" shall be construed accordingly.

<u>Congestion Management</u> The alleviation of Congestion in accordance with Applicable

ISO Protocols and Good Utility Practice.

Congestion Management Charge

The component of the Grid Management Charge that provides for the recovery of the ISO's costs of operating the Congestion Management process including, but not limited to, the management and operation of Inter-Zonal Congestion markets, Adjustment Bids, taking Firm Transmission Rights and Existing Contracts into account, and determining the price for mitigating Congestion for flows on Congested paths. The formula for determining the Congestion Management Charge is set forth in Appendix F, Schedule 1, Part A of this Tariff.

Effective: July 1, 2005

Issued by: Charles F. Robinson Issued on: January 1, 2005

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Substitute Fourth Revised Sheet No. 308 Superseding Third Revised Sheet No. 308

Connected Entity A Participating TO or any party that owns or operates facilities that

are electrically interconnected with the ISO Controlled Grid.

Constrained Output

Generation

Generating resources with only two viable operating states: (a) off-

line or (b) operating at their maximum output level.

<u>Constraints</u> Physical and operational limitations on the transfer of electrical

power through transmission facilities.

Contingency Disconnection or separation, planned or forced, of one or more

components from an electrical system.

Control Area An electric power system (or combination of electric power

systems) to which a common AGC scheme is applied in order to: i)

match, at all times, the power output of the Generating Units within

the electric power system(s), plus the Energy purchased from

entities outside the electric power system(s), minus Energy sold to

entities outside the electric power system, with the Demand within

the electric power system(s); ii) maintain scheduled interchange

with other Control Areas, within the limits of Good Utility Practice;

iii) maintain the frequency of the electric power system(s) within

reasonable limits in accordance with Good Utility Practice; and iv)

provide sufficient generating capacity to maintain operating

reserves in accordance with Good Utility Practice.

Control Area Gross Load For the purpose of calculating and billing Minimum Load Costs,

Emission Costs Charge and Start-Up Fuel Costs Charge, Control

Area Gross Load is all Demand for Energy within the ISO Control

Area. Control Area Gross Load shall not include Energy consumed

by:

Issued by: Charles Robinson, Vice President and General Counsel

Issued on: June 17, 2004 Effective: Upon Notice On or After May 1, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Original Sheet No. 308.01

FIRST REPLACEMENT VOLUME NO. I

generator auxiliary Load equipment that is dedicated to the (a) production of Energy and is electrically connected at the same point as the Generating Unit (e.g., auxiliary Load

equipment that is served via a distribution line

Issued by: Charles Robinson, Vice President and General Counsel

Issued on: March 19, 2004 Effective: Upon Notice On or After May 1, 2004 FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Third Revised Sheet No. 308A

Superseding Second Revised Sheet No. 308A

that is separate from the switchyard to which the
Generating Unit is connected will not be considered to
be electrically connected at the same point); and

(b) Load that is isolated electrically from the ISO Control Area (i.e., Load that is not synchronized with the ISO Control Area).

Converted Rights

Those transmission service rights as defined in Section 2.4.4.2.1 of the ISO Tariff.

<u>Core Reliability Services -</u> Demand Charge

A component of the Grid Management Charge that provides for the recovery of the ISO's costs of providing a basic, non-scalable level of reliable operation for the ISO Control Area and meeting regional and national reliability requirements. The formula for determining the Core Reliability Services – Demand Charge is set forth in Appendix F, Schedule 1, Part A of this Tariff.

<u>Core Reliability Services –</u> <u>Energy Export Charge</u>

A component of the Grid Management Charge that provides for the recovery of the ISO's costs of providing a basic, non-scalable level of reliable operation for the ISO Control Area and meeting regional and national reliability requirements. The formula for determining the Core Reliability Services – Energy Exports Charge is set forth in Appendix F, Schedule 1, Part A of this Tariff.

CPUC

The California Public Utilities Commission, or its successor.

Issued on: July 29, 2004 Effective: January 1, 2004

FERC ELECTRIC TARIFF Fourth Revised Sheet No. 309
FIRST REPLACEMENT VOLUME NO. I Superseding Third Revised Sheet No. 309

<u>Critical Protective System</u> Facilities and sites with protective relay systems and Remedial

Action Schemes that the ISO determines may have a direct

impact on the ability of the ISO to maintain system security and

over which the ISO exercises Operational Control.

<u>CTC (Competition</u>

Transition Charge)

A non-bypassable charge that is the mechanism that the

California Legislature and the CPUC mandated to permit

recovery of costs stranded as a result of the shift to the new

market structure.

<u>Curtailable Demand</u> Demand from a Participating Load that can be curtailed at the

direction of the ISO in the real-time Dispatch of the ISO

Controlled Grid. Scheduling Coordinators with Curtailable

Demand may offer it to the ISO to meet Non-Spinning Reserve

or Replacement Reserve requirements.

<u>Day-Ahead</u> Relating to a Day-Ahead Market or Day-Ahead Schedule.

<u>Day-Ahead Market</u> The forward market for Energy and Ancillary Services to be

supplied during the Settlement Periods of a particular Trading

Day that is conducted by the ISO and other Scheduling

Coordinators and which closes with the ISO's acceptance of

the Final Day-Ahead Schedule.

<u>Day-Ahead Schedule</u>
A Schedule prepared by a Scheduling Coordinator or the ISO

before the beginning of a Trading Day indicating the levels of

Generation and Demand scheduled for each Settlement Period

of that Trading Day.

<u>Default GMM</u> Pre calculated GMM based on historical Load and interchange

levels.

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

Third Revised Sheet No. 310 Superseding Second Revised Sheet No. 310

Deliverability Assessment

An evaluation by the Participating TO, ISO or a third party consultant for the Interconnection Customer to determine a list of facilities, the cost of those facilities, and the time required to construct these facilities, that would ensure a Large Generating Facility could provide Energy to the ISO Controlled Grid at peak load, under a variety of severely stressed conditions, such that the aggregate of Generation in the local area can be

consistent with the ISO's reliability criteria and procedures.

delivered to the aggregate of Load on the ISO Controlled Grid,

Delivery Network Upgrades

Transmission facilities at or beyond the Point of Interconnection, other than Reliability Network Upgrades, identified in the Interconnection Studies to relieve constraints on the ISO Controlled Grid.

Delivery Point

Coordinators is deemed to take place. It can be either the Generation input point, a Demand Take-Out Point, or a transmission bus at some intermediate location.

The point where a transaction between Scheduling

Demand

The rate at which Energy is delivered to Loads and Scheduling Points by Generation, transmission or distribution facilities. It is the product of voltage and the in-phase component of alternating current measured in units of watts or standard multiples thereof, e.g., 1,000W=1kW, 1,000kW=1MW, etc.

Demand Forecast

An estimate of Demand over a designated period of time.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF
Substitute First Revised Sheet No. 310A
FIRST REPLACEMENT VOLUME NO. I
Superseding Original Sheet No. 310A

<u>Direct Access Demand</u> The Demand of Direct Access End-Users.

<u>Direct Access End-User</u> An Eligible Customer located within the Service Area of a UDC

who purchases Energy and Ancillary Services through a

Scheduling Coordinator.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Sixth Revised Sheet No. 311 Superseding Fifth Revised Sheet No. 311

Dispatch

The operating control of an integrated electric system to:

i) assign specific Generating Units and other sources of supply

to effect the supply to meet the relevant area Demand taken as

Load rises or falls; ii) control operations and maintenance of

high voltage lines, substations, and equipment, including

administration of safety procedures; iii) operate

interconnections; iv) manage Energy transactions with other

interconnected Control Areas; and v) curtail Demand.

<u>Dispatch Instruction</u> An instruction by the ISO to a resource for increasing or

decreasing its energy supply or demand from the Hour-Ahead

Schedule to a specified operating point.

Dispatch IntervalThe time period, which may range between five (5) and thirty

(30) minutes, over which the ISO's RTD Software measures

deviations in Generation and Demand, and selects Ancillary

Service and Supplemental Energy resources to provide

balancing Energy in response to such deviations. The

Dispatch Interval shall be five (5) minutes. Following a

decision by the ISO Governing Board, the ISO may, by seven

(7) days' notice published on the ISO's Home Page, at

http://www.caiso.com (or such other internet address as the

ISO may publish from time to time), increase or decrease the

Dispatch Interval within the range of five (5) to thirty (30)

minutes.

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

First Revised Sheet No. 311.01

FIRST REPLACEMENT VOLUME NO. I

Superseding Original Sheet No. 311.01

<u>Dispatch Interval Ex Post</u> <u>Prices</u> The price of Imbalance Energy determined each Dispatch
Interval based on 1) the Imbalance Energy requirements in that
Dispatch Interval, and 2) the Energy Bid price of the resource
eligible to set the price. The Dispatch Interval Ex Post Price is
used to determine other prices used to settle Imbalance
Energy.

Dispatch Operating Point

The expected operating point of a resource that has received a Dispatch Instruction. The resource is expected to operate at the Dispatch Operating Point after completing the Dispatch Instruction, taking into account any relevant ramp rate and time delays. Energy expected to be produced or consumed above or below the Final Hour-Ahead Schedule in response to a Dispatch Instruction constitutes Instructed Imbalance Energy. For resources that have not received a Dispatch Instruction, the Dispatch Operating Point defaults to the corresponding Final Hour-Ahead Schedule.

Dispatchable Load

Load which is the subject of an Adjustment Bid.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

FERC ELECTRIC TARIFF Fifth Revised Sheet No. 311A

FIRST REPLACEMENT VOLUME NO. I Superseding Fourth Revised Sheet No. 311A

<u>Distribution System</u> The distribution assets of an IOU or Local Publicly Owned

Electric Utility.

<u>Distribution Upgrades</u> The additions, modifications, and upgrades to the Participating

TO's electric systems that are not part of the ISO Controlled

Grid. Distribution Upgrades do not include Interconnection

Facilities.

EEP (Electrical Emergency Plan)

A plan to be developed by the ISO in consultation with UDCs to

address situations when Energy reserve margins are forecast

to be below established levels.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF

Third Revised Sheet No. 312

FIRST REPLACEMENT VOLUME NO. I

Superseding Sub. Second Revised Sheet No. 312

Eligible Customer

(i) any utility (including Participating TOs, Market Participants and any power marketer), Federal power marketing agency, or any person generating Energy for sale or resale; Energy sold or produced by such entity may be Energy produced in the United States, Canada or Mexico; however, such entity is not eligible for transmission service that would be prohibited by Section 212(h)(2) of the Federal Power Act; and (ii) any retail customer taking unbundled transmission service pursuant to a state retail access program or pursuant to a voluntary offer of unbundled

Eligible Intermittent

Resource

A Generating Unit that is powered solely by 1) wind, 2) solar

retail transmission service by the Participating TO.

energy, or 3) hydroelectric potential derived from small conduit

water distribution facilities that do not have storage capability.

Emissions Cost Charge

The charge determined in accordance with Section 2.5.23.3.6

Emissions Cost Demand

The level of Demand specified in Section 2.5.23.3.6.3

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: November 23, 2002

FERC ELECTRIC TARIFF First Revised Sheet No. 312A

FIRST REPLACEMENT VOLUME NO. I Superseding Original Sheet No. 312A

Emissions Cost Invoice The invoice submitted to the ISO in accordance with Section

2.5.23.3.6.6.

Emissions Cost Trust

Account

The trust account established in accordance with Section

2.5.23.3.6.2.

Emissions Costs The mitigation fees, excluding capital costs, assessed against a

Generating Unit by a state or federal agency, including air quality

districts, for exceeding applicable NOx emissions limitations.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: June 21, 2001 FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 313 Superseding Original Sheet No. 313

EMS (Energy Management System)

A computer control system used by electric utility dispatchers to monitor the real-time performance of the various elements of an electric system and to control Generation and transmission facilities.

Encumbrance

A legal restriction or covenant binding on a Participating TO that affects the operation of any transmission lines or associated facilities and which the ISO needs to take into account in exercising Operational Control over such transmission lines or associated facilities if the Participating TO is not to risk incurring significant liability. Encumbrances shall include Existing Contracts and may include: (1) other legal restrictions or covenants meeting the definition of Encumbrance and arising under other arrangements entered into before the ISO Operations Date, if any; and (2) legal restrictions or covenants meeting the definition of Encumbrance and arising under a contract or other arrangement entered into after the ISO Operations Date.

End-Use Customer or End-User A consumer of electric power who consumes such power to satisfy a Load directly connected to the ISO Controlled Grid or to a Distribution System and who does not resell the power.

End-Use Meter Data

Meter Data that measures the Energy consumption in respect of End-Users gathered, edited and validated by Scheduling Coordinators and submitted to the ISO in Settlement quality form.

End-Use Meter

A metering device collecting Meter Data with respect to the Energy consumption of an End-User.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 8, 2004

FERC ELECTRIC TARIFF Fourth Revised Sheet No. 314
FIRST REPLACEMENT VOLUME NO. I Superseding Third Revised Sheet No. 314

Energy The electrical energy produced, flowing or supplied by

generation, transmission or distribution facilities, being the

integral with respect to time of the instantaneous power,

measured in units of watt-hours or standard multiples thereof,

e.g., 1,000 Wh=1kWh, 1,000 kWh=1MWh, etc.

Energy Bid The price at or above which a Generator has agreed to produce

the next increment of Energy.

Energy Transmission Services Net Energy Charge The component of the Grid Management Charge that provides,

in conjunction with the Energy Transmission Services

Uninstructed Deviations Charge, for the recovery of the ISO's

costs of providing reliability on a scalable basis, i.e., a function of

the intensity of the use of the transmission system within the

Control Area and the occurrence of system outages and

disruptions. The formula for determining the Energy

Transmission Services Net Energy Charge is set forth in

Appendix F, Schedule 1, Part A of this Tariff.

Energy Transmission
Services Uninstructed
Deviations Charge

The component of the Grid Management Charge that provides,

in conjunction with the Energy Transmission Services Net

Energy Charge, for the recovery of the ISO's costs of providing

reliability on a scalable basis, in particular for the costs

associated with balancing transmission flows that result from

uninstructed deviations. The formula for determining the Energy

Transmission Services Uninstructed Deviations Charge is set

forth in Appendix F, Schedule 1, Part A of this Tariff.

Engineering & Procurement (E&P)
Agreement

An agreement that authorizes the Participating TO to begin

engineering and procurement of long lead-time items necessary

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF Third Revised Sheet No. 314A
FIRST REPLACEMENT VOLUME NO. I Superseding Second Revised Sheet No. 314A

for the establishment of the interconnection in order to advance

the implementation of the Interconnection Request.

Energy Export For purposes of calculating the Grid Management Charge,

Energy included in an interchange Schedule submitted to the

ISO, or dispatched by the ISO, to serve a Load located outside

the ISO's Control Area, whether the Energy is produced by a

Generator in the ISO Control Area or a resource located

outside the ISO's Control Area.

Entitlements The right of a Participating TO obtained through contract or

other means to use another entity's transmission facilities for

the transmission of Energy.

Environmental Dispatch Dispatch designed to meet the requirements of air quality and

other environmental legislation and environmental agencies

having authority or jurisdiction over the ISO.

Ex Post GMM GMM that is calculated utilizing the real-time Power Flow

Model in accordance with Section 7.4.2.1.2.

Ex Post Price The Hourly Ex Post Price, the Dispatch Interval Ex Post Price,

the Resource-Specific Settlement Interval Ex Post Price, or the

Zonal Settlement Interval Ex Post Price.

Ex Post Transmission

Loss

Transmission Loss that is calculated based on Ex Post GMM.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF Fourth Revised Sheet No. 315

FIRST REPLACEMENT VOLUME NO. I Superseding Third Revised Sheet No. 315

Existing Contracts The contracts which grant transmission service rights in

existence on the ISO Operations Date (including any contracts

entered into pursuant to such contracts) as may be amended in

accordance with their terms or by agreement between the

parties thereto from time to time.

Existing High Voltage

Facility

A High Voltage Transmission Facility of a Participating TO that

was placed in service on or before the Transition Date defined

in Section 4.2 of Schedule 3 of Appendix F.

Existing Rights Those transmission service rights defined in Section 2.4.4.1.1

of the ISO Tariff.

Facility Owner An entity owning transmission, Generation, or distribution

facilities connected to the ISO Controlled Grid.

Facility Study An engineering study conducted by a Participating TO to

determine required modifications to the Participating TO's

transmission system, including the cost and scheduled

completion date for such modifications that will be required to

provide needed services.

Facility Study Agreement An agreement between a Participating TO and either a Market

Participant, Project Sponsor, or identified principal beneficiaries

pursuant to which the Market Participants, Project Sponsor,

and identified principal beneficiaries agree to reimburse the

Participating TO for the cost of a Facility Study.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF Third Revised Sheet No. 315A

FIRST REPLACEMENT VOLUME NO. I Superseding Second Revised Sheet No. 315A

FERC The Federal Energy Regulatory Commission or its successor.

FERC Annual ChargesThose charges assessed against a public utility by the FERC

pursuant to 18 C.F.R. § 382.201 and any related statutes or

regulations, as they may be amended from time to time.

FERC Annual Charge Recovery Rate

The rate to be paid by Scheduling Coordinators for recovery of

FERC Annual Charges assessed against the ISO for

transactions on the ISO Controlled Grid.

FERC Annual Charge Trust Account An account to be established by the ISO for the purpose of

maintaining funds collected from Scheduling Coordinators for

FERC Annual Charges and disbursing such funds to the

FERC.

Final Day-Ahead Schedule The Day-Ahead Schedule which has been approved as

feasible and consistent with all other Schedules by the ISO

based upon the ISO's Day-Ahead Congestion Management

procedures.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: June 1, 2003

FERC ELECTRIC TARIFF Second Revised Sheet No. 316

FIRST REPLACEMENT VOLUME NO. I Superseding First Revised Sheet No. 316

Final Hour-Ahead

Schedule

been approved by the ISO as feasible and consistent with all

been approved by the 130 as leasible and consistent with all

The Hour-Ahead Schedule of Generation and Demand that has

other Schedules based on the ISO's Hour-Ahead Congestion

Management procedures.

Final Invoice The invoice due from a RMR Owner to the ISO at termination

of the RMR Contract.

Final Schedule A Schedule developed by the ISO following receipt of a

Revised Schedule from a Scheduling Coordinator.

Final Settlement Statement

The restatement or recalculation of the Preliminary Settlement

Statement by the ISO following the issue of that Preliminary

Settlement Statement.

Forbidden Operating

Region

The operating region of a resource wherein the resource

cannot operate in a stable manner and must ramp through at

maximum ramp capacity.

Forced Outage An Outage for which sufficient notice cannot be given to allow

the Outage to be factored into the Day-Ahead Market or Hour-

Ahead Market scheduling processes.

Forward Scheduling

Charge

The component of the Grid Management Charge that provides

for the recovery of the ISO's costs, including, but not limited to

the costs of providing the ability to Scheduling Coordinators to

forward schedule Energy and Ancillary Services and the cost of

processing accepted Ancillary Service bids. For purposes of

the Forward Scheduling Charge, a schedule is represented by

each Final Hour-Ahead Schedule with a value other than 0 MW

submitted to the scheduling infrastructure/scheduling

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF First Revised Sheet No. 316A

Superseding Original Sheet No. 316A

FIRST REPLACEMENT VOLUME NO. I application system (import, export, Load, Generation, inter-

not have an FTR.

Scheduling Coordinator trade, and Ancillary Services, including

self-provided Ancillary Services) submitted to the ISO's

scheduling infrastructure. The formula for determining the

Forward Scheduling Charge is set forth in Appendix F,

Schedule 1, Part A of this Tariff.

Parts II and III of the Federal Power Act, 16 U.S.C. § 824 et

seq., as they may be amended from time to time.

FTR (Firm Transmission Right)

FPA

A contractual right, subject to the terms and conditions of the ISO Tariff, that entitles the FTR Holder to receive, for each hour of the term of the FTR, a portion of the Usage Charges received by the ISO for transportation of energy from a specific originating Zone to a specific receiving Zone and, in the event of an uneconomic curtailment to manage Day-Ahead Congestion, to a Day-Ahead scheduling priority higher than that of a Schedule using Converted Rights capacity that does

FERC ELECTRIC TARIFF

Second Revised Sheet No. 317

FURCH PERIA CEMENT VOLUME NO. 1

FIRST REPLACEMENT VOLUME NO. I Superseding Sub. First Sheet No. 317

FTR Bidder An entity that submits a bid in an FTR auction conducted by the

ISO in accordance with Section 9.4 of the ISO Tariff.

FTR Holder The owner of an FTR, as registered with the ISO.

FTR Market A transmission path from an originating Zone to a contiguous

receiving Zone for which FTRs are auctioned by the ISO in

accordance with Section 9.4 of the ISO Tariff.

Full Marginal Loss Rate A rate calculated by the ISO for each Generation and

Scheduling Point location to determine the effect on total

system Transmission Losses of injecting an increment of

Generation at each such location to serve an equivalent

incremental MW of Demand distributed proportionately

throughout the ISO Control Area.

Generating Facility An Interconnection Customer's Generating Unit(s) used for the

production of electricity identified in the Interconnection

Request, but shall not include the Interconnection Customer's

Interconnection Facilities.

Generating Facility
The capacity of the Generating Facility and the aggregate
Capacity

capacity of the Generating Facility where it includes multiple

energy production devices.

Generating Unit An individual electric generator and its associated plant and

apparatus whose electrical output is capable of being

separately identified and metered or a Physical Scheduling

Plant that, in either case, is:

(a) located within the ISO Control Area;

(b) connected to the ISO Controlled Grid, either directly or

via interconnected transmission, or distribution

facilities; and

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 30, 2005 Effective: July 1, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 317A

Effective: July 1, 2005

(c) that is capable of producing and delivering net Energy(Energy in excess of a generating station's internal power requirements).

Generation

Energy delivered from a Generating Unit.

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

FERC ELECTRIC TARIFF Third Revised Sheet No. 318

FIRST REPLACEMENT VOLUME NO. I Superseding Second Revised Sheet No. 318

Generator The seller of Energy or Ancillary Services produced by a

Generating Unit.

GMM (Generation Meter

Multiplier)

A number which when multiplied by a Generating Unit's

Metered Quantity will give the total Demand to be served from

that Generating Unit.

Good Utility Practice Any of the practices, methods, and acts engaged in or

approved by a significant portion of the electric utility industry

during the relevant time period, or any of the practices,

methods, and acts which, in the exercise of reasonable

judgment in light of the facts known at the time the decision

was made, could have been expected to accomplish the

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 318A

desired result at a reasonable cost consistent with good business practices, reliability, safety, and expedition. Good Utility Practice is not intended to be any one of a number of the optimum practices, methods, or acts to the exclusion of all others, but rather to be acceptable practices, methods, or acts generally accepted in the region

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: April 2, 2001 Effective: June 1, 2001

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Superseding Substitute Fourth Revised Sheet No. 319

Grid Management Charge

Fifth Revised Sheet No. 319

The ISO monthly charge on all Scheduling Coordinators that provides

for the recovery of the ISO's costs listed in Section 8.2 through the

eight service charges described in Section 8.3 calculated in

accordance with the formula rate set forth in Appendix F, Schedule 1,

Part A of this Tariff. The eight charges that comprise the Grid

Management Charge consist of: 1) the Core Reliability Services -

Demand Charge, 2) the Core Reliability Services – Energy Exports

Charge, 3) the Energy Transmission Services Net Energy Charge,

4) the Energy Transmission Services Uninstructed Deviations

Charge, 5) the Forward Scheduling Charge, 6) the Congestion

Management Charge, 7) the Market Usage Charge, and 8) the

Settlements, Metering, and Client Relations Charge.

Grid Operations Charge An ISO charge that recovers Redispatch costs incurred due to Intra-

Zonal Congestion in each Zone. These charges will be paid to the

ISO by the Scheduling Coordinators, in proportion to their metered

Demand within, and metered exports from, the Zone to a neighboring

Control Area.

Gross Load For the purposes of calculating the transmission Access Charge,

Gross Load is all Energy (adjusted for distribution losses) delivered

for the supply of End-Use Customer Loads directly connected to the

transmission facilities or directly connected to the Distribution

System of a UDC or MSS Operator located in a PTO Service

Territory. Gross Load shall exclude Load with respect to which the

Wheeling Access Charge is payable and the portion of the Load of

an individual retail customer of a UDC or MSS Operator that is

served by a Generating Unit that: (a) is located on the customer's

site or provides service to the customers site through arrangements

as authorized by Section 218

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2004 Effective: May 8, 2004 CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 319A

of the California Public Utilities Code; (b) is a qualifying small power production facility or qualifying cogeneration facility, as those terms are defined in the FERC's regulations implementing Section 201 of the Public Utility Regulatory Policies Act of 1978; and

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 31, 2003 Effective: January 1, 2004

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 320 Superseding First Revised Sheet No. 320

(c) secures Standby Service from a Participating TO under terms approved by a Local Regulatory Authority or FERC, as applicable, or can be curtailed concurrently with an outage of the Generating Unit serving the Load. Gross Load forecasts consistent with filed TRR will be provided by each Participating TO to the ISO.

High Voltage Access
Charge

The Access Charge applicable under Section 7.1 to recover the High Voltage Transmission Revenue Requirements of each Participating TO in a TAC Area.

High Voltage Transmission Facility A transmission facility that is owned by a Participating TO or to which a Participating TO has an Entitlement that is represented by a Converted Right, that is under the ISO Operational Control, and that operates at a voltage at or above 200 kilovolts, and supporting facilities, and the costs of which are not directly assigned to one or more specific customers.

High Voltage Transmission Revenue Requirement The portion of a Participating TO's TRR associated with and allocable to the Participating TO's High Voltage Transmission Facilities and Converted Rights associated with High Voltage Transmission Facilities that are under the ISO Operational Control.

Effective: June 1, 2003

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2003

FERC ELECTRIC TARIFF First Revised Sheet No. 321

FIRST REPLACEMENT VOLUME NO. I

Superseding Original Sheet No. 321

High Voltage Wheeling

Access Charge

The Wheeling Access Charge associated with the recovery of a

Participating TO's High Voltage Transmission Revenue

Requirements in accordance with Section 7.1.

Hour-Ahead Relating to an Hour-Ahead Market or an Hour-Ahead

Schedule.

<u>Hour-Ahead Market</u> The forward market for Energy and Ancillary Services to be

supplied during a particular Settlement Period that is conducted

by the ISO and other Scheduling Coordinators which opens

after the ISO's acceptance of the Final Day-Ahead Schedule

for the Trading Day in which the Settlement Period falls and

closes with the ISO's acceptance of the Final Hour-Ahead

Schedule.

before the beginning of a Settlement Period indicating the

changes to the levels of Generation and Demand scheduled for

that Settlement Period from that shown in the Final Day-Ahead

Schedule.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Fourth Revised Sheet No. 322 Superseding Third Revised Sheet No. 322

Hourly Ex Post Price The Energy-weighted average of the Dispatch Interval Ex Post

Prices in each Zone during each Settlement Period. The

Hourly Ex Post Price will vary between Zones when

Congestion is present. This price is used in the Regulation

Energy Payment Adjustment and in RMR settlements.

Hourly Pre-Dispatch The process in which the ISO Dispatches Energy Bids from

System Resources before the start of the next Settlement

Period for the entire duration of that Settlement Period.

<u>Hydro Spill Generation</u> Hydro-electric Generation in existence prior to the ISO

Operations Date that: i) has no storage capacity and that, if

backed down, would spill; ii) has exceeded its storage capacity

and is spilling even though the generators are at full output, or

iii) has inadequate storage capacity to prevent loss of hydro-

electric Energy either immediately or during the forecast period,

if hydro-electric Generation is reduced; iv) has increased

regulated water output to avoid an impending spill.

<u>Identification Code</u> An identification number assigned to each Scheduling

Coordinator by the ISO.

Imbalance Energy is Energy from Regulation, Spinning and

Non-Spinning Reserves, or Replacement Reserve, or Energy

from other Generating Units, System Units, System Resources,

or Loads that are able to respond to the ISO's request for more

or less Energy.

Inactive Zone All Zones which the ISO Governing Board has determined do

not have a workably competitive Generation market and as set

out in Appendix I to the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

FERC ELECTRIC TARIFF
First Revised Sheet No. 323

FIRST REPLACEMENT VOLUME NO. I Superseding First Revised Sheet No. 323

Incremental Change The change in dollar value of a specific charge type from the

Preliminary Settlement Statement to the Final Settlement

Statement including any new charge types or Trading Day

charges appearing for the first time on the Final Settlement

Statement.

<u>In-Service Date</u> The date upon which the Interconnection Customer reasonably

expects it will be ready to begin use of the Participating TO

Interconnection Facilities to obtain back feed power.

Instructed Imbalance Energy

The real-time change in Generation output or Demand (from

dispatchable Generating Units, System Units, System

Resources or Loads) which is instructed by the ISO to ensure

that reliability of the ISO Control Area is maintained in

accordance with Applicable Reliability Criteria. Sources of

Imbalance Energy include Spinning and Non-Spinning

Reserves, Replacement Reserve, and Energy from other

dispatchable Generating Units, System Units, System

Resources or Loads that are able to respond to the ISO's

request for more or less Energy.

Inter-Scheduling Coordinator Ancillary Service Trades

Ancillary Service transactions between Scheduling

Coordinators.

Inter-Scheduling Coordinator Energy Trades Energy transactions between Scheduling Coordinators.

Inter-Zonal Congestion

Congestion across an Inter-Zonal Interface.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Second Revised Sheet No. 324
FIRST REPLACEMENT VOLUME NO. I
Superseding First Revised Sheet No. 324

Inter-Zonal Interface

The (i) group of transmission paths between two adjacent Zones of the ISO Controlled Grid, for which a physical, non-simultaneous transmission capacity rating (the rating of the interface) has been established or will be established prior to the use of the interface for Congestion Management; (ii) the group of transmission paths between an ISO Zone and an adjacent Scheduling Point, for which a physical, non-simultaneous transmission capacity rating (the rating of the interface) has been established or will be established prior to the use of the interface for Congestion Management; or (iii) the group of transmission paths between two adjacent Scheduling Points, where the group of paths has an established transfer capability and established transmission rights.

Interconnection

Transmission facilities, other than additions or replacements to existing facilities that: i) connect one system to another system where the facilities emerge from one and only one substation of the two systems and are functionally separate from the ISO Controlled Grid facilities such that the facilities are, or can be, operated and planned as a single facility; or ii) are identified as radial transmission lines pursuant to contract; or iii) produce Generation at a single point on the ISO Controlled Grid; provided that such interconnection does not include facilities that, if not owned by the Participating TO, would result in a reduction in the ISO's Operational Control of the Participating TO's portion of the ISO Controlled Grid.

Issued by: Charles F. Robinson, Vice Presdient and General Counsel

Issued on: November 2, 2001 Effective: January 1, 2002

FERC ELECTRIC TARIFF Second Revised Sheet No. 325

FIRST REPLACEMENT VOLUME NO. I Superseding Second Revised Sheet No. 325

Interconnection A contract between a party requesting interconnection and the Agreement

Participating TO that owns the transmission facility with which

the requesting party wishes to interconnect.

Interconnection Customer Any entity, including a Participating TO or any of its Affiliates or

subsidiaries, that proposes to interconnect its Generating

Facility with the ISO Controlled Grid.

<u>Interconnection</u>

Customer's

Interconnection Facilities

All facilities and equipment, as identified in Appendix A of the

Standard Large Generator Interconnection Agreement, that are

located between the Generating Facility and the Point of

Change of Ownership, including any modification, addition, or

upgrades to such facilities and equipment necessary to

physically and electrically interconnect the Generating Facility

to the ISO Controlled Grid. Interconnection Customer's

Interconnection Facilities are sole use facilities.

Interconnection Facilities The Participating TO's Interconnection Facilities and the

Interconnection Customer's Interconnection Facilities.

Collectively, Interconnection Facilities include all facilities and

equipment between the Generating Facility and the Point of

Interconnection, including any modification, additions or

upgrades that are necessary to physically and electrically

interconnect the Generating Facility to the ISO Controlled Grid.

Interconnection Facilities are sole use facilities and shall not

include Distribution Upgrades, Stand Alone Network Upgrades

or Network Upgrades.

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Sheet No. 325A Superseding Original Sheet No. 325A

Interconnection Facilities Study

A study conducted by the Participating TO(s), ISO, or a third party consultant for the Interconnection Customer to determine a list of facilities (including the Participating TO's Interconnection Facilities, Network Upgrades, and Distribution Upgrades), the cost of those facilities, and the time required to interconnect the Generating Facility with the ISO Controlled Grid. The scope of the study is defined in Section 8 of the Standard Large Generator Interconnection Procedures.

Interconnection Facilities Study Agreement

The form of agreement accepted by FERC and posted on the ISO Home Page for conducting the Interconnection Facilities Study.

Interconnection Feasibility Study

A preliminary evaluation conducted by the Participating TO(s), ISO, or a third party consultant for the Interconnection

Customer of the system impact and cost of interconnecting the Generating Facility to the ISO Controlled Grid, the scope of which is described in Section 6 of the Standard Large

Generator Interconnection Procedures.

Interconnection Feasibility Study Agreement

The form of agreement accepted by FERC and posted on the ISO Home Page for conducting the Interconnection Feasibility Study.

Effective: July 1, 2005

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: January 5, 2005

Interconnection Handbook A handbook, developed by the Participating TO and posted on the Participating TO's web site or otherwise made available by the Participating TO, describing technical and operational requirements for wholesale generators and loads connected to the Participating TO's portion of the ISO Controlled Grid, as such handbook may be modified or superseded from time to time. Participating TO's standards contained in the Interconnection Handbook shall be deemed consistent with Good Utility Practice and Applicable Reliability Criteria. In the event of a conflict between the terms of the LGIP and the terms of the Participating TO's Interconnection Handbook, the terms in the LGIP shall apply.

Interconnection Request

An Interconnection Customer's request, in the form of

Appendix 1 to the Standard Large Generator Interconnection

Procedures, in accordance with Section 5.7.1 of the ISO Tariff.

Interconnection Service

The service provided by the Participating TO and ISO associated with interconnecting the Interconnection Customer's Generating Facility to the ISO Controlled Grid and enabling it to receive electric energy and capacity from the Generating Facility at the Point of Interconnection, pursuant to the terms of the Standard Large Generator Interconnection Agreement, the Participating TO's TO Tariff, and the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 325C

Interconnection Study

Any of the following studies: the Interconnection Feasibility Study, the Interconnection System Impact Study, and the Interconnection Facilities Study described in the Standard Large Generator Interconnection Procedures.

Interconnection System Impact Study An engineering study conducted by the Participating TO(s), ISO, or a third party consultant for the Interconnection Customer that evaluates the impact of the proposed interconnection on the safety and reliability of the ISO Controlled Grid and, if applicable, an Affected System. The study shall identify and detail the system impacts that would result if the Generating Facility were interconnected without project modifications or system modifications, focusing on the Adverse System Impacts identified in the Interconnection Feasibility Study, or to study potential impacts, including but not limited to those identified in the Scoping Meeting as described in the Standard Large Generator Interconnection Procedures.

Interconnection System
Impact Study Agreement

The form of agreement accepted by FERC and posted on the ISO Home Page for conducting the Interconnection System Impact Study.

Interest

Interest shall be calculated in accordance with the methodology specified for interest on refunds in the regulations of FERC at 18 C.F.R. §35.19(a)(2)(iii) (1996). Interest on delinquent amounts shall be calculated from the due date of the bill to the date of payment, except as provided in SABP 6.10.5. When payments are made by mail, bills shall be considered as having been paid on the date of receipt.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I Original Sheet No. 325D

<u>Interruptible Imports</u> Energy sold by a Generator or resource located outside the

ISO Controlled Grid which by contract can be interrupted or

reduced at the discretion of the seller.

<u>Intra-Zonal Congestion</u> Congestion within a Zone.

IOU An investor owned electric utility.

ISO (Independent System The California Independent System Operator Corporation, a

<u>Operator</u>) state chartered, nonprofit corporation that controls the

transmission facilities of all Participating TOs and dispatches

certain Generating Units and Loads.

ISO Account The ISO Clearing Account, the ISO Reserve Account or such

other trust accounts as the ISO deems necessary or

convenient for the purpose of efficiently implementing the funds

transfer system under the ISO Tariff.

<u>ISO ADR Committee</u>

The Committee appointed by the ISO ADR Committee

pursuant to Article IV, Section 3 of the ISO bylaws to perform

functions assigned to the ISO ADR Committee in the ADR

process in Section 13 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 326 Superseding Original Sheet No. 326

ISO ADR ProceduresThe procedures for resolution of disputes or differences set out

in Section 13 of the ISO Tariff, as amended from time to time.

ISO Audit Committee A Committee of the ISO Governing Board appointed pursuant

to Article IV, Section 5 of the ISO bylaws to (1) review the

ISO's annual independent audit (2) report to the ISO Governing

Board on such audit, and (3) to monitor compliance with the

ISO Code of Conduct.

ISO Authorized Inspector A person authorized by the ISO to certify, test, inspect and

audit meters and Metering Facilities (as that term is defined in

the ISO Metering Protocol) in accordance with the procedures

established by the ISO pursuant to the ISO Protocols on

metering.

ISO Bank The bank appointed by the ISO from time to time for the

purposes of operating the Settlement process.

ISO Clearing Account The account in the name of the ISO with the ISO Bank to which

payments are required to be transferred for allocation to ISO

Creditors in accordance with their respective entitlements.

ISO Code of Conduct For employees, the code of conduct for officers, employees

and substantially full-time consultants and contractors of the

ISO as set out in exhibit A to the ISO bylaws; for Governors,

the code of conduct for governors of the ISO as set out in

exhibit B to the ISO bylaws.

ISO Control Area
Balancing Function

<u>a</u> The real-time Dispatch of Generation (and Curtailable

Demand), directed by the ISO, to balance with actual Demand

during the current operating hour to meet operating Reliability

Criteria.

ISO Control Center The Control Center established, pursuant to Section 2.3.1.1 of

the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FERC ELECTRIC TARIFF

Substitute First Revised Sheet No. 327

FIRST REPLACEMENT VOLUME NO. I Superseding Original Sheet No. 327

ISO Controlled Grid

The system of transmission lines and associated facilities of

the Participating TOs that have been placed under the ISO's

Operational Control.

<u>ISO Creditor</u> A Scheduling Coordinator, Participating TO, or other Market

Participant to which amounts are payable under the terms of

the ISO Tariff.

ISO Debtor A Scheduling Coordinator, Participating TO, or other Market

Participant that is required to make a payment to the ISO under

the ISO Tariff.

<u>ISO Documents</u> The ISO Tariff, the ISO Protocols, ISO bylaws, and any

agreement entered into between the ISO and a Scheduling

Coordinator, a Participating TO or any other Market Participant

pursuant to the ISO Tariff.

<u>ISO Governing Board</u> The Board of Governors established to govern the affairs of the

ISO.

<u>ISO Home Page</u> The ISO internet home page at http://www.caiso.com/ or such

other internet address as the ISO shall publish from time to

time.

ISO Invoice The invoices issued by the ISO to the Responsible Utilities or

RMR Owners based on the Revised Estimated RMR Invoice

and the Revised Adjusted RMR Invoice.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: January 15, 2004 Effective: August 9, 2003

FERC ELECTRIC TARIFF

Third Revised Sheet No. 328

FIRST REPLACEMENT VOLUME NO. I

Superseding Sub. Second Revised Sheet No. 328

ISO Market

Any of the markets administered by the ISO under the ISO

Tariff, including, without limitation, Imbalance Energy, Ancillary

Services, and FTRs.

ISO Memorandum Account The memorandum account established by each California IOU

pursuant to California Public Utilities Commission Order

D. 96-08-038 date August 2, 1996 which records all ISO

startup and development costs incurred by that California IOU.

ISO Metered Entity

a) any one of the following entities that is directly

connected to the ISO Controlled Grid:

i. a Generator other than a Generator that sells all of its

Energy (excluding any Energy consumed by auxiliary load

equipment electrically connected to that Generator at the

same point) and Ancillary Services to the UDC in whose

Service Area it is located;

ii. an Eligible Customer; or

iii. an End-User other than an End-User that purchases all of

its Energy from the UDC in whose Service Area it is

located; and

(b) any one of the following entities:

a Participating Generator;

ii. a Participating TO in relation to its Tie Point Meters with

other TOs or Control Areas;

iii. a Participating Load;

iv. a Participating Intermittent Resource; or

v. a utility that requests that UFE for its Service Area be

calculated separately, in relation to its meters at points of

connection of its Service Area with the systems of other

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: November 23, 2002

FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I Substitute Original Sheet No. 328A

utilities.

<u>ISO Operations Date</u> The date on which the ISO first assumes Operational Control of

the ISO Controlled Grid.

ISO Outage Coordination

Office Property of the Contract of the Contrac

The office established by the ISO to coordinate Maintenance

Outages in accordance with Section 2.3.3 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 25, 2003 Effective: November 23, 2002

ISO Payments Calendar A calendar published by the ISO showing the dates on which

Settlement Statements will be published by the ISO and the

Payment Dates by which invoices issued under the ISO Tariff

must be paid.

<u>ISO Protocols</u> The rules, protocols, procedures and standards attached to the

ISO Tariff as Appendix L, promulgated by the ISO (as

amended from time to time) to be complied with by the ISO

Scheduling Coordinators, Participating TOs and all other

Market Participants in relation to the operation of the ISO

Controlled Grid and the participation in the markets for Energy

and Ancillary Services in accordance with the ISO Tariff.

<u>ISO Register</u> The register of all the transmission lines, associated facilities

and other necessary components that are at the relevant time

being subject to the ISO's Operational Control.

ISO Reserve Account

The account established for the purpose of holding cash

deposits which may be used in or towards clearing the ISO

Clearing Account.

ISO Security Amount The level of security provided in accordance with Section

2.2.3.2 of the ISO Tariff by an SC Applicant who does not have

an Approved Credit Rating. The ISO Security Amount may be

separated into two components: (i) the level of security

required to secure payment of the Grid Management Charge;

and (ii) the level of security required to secure payment of all

charges other than the Grid Management Charge.

<u>ISO Tariff</u>
The California Independent System Operator Corporation

Operating Agreement and Tariff, dated March 31, 1997, as it

may be modified from time to time.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

FERC ELECTRIC TARIFF Third Revised Sheet No. 330

FIRST REPLACEMENT VOLUME NO. I Superseding Second Revised Sheet No. 330

ISP (Internet Service

Provider)

An independent network service organization engaged by the

ISO to establish, implement and operate WEnet.

Large Generating Facility A Generating Facility having a Generating Facility Capacity of

more than 20 MW.

Load An end-use device of an End-Use Customer that consumes

power. Load should not be confused with Demand, which is

the measure of power that a Load receives or requires.

Load Shedding The systematic reduction of system Demand by temporarily

decreasing the supply of Energy to Loads in response to

transmission system or area capacity shortages, system

instability, or voltage control considerations.

Local Furnishing Bond Tax-exempt bonds utilized to finance facilities for the local

furnishing of electric energy, as described in section 142(f) of

the Internal Revenue Code, 26 U.S.C. § 142(f).

Local Furnishing Participating TO

Any Tax-Exempt Participating TO that owns facilities financed

by Local Furnishing Bonds.

Local Publicly Owned

Electric Utilities

A municipality or municipal corporation operating as a public

utility furnishing electric service, a municipal utility district

furnishing electric service, a public utility district furnishing

electric services, an irrigation district furnishing electric

services, a state agency or subdivision furnishing electric

services, a rural cooperative furnishing electric services, or a

joint powers authority that includes one or more of these

agencies and that owns Generation or transmission facilities, or

furnishes electric services over its own or its members' electric

Distribution System.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 30, 2005 Effective: July 1, 2005

FERC ELECTRIC TARIFF Second Revised Sheet No. 331

FIRST REPLACEMENT VOLUME NO. I Superseding First Revised Sheet No. 331

Local Regulatory

Authority

The state or local governmental authority responsible for the

regulation or oversight of a utility.

<u>Local Reliability Criteria</u> Reliability Criteria established at the ISO Operations Date,

unique to the transmission systems of each of the Participating

TOs.

<u>Location Code</u> The code assigned by the ISO to Generation input points, and

Demand Take-Out Points from the ISO Controlled Grid, and

transaction points from trades between Scheduling

Coordinators. This will be the information used by the ISO

Controlled Grid, and transaction points for trades between

Scheduling Coordinators. This will be the information used by

the ISO to determine the location of the input, output, and trade

points of Energy Schedules. Each Generation input and

Demand Take-Out Point will have a designated Location Code

identification for use in submitting Energy and Ancillary Service

bids and Schedules.

Loop Flow Energy flow over a transmission system caused by parties

external to that system.

<u>Loss Scale Factor</u> The ratio of expected Transmission Losses to the total

Transmission Losses which would be collected if Full Marginal

Loss Rates were utilized.

Low Voltage Access

Charge

The Access Charge applicable under Section 7.1 to recover the

Low Voltage Transmission Revenue Requirement of a

Participating TO.

Low Voltage

Transmission Facility

A transmission facility owned by a Participating TO or to which

a Participating TO has an Entitlement that is represented by a

Converted Right, which is not a High Voltage Transmission

Facility, that is under the ISO Operational Control.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: January 1, 2003

FERC ELECTRIC TARIFF

Sixth Revised Sheet No. 332

FIRST REPLACEMENT VOLUME NO. I Superseding Fifth Revised Sheet No. 332

Low Voltage Transmission Revenue Requirement The portion of a Participating TO's TRR associated with and allocable to the Participating TO's Low Voltage Transmission Facilities and Converted Rights associated with Low Voltage Transmission Facilities that are under the ISO Operational Control.

Low Voltage Wheeling Access Charge

The Wheeling Access Charge associated with the recovery of a Participating TO's Low Voltage Transmission Revenue Requirement in accordance with Section 7.1.

Maintenance Outage

A period of time during which an Operator (i) takes its transmission facilities out of service for the purposes of carrying out routine planned maintenance, or for the purposes of new construction work or for work on de-energized and live transmission facilities (e.g., relay maintenance or insulator washing) and associated equipment; or (ii) limits the capability of or takes its Generating Unit or System Unit out of service for the purposes of carrying out routine planned maintenance, or for the purposes of new construction work.

Issued on: March 11, 2004 Effective: January 1, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I Original Sheet No. 332A

Market Clearing Price The price in a market at which supply equals Demand. All

Demand prepared to pay at least this price has been satisfied

and all supply prepared to operate at or below this price has

been purchased.

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: May 11, 2001 Effective: May 29, 2001

FERC ELECTRIC TARIFF

Third Revised Sheet No. 333

FIRST REPLACEMENT VOLUME NO. I Superseding Second Revised Sheet No. 333

<u>Market Participant</u> An entity, including a Scheduling Coordinator, who participates

in the Energy marketplace through the buying, selling,

transmission, or distribution of Energy or Ancillary Services

into, out of, or through the ISO Controlled Grid.

Market Usage Charge The component of the Grid Management Charge that provides

for the recovery of the ISO's costs, including, but not limited to

the costs for processing Supplemental Energy and Ancillary

Service bids, maintaining the Open Access Same-Time

Information System, monitoring market performance, ensuring

generator compliance with market protocols, and determining

Market Clearing Prices. The formula for determining the Market

Usage Charge is set forth in Appendix F, Schedule 1, Part A of

this Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 31, 2003 Effective: January 1, 2004

FERC ELECTRIC TARIFF Fourth Revised Sheet No. 333A

FIRST REPLACEMENT VOLUME NO. I Superseding Fourth Revised Sheet No. 333A

Master File A file containing information regarding Generating Units, Loads

and other resources.

Material Modification Those modifications that have a material impact on the cost or

timing of any Interconnection Request or any other valid

interconnection request with a later queue priority date.

Meter Data Energy usage data collected by a metering device or as may

be otherwise derived by the use of Approved Load Profiles.

Meter Points Locations on the ISO Controlled Grid at which the ISO requires

the collection of Meter Data by a metering device.

Metered Control Area Load

For purposes of calculating and billing the Grid Management

Charge, Metered Control Area Load is:

(a) all metered Demand for Energy of Scheduling Coordinators

for the supply of Loads in the ISO's Control Area, plus (b) all

Energy for exports by Scheduling Coordinators from the ISO

Control Area; less (c) Energy associated with the Load of a

retail customer of a Scheduling Coordinator, UDC, or MSS that

is served by a Generating Unit that: (i) is located on the same

site as the customer's Load or provides service to the

customer's Load through arrangements as authorized by

Section 218 of the California Public Utilities Code; (ii) is a

qualifying small power production facility or qualifying

cogeneration facility, as those terms are defined in FERC's

regulations implementing Section 201 of the Public Utility

Regulatory Policies Act of 1978; and (iii) the customer secures

Standby Service from a Participating TO under terms approved

by a Local Regulatory Authority or FERC, as applicable, or the

customer's Load can be curtailed concurrently with an outage

of the Generating Unit.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Firs

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 333B Superseding Original Sheet No. 333B

Metered Quantities For each Direct Access End-User, the actual metered amount

of MWh and MW; for each Participating Generator the actual

metered amounts of MWh, MW, MVAr and MVArh.

<u>Minimum Load Costs</u> The costs a Generating Unit incurs operating at minimum load.

Monthly Peak Load The maximum hourly Demand on a Participating TO's

transmission system for a calendar month, multiplied by the

Operating Reserve Multiplier.

MSS (Metered Subsystem) A geographically contiguous system located within a single

Zone which has been operating as an electric utility for a

number of years prior to the ISO Operations Date as a

municipal utility, water district, irrigation district, State agency or

Federal power administration subsumed within the ISO Control

Area and encompassed by ISO certified revenue quality meters

at each interface point with the ISO Controlled Grid and ISO

certified revenue quality meters on all Generating Units or, if

aggregated, each individual resource and Participating Load

internal to the system, which is operated in accordance with a

MSS Agreement described in Section 23.1.

MSS Operator An entity that owns an MSS and has executed a MSS

Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: January 1, 2004

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Sixth Revised Sheet No. 334 Superseding Fifth Revised Sheet No. 334

Municipal Tax Exempt Debt

An obligation the interest on which is excluded from gross

income for federal tax purposes pursuant to Section 103(a) of

the Internal Revenue Code of 1986 or the corresponding

provisions of prior law without regard to the identity of the

holder thereof. Municipal Tax Exempt Debt does not include

Local Furnishing Bonds.

<u>Must-Offer Generator</u> All entities defined in Section 5.11.1 of the ISO Tariff

Native Load required to be served by a utility within its Service Area

pursuant to applicable law, franchise, or statute.

NERC The North American Electric Reliability Council or its

successor.

Net FTR Revenue The sum of: 1) the revenue received by the New Participating

TO from the sale, auction, or other transfer of the FTRs

provided to it pursuant to Section 9.4.3 FTR, or any

substantively identical successor provision of the ISO Tariff;

and 2) for each hour: a) the Usage Charge revenue received

by the New Participating To associated with its Section 9.4.3

FTRs; minus b) Usage Charges that are: i) incurred by the

Scheduling Coordinator for the New Participating TO under

ISO Tariff Section 7.3.1.4, ii) associated with the New

Participating TO's Section 9.4.3 FTRs, and iii) incurred by the

New Participating TO for its energy transactions but not

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: June 1, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Second Revised Sheet No. 334.01
FIRST REPLACEMENT VOLUME NO. I
Superseding First Revised Sheet No. 334.01

incurred as a result of the use of the transmission by a third-party and minus c) the charges paid by the New Participating TO pursuant to Section 7.3.1.7, to the extent such charges are incurred by the Scheduling Coordinator of the New Participating TO on Congested Inter-Zonal Interfaces that are associated with the Section 9.4.3 FTRs provided to the New Participating TO. The component of New FTR Revenue represented by item 2) immediately above shall not be less than zero for any hour.

Net Negative Uninstructed Deviation

The real-time change in Generation or Demand associated with underscheduled Load (i.e., Load that appears unscheduled in real time) and overscheduled Generation (i.e., Generation that is scheduled in forward markets and does not appear in real time). Deviations are netted for each Settlement Interval, apply to a Scheduling Coordinator's entire portfolio, and include Load, Generation, imports and exports.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

FERC ELECTRIC TARIFF Seventh Revised Sheet No. 334A

FIRST REPLACEMENT VOLUME NO. I Superseding Seventh Revised Sheet No. 334A

Network Upgrades The additions, modifications, and upgrades to the ISO

Controlled Grid required at or beyond the Point of

Interconnection to accommodate the interconnection of the

Large Generating Facility to the ISO Controlled Grid. Network

Upgrades shall consist of Delivery Network Upgrades and

Reliability Network Upgrades.

New High Voltage Facility A High Voltage Transmission Facility of a Participating TO that

is placed in service after the beginning of the transition period

described in Section 4 of Schedule 3 of Appendix F, or a

capital addition made and placed in service after the beginning

of the transition period described in Section 4.2 of Schedule 3

of Appendix F to an Existing High Voltage Facility.

New Participating TOA Participating TO that is not an Original Participating TO.

Nomogram A set of operating or scheduling rules which are used to ensure

that simultaneous operating limits are respected, in order to

meet NERC and WECC operating criteria.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF First Revised Sheet No. 335 Superseding Original Sheet No. 335

FIRST REPLACEMENT VOLUME NO. I

Non-Participating **Generator**

A Generator that is not a Participating Generator.

Non-Participating TO A TO that is not a party to the TCA or for the purposes of

Sections 2.4.3 and 2.4.4 of the ISO Tariff the holder of

transmission service rights under an Existing Contract that is

not a Participating TO.

Non-Spinning Reserve The portion of off-line generating capacity that is capable of

being synchronized and Ramping to a specified load in ten

minutes (or load that is capable of being interrupted in ten

minutes) and that is capable of running (or being interrupted)

for at least two hours.

NRC The Nuclear Regulatory Commission or its successor.

Operating Procedures Procedures governing the operation of the ISO Controlled Grid

as the ISO may from time to time develop, and/or procedures

that Participating TOs currently employ which the ISO adopts

for use.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FERC ELECTRIC TARIFF Third Revised Sheet No. 336

FIRST REPLACEMENT VOLUME NO. I Superseding Third Revised Sheet No. 336

Operating Reserve The combination of Spinning and Non-Spinning Reserve

required to meet WECC and NERC requirements for reliable

operation of the ISO Control Area.

Operating Transfer Capability

The maximum capability of a transmission path to transmit real

power, expressed in MW, at a given point in time.

Operational Control The rights of the ISO under the Transmission Control

Agreement and the ISO Tariff to direct Participating TOs how to

operate their transmission lines and facilities and other electric

plant affecting the reliability of those lines and facilities for the

purpose of affording comparable non-discriminatory

transmission access and meeting Applicable Reliability Criteria.

Operator The operator of facilities that comprise the ISO Controlled Grid

or a Participating Generator.

OPF (Optimal Power Flow) A computer optimization program which uses a set of control

variables (which may include active power and/or reactive

power controls) to determine a steady-state operating condition

for the transmission grid for which a set of system operating

Constraints (which may include active power and/or reactive

power constraints) are satisfied and an objective function (e.g.

total cost or shift of schedules) is minimized.

Optional Interconnection

Study

A sensitivity analysis based on assumptions specified by the

Interconnection Customer in the Optional Interconnection

Study Agreement.

Optional Interconnection

Study Agreement

The form of agreement accepted by FERC and posted on the

ISO Home Page for conducting the Optional Interconnection

Study.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 336A

Order No. 888

The final rule issued by FERC entitled "Promoting Wholesale Competition through Open Access Non- discriminatory Transmission Services by Public Utilities; Recovery of Stranded Costs by Public Utilities and Transmitting Utilities," 61 Fed. Reg. 21,540 (May 10, 1996), FERC Stats. & Regs., Regulations Preambles [1991-1996] ¶ 31,036 (1996), Order on Rehearing, Order No. 888-A, 78 FERC ¶ 61,220 (1997), as it may be amended from time to time

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF Fifth Revised Sheet No. 337

FIRST REPLACEMENT VOLUME NO. I Superseding Fourth Revised Sheet No. 337

Order No. 889 The final rule issued by FERC entitled "Open Access Same-Time

Information System (formerly Real Time Information Networks)

and Standards of Conduct," 61 Fed. Reg. 21,737 (May 10, 1996),

FERC Stats. & Regs., Regulations Preambles [1991-1996] ¶

31,035 (1996), Order on Rehearing, Order No. 889-A, 78 FERC ¶

61,221 (1997), as it may be amended from time to time.

Original Participating TOA Participating TO that was a Participating TO as of January 1,

2000.

Outage Disconnection, separation or reduction in capacity, planned or

forced, of one or more elements of an electric system.

Overgeneration A condition that occurs when total Generation exceeds total

Demand in the ISO Control Area.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

FERC ELECTRIC TARIFF Second Revised Sheet No. 337A

FIRST REPLACEMENT VOLUME NO. I

Superseding First Revised Sheet No. 337A

Participating Buyer A Direct Access End-User or a wholesale buyer of Energy or

Ancillary Services through Scheduling Coordinators.

Participating Intermittent

Resource

One or more Eligible Intermittent Resources that meets the

requirements of the technical standards for Participating

Intermittent Resources adopted by the ISO and published on the

ISO Home Page.

Participating Load An entity providing Curtailable Demand, which has undertaken in

writing to comply with all applicable provisions of the ISO Tariff,

as they may be amended from time to time.

Participating Seller or Participating Generator A Generator or other seller of Energy or Ancillary Services

through a Scheduling Coordinator over the ISO Controlled Grid

from a Generating Unit with a rated capacity of 1 MW or greater,

or from a Generating Unit providing Ancillary Services and/or

submitting Supplemental Energy bids through an aggregation

arrangement approved by the ISO, which has undertaken to be

bound by the terms of the ISO Tariff, in the case of a Generator

through a Participating Generator Agreement.

Participating TO's **Interconnection Facilities** All facilities and equipment owned, controlled, or operated by the

Participating TO from the Point of Change of Ownership to the

Point of Interconnection as identified in Appendix A to the

Standard Large Generator Interconnection Agreement, including

any modifications, additions or upgrades to such facilities and

equipment. Participating TO's Interconnection Facilities are sole

use facilities and shall not include Distribution Upgrades, Stand

Alone Network Upgrades or Network Upgrades.

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
First Revised Sheet No. 338

FIRST REPLACEMENT VOLUME NO. I Superseding Original Sheet No. 338

Participating TO A party to the TCA whose application under Section 2.2 of the

TCA has been accepted and who has placed its transmission

assets and Entitlements under the ISO's Operational Control in

accordance with the TCA. A Participating TO may be an

Original Participating TO or a New Participating TO.

Path 15 Upgrade

The upgraded transmission facilities across the Path 15 Inter-

Zonal Interface that have been turned over to ISO Operational

Control.

Payment Date The date by which invoiced amounts are to be paid under the

terms of the ISO Tariff.

PBR (Performance-Based

Ratemaking)

Regulated rates based in whole or in part on the achievement

of specified performance objectives.

Physical Scheduling Plant A group of two or more related Generating Units, each of which

is individually capable of producing Energy, but which either by

physical necessity or operational design must be operated as if

they were a single Generating Unit and any Generating Unit or

Units containing related multiple generating components which

meet one or more of the following criteria: i) multiple

generating components are related by a common flow of fuel

which cannot be interrupted without a substantial loss of

efficiency of the combined output of all components; ii) the

Energy production from one component necessarily causes

Energy production from other components; iii) the operational

arrangement of related multiple generating components

determines the overall physical efficiency of the combined

output of all components; iv) the level of coordination required

Issued on: September 7, 2004 Effective: November 1, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 338A

to schedule individual generating components would cause the ISO to incur scheduling costs far in excess of the benefits of having scheduled such individual components separately; or

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004 Effective: November 1, 2004

FERC ELECTRIC TARIFF

Second Revised Sheet No. 339

FIRST REPLACEMENT VOLUME NO. I

Superseding Second Revised Sheet No. 339

v) metered output is available only for the combined output of

related multiple generating components and separate

generating component metering is either impractical or

economically inefficient.

PMS (Power Management

System)

The ISO computer control system used to monitor the real-time

performance of the various elements of the ISO Controlled

Grid, control Generation, and perform operational power flow

studies.

Point of Change of Ownership

The point, as set forth in Appendix A to the Standard Large

Generator Interconnection Agreement, where the

Interconnection Customer's Interconnection Facilities connect

to the Participating TO's Interconnection Facilities.

Point of Interconnection The point, as set forth in Appendix A to the Standard Large

Generator Interconnection Agreement, where the

Interconnection Facilities connect to the ISO Controlled Grid.

<u>Power Flow Model</u> The computer software used by the ISO to model the voltages,

power injections and power flows on the ISO Controlled Grid

and determine the expected Transmission Losses and

Generation Meter Multipliers.

Preferred Day-Ahead

Schedule

A Scheduling Coordinator's Preferred Schedule for the ISO

Day-Ahead scheduling process.

Preferred Hour-Ahead

Schedule

A Scheduling Coordinator's Preferred Schedule for the ISO

Hour-Ahead scheduling process.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
First Revised Sheet No. 339A
FIRST REPLACEMENT VOLUME NO. I
Superseding Original Sheet No. 339A

Preferred Schedule

The initial Schedule produced by a Scheduling Coordinator that represents its preferred mix of Generation to meet its Demand. For each Generator, the Schedule will include the quantity of output, details of any Adjustment Bids, and the location of the Generator. For each Load, the Schedule will include the quantity of consumption, details of any Adjustment Bids, and the location of the Load. The Schedule will also specify quantities and location of trades between the Scheduling Coordinator and all other Scheduling Coordinators. The Preferred Schedule will be balanced with respect to Generation, Transmission Losses, Load and trades between Scheduling Coordinators.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF

Substitute Sixth Revised Sheet No. 340

FIRST REPLACEMENT VOLUME NO. I

Superseding Fifth Revised Sheet No. 340

Preliminary Settlement

Statement

The initial statement issued by the ISO of the calculation of the

Settlements and allocation of the charges in respect of all

Settlement Periods covered by the period to which it relates.

Price Overlap The price range of bids for Supplemental Energy or Energy

associated with Ancillary Services bids for any Dispatch

Interval that includes decremental and incremental Energy Bids

where the price of the decremental Energy Bids exceeds the

price of the incremental Energy Bids.

Project Sponsor A Market Participant or group of Market Participants or a

Participating TO that proposes the construction of a

transmission addition or upgrade in accordance with

Section 3.2 of the ISO Tariff.

Proxy Price The value determined for each gas-fired Generating Unit

owned or controlled by a Must-Offer Generator in accordance

with Section 2.5.23.3.4.

PTO Service Territory The area in which an IOU, a Local Public Owned Electric

Utility, or federal power marketing administration that has

turned over its transmission facilities and/or Entitlements to ISO

Operational Control is obligated to provided electric service to

Load. A PTO Service Territory may be comprised of the

Service Areas of more than one Local Public Owned Electric

Utility, if they are operating under an agreement with the ISO

for aggregation of their MSS and their MSS Operator is

designated as the Participating TO.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 21, 2004 Effective: Upon Notice After September 6, 2003

FERC ELECTRIC TARIFF First Revised Sheet No. 341

FIRST REPLACEMENT VOLUME NO. I Superseding First Revised Sheet No. 341

Queue Position The order of a valid Interconnection Request, relative to all

other pending valid Interconnection Requests, that is

established based upon the date and time of receipt of the valid

Interconnection Request by the ISO.

Ramping Changing the loading level of a Generating Unit in a constant

manner over a fixed time (e.g., ramping up or ramping down).

Such changes may be directed by a computer or manual

control.

RAS (Remedial Action Schemes)

Protective systems that typically utilize a combination of

conventional protective relays, computer-based processors,

and telecommunications to accomplish rapid, automated

response to unplanned power system events. Also, details of

RAS logic and any special requirements for arming of RAS

schemes, or changes in RAS programming, that may be

required.

Reactive Power ControlGeneration or other equipment needed to maintain acceptable

voltage levels on the ISO Controlled Grid and to meet reactive

capacity requirements at points of interconnection on the ISO

Controlled Grid.

Real Time Market The competitive generation market controlled and coordinated

by the ISO for arranging real-time Imbalance Energy.

Redispatch The readjustment of scheduled Generation or Demand side

management measures, to relieve Congestion or manage

Energy imbalances.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 341A

Registered Data

Those items of technical data and operating characteristics relating to Generation, transmission or distribution facilities which are identified to the owners of such facilities as being information, supplied in accordance with ISO Protocols, to assist the ISO to maintain reliability of the ISO Controlled Grid and to carry out its functions.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

First Revised Sheet No. 342

FIRST REPLACEMENT VOLUME NO. I

Superseding Original Sheet No. 342

Regulation

The service provided either by Generating Units certified by the ISO as equipped and capable of responding to the ISO's direct digital control signals, or by System Resources that have been certified by the ISO as capable of delivering such service to the ISO Control Area, in an upward and downward direction to match, on a real-time basis, Demand and resources, consistent with established NERC and WECC operating criteria. Regulation is used to control the power output of electric generators within a prescribed area in response to a change in system frequency, tieline loading, or the relation of these to each other so as to maintain the target system frequency and/or the established interchange with other areas within the predetermined limits. Regulation includes both the increase of output by a Generating Unit or System Resource ("Regulation" Up") and the decrease in output by a Generating Unit or System Resource ("Regulation Down"). Regulation Up and Regulation Down are distinct capacity products, with separately stated requirements and Market Clearing Prices in each Settlement Period.

Regulation Energy
Payment Adjustment

The additional value of regulating Energy.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

Regulatory Must-Run Generation

Hydro Spill Generation and Generation which is required to run by applicable Federal or California laws, regulations, or other governing jurisdictional authority. Such requirements include but are not limited to hydrological flow requirements, environmental requirements, such as minimum fish releases, fish pulse releases and water quality requirements, irrigation and water supply requirements of solid waste Generation, or other Generation contracts specified or designated by the jurisdictional regulatory authority as it existed on December 20, 1995, or as revised by Federal or California law or Local Regulatory Authority.

Regulatory Must-Take Generation

Those Generation resources identified by CPUC, or a Local Regulatory Authority, the operation of which is not subject to competition. These resources will be scheduled by the relevant Scheduling Coordinator directly with the ISO on a must-take basis. Regulatory Must-Take Generation includes qualifying facility Generating Units as defined by federal law, nuclear units and pre-existing power purchase contracts with minimum energy take requirements.

Reliability Criteria

Pre-established criteria that are to be followed in order to maintain desired performance of the ISO Controlled Grid under contingency or steady state conditions.

Reliability Must-Run Charge (RMR Charge)

The sum payable by a Responsible Utility to the ISO pursuant to Section 5.2.7 of the ISO Tariff for the costs, net of all applicable credits, incurred under the RMR Contract.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

FERC ELECTRIC TARIFF
Fourth Revised Sheet No. 344

Unit and the ISO.

FIRST REPLACEMENT VOLUME NO. I

Superseding Third Revised Sheet No. 344

Reliability Must-Run
Contract (RMR Contract)

A Must-Run Service Agreement between the owner of an RMR

Reliability Must-Run Generation (RMR Generation) Generation that the ISO determines is required to be on line to meet Applicable Reliability Criteria requirements. This includes

- i) Generation constrained on line to meet NERC and WECC reliability criteria for interconnected systems operation;
- ii) Generation needed to meet Load demand in constrained areas; and iii) Generation needed to be operated to provide voltage or security support of the ISO or a local area.

Reliability Must-Run Unit (RMR Unit)

A Generating Unit which is the subject of a Reliability Must-Run Contract.

Reliability Network
Upgrades

The transmission facilities at or beyond the Point of
Interconnection necessary to interconnect a Large Generating
Facility safely and reliably to the ISO Controlled Grid, which
would not have been necessary but for the interconnection of
the Large Generating Facility, including Network Upgrades
necessary to remedy short circuit or stability problems resulting
from the interconnection of the Large Generating Facility to the
ISO Controlled Grid. Reliability Network Upgrades also
include, consistent with WECC practice, the facilities necessary
to mitigate any adverse impact the Large Generating Facility's
interconnection may have on a path's WECC rating.

Reliability Services Costs

The costs associated with services provided by the ISO: 1) that are deemed by the ISO as necessary to maintain reliable electric service in the ISO Control Area; and 2) whose costs are billed by the ISO to the Participating TO pursuant to the ISO Tariff. Reliability Services Costs include costs charged by the ISO to a Participating TO associated with service provided

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF First Revis

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 344.01 Superseding Original Sheet No. 344.01

under an RMR Contract (Section 5.2.8), local out-of-market

dispatch calls (Section 11.2.4.2.1) and Minimum Load Costs

associated with units committed under the must-offer obligation

for local reliability requirements (Section 5.11.6.1.4)

REMnet The Wide Area Network through which the ISO acquires Meter

Data.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Second Revised Sheet No. 344A
FIRST REPLACEMENT VOLUME NO. I
Superseding Second Revised Sheet No. 344A

Replacement Reserve

Generating capacity that is dedicated to the ISO, capable of starting up if not already operating, being synchronized to the ISO Controlled Grid, and Ramping to a specified operating level within a sixty (60) minute period, the output of which can be continuously maintained for a two hour period. Also, Curtailable Demand that is capable of being curtailed within sixty minutes and that can remain curtailed for two hours.

Resource-Specific
Settlement Interval Ex
Post Price

The Resource-Specific Settlement Interval Ex Post Price will equal the Energy-weighted average of the applicable Dispatch Interval Ex Post Prices for each Settlement Interval taking into account each resource's Instructed Imbalance Energy, except Regulation Energy. The Resource-Specific Settlement Interval Ex Post Price shall apply to those resources that are capable of responding to ISO Dispatch Instructions.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF Substitute Third Revised Sheet No. 345

FIRST REPLACEMENT VOLUME NO. I Superseding Second Revised Sheet No. 345

Responsible Utility The utility which is a party to the TCA in whose PTO Service

Territory the Reliability Must-Run Unit is located or whose PTO

Service Territory is contiguous to the PTO Service Territory in

which a Reliability Must-Run Unit owned by an entity outside of the

ISO Controlled Grid is located.

Revenue Requirement The revenue level required by a utility to cover expenses made on an

investment, while earning a specified rate of return on the investment.

Revised Adjusted RMR

Invoice

The monthly invoice issued by the RMR Owner to the ISO pursuant

to the RMR Contract reflecting any appropriate revisions to the

Adjusted RMR Invoice based on the ISO's validation and actual data

for the billing month.

Revised Estimated RMR

Invoice

The monthly invoice issued by the RMR Owner to the ISO pursuant

to the RMR Contract reflecting appropriate revisions to the Estimated

RMR Invoice based on the ISO's validation of the Estimated RMR

Invoice.

Revised Schedule A Schedule submitted by a Scheduling Coordinator to the ISO

following receipt of the ISO's Suggested Adjusted Schedule.

RMR Owner The provider of services under a Reliability Must-Run Contract.

Real-Time Dispatch (RTD)

Software

The security constrained optimal dispatch and ex post pricing

software used by the ISO to determine which Ancillary Service and

Supplementary Energy resources to Dispatch and to calculate the Ex

Post Prices.

SCADA (Supervisory

Control and Data

Acquisition)

A computer system that allows an electric system operator to

remotely monitor and control elements of an electric system.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 21, 2004 Effective: Upon Notice After September 6, 2003 CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I Original Sheet No. 345A

SC Agreement An agreement between a Scheduling Coordinator and the ISO

whereby the Scheduling Coordinator agrees to comply with all

ISO rules, protocols and instructions, as those rules, protocols

and instructions may be amended from time to time.

SC Applicant An applicant for certification by the ISO as a Scheduling Coordinator.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

FERC ELECTRIC TARIFF First Revised Sheet No. 346

FIRST REPLACEMENT VOLUME NO. I Superseding Original Sheet No. 346

SC Application Form The form specified by the ISO from time to time in which an SC

Applicant must apply to the ISO for certification as a

Scheduling Coordinator.

Scaled Marginal Loss

Rate

A factor calculated by the ISO for a given Generator location

for each hour by multiplying the Full Marginal Loss Rate for

such Generator location by the Loss Scale Factor for the

relevant hour.

Schedule A statement of (i) Demand, including quantity, duration and

Take-Out Points and (ii) Generation, including quantity,

duration, location of Generating Unit, and Transmission

Losses; and (iii) Ancillary Services which will be self-provided,

(if any) submitted by a Scheduling Coordinator to the ISO.

"Schedule" includes Preferred Schedules, Suggested Adjusted

Schedules, Final Schedules and Revised Schedules.

Scheduled Maintenance Maintenance on Participating Generators, TOs and UDC

facilities scheduled more than twenty-four hours in advance.

Scheduling Coordinator An entity certified by the ISO for the purposes of undertaking

the functions specified in Section 2.2.6 of the ISO Tariff.

Scheduling Coordinator

Metered Entity or SC

Metered Entity

A Generator, Eligible Customer or End-User that is not an ISO

Metered Entity.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000 FIRST REPLACEMENT VOLUME NO. I

Fourth Revised Sheet No. 347 Superseding Sub. Third Revised Sheet No. 347

Scheduling Point

A location at which the ISO Controlled Grid is connected, by a

group of transmission paths for which a physical, non-

simultaneous transmission capacity rating has been

established for Congestion Management, to transmission

facilities that are outside the ISO's Operational Control. A

Scheduling Point typically is physically located at an "outside"

boundary of the ISO Controlled Grid (e.g., at the point of

interconnection between a Control Area utility and the ISO

Controlled Grid). For most practical purposes, a Scheduling

Point can be considered to be a Zone that is outside the ISO's

Controlled Grid.

Scoping Meeting The meeting among representatives of the Interconnection

Customer, the applicable Participating TO, and the ISO

conducted for the purpose of discussing alternative

interconnection options, to exchange information including any

transmission data and earlier study evaluations that would be

reasonably expected to impact such interconnection options, to

analyze such information, and to determine the potential

feasible Points of Interconnection.

Security Monitoring The real-time assessment of the ISO Controlled Grid that is

conducted to ensure that the system is operating in a secure

state, and in compliance with all Applicable Reliability Criteria.

<u>Service Area</u> An area in which an IOU or a Local Publicly Owned Electric

Utility is obligated to provide electric service to End-Use

Customers.

<u>Set Point</u> Scheduled operating level for each Generating Unit or other

resource scheduled to run in the Hour-Ahead Schedule.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF

First Revised Sheet No. 348

FIRST REPLACEMENT VOLUME NO. I

Superseding Original Sheet No. 348

Settlement Process of financial settlement for products and services

purchased and sold undertaken by the ISO under Section 11 of

the ISO Tariff. Each Settlement will involve a price and a

quantity.

Settlement Account An Account held at a bank situated in California, designated by

a Scheduling Coordinator or a Participating TO pursuant to the

Scheduling Coordinator's SC Agreement or in the case of a

Participating TO, Section 2.2.1 of the TCA, to which the ISO

shall pay amounts owing to the Scheduling Coordinator or the

Participating TO under the ISO Tariff.

Settlement Interval The time period, which is equal to or a multiple of the Dispatch

Interval, over which the ISO settles deviations in Generation

and Demand from Final Hour-Ahead Schedules.

Settlement Period For all ISO transactions the period beginning at the start of the

hour, and ending at the end of the hour. There are twenty-four

Settlement Periods in each Trading Day, with the exception of

a Trading Day in which there is a change to or from daylight

savings time.

Settlement Quality Meter

Data

Meter Data gathered, edited, validated, and stored in a

settlement-ready format, for Settlement and auditing purposes.

Settlement Statement Either or both of a Preliminary Settlement Statement or Final

Settlement Statement.

Settlement Statement Re-

run

The re-calculation of a Settlement Statement in accordance

with the provisions of the ISO Tariff including any protocol of

the ISO.

Settlements, Metering, and Client Relations

Charge

The component of the Grid Management Charge that provides

for the recovery of the ISO's costs, including, but not limited to

the costs of maintaining customer account data, providing

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 31, 2003 Effective: Upon Notice After September 6, 2003 account information to customers, responding to customer inquiries, calculating market charges, resolving customer disputes, and the costs associated with the ISO's Settlement, billing, and metering activities. Because this is a fixed charge per Scheduling Coordinator ID, costs associated with activities listed above also are allocated to other charges under the Grid Management Charge according to formula set forth in Appendix F, Schedule 1, Part A of this Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 31, 2003 Effective: January 1, 2004

FIRST REPLACEMENT VOLUME NO. I

Fourth Revised Sheet No. 349 Superseding Third Revised Sheet No. 349

Severance Fee

The charge or periodic charge assessed to customers to recover the reasonable uneconomic portion of costs associated with Generation-related assets and obligations, nuclear decommissioning, and capitalized Energy efficiency investment programs approved prior to August 15, 1996 and as defined in the California Assembly Bill No. 1890 approved by the Governor on September 23, 1996.

Site Control

Documentation reasonably demonstrating: (1) ownership of, a leasehold interest in, or a right to develop a site for the purpose of constructing the Generating Facility; (2) an option to purchase or acquire a leasehold site for such purpose; or (3) an exclusivity or other business relationship between Interconnection Customer and the entity having the right to sell, lease or grant Interconnection Customer the right to possess or occupy a site for such purpose.

Scheduling and Logging system for the ISO of California (SLIC) A logging application that allows Market Participants to notify the ISO when a unit's properties change due to physical problems. Users can modify the maximum and minimum output of a unit, as well as the ramping capability of the unit.

Small Generating Facility

A Generating Facility that has a Generating Facility Capacity of no more than 20 MW.

Spinning Reserve

The portion of unloaded synchronized generating capacity that is immediately responsive to system frequency and that is capable of being loaded in ten minutes, and that is capable of running for at least two hours.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 30, 2005 Effective: July 1, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Original Sheet No. 349.00

FIRST REPLACEMENT VOLUME NO. I

Stand Alone Network

Upgrades

Network Upgrades that an Interconnection Customer may

construct without affecting day-to-day operations of the ISO

Controlled Grid or Affected Systems during their construction.

The Participating TO, the ISO, and the Interconnection

Customer must agree as to what constitutes Stand Alone

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 30, 2005 Effective: July 1, 2005

FERC ELECTRIC TARIFF Second Revised Sheet No. 349.01
FIRST REPLACEMENT VOLUME NO. I Superseding First Revised Sheet No. 349.01

Network Upgrades and identify them in Appendix A to the

Standard Large Generator Interconnection Agreement.

Standard Large Generator

Interconnection Agreement (LGIA The form of interconnection agreement applicable to an

Interconnection Request pertaining to a Large Generating

Facility.

Standard Large Generator

Interconnection Procedures (LGIP) The ISO Protocol that sets forth the interconnection procedures

applicable to an Interconnection Request pertaining to a Large

Generating Facility that is included in the ISO Tariff.

Standard Ramp (-ing) A ramp calculated from two consecutive Final Hour Ahead

Schedules that results in a straight trajectory between 10

minutes before the start of an operating hour to 10 minutes

after the start of the operating hour

Standby Rate A rate assessed a Standby Service Customer by the

Participating TO that also provides retail electric service, as

approved by the Local Regulatory Authority, or FERC, as

applicable, for Standby Service which compensates the

Participating TO, among other things, for costs of High Voltage

Transmission Facilities.

<u>Standby Service</u> Service provided by a Participating TO that also provides retail

electric service, which allows a Standby Service Customer,

among other things, access to High Voltage Transmission

Facilities for the delivery of backup power on an instantaneous

basis to ensure that Energy may be reliably delivered to the

Standby Service Customer in the event of an outage of a

Generating Unit serving the customer's Load.

Standby Service Customer

A retail End-Use Customer of a Participating TO that also

provides retail electric service that receives Standby Service

and pays a Standby Rate.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 349.02

Standby Transmission Revenue

The transmission revenues, with respect to cost of both High

Voltage Transmission Facilities and Low Voltage Transmission

Facilities, collected directly from Standby Service Customers

through charges for Standby Service.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF Substitute Fifth Revised Sheet No. 349A

FIRST REPLACEMENT VOLUME NO. I Superseding Fourth Revised Sheet No. 349A

Start-Up Cost Charge The charge determined in accordance with Section 2.5.23.3.7.

Start-Up Cost Demand The level of Demand specified in Section 2.5.23.3.7.3.

The invoice submitted to the ISO in accordance with Section **Start-Up Cost Invoice**

2.5.23.3.7.6.

Start-Up Cost Trust Account

The trust account established in accordance with Section

2.5.23.3.7.2.

Start-Up Costs The cost incurred by a particular Generating Unit from the time

of first fire, the time of receipt of an ISO Dispatch instruction, or

the time the unit was last synchronized to the grid, whichever is

later, until the time the generating unit reaches its minimum

operating level. Start-Up Costs are determined as the sum of

(1) the cost of auxiliary power used during the start-up and (2)

the number that is determined multiplying the actual amount of

fuel consumed by the proxy gas price as determined by

Equation C1-8 (Gas) of the Schedules to the Reliability Must-

Run Contract for the relevant Service Area (San Diego Gas &

Electric Company, Southern California Gas Company, or

Pacific Gas and Electric Company), or, if the Must-Offer

Generator is not served from one of those three Service Areas.

from the nearest of those three Service Areas.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: June 8, 2005 Effective: October 1, 2004 An entity that owns a Distribution System that is capable of transmitting or delivery of Energy to and/or from the ISO Controlled Grid that provides retail electric service to End-Use Customers, and has the following characteristics:

- 1. Annual peak Demand is 25 MW or less;
- The Distribution System is not in a local reliability area defined by the ISO; and
- Good Utility Practice was used in designing all substation facilities that are owned or operated by the entity and interconnected to the ISO Controlled Grid, and none of those substations have transmission circuit breakers.

Suggested Adjusted Schedule

The output of the ISO's initial Congestion Management for each Scheduling Coordinator for the Day-Ahead Market ("Suggested Adjusted Day-Ahead Schedule") or for the Hour-Ahead Market ("Suggested Adjusted Hour-Ahead Schedule"). These Schedules will reflect ISO suggested adjustments to each Scheduling Coordinator's Preferred Schedule to resolve Inter-Zonal Congestion on the ISO Controlled Grid, based on the Adjustment Bids submitted. These Schedules will be balanced with respect to Generation, Transmission Losses, Load, and trades between Scheduling Coordinators to resolve Inter-Zonal Congestion.

Supplemental Energy

Energy from Generating Units bound by a Participating

Generator Agreement, Loads bound by a Participating Load

Agreement, System Units, and System Resources which have

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 25, 2005 Effective: May 26, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 350A

uncommitted capacity following finalization of the Hour-Ahead Schedules and for which Scheduling Coordinators have submitted bids to the ISO at least half an hour before the commencement of the Settlement Period.

Supply

The rate at which Energy is delivered to the ISO Controlled
Grid measured in units of watts or standard multiples thereof,
e.g., 1,000W=1 KW; 1,000 KW = 1MW, etc.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 25, 2005 Effective: May 26, 2005

FERC ELECTRIC TARIFF Second Revised Sheet No. 351

FIRST REPLACEMENT VOLUME NO. I Superseding Third Revised Sheet No. 351

System Emergency Conditions beyond the normal control of the ISO that affect the ability of

the ISO Control Area to function normally including any abnormal

system condition which requires immediate manual or automatic action

to prevent loss of Load, equipment damage, or tripping of system

elements which might result in cascading Outages or to restore system

operation to meet the minimum operating reliability criteria.

System Planning Studies Reports summarizing studies performed to assess the adequacy of the

ISO Controlled Grid as regards conformance to Reliability Criteria.

System Reliability A measure of an electric system's ability to deliver uninterrupted service

at the proper voltage and frequency.

System Resource A group of resources, single resource, or a portion of a resource located

outside of the ISO Control Area, or an allocated portion of a Control

Area's portfolio of generating resources that are directly responsive to

that Control Area's Automatic Generation Control (AGC) capable of

providing Energy and/or Ancillary Services to the ISO Controlled Grid.

System Unit One or more individual Generating Units and/or Loads within a Metered

Subsystem controlled so as to simulate a single resource with specified

performance characteristics, as mutually determined and agreed to by

the MSS Operator and the ISO. The Generating Units and/or Loads

making up a System Unit must be in close physical proximity to each

other such that the operation of the resources comprising the System

Unit does not result in significant differences in flows on the ISO

Controlled Grid.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 351A

TAC Area

A portion of the ISO Controlled Grid with respect to which

Participating TOs' High Voltage Transmission Revenue

Requirements are recovered through a High Voltage Access

Charge. TAC Areas are listed in Schedule 3 of Appendix F.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: April 2, 2001 Effective: June 1, 2001

FERC ELECTRIC TARIFF Second Revised Sheet No. 352

FIRST REPLACEMENT VOLUME NO. I Superseding Second Revised Sheet No. 352

<u>Take-Out Point</u> The metering points at which a Scheduling Coordinator

Metered Entity or ISO Metered Entity takes delivery of Energy.

<u>Tax Exempt Debt</u> Municipal Tax Exempt Debt or Local Furnishing Bonds.

Tax Exempt Participating

<u>TO</u>

A Participating TO that is the beneficiary of outstanding Tax

Exempt Debt issued to finance any electric facilities, or rights

associated therewith, which are part of an integrated system

including transmission facilities the Operational Control of

which is transferred to the ISO pursuant to the TCA.

TCA (Transmission Control Agreement)

The agreement between the ISO and Participating TOs

establishing the terms and conditions under which TOs will

become Participating TOs and how the ISO and each

Participating TO will discharge their respective duties and

responsibilities, as may be modified from time to time.

<u>Tie Point Meter</u> A revenue meter, which is capable of providing Settlement

Quality Meter Data, at a Scheduling Point or at a boundary

between UDCs within the ISO Controlled Grid.

TO (Transmission Owner) An entity owning transmission facilities or having firm

contractual rights to use transmission facilities.

TO Tariff A tariff setting out a Participating TO's rates and charges for

transmission access to the ISO Controlled Grid and whose

other terms and conditions are the same as those contained in

the document referred to as the Transmission Owners Tariff

approved by FERC as it may be amended from time to time.

<u>Tolerance Band</u> The tolerance band expressed in terms of Energy (MWh) for

the performance requirement for Generating Units, System

Units and imports from dynamically scheduled System

Resources for each Settlement Interval will equal the greater of

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice On or After May 1, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF First

First Revised Sheet No. 352A

FIRST REPLACEMENT VOLUME NO. I Superseding First Revised Sheet No. 352A

the absolute value of: 1) 5 MW divided by number of
Settlement Intervals per Settlement Period or 2) three percent
(3%) of the relevant Generating Unit's, dynamically scheduled
System Resource's or System Unit's maximum output (Pmax),
as registered in the Master File, divided by number of
Settlement Intervals per Settlement Period. The maximum
output (Pmax) of a dynamically scheduled System Resource
will be established by agreement between the ISO and the
Scheduling Coordinator representing the System Resource on
an individual case basis, taking into account the number and
size of the generating resources, or allocated portions of
generating resources, that comprise the System Resource.
The tolerance band expressed in terms of Energy (MWh) for

the performance requirement for Participating Loads for each Settlement Interval will equal the greater of the absolute value of: 1) 5 MW divided by number of Settlement Intervals per Settlement Period or 2) three percent (3%) of the applicable Final Hour-Ahead Schedule or ISO Dispatch amount divided by number of Settlement Intervals per Settlement Period.

The Tolerance Band shall not be applied to non-dynamically scheduled System Resources.

Trading Day

The twenty-four hour period beginning at the start of the hour ending 0100 and ending at the end of the hour ending 2400 daily, except where there is a change to and from daylight savings time.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 29, 2004 Effective: Upon Notice On or After May 1, 2004

FERC ELECTRIC TARIFF
Fourth Revised Sheet No. 353

FIRST REPLACEMENT VOLUME NO. I Superseding Third Revised Sheet No. 353

<u>Transition Charge</u> The component of the Access Charge collected by the ISO with

the High Voltage Access Charge in accordance with Section

5.7 of Appendix F, Schedule 3.

<u>Transition Period</u> The period of time established by the California Legislature and

CPUC to allow IOUs and Local Publicly Owned Electric Utilities

an opportunity to recover Transition Costs or Severance Fees.

<u>Transmission Losses</u> Energy that is lost as a natural part of the process of

transmitting Energy from Generation to Load delivered at the

ISO/UDC boundary or Control Area boundary.

Transmission Revenue

Credit

For an Original Participating TO, the proceeds received from the ISO for(1) the sum of: (a) Wheeling service, (b) the shortfall

or surplus resulting from any cost differences between

Transmission Losses and Ancillary Service requirements

associated with Existing Rights and the ISO's rules and

protocols, (c) Usage Charge revenues received by the

Participating TO (but not those attributable to the Participating

TO as a FTR Holder), plus (d) FTR auction revenues received

by the Participating TO; minus (2) any charges attributable to

the Participating TO (but not those attributable to the

Participating TO as a FTR Holder) pursuant to Section 7.3.1.7.

For a New Participating TO during the 10-year transition period

described in Section 4 of Schedule 3 of Appendix F, the

proceeds received from the ISO for Wheeling service and Net

FTR Revenue, plus the shortfall or surplus resulting from any

cost differences between Transmission Losses and Ancillary

Service requirements associated with Existing Rights and the

ISO's rules and protocols. After the 10-year transition period,

the New Participating TO Transmission

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 353A

Revenue Credit shall be calculated the same as the

Transmission Revenue Credit for the Original Participating TO.

TRBA (Transmission Revenue Balancing Account)

A mechanism to be established by each Participating TO which will ensure that all Transmission Revenue Credits and other credits specified in Sections 6 and 8 of Appendix F, Schedule 3, flow through to transmission customers.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2003 Effective: June 1, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF Fourth Revised Sheet No. 354

FIRST REPLACEMENT VOLUME NO. I Superseding Sub. Third Revised Sheet No. 354

TRR (Transmission Revenue Requirement)

The TRR is the total annual authorized revenue requirements associated with transmission facilities and Entitlements turned over to the Operational Control of the ISO by a Participating TO. The costs of any transmission facility turned over to the Operational Control of the ISO shall be fully included in the

Participating TO's TRR. The TRR includes the costs of

transmission facilities and Entitlements and deducts

Transmission Revenue Credits and credits for Standby

Transmission Revenue and the transmission revenue expected

to be actually received by the Participating TO for Existing

Rights and Converted Rights.

Trial Operation The period during which Interconnection Customer is engaged

in on-site test operations and commissioning of a Generating

Unit prior to Commercial Operation.

<u>Trustee</u> The trustee of the California Independent System Operator

trust established by order of the California Public Utilities

Commission on August 2, 1996 Decision No. 96-08-038

relating to the Ex Parte Interim Approval of a Loan Guarantee

and Trust Mechanism to Fund the Development of an

Independent System Operator (ISO) and a Power Exchange

(PX) pursuant to Decision 95-12-063 as modified.

UDC (Utility Distribution

Company)

An entity that owns a Distribution System for the delivery of Energy to and from the ISO Controlled Grid, and that provides

regulated retail electric service to Eligible Customers, as well

as regulated procurement service to those End-Use Customers

who are not yet eligible for direct access, or who choose not to

arrange services through another retailer.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Fourth Revised Sheet No. 355 Superseding Substitute Third Revised Sheet No. 355

<u>Unaccounted for Energy</u> (UFE)

UFE is the difference in Energy, for each utility Service Area

and Settlement Period, between the net Energy delivered into

the utility Service Area, adjusted for utility Service Area

Transmission Losses (calculated in accordance with Section

7.4.2), and the total metered Demand within the utility Service

Area adjusted for distribution losses using Distribution System

loss factors approved by the Local Regulatory Authority. This

difference is attributable to meter measurement errors, power

flow modeling errors, energy theft, statistical Load profile

errors, and distribution loss deviations.

<u>Uncontrollable Force</u> Any act of God, labor disturbance, act of the public enemy,

war, insurrection, riot, fire, storm, flood, earthquake, explosion,

any curtailment, order, regulation or restriction imposed by

governmental, military or lawfully established civilian authorities

or any other cause beyond the reasonable control of the ISO or

Market Participant which could not be avoided through the

exercise of Good Utility Practice.

Uninstructed Deviation

Penalty

Uninstructed Imbalance

Energy

The penalty as set forth in Section 11.2.4.1.2 of this ISO Tariff.

The real-time change in Generation or Demand other than that

instructed by the ISO or which the ISO Tariff provides will be

paid at the price for Uninstructed Imbalance Energy.

<u>Unit Commitment</u> The process of determining which Generating Units will be

committed (started) to meet Demand and provide Ancillary

Services in the near future (e.g., the next Trading Day).

<u>Usage Charge</u> The amount of money, per 1 kW of scheduled flow, that the

ISO charges a Scheduling Coordinator for use of a specific

Congested Inter-Zonal Interface during a given hour.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: November 23, 2002

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. I

Third Revised Sheet No. 356 Superseding Second Sheet No. 356

<u>Voltage Limits</u> For all substation busses, the normal and post-contingency

Voltage Limits (kV). The bandwidth for normal Voltage Limits

must fall within the bandwidth of the post-contingency Voltage

Limits. Special voltage limitations for abnormal operating

conditions such as heavy or light Demand may be specified.

<u>Voltage Support</u> Services provided by Generating Units or other equipment

such as shunt capacitors, static var compensators, or

synchronous condensers that are required to maintain

established grid voltage criteria. This service is required under

normal or System Emergency conditions.

Waiver Denial Period The period determined in accordance with Section 5.11.6.

Warning Notice A Notice issued by the ISO when the operating requirements

for the ISO Controlled Grid are not met in the Hour-Ahead

Market, or the quantity of Regulation, Spinning Reserve, Non-

Spinning Reserve, Replacement Reserve and Supplemental

Energy available to the ISO does not satisfy the Applicable

Reliability Criteria.

WEnet (Western Energy

Network)

An electronic network that facilitates communications and data

exchange among the ISO, Market Participants and the public in

relation to the status and operation of the ISO Controlled Grid.

Western Path 15 The Western Area Power Administration, Sierra Nevada

Region (or its successor) with respect solely to its rights and

interests in the Path 15 Upgrade.

Wheeling Out or Wheeling Through.

Wheeling Access Charge The charge assessed by the ISO that is paid by a Scheduling

Coordinator for Wheeling in accordance with Section 7.1.

Wheeling Access Charges shall not apply for Wheeling under a

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004 Effective: November 1, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 356A

bundled non-economy Energy coordination agreement of a

Participating TO executed prior to July 9, 1996. The Wheeling

Access Charge may consist of a High Voltage Wheeling

Access Charge and a Low Voltage Wheeling Access Charge.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004 Effective: November 1, 2004

FERC ELECTRIC TARIFF Fifth Revised Sheet No. 357

FIRST REPLACEMENT VOLUME NO. I Superseding Fourth Revised Sheet No. 357

Wheeling Out Except for Existing Rights exercised under an Existing Contract

in accordance with Sections 2.4.3 and 2.4.4, the use of the ISO

Controlled Grid for the transmission of Energy from a

Generating Unit located within the ISO Controlled Grid to serve

a Load located outside the transmission and Distribution

System of a Participating TO.

Wheeling Through Except for Existing Rights exercised under an Existing Contract

in accordance with Sections 2.4.3 and 2.4.4, the use of the ISO

Controlled Grid for the transmission of Energy from a resource

located outside the ISO Controlled Grid to serve a Load located

outside the transmission and Distribution System of a

Participating TO.

Wholesale Customer A person wishing to purchase Energy and Ancillary Services at

a Bulk Supply Point or a Scheduling Point for resale.

Wholesale Sales The sale of Energy and Ancillary Services at a Bulk Supply

Point or a Scheduling Point for resale.

WSCC (Western System

Coordinating Council)

The Western Systems Coordinating Council or its successor,

the WECC.

WECC (Western Electricity Oversight

Council)

WSCC Reliability Criteria

Agreement

The Western Electricity Coordinating Council or its successor.

The Western Systems Coordinating Council Reliability Criteria

Agreement dated June 18, 1999 among the WSCC and certain

of its Member transmission operators, as such may be

amended from time to time.

Zone A portion of the ISO Controlled Grid within which Congestion is

expected to be small in magnitude or to occur infrequently.

"Zonal" shall be construed accordingly.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 30, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 357A

Zonal Settlement Interval Ex Post Price The Zonal Settlement Interval Ex Post Price in a Settlement Interval in each Zone will equal the absolute-value Energy-weighted average of the Dispatch Interval Ex Post Prices in each Zone, where the weights are the system total Instructed Imbalance Energy, except Regulation Energy, for the Dispatch Interval.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

ISO TARIFF APPENDIX B

Scheduling Coordinator Agreement

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

Scheduling Coordinator Agreement

| THIS A | AGREEMENT is made this day of,, and is entered into, by tween: | | | |
|--------|---|--|--|--|
| (1) | [Full legal name] having a registered or principal executive office at [address] (the "Scheduling Coordinator") | | | |
| | and | | | |
| (2) | CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION, a California nonprofit public benefit Corporation having a principal executive office located at such place in the State of California as the ISO Governing Board may from time to time | | | |

Whereas:

- A. The Scheduling Coordinator has applied for certification by the ISO under the certification procedure referred to in Section 2.2.3 of the ISO Tariff.
- B. The Scheduling Coordinator wishes to schedule Energy and Ancillary Services on the ISO Controlled Grid under the terms and conditions set forth in the ISO Tariff.

NOW IT IS HEREBY AGREED as follows:

designate (the "ISO").

1. **Definitions**

- A. Terms and expressions used in this Agreement shall have the same meanings as those contained in the Master Definitions Supplement to the ISO Tariff.
- B. The "ISO Tariff" shall mean the ISO Operating Agreement and Tariff as amended from time to time, together with any Appendices or attachments thereto.

2. Covenant of the Scheduling Coordinator

The Scheduling Coordinator agrees that:

- A. the ISO Tariff governs all aspects of scheduling of Energy and Ancillary Services on the ISO Controlled Grid, including (without limitation), the financial and technical criteria for Scheduling Coordinators, bidding, settlement, information reporting requirements and confidentiality restrictions;
- B. it will abide by, and will perform all of the obligations under the ISO Tariff placed on Scheduling Coordinators in respect of all matters set forth therein including, without limitation, all matters relating to the scheduling of Energy and Ancillary Services on the ISO Controlled Grid, ongoing obligations in respect of scheduling, Settlement, system security policy and procedures to be developed by the ISO from time to time, billing and payments, confidentiality and dispute resolution;

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

Effective: October 13, 2000

- C. it shall ensure that each UDC, over whose Distribution System Energy or Ancillary Services are to be transmitted in accordance with Schedules, Adjustment Bids or bids for Ancillary Services submitted to the ISO by the Scheduling Coordinator, enters into a UDC operating agreement in accordance with Section 4 of the ISO Tariff;
- D. it shall ensure that each Generator for which it schedules Energy or on whose behalf it submits to the ISO Adjustment Bids or bids for Ancillary Services enters into a Generator agreement in accordance with Section 5 of the ISO Tariff;
- E. it shall have the primary responsibility to the ISO, as principal, for all Scheduling Coordinator payment obligations under the ISO Tariff;
- F. its status as a Scheduling Coordinator is at all times subject to the ISO Tariff.

3. Term and Termination

- 3.1 This Agreement shall commence on the later of (a) _____ or (b) the date the Scheduling Coordinator is certified by the ISO as a Scheduling Coordinator.
- This Agreement shall terminate upon acceptance by FERC of a notice of termination. The ISO Shall timely file any notice of termination with FERC.

4. Assignment

Either party may assign its obligations under this Agreement with the other party's consent, such consent shall not to be unreasonably withheld.

5. Partial Invalidity

If any provision of this Agreement, or the application of such provision to any persons, circumstance or transaction, shall be held invalid, the remainder of this Agreement, or the application of such provision to other persons or circumstances or transactions, shall not be affected thereby.

6. Settlement Account

The Scheduling Coordinator shall maintain at all times an account with a bank capable of Fed-Wire transfer to which credits or debits shall be made in accordance with the billing and Settlement provisions of Section 11 of the ISO Tariff. Such account shall be the account referred to in Clause 7 hereof or as notified by the Scheduling Coordinator to the ISO from time to time by giving at least 7 days written notice before the new account becomes operational.

7. Notices

Any notice, demand or request made to or by either party regarding this Agreement shall be made in accordance with the ISO Tariff and unless otherwise stated or agreed shall be made to the representative of the other party indicated below.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

Effective: October 13, 2000

| ISO: | | | | | |
|-------------------------------------|------------------|--|--|--|--|
| Name of Primary Represer | ntative: | | | | |
| Name of Alternative Representative: | | | | | |
| Address: | | | | | |
| | | | | | |
| | State: Zip Code: | | | | |
| E-Mail Add | dress: | | | | |
| | · | | | | |
| | | | | | |
| Scheduling Coordinator: | | | | | |
| Scrieduling Coordinator. | | | | | |
| Name of Primary Representative: | | | | | |
| Name of Alternative Representative: | | | | | |
| Address: | | | | | |
| State: | Zip Code: | | | | |
| E-Mail Add | dress: | | | | |
| Phone No: | | | | | |
| | | | | | |
| Settlement Account No: | | | | | |
| | | | | | |
| | · | | | | |
| | | | | | |

8. Agreement to be bound by ISO Tariff.

The ISO Tariff is incorporated herein and made a part hereof. In the event of a conflict between the terms and conditions of this Agreement and any other terms and conditions set forth in the ISO Tariff, the terms and conditions of the ISO Tariff shall prevail.

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Original Sheet No. 362

Effective: October 13, 2000

9. Electronic Contracting.

All submitted applications, schedules, bids, confirmations, changes to information on file with the ISO and other communications conducted via electronic transfer (e.g. direct computer link, FTP file transfer, bulletin board, e-mail, facsimile or any other means established by the ISO) shall have the same legal rights, responsibilities, obligations and other implications as set forth in the terms and conditions of the ISO Tariff and Protocols as if executed in written format.

IN WITNESS WHEREOF, the Parties have caused this Agreement to be executed by their respective authorized officials.

| ISO: | | | | | | |
|-------------------------|------|-------|------|--|--|--|
| Ву: | Name | Title | Date | | | |
| Scheduling Coordinator: | | | | | | |
| Ву: | | | | | | |
| | Name | Title | Date | | | |

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

ISO TARIFF APPENDIX C

ISO Scheduling Process

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

Effective: October 13, 2000

Day-Ahead Schedule Timeline

| | Responsible | Parties | ; | | | d Scriedule Timeline |
|-----------------|---------------------------|---------|-----|---|-----|--|
| Line | Time (Before or on) | ISO | SCs | Must-Take and Reliability generation | UDC | Actions |
| | Two days ah | ead | | | | |
| 0 | 6:00 PM | x | | | | Publish forecasted transmission conditions (Generator Meter Multipliers, system load forecast (by Zones), estimated Ancillary Service requirements, scheduled transmission Outages, Loop Flows, congestion, ATC, etc.) |
| | One day ahe | ad | | | | |
| 1 | 5:00 AM | X | | | | Notify Scheduling Coordinators of unit-specific Reliability Must Run requirements |
| 2 | 6:00 AM | Х | | | | Update system load forecast and Ancillary Service requirements. |
| 3 | | | Х | | | Notify ISO of price option for Reliability Must-Run Units for which notification was provided at 5:00 a.m. |
| 4 | | | Х | | | Provide direct access load forecasts to the ISO. |
| 5 | 6:30 AM | Х | | | | Provide net direct access load forecasts to UDCs. |
| 6[not used] | | | | | | |
| 7 [not used] | | | | | | |
| 8 [not used] | | | | | | |
| 9 [not used] | | | | | | |
| 10 | | | Х | | | Submit initial preferred energy schedules to the ISO. |
| 11 | | | х | | | Submit Ancillary Service bids and/or self-provided Ancillary Service schedules to the ISO. |
| 12 | 10:00 AM | х | | | | Validate all SC energy schedules, including RMR requirements, and bids; notify and resolve incorrect schedules and bids, if any. |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004

Effective: October 13, 2000

| | | | | Validate all SC Ancillary Service schedules and bids; notify and |
|----|----------|---|---|---|
| 13 | | Χ | | resolve incorrect Ancillary Service schedules and bids, If any. |
| | | | | Start the Inter-Zonal Congestion Management evaluation process |
| 14 | | Х | | and Ancillary Services bid evaluation. |
| 15 | 11:00 AM | Х | | If no Inter-Zonal Congestion exists, go to line 27. |
| | | | | Complete advisory dispatch schedules and transmission prices if |
| 16 | | Х | | Inter-Zonal Congestion exists. |
| | | | | Complete the advisory schedules and prices of each Ancillary |
| 17 | | Х | | Service. |
| | | | | Notify all SC if Inter-Zonal Congestion exists. Publish advisory |
| 18 | | Х | | transmission prices. |
| | | | | Inform all SCs their advisory dispatch schedules if Inter-Zonal |
| 19 | | Х | | Congestion exists. |
| | | | | Inform all SCs advisory AS schedules and prices if Inter-Zonal |
| 20 | | Х | | Congestion exists. |
| | | | | Start the process of developing revised schedules and price bids. |
| 21 | 11:05 PM | | Х | |
| | | | | Start the process of developing revised AS schedules and price |
| 22 | | | Х | bids. |
| 23 | 12:00 PM | | Χ | Submit revised Preferred Schedules and price bids to the ISO. |
| 24 | | | Х | Submit revised preferred AS schedules and price bids to the ISO. |
| | | | | Validate all SC schedules and bids; notify and resolve incorrect |
| 25 | 12:00 PM | Χ | | schedules and bids, if any. |
| | | | | Validate all SC AS schedules and bids; notify and resolve incorrect |
| 26 | | Χ | | schedules and bids, if any. |
| | | | | Start the Inter-Zonal Congestion Management evaluation process |
| 27 | | Х | | and Ancillary Services bid evaluation. |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004

| 28 | 1:00 PM | Х | Complete final dispatch schedules and transmission prices. |
|---------------------|---------|---|---|
| 29 | | Х | Complete Final Schedules and prices of each Ancillary Service. |
| 30 | 1:00 PM | Х | Complete Final Schedules. |
| 31 | 1:00 PM | Х | Inform all SCs their final dispatch schedules. |
| 32 | | Х | Inform all SCs their final AS schedules and prices. |
| 33 | | Х | Publish transmission prices if Inter-Zonal Congestion exists. |
| 34 | | х | Calculate and communicate with SC the specific SCs Zonal prices if asked. |
| 35 [not used] | | | |
| 36 [not used] | | | |
| 37 [not used] | | | |
| 38 | | x | Develop net schedules for each of the Control Area interfaces. These interfaces include SC net schedules, Control Area net schedules and/or individual transactions. |
| 39 | | x | Call each adjacent Control Area and check that net schedules at each interface point match. Search for discrepancies and identify transactions that do not match. Resolve discrepancies with the involved SCs or eliminate the transactions with discrepancies. |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004

Issued on: March 11, 2004 Effective: October 13, 2000

ISO TARIFF APPENDIX D

Black Start Units

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

Black Start Units

The following requirements must be met by Generating Units providing Black Start ("Black Start Units"):

- (a) Black Start Units must be capable of starting and paralleling with the ISO Controlled Grid without aid from the ISO Controlled Grid:
- (b) Black Start Units must be capable of making a minimum number of starts per event (to be without aid from the ISO Controlled Grid as determined by the ISO);
- (c) Black Start Units must be equipped with governors capable of operating in the stand alone (asynchronous) and parallel (synchronous) modes.
- (d) Black Start Units must have startup load pickup capabilities at a level to be determined by the ISO, including total startup load (MW) and largest startup load (MW) for such power output levels as the ISO may specify.
- (e) All Black Start Units must be capable of producing Reactive Power (boost) and absorbing Reactive Power (buck) as required by the ISO to control system voltages. This requirement may be met by the operation of more than one Black Start Unit in parallel providing that:
 - (i) the Black Start generation supplier demonstrates that the proposed Generation resource shares reactive burden equitably;
 - (ii) all Participating Generators associated with the proposed Black Start source are located in the same general area.

Buck/boost capability requirement shall be dependent on the location of the proposed resource in relation to Black Start load.

- (f) All Black Start Units must have the following communication/control requirements:
 - (i) dial-up telephone;
 - (ii) backup radio;
 - (iii) manning levels which accord with Good Utility Practice.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

ISO TARIFF APPENDIX E

Verification of Submitted Data for Ancillary Services

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

Verification of Submitted Data for Ancillary Services

The ISO shall use the following procedures for verifying the scheduling and bid information submitted by Scheduling Coordinators for Ancillary Services. In this Appendix, a "bid" is a bid submitted by a Scheduling Coordinator in the ISO's competitive Ancillary Services market. A "schedule" is a Schedule including Ancillary Services which the Scheduling Coordinator wishes to self-provide.

- 1. Bid File and Schedule Format. The ISO shall verify that the bid files and schedules conform to the format specified for the type of Ancillary Service bid or schedule submitted. If the bid file or schedule does not conform to specifications, it shall be annotated by the ISO to indicate the location of the errors, and returned to the Scheduling Coordinator for corrections. Any changes made by a Scheduling Coordinator shall require a new submittal of bid or schedule information, and all validity checks shall be performed on the re-submitted bid or schedule.
- 2. Generation Schedules and Bids.
- **2.1. Quantity Data.** The ISO shall verify that no Scheduling Coordinator is submitting a scheduled or bid quantity for Regulation, Spinning Reserve, Non-Spinning or Replacement Reserve which exceeds available capacity for Regulation and Reserves on the Generating Units, Loads and resources scheduled for that Settlement Period.
- **2.2 Location Data.** The ISO shall verify that the location data corresponds to the ISO Controlled Grid interconnection data.
- **2.3. Operating Capability.** The ISO shall verify that the operating capability data corresponds to the ISO Controlled Grid interconnection data for each Generating Unit, Load or other resource for which a Scheduling Coordinator is submitting an Ancillary Service bid or schedule.
- 3. Load Schedules and Bids.
- **3.1. Quantity data.** The ISO shall verify that the quantity of Non-Spinning and Replacement Reserve scheduled or bid from Dispatchable Load does not exceed scheduled consumption quantities for that Settlement Period.
- **3.2. Location data.** The ISO shall verify that the location of the Dispatchable Load corresponds to the ISO Controlled Grid interconnection data for each supplier of Dispatchable Load.
- 4. Notification of Validity or Invalidity of Ancillary Services Schedules and Competitive Bids. The ISO shall, as soon as reasonably practical following the receipt of competitive bids or self-provided Ancillary Service schedules, send to the Scheduling Coordinator who submitted the schedule or bid the following information:
 - (a) acknowledgment of receipt of the competitive bid or self-provided Ancillary Service schedule;
 - (b) notification that the bid or schedule has been accepted or reject for noncompliance with the rules specified in this Appendix. If a bid or schedule is rejected, such notification shall contain an explanation of why the bid or schedule was not accepted;
 - (c) a copy of the bid or schedule as processed by the ISO.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

In response to an invalid schedule or bid, the Scheduling Coordinator shall be given a period of time to respond to the notification. The Scheduling Coordinator shall respond by resubmitting a corrected schedule or bid. If the Scheduling Coordinator does not respond to the notification within the required time frame, the ISO shall proceed without that Scheduling Coordinator's bid or schedule.

- 5. Treatment of Missing Values.
- **5.1 Missing Location Values.** Any bid submitted without a Location Code shall be deemed to have a zero bid quantity for that Settlement Period.
- **5.2 Missing Quantity Values.** Any bid submitted without a quantity value shall be deemed to have a zero bid quantity for Ancillary Service capacity for that Settlement Period.
- **5.3 Missing Price Values.** Any bid submitted with non-zero quantity value, but with a missing price value, shall be rejected.
- **6. Treatment of Equal Price Bids.** The ISO shall allow these Scheduling Coordinators to resubmit, at their own discretion, their bid no later than 2 hours the same day the original bid was submitted. In the event identical prices still exist following resubmission of bids, the ISO shall determine the merit order for each Ancillary Service by considering applicable constraint information for each Generating Unit, Load or other resource, and optimize overall costs for the Trading Day. If equal bids still remain, the ISO shall proportion participation in the Final Day-Ahead or Hour-Ahead Schedule (as the case may be) amongst the bidding Generating Units, Loads and resources with identical bids to the extent permitted by operating constraints and in a manner deemed appropriate by the ISO.
- **7. Receipt of Bids and Schedules.** The ISO shall maintain an audit trail relating to the receipt of bids and schedules and the processing of those bids and schedules.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

ISO TARIFF APPENDIX F

Rate Schedules

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

Schedule 1

Grid Management Charge

Part A – Monthly Calculation of Grid Management Charge (GMC)

The Grid Management Charge consists of eight separate service charges: (1) the Core Reliability Services – Demand Charge, (2) the Core Reliability Services – Energy Exports Charge; (3) Energy Transmission Services Net Energy Charge, (4) the Energy Transmission Services Uninstructed Deviations Charge, (5) the Forward Scheduling Charge, (6) the Congestion Management Charge, (7) the Market Usage Charge, and (8) the Settlements, Metering, and Client Relations Charge.

- The rate in \$/MW for the Core Reliability Services Demand Charge will be calculated by dividing the GMC costs, as determined in accordance with Part C of this Schedule 1, allocated to this service category in accordance with Part E of this Schedule 1, by the total of the forecasted Scheduling Coordinators' metered non-coincident peak hourly demand in MW for all months during the year (excluding the portion of such Demand associated with Energy Exports, if any, as may be modified in accordance with Part F of this Schedule 1), reduced by thirty-four (34) percent of the sum of all Scheduling Coordinators' metered non-coincident peaks occurring during the hours ending 0100 through 0600, or during the hours ending 2300 through 2400, every day, including Sundays and holidays; provided that if a Scheduling Coordinator's metered non-coincident peak hour during the month occurs during the hours ending 0100 through 0600, or during the hours ending 2300 through 2400, every day, the rate shall be sixty-six (66) percent of the standard Core Reliability Services Demand rate.
- 2. The rate in \$/MWh for the Core Reliability Services Energy Export Charge will be calculated by dividing the GMC costs, as determined in accordance with Part C of this Schedule 1, allocated to this service category in accordance with Part E of this Schedule 1, by the total of the forecasted Scheduling Coordinators' metered volume of Energy Exports in MWh, as may be modified in accordance with Part F of this Schedule 1, for all months during the year.
- 3. The rate in \$/MWh for the Energy Transmission Services Net Energy Charge will be calculated by dividing the GMC costs, as determined in accordance with Part C of this Schedule 1, allocated to this service category in accordance with Part E of this Schedule 1, by the total annual forecasted Metered Control Area Load.
- 4. The rate in \$/MWh for the Energy Transmission Services Uninstructed Deviations Charge will be calculated by dividing the GMC costs, as determined in accordance with Part C of this Schedule 1, allocated to this service category in accordance with Part E of this Schedule 1, by the absolute value of total annual forecasted net uninstructed deviations (netted within a Settlement Interval summed over the calendar month) in MWh.
- 5. The rate in \$ per Schedule for the Forward Scheduling Charge will be calculated by dividing the GMC costs, as determined in accordance with Part C of this Schedule 1, allocated to this service category in accordance with Part E of this Schedule 1, by the annual forecasted number of non-zero MW Final Hour-Ahead Schedules, as may be modified in accordance with Part F of this Schedule 1, including all awarded Ancillary Service bids; provided that the Forward Scheduling charge attributable to Final Hour-Ahead Schedules for Inter-Scheduling Coordinator Energy and Ancillary Service Trades for each

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 373A

Scheduling Coordinator is fifty (50) percent of the standard Forward Scheduling Charge.

- 6. The rate in \$/MWh for the Congestion Management Charge will be calculated by dividing the GMC costs, as determined in accordance with Part C of this Schedule 1, allocated to this service category in accordance with Part E of this Schedule 1, by the total annual forecasted Scheduling Coordinators' inter-zonal scheduled flow (excluding flows pursuant to Existing Contracts) per path in MWh.
- 7. The rate in \$/MWh for the Market Usage Charge will be calculated by dividing the GMC costs, as determined in accordance with Part C of this Schedule 1, allocated to this service category in accordance with Part E of this Schedule 1, by the annual forecasted total purchases and sales (including out-of-market transactions) of Ancillary Services, Supplemental Energy, Instructed Imbalance Energy, and net Uninstructed Imbalance Energy (with uninstructed deviations being netted within a Settlement Interval summed over the calendar month) in MWh.
- 8. The rate for the Settlements, Metering, and Client Relations Charge will be fixed at \$500.00 per month, per Scheduling Coordinator Identification Number ("SC ID") with an invoice value other than \$0.00 in the current trade month.

Issued by: Charles F. Robinson, Vice President and General Counsel

Fifth Revised Sheet No. 374

Superseding Fourth Revised Sheet No. 374

The rates for the foregoing charges shall be adjusted automatically each year, effective January 1 for the following twelve months, in the manner set forth in Part D of this Schedule.

Part B - Quarterly Adjustment, If Required

Each component rate of the Grid Management Charge will be adjusted automatically on a quarterly basis, up or down, so that rates reflect the annual revenue requirement as stated in the ISO's filing or posting on the ISO Home Page, as applicable, if the estimated billing determinant volumes for that component, on an annual basis, change by 5% or more during the year. Such adjustment may be implemented not more than once per calendar quarter, and will be effective the first day of the next calendar month.

The rates will be adjusted in accordance with the following formula:

According to the formulae listed in Appendix F, Schedule 1, Part A with the billing determinant(s) readjusted on a going-forward basis to reflect the 5% or greater change from the estimated billing determinant provided in the annual informational filing.

Part C - Costs Recovered through the GMC

As provided in Section 8 of the ISO Tariff, the Grid Management Charge includes the following costs, as projected in the ISO's budget for the year to which the Grid Management Charge applies:

- Operating costs (as defined in Section 8.2.2)
- Financing costs (as defined in Section 8.2.3), including Start-Up and Development costs and
- Operating and Capital Reserve costs (as defined in Section 8.2.4)

Such costs, for the ISO as a whole, are allocated to the eight service charges that comprise the Grid Management Charge: (1) Core Reliability Services - Demand Charge, (2) Core Reliability Services - Energy Export Charge, (3) Energy Transmission Services Net Energy Charge, (4) Energy Transmission Services Uninstructed Deviations Charge, (5) Forward Scheduling Charge, (6) Congestion Management Charge, (7) Market Usage Charge, and (8) Settlements, Metering, and Client Relations Charge, according to the factors listed in Part E of this Schedule 1, and

adjusted annually for:

 any surplus revenues from the previous year as deposited in the Operating and Capital Reserve Account, as defined under Section 8.5, or deficiency of revenues, as recorded in a memorandum account;

divided by:

forecasted annual billing determinant volumes;

adjusted quarterly for:

 a change in the volume estimate used to calculate the individual Grid Management Charge components, if, on an annual basis, the change is 5% or more.

The Grid Management Charge revenue requirement formula is as follows:

Grid Management Charge revenue requirement =

 Operating Expenses + Debt Service + [(Coverage Requirement x Senior Lien Debt Service) and/or (Cash Funded Capital Expenditures)] - Interest Earnings -Other Revenues - Reserve Transfer

Where.

• Operating Expenses = O&M Expenses plus Taxes Other Than Income Taxes and Penalties

Issued by: Charles F. Robinson, Vice President and General Counsel

- O&M Expenses = Transmission O&M Expenses (Accounts 560-574) plus Customer Accounting Expenses (Accounts 901-905) plus Customer Service and Informational Expenses (Accounts 906-910) plus Sales Expenses (Accounts 911-917) plus Administrative & General Expenses (Accounts 920-935)
- Taxes Other Than Income Taxes = those taxes other than income taxes which relate to ISO operating income (Account 408.1)
- Penalties = payments by the ISO for penalties or fines incurred for violation of WECC reliability criteria (Account 426.3)
- **Debt Service** = for any fiscal year, scheduled principal and interest payments, sinking fund payments related to balloon maturities, repayment of commercial paper notes, net payments required pursuant to a payment obligation, or payments due on any ISO notes. This amount includes the current year accrued principal and interest payments due in April of the following year.
- Coverage Requirement = 25% of the Senior Lien Debt Service.
- Senior Lien Debt Service = all Debt Service that has a first lien on ISO Net Operating Revenues (Account 128 subaccounts).
- Cash Funded Capital Expenditures = Post current fiscal year capital additions (Accounts 301-399) funded on a pay-as-you-go basis.
- Interest Earnings = Interest earnings on Operating and Capital Reserve balances (Account 419). Interest on bond or note proceeds specifically designated for capital projects or capitalized interest is excluded.
- Other Revenues = Amounts booked to Account 456 subaccounts. Such amounts include but are not limited to application fees, WECC reliability coordinator reimbursements, Line Operator Charges, and fines assessed and collected by the ISO.
- Reserve Transfer = the projected reserve balance for December 31 of the prior year less the Reserve Requirement as adopted by the ISO Governing Board and FERC.
 If such amount is negative, the amount may be divided by two, so that the reserve is replenished within a two-year period. (Account 128 subaccounts)
- **Reserve Requirement** = 15% of Annual Operating Expenses.

A separate revenue requirement shall be established for each component of the Grid Management Charge by developing the revenue requirement for the ISO as a whole and then assigning such costs to the seven service categories using the allocation factors provided in Appendix F, Schedule 1, Part E of this Tariff.

Part D - Information Requirements

Budget Schedule

The ISO will convene, prior to the commencement of the Annual Budget process, an initial meeting with stakeholders to: (a) receive ideas to control ISO costs; (b) receive ideas for projects to be considered in the capital budget development process; and, (c) receive suggestions for reordering ISO priorities in the coming year.

Within 2 weeks of the initial meeting, the ideas presented by the stakeholders shall be communicated in writing to the ISO's officers, directors and managers as part of the budget development process, and a copy of this communication shall be made available to stakeholders.

Subsequent to the initial submission of the draft budget to the finance committee of the ISO Governing Board, the ISO will provide stakeholders with the following information: (a) proposed capital budget with indicative projects for the next subsequent calendar year, a budget-to-actual

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 375.01

review for capital expenditures for the previous calendar year, and a budget-to-actual review of current year capital costs; and, (b) expenditures and activities in detail for the next subsequent calendar year (in the form of a draft of the budget book for the ISO Governing Board), budget-to-actual review of expenditures and activities for the previous calendar year, and a budget-to-actual review of expenditures for the current year. Certain of this detailed information which is deemed commercially sensitive will only be made available to parties that pay the ISO's GMC (or regulators) who execute a confidentiality agreement.

The ISO shall provide such materials on a timely basis to provide stakeholders at least one full committee meeting cycle to review and prepare comments on the draft annual budget to the finance committee of the ISO Governing Board.

At least one month prior to the ISO Governing Board meeting scheduled to consider approval of the proposed budget, the ISO will hold a meeting open to all stakeholders to discuss the details of the ISO's budget and revenue requirement for the forthcoming year. To the extent that such a meeting will deal with complex matters of budgetary and policy import, the ISO will endeavor to host a workshop on the ISO's budget preparation process in advance of the meeting to better prepare stakeholders.

Prior to a final recommendation by the finance committee of the ISO Governing Board on the ISO's draft annual budget, the ISO shall respond in writing to all written comments on the draft annual budget submitted by stakeholders and/or the ISO shall issue a revised draft budget indicating in detail the manner in which the stakeholders' comments have been taken into consideration.

The ISO will provide no fewer than 45 days for stakeholder review of its annual budget between initial budget posting and final approval of the budget by the ISO Governing Board.

Budget Posting

After the approval of the annual budget by the ISO Governing Board, the ISO will post on its Internet site the ISO operating and capital budget to be effective during the subsequent fiscal year, and the billing determinant volumes used to develop the rate for each component of the Grid Management Charge, together with workpapers showing the calculation of such rates.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Fourth Revised Sheet No. 375A
FIRST REPLACEMENT VOLUME NO. I
Superseding Third Revised Sheet No. 375A

Annual Filing

If the Grid Management Charge revenue requirement for Budget Year 2005 does not exceed \$218.4 million or its revenue requirement for Budget Year 2006 does not exceed \$221.7 million, the ISO shall not be required to make a Section 205 filing to adjust the GMC charges calculated in accordance with this Schedule 1 to collect such Revenue Requirement. In order for the ISO to adjust the GMC charges to collect a Grid Management Charge revenue requirement for Budget Year 2005 that exceeds \$218.4 million or Budget Year 2006 that exceeds \$221.7 million, the ISO must submit an application to the FERC under Section 205. In any event, the ISO shall submit a filing under Section 205 for approval of the GMC charges to be effective as of January 1, 2007. In such filing, the ISO may revise the GMC rates set forth in this Schedule 1, but shall not be required to do so.

Periodic Financial Reports

The ISO will create periodic financial reports consisting of an income statement, balance sheet, statement of operating reserves, and such other reports as are required by the ISO Governing Board. The periodic financial reports will be posted on the ISO's Website not less than quarterly.

Issued by: Charles F. Robinson, Vice President and General Counsel

Part E - Cost Allocation

1. The Grid Management Charge revenue requirement, determined in accordance with Part C of this Schedule 1, shall be allocated to the eight service charges specified in Part A of this Schedule 1 as follows, subject to Section 2 of this Part E. Expenses projected to be recorded in each cost center shall be allocated among the eight charges in accordance with the allocation factors listed in Table 1 to this Schedule 1, subject to Section 2 of this Part E. In the event the ISO budgets for projected expenditures for cost centers are not specified in Table 1 to Schedule 1, such expenditures shall be allocated based on the allocation factors for the respective ISO division hosting that newly-created cost center. Such divisional allocation factors are specified in Table 1 to this Schedule 1.

Debt service expenditures for the ISO's year 2000 (or subsequently refinanced) bond offering shall be allocated among the eight charges in accordance with the allocation factors listed in Table 1 to this Schedule 1, subject to Section 2 of this Part E. Capital expenditures shall be allocated among the eight charges in accordance with the allocation factors listed in Table 2 to this Schedule 1, subject to Section 2 of this Part E, for the system for which the capital expenditure is projected to be made.

Any costs allocated by the factors listed in Table 1 and Table 2 to the Settlements, Metering, and Client Relations category that would remain un-recovered after the assessment of the charge for that service specified in Section 8 of Part A of this Schedule 1 on forecasted billing determinant volumes shall be reallocated to the remaining GMC service categories in the ratios set forth in Table 3 to this Schedule 1.

2. The allocation of costs in accordance with Section 1 and Tables 1 and 2 of this Part E shall be adjusted as follows:

Costs allocated to the Energy Transmission Services category in the following tables are further apportioned to the Energy Transmission Services Net Energy and Energy Transmission Services Uninstructed Deviations subcategories in 80% and 20% ratios, respectively.

Twenty (20) percent of the costs allocated to the Forward Scheduling Charge in the following Tables shall be reallocated to the Congestion Management Charge. A portion of the costs allocated to the Forward Scheduling Charge, associated with the fifty (50) percent reduction in the standard Forward Scheduling Charge to be applied to Final Hour-Ahead Schedules for Inter-Scheduling Coordinator Energy and Ancillary Service Trades as specified in Part A of this Schedule 1, shall be reallocated to the remaining GMC service categories in the ratios set forth in Table 3 to this Schedule 1.

<u>Table 1</u>

<u>O&M, Debt Service, and Other Expense Recoveries Cost Allocation Factors</u>

| CC# | Cost Center | CRS | <u>ETS</u> | <u>FS</u> | <u>CM</u> | MU | SMCR | <u>Total</u> |
|------|------------------|--------|------------|-----------|------------|--------|--------|--------------|
| 1100 | CEO Division | 44.01% | 21.51% | 3.78% | 4.61% | 10.45% | 15.63% | 100% |
| 1111 | CEO - General | 44.01% | 21.51% | 3.78% | 4.61% | 10.45% | 15.63% | 100% |
| 1241 | MD02 | 6.95% | 0% | 13.86% | 10.91 % | 28.38% | 39.90% | 100% |
| 1521 | Grid Planning | 62.50% | 37.50% | 0% | 0% | 0% | 0% | 100% |
| 1300 | Finance Division | 44.04% | 21.49% | 3.62% | 4.22% | 10.31% | 16.32% | 100% |

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

| 1311 | CFO - General | 44.04% | 21.49% | 3.62% | 4.22% | 10.31% | 16.32% | 100% |
|------|------------------------------------|--------|--------|-------|-------|--------|--------|------|
| 1321 | Accounting | 44.01% | 21.51% | 3.78% | 4.61% | 10.45% | 15.63% | 100% |
| 1331 | Financial Planning and Treasury | 44.01% | 21.51% | 3.78% | 4.61% | 10.45% | 15.63% | 100% |
| 1351 | Facilities | | 21.47% | | 3.93% | 10.21% | 16.81% | 100% |
| 1361 | Security & Corporate Services | 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| | | | | | | | · | |

First Revised Sheet No. 376A Superseding Original Sheet No. 376A

| 1400 | Information Services Division | 38.25% | 7.16% | 9.74% | 4.78% | 9.23% | 30.85% | 100% |
|------|---|--------|--------|------------|------------|--------|--------|------|
| 1411 | Chief Information Officer | 38.25% | 7.16% | 9.74% | 4.78% | 9.23% | 30.85% | 100% |
| | Corporate & Enterprise Applications | 33.28% | 7.06% | 1.16% | 25.28 % | 12.58% | 20.63% | 100% |
| | Asset Management | 35.30% | | 10.91 % | 4.88% | 10.50% | 32.29% | 100% |
| | End User Support | 37.80% | | 8.29% | 3.5% | 9.32% | 26.65% | 100% |
| 1432 | Computer Operations and Infrastructure Services | 34.15% | 9.21% | 11.76 % | 3.08% | 8.69% | 33.11% | 100% |
| 1433 | Network Services | 43.38% | 11.88% | 9.39% | 2.61% | 9.23% | 23.51% | 100% |
| | Outsourced Contracts | 42.25% | | 10.25 % | 2.53% | 9.07% | 25.28% | 100% |
| | Production Support | 25.09% | | 17.98 % | 2.62% | 7.52% | 46.62% | 100% |
| | Information Support Services | 25.09% | | 17.98 % | 2.62% | 7.52% | 46.62% | 100% |
| | Control Systems | 96.44% | | 0% | 0% | 0.56% | 0.56% | 100% |
| | Field Data Acquisition System (FDAS) | 21.43% | | 0% | 0% | 0% | 78.57% | 100% |
| | Operations Systems Services | 50.44% | | 6.01% | 1.21% | 5.95% | 33.49% | 100% |
| 1466 | Enterprise Applications | 47.98% | 7.30% | 1.19% | 1.34% | 3.47% | 38.72% | 100% |
| | Settlement Systems Services | 27.34% | | 1.83% | 2.05% | 5.32% | 52.25% | 100% |
| 1468 | Corporate Application Support and Administration | 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| 1469 | Analytical and Reporting Applications | 10% | 0% | 0% | 65% | 25% | 0% | 100% |
| 1471 | IT Planning | 25.09% | 0.17% | 17.98 % | 2.62% | 7.52% | 46.62% | 100% |
| | Markets and Scheduling System Services | 46.85% | | 23.68 % | 2.5% | | 6.48% | 100% |
| 1482 | Market Systems Support Services | 44.94% | 1.05% | 18.51 % | 6.17% | 23.78% | 5.54% | 100% |
| 1500 | Grid Operations Division | 66.71% | 33.29% | 0% | 0% | 0% | 0% | 100% |
| 1511 | VP Grid Operations | 66.71% | 33.29% | 0% | 0% | 0% | 0% | 100% |
| 1542 | Outage Coordination | 95.11% | 4.89% | 0% | 0% | 0% | 0% | 100% |
| 1543 | Loads and Resources | 48.95% | 51.05% | 0% | 0% | 0% | 0% | 100% |
| 1544 | Real-Time Scheduling | 60% | 40% | 0% | 0% | 0% | 0% | 100% |
| 1545 | Grid Operations | 67.47% | 32.53% | 0% | 0% | 0% | 0% | 100% |
| 1546 | Security Coordination | 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| 1547 | Engineering and Maintenance | 46.42% | 53.58% | 0% | 0% | 0% | 0% | 100% |

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 376A.01

| 1548 | OSAT Group - General | 93.2% | 6.80% | 0% | 0% | 0% | 0% | 100% |
|------|------------------------------|--------|--------|----|----|----|----|------|
| 1549 | Operations Training | 50.48% | 49.52% | 0% | 0% | 0% | 0% | 100% |
| | Special Projects Engineering | 42.86% | 57.14% | 0% | 0% | 0% | 0% | 100% |
| 1555 | Operations Support Group | 55.56% | 44.44% | 0% | 0% | 0% | 0% | 100% |

FIRST REPLACEMENT VOLUME NO. I

Second Revised Sheet No. 376B Superseding First Revised Sheet No. 376B

| 1558 | Transmission | 58.46% | 41.54% | 0% | 0% | 0% | 0% | 100% |
|------|-------------------------------------|--------|--------|------------|------------|--------|--------|------|
| | Maintenance | | | | | | | |
| | Operations Application Support | 60% | | 0% | 0% | 0% | 0% | 100% |
| | Operations Engineering South | 65.32% | 34.68% | 0% | 0% | 0% | 0% | 100% |
| 1562 | Operations Engineering North | 55.15% | 44.85% | 0% | 0% | 0% | 0% | 100% |
| 1563 | Operations Coordination | 74.55% | 25.45% | 0% | 0% | 0% | 0% | 100% |
| 1564 | Operations Scheduling | 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| 1565 | Pre-Scheduling and Support | 76.92% | 23.08% | 0% | 0% | 0% | 0% | 100% |
| 1566 | Regional Coordination - General | 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| 1600 | Legal and Regulatory Division | 35.80% | 21.78% | 3.73% | 7.18% | 16.97% | 14.54% | 100% |
| | VP General Counsel - General | | 21.78% | 3.73% | 7.18% | | 14.54% | 100% |
| 1631 | Legal and Regulatory | 44.01% | 21.51% | 3.78% | 4.61% | 10.45% | 15.63% | 100% |
| 1641 | Market Analysis | 15.32% | 26.33% | 0% | 19.90 % | 31.38% | 7.07% | 100% |
| 1642 | Market Surveillance Committee | 25% | 25% | 0% | 25% | 25% | 0% | 100% |
| 1651 | ISO Governing Board | 44.01% | 21.51% | 3.78% | 4.61% | 10.45% | 15.63% | 100% |
| 1661 | Compliance - General | 21.90% | 20.37% | 11.90 % | 0% | 28.50% | 17.33% | 100% |
| 1662 | Compliance - Audits | 8.33% | 0% | 0% | 0% | 50% | 41.67% | 100% |
| 1700 | Market Services Division | 17.14% | 2.43% | 9.46% | 9.39% | 20.35% | 41.23% | 100% |
| 1711 | VP Market Services - General | 17.14% | 2.43% | 9.46% | 9.39% | 20.35% | 41.23% | 100% |
| 1721 | Billing and Settlements- General | 25% | 0% | 0% | 0% | 0% | 75% | 100% |
| 1722 | Business Development Support | 0% | 0% | 0% | 0% | 0% | 100% | 100% |
| 1723 | RMR Settlements | 80.30% | 19.70% | 0% | 0% | 0% | 0% | 100% |
| 1724 | BBS - PSS | 0% | 0% | 0% | 0% | 0% | 100% | 100% |
| 1725 | BBS - FSS | 0% | 0% | 0% | 0% | 0% | 100% | 100% |
| 1731 | Contracts and Special Projects | 43.17% | 6.83% | 0% | 0% | 0% | 50% | 100% |
| 1741 | Client Relations | 0% | 0% | 0% | 0% | 0% | 100% | 100% |
| 1751 | Market Operations - General | 30.66% | 0% | 15.33 % | 15.33 % | 34.85% | 3.83% | 100% |
| 1752 | Manager of Markets | 27.31% | 5.46% | 27.31 % | 21.84 % | 18.08% | 0% | 100% |
| 1753 | Market Engineering | 21.32% | 0% | 0% | 28.43 % | 43.15% | 7.11% | 100% |
| 1755 | Business Solutions | 5.91% | 0% | 47.27 % | 11.82 % | 29.10% | 5.91% | 100% |

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 376B.01

| 1756 Market Quality - General | 0% | 0% | 0% | 0% | 70.93% | 29.07% | 100% |
|-------------------------------|-------|----|--------|--------|--------|--------|------|
| 1757 Market Integration | 7.38% | 0% | 29.52% | 29.52% | 26.20% | 7.38% | 100% |

| 1800 | Corporate and Strategic Development Division | 44.04% | 21.49% | 3.62% | 4.21% | 10.31% | | 100% |
|-----------|--|--------|--------|--------|-------|--------|--------|------|
| 1811 | VP Corporate and Strategic Development - General | 44.04% | 21.49% | 3.62% | 4.21% | 10.31% | 16.33% | 100% |
| 1821 | Communications | 44.01% | 22.51% | 3.78% | 4.61% | 10.45% | 15.63% | 100% |
| 1831 | Strategic Development | 44.01% | 22.51% | 3.78% | 4.61% | 10.45% | 15.63% | 100% |
| 1841 | Human Resources | 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| 1851 | Project Office | 44.01% | 21.51% | 3.78% | 4.61% | 10.45% | 15.63% | 100% |
| 1861 | Regulatory Policy | 44.01% | 21.51% | 3.78% | 4.61% | 10.45% | 15.63% | 100% |
| Other Rev | venue and Credits | | | | | | | |
| | SC Application and Training Fees | 0% | 0% | 0% | 0% | 0% | 100% | 100% |
| | WECC Reimbursement/NERC Reimbursement | 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| _ | Interest Earnings | 36.64% | 12.29% | 9.34% | 4.97% | 11.47% | 25.30% | 100% |
| ebt Serv | rice Related | 33.49% | 7.93% | 15.26% | 5.19% | 9.44% | 28.69% | 100 |

<u>Table 2</u>

<u>Capital Cost Allocation Factors</u>

| System | CRS | ETS | FS | CM | MU | SMCR | Total |
|---|--------|-------|--------|-------|-------|--------|-------|
| ACC Upgrades (Communication between ISO & IOUs) | 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| Ancillary Services Management (ASM) Component of SA | 15% | 0% | 40% | 0% | 45% | 0% | 100% |
| Application Development Tools | 23.46% | 0.18% | 21.78% | 2.68% | 6.86% | 45.04% | 100% |
| Automated Dispatch System (ADS) | 50% | 0% | 25% | 0% | 20% | 5% | 100% |
| Automated Load Forecast System (ALFS) | 70% | 0% | 10% | 0% | 20% | 0% | 100% |
| Automatic Mitigation Procedure (AMP) | 85% | 0% | 0% | 0% | 15% | 0% | 100% |
| Backup systems (Legato/Quantum) | 23% | 0% | 22% | 3% | 7% | 45% | 100% |

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF First Revised Sheet No. 376D Superseding Original Sheet No. 376D

FIRST REPLACEMENT VOLUME NO. I

| Balance of Business Systems (BBS) | 0% | 0% | 0% | 0% | 0% | 100% | 100% |
|---|--------|--------|-------|--------|--------|--------|------|
| Balancing Energy Ex Post Price (BEEP) Component of SA | 50% | 0% | 20% | 10% | 20% | 0% | 100% |
| Bill's Interchange Schedule (BITS) | 85% | 0% | 0% | 0% | 15% | 0% | 100% |
| CaseWise (process modeling tool) | 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| CHASE | 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| Common Information Model (CIM) | 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| Compliance (Blaze) | 19.17% | 16.27% | 9.5% | 0% | 32.83% | 22.23% | 100% |
| Congestion Management (CONG) (Component of SA) | 10% | 0% | 0% | 65% | 25% | 0% | 100% |
| Congestion Reform-DSOW | 50% | 0% | 0% | 50% | 0% | 0% | 100% |
| Congestion Revenue Rights (CRR) | 0% | 0% | 0% | 80% | 20% | 0% | 100% |
| DataWarehouse | 24.46% | 18.27% | 6.40% | 8.74% | 24.30% | 17.82% | 100% |
| Dept. of Market Analysis Tools (SAS/MARS) | 15.32% | 26.33% | 0% | 19.90% | 31.38% | 7.07% | 100% |
| Dispute Tracking System (Remedy) | 0% | 0% | 0% | 0% | 0% | 100% | 100% |
| Documentum | 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| Electronic Tagging (Etag) | 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| Energy Management System (EMS) | 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| Engineering Analysis Tools | 60% | 40% | 0% | 0% | 0% | 0% | 100% |
| Evaluation of Market Separation | 0% | 0% | 0% | 50% | 50% | 0% | 100% |
| Existing Transmission Contracts Calculator (ETCC) | 25% | 0% | 20% | 15% | 20% | 20% | 100% |
| FERC Study Software | 0% | 0% | 0% | 0% | 100% | 0% | 100% |
| Firm Transmission Right (FTR) and Secondary Registration System (SRS) | 0% | 0% | 15% | 60% | 15% | 10% | 100% |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: July 29, 2004

Effective: January 1, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF First Revised Sheet No. 376E FIRST REPLACEMENT VOLUME NO. I Superseding Original Sheet No. 376E

| Global Resource Reliability | 75% | 15% | 0% | 0% | 10% | 0% | 100% |
|---|--------|--------|--------|--------|--------|--------|------|
| Management Application (GRRMA) | | | | | | | |
| Grid Operations Training Simulator (GOTS) | 56% | 44% | 0% | 0% | 0% | | 100% |
| Hour-Ahead Data AnalysisTool, Day-Ahead Data AnalysisTool, | 0% | 0% | 100% | 0% | 0% | 0% | 100% |
| Human Resources | 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| IBM Contract | 37.26% | 14.44% | 9.54% | 3.52% | 9.10% | 26.13% | 100% |
| Integrated Forward Market (IFM) | 10% | 0% | 35% | 0% | 55% | 0% | 100% |
| Internal Development | 23.46% | 0.18% | 21.78% | 2.68% | 6.86% | 45.04% | 100% |
| Interzonal Congestion Management reform - Real Time | 50% | 0% | 0% | 50% | 0% | 0% | 100% |
| Land and Building Costs | 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| Local Area Network (LAN) | 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| Locational Marginal Pricing (LMPM) | 10% | 0% | 35% | 0% | 55% | 0% | 100% |
| Market Transaction System (MTS) | 0% | 0% | 0% | 0% | 100% | 0% | 100% |
| Masterfile | 20% | 0% | 20% | 0% | 55% | 5% | 100% |
| MD02 Capital | 6.95% | 0% | 13.86% | 10.91% | 28.38% | 39.90% | 100% |
| Meter Data Acquisition System (MDAS) | 0% | 0% | 0% | 0% | 0% | 100% | 100% |
| Miscellaneous (2004 related projects) | 23.46% | 0% | 21.78% | 2.68% | 6.86% | 45.04% | 100% |
| Monitoring (Tivoli) | 23.46% | 0% | 21.78% | 2.68% | 6.86% | 45.04% | 100% |
| New Resource Interconnection (NRI) | 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| New System Equipment (replacement of owned equipment) | 23.46% | 0.18% | 21.78% | 2.68% | 6.86% | 45.04% | 100% |
| NT/web servers | 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| NT-servers | 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 376F Superseding Original Sheet No. 376F

| 27% | 0.% | 18% | 5% | 9% | 41% | 100% |
|--------|---|--|---|--|--|--|
| 44% | 27% | 4% | 4% | 10% | 17% | 100% |
| 44% | 21% | 4% | 4% | 10% | 17% | 100% |
| 10% | 0% | 25% | 10% | 35% | 20% | 100% |
| 0% | 0% | 0% | 0% | 0% | 100% | 100% |
| 44% | 21% | 4% | 4% | 10% | 17% | 100% |
| 27% | 0% | 18% | 5% | 9% | 41% | 100% |
| 0% | 0% | 0% | 0% | 0% | 100% | 100% |
| 5% | 5% | 0% | 0% | 90% | 0% | 100% |
| 50% | 0% | 10% | 20% | 20% | 0% | 100% |
| 0% | 0% | 93.92% | 0% | 6.08% | 0% | 100% |
| 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| 80% | 0% | 0% | 0% | 10% | 10% | 100% |
| 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| 35% | 0% | 10% | 0% | 55% | 0% | 100% |
| 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| | 44% 44% 10% 0% 44% 27% 0% 5% 50% 44.06% 80% 100% 100% | 44% 27% 44% 21% 10% 0% 0% 0% 44% 21% 27% 0% 5% 5% 50% 0% 44.06% 21.47% 80% 0% 100% 0% 35% 0% 100% 0% 100% 0% 100% 0% 100% 0% | 44% 27% 4% 44% 21% 4% 10% 0% 25% 0% 0% 0% 44% 21% 4% 27% 0% 18% 0% 0% 0% 5% 5% 0% 50% 0% 10% 44.06% 21.47% 3.51% 80% 0% 0% 100% 0% 0% 100% 0% 0% 100% 0% 0% 100% 0% 0% 100% 0% 0% 100% 0% 0% 100% 0% 0% | 44% 27% 4% 4% 44% 21% 4% 4% 10% 0% 25% 10% 0% 0% 0% 0% 44% 21% 4% 4% 27% 0% 18% 5% 0% 0% 0% 0% 5% 0% 0% 0% 5% 0% 0% 0% 50% 0% 10% 20% 0% 0% 93.92% 0% 44.06% 21.47% 3.51% 3.93% 80% 0% 0% 0% 100% 0% 0% 0% 100% 0% 0% 0% 100% 0% 0% 0% 100% 0% 0% 0% 100% 0% 0% 0% 100% 0% 0% 0% 100% 0% 0% 0% 100% 0% 0% 0% 100% 0% 0% <td< td=""><td>44% 27% 4% 4% 10% 44% 21% 4% 4% 10% 10% 0% 25% 10% 35% 0% 0% 0% 0% 0% 44% 21% 4% 4% 10% 27% 0% 18% 5% 9% 0% 0% 0% 0% 0% 5% 5% 0% 0% 90% 50% 0% 10% 20% 20% 0% 0% 10% 20% 20% 44.06% 21.47% 3.51% 3.93% 10.21% 80% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 0% 0% 0% 0% <td< td=""><td>44% 27% 4% 4% 10% 17% 44% 21% 4% 4% 10% 17% 10% 0% 25% 10% 35% 20% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 44% 21% 4% 4% 10% 17% 27% 0% 18% 5% 9% 41% 0% 0% 0% 0% 10% 10% 5% 5% 0% 0% 0% 0% 5% 5% 0% 0% 0% 0% 5% 5% 0% 0% 0% 0% 5% 5% 0% 0% 0% 0% 44.06% 21.47% 3.51% 3.93% 10.21% 16.81% 80% 0% 0% 0% 0% 0% 100% 0% 0% 0%</td></td<></td></td<> | 44% 27% 4% 4% 10% 44% 21% 4% 4% 10% 10% 0% 25% 10% 35% 0% 0% 0% 0% 0% 44% 21% 4% 4% 10% 27% 0% 18% 5% 9% 0% 0% 0% 0% 0% 5% 5% 0% 0% 90% 50% 0% 10% 20% 20% 0% 0% 10% 20% 20% 44.06% 21.47% 3.51% 3.93% 10.21% 80% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 0% 0% 0% 0% <td< td=""><td>44% 27% 4% 4% 10% 17% 44% 21% 4% 4% 10% 17% 10% 0% 25% 10% 35% 20% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 44% 21% 4% 4% 10% 17% 27% 0% 18% 5% 9% 41% 0% 0% 0% 0% 10% 10% 5% 5% 0% 0% 0% 0% 5% 5% 0% 0% 0% 0% 5% 5% 0% 0% 0% 0% 5% 5% 0% 0% 0% 0% 44.06% 21.47% 3.51% 3.93% 10.21% 16.81% 80% 0% 0% 0% 0% 0% 100% 0% 0% 0%</td></td<> | 44% 27% 4% 4% 10% 17% 44% 21% 4% 4% 10% 17% 10% 0% 25% 10% 35% 20% 0% 0% 0% 0% 100% 0% 0% 0% 0% 100% 44% 21% 4% 4% 10% 17% 27% 0% 18% 5% 9% 41% 0% 0% 0% 0% 10% 10% 5% 5% 0% 0% 0% 0% 5% 5% 0% 0% 0% 0% 5% 5% 0% 0% 0% 0% 5% 5% 0% 0% 0% 0% 44.06% 21.47% 3.51% 3.93% 10.21% 16.81% 80% 0% 0% 0% 0% 0% 100% 0% 0% 0% |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: July 29, 2004

Effective: January 1, 2004

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 376G Superseding Original Sheet No. 376G

| 100% | 0% | 0% | 0% | 0% | 0% | 100% |
|---------|---|--|--|---|---|--|
| 65% | 0% | 15% | 5% | 15% | 0% | 100% |
| 23.96% | 0% | 19.84% | 25.87% | 30.33% | 0% | 100% |
| 0% | 0% | 93.92% | 0% | 6.08% | 0% | 100% |
| 0% | 0% | 93.92% | 0% | 6.08% | 0% | 100% |
| 40% | 0% | 0% | 0% | 60% | 0% | 100% |
| 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| 23% | 0% | 22% | 3% | 7% | 45% | 100% |
| 0% | 0% | 0% | 0% | 0% | 100% | 100% |
| 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| 18.67% | 9.55% | 13.71% | 4.21% | 11.77% | 42.09% | 100% |
| 43.27% | 1.02% | 7.34% | 1.79% | 11.03% | 35.56% | 100% |
| 44.06% | 21.47% | 3.51% | 3.93% | 10.21% | 16.81% | 100% |
| 23.46% | 0.18% | 21.78% | 2.68% | 6.86% | 45.04% | 100% |
| 100% | 0% | 0% | 0% | 0% | 0% | 100% |
| 50% | 50% | 0% | 0% | 0% | 0% | 100% |
| 53.60% | 0.55% | 10.62% | 15.74% | 17.48% | 2% | 100% |
| 23.46% | 0.18% | 21.78% | 2.68% | 6.86% | 45.04% | 100% |
| 23.46% | 0.18% | 21.78% | 2.68% | 6.86% | 45.04% | 100% |
| 20.4070 | | | | | | |
| | 65% 23.96% 0% 40% 44.06% 44.06% 44.06% 44.06% 18.67% 44.06% 23.46% 50% 53.60% | 65% 0% 23.96% 0% 0% 0% 0% 0% 44.06% 21.47% 23% 0% 44.06% 21.47% 44.06% 21.47% 44.06% 21.47% 23.46% 0.18% 50% 50% 53.60% 0.55% 23.46% 0.18% | 65% 0% 15% 23.96% 0% 19.84% 0% 0% 93.92% 0% 0% 93.92% 40% 0% 0% 44.06% 21.47% 3.51% 44.06% 21.47% 3.51% 44.06% 21.47% 3.51% 43.27% 1.02% 7.34% 44.06% 21.47% 3.51% 23.46% 0.18% 21.78% 100% 0% 0% 50% 50% 0% 53.60% 0.55% 10.62% 23.46% 0.18% 21.78% | 65% 0% 15% 5% 23.96% 0% 19.84% 25.87% 0% 0% 93.92% 0% 0% 0% 93.92% 0% 40% 0% 0% 0% 44.06% 21.47% 3.51% 3.93% 44.06% 21.47% 3.51% 3.93% 44.06% 21.47% 3.51% 3.93% 43.27% 1.02% 7.34% 1.79% 44.06% 21.47% 3.51% 3.93% 44.06% 21.47% 3.51% 3.93% 44.06% 21.47% 3.51% 3.93% 44.06% 21.47% 3.51% 3.93% 43.27% 1.02% 7.34% 1.79% 44.06% 21.47% 3.51% 3.93% 23.46% 0.18% 21.78% 2.68% 50% 50% 0% 0% 53.60% 0.55% 10.62% 15.74% 23.46% 0.18% 21.78% 2.68% | 65% 0% 15% 5% 15% 23.96% 0% 19.84% 25.87% 30.33% 0% 0% 93.92% 0% 6.08% 0% 0% 93.92% 0% 6.08% 40% 0% 0% 0% 6.08% 44.06% 21.47% 3.51% 3.93% 10.21% 23% 0% 22% 3% 7% 0% 0% 0% 0% 0% 44.06% 21.47% 3.51% 3.93% 10.21% 44.06% 21.47% 3.51% 3.93% 10.21% 43.27% 1.02% 7.34% 1.79% 11.03% 44.06% 21.47% 3.51% 3.93% 10.21% 43.27% 1.02% 7.34% 1.79% 11.03% 44.06% 21.47% 3.51% 3.93% 10.21% 23.46% 0.18% 21.78% 2.68% 6.86% 50% 50% 0% | 65% 0% 15% 5% 15% 0% 23.96% 0% 19.84% 25.87% 30.33% 0% 0% 0% 93.92% 0% 6.08% 0% 0% 0% 93.92% 0% 6.08% 0% 40% 0% 0% 6.08% 0% 44.06% 21.47% 3.51% 3.93% 10.21% 16.81% 23% 0% 22% 3% 7% 45% 0% 0% 0% 0% 100% 44.06% 21.47% 3.51% 3.93% 10.21% 16.81% 44.06% 21.47% 3.51% 3.93% 10.21% 16.81% 18.67% 9.55% 13.71% 4.21% 11.77% 42.09% 43.27% 1.02% 7.34% 1.79% 11.03% 35.56% 44.06% 21.47% 3.51% 3.93% 10.21% 16.81% 23.46% 0.18% 21.78% 2.68% |

FIRST REPLACEMENT VOLUME NO. I

| Capital Expenditures for Systems | 32.20% | 7.40% | 15% | 5.50% | 10.60% | 29.30% | 100% |
|----------------------------------|--------|-------|-----|-------|--------|--------|------|
| not Specified | | | | | | | |

Table 3 Reallocation Factors for Projected Unrecovered Portion of Settlements, Metering, and Client Relations Revenue Requirement

| | CRS | ETS | FS | СМ | MU | SMCR | Total | |
|---|------|--------|------|-------|--------|------|--------|---|
| Functional Association of Settlements, Metering, and Client Relations | 0.0% | 70.34% | 0.0% | 8.23% | 21.43% | 0.0% | 100.0% | 6 |

Part F – Other Modifications to the Rates

Consistent with a Settlement Agreement accepted by the FERC in Docket Nos. ER04-115-000, et al., GMC rates and charges shall be calculated consistent with the following additional requirements during the period that the GMC rates and charges specified in that Settlement Agreement remain in effect:

- The GMC chargeable to a Scheduling Coordinator for transactions representing transfers from the Mohave generation facility to the Loads of the Mohave co-owners located outside of the ISO Control Area, will be reduced by excluding 65 percent of those Loads from the Energy Transmission Services Net Energy Charge and the Core Reliability Services – Energy Exports Charge. Such excluded Load shall not be included in the denominators used to calculate the rates for the Energy Transmission Services – Net Energy Charge and the Core Reliability Services – Energy Export Charge.
- The Forward Scheduling Charge assessed against Schedules submitted by PG&E solely in its role as Path 15 facilitator will be reduced by excluding 65 percent of the number of such Schedules from the Forward Scheduling Charge. Such excluded Schedules shall not be included in the denominator upon which the Forward Scheduling Charge is calculated.
- Modesto Irrigation District (MID) is a Scheduling Coordinator and also is responsible for a portion of the GMC charges payable by another Scheduling Coordinator, Pacific Gas and Electric Company (PG&E) pursuant to a contract between them. MID and PG&E have agreed that MID shall pay the ISO directly \$75,000 each month, in lieu of any payments to PG&E for its share of the GMC charges payable by PG&E and the ISO shall credit a portion of the amount received from MID to PG&E as an offset to PG&E's obligation for GMC charges. Any difference, positive or negative, between the amount credited to PG&E and the amount paid by MID to the ISO under this provision shall be reflected in the Operating and Capital Reserves Account. The payment arrangement described in this paragraph is subject to the conditions, and will be implemented pursuant to the procedures, set forth in the Offer of Partial Settlement accepted by the FERC in Docket Nos. ER04-115-000, et al. This arrangement shall not apply to MID's obligation for GMC charges as a Scheduling Coordinator, which shall be governed by the provisions of this Schedule 1 and the other applicable provisions of the ISO Tariff, except that in the event that MID accepts responsibility for scheduling any load currently scheduled by PG&E

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

Substitute Original Sheet No. 3761

under SCID PGAB, the ISO will not charge any additional GMC at the tariffed GMC rate, but rather will attribute such schedules and load to the fixed \$75,000.00 per month payment set forth above, provided that MID schedules such load under a new and separate SCID and the ISO shall not assess GMC charges to such SCID.

4. San Diego Gas & Electric is the Scheduling Coordinator for transactions on those portions of the Southwest Power Link ("SWPL") which are owned by the Arizona Public Service Company ("APS") and the Imperial Irrigation District ("IID"), and are scheduled by SDG&E under a designated SCID. Schedules submitted to the ISO under that designated SCID shall not be subject to GMC charges. In lieu of GMC charges, SDG&E will pay the ISO a Line Operator Charge, as agreed to in the SWPL Operations Agreement, entered into by the ISO and SDG&E on May 23, 2005, and submitted to the Commission as a rate schedule pursuant to the Federal Power Act.

Issued by: Charles F. Robinson, Vice President and General Counsel

Schedule 2

Other Charges

Voltage Support Service

The user rate per unit of purchased Voltage Support will be calculated in accordance with the formula in ISO Tariff Section 2.5.28.5.

Regulation Service

Regulation Obligation:

The amount of Regulation required will be calculated in accordance with Section 4.1 of the Ancillary Services Requirements Protocol (ASRP).

Regulation Rates:

The formulas for calculating the amount of and charges for Regulation Service are referenced in ISO Tariff Sections 2.5.20.1, 2.5.27, and 2.5.28.

The ISO will calculate the user rate for Regulation in each Zone for each Settlement Period in accordance with Section 2.5.28.1.

Spinning Reserve Service

Spinning Reserve Obligation:

The amount of Spinning Reserve required as a component of Operating Reserves is specified in Section 5.1 of the Ancillary Services Requirements Protocol (ASRP).

Spinning Reserve Rates:

The formulas for calculating the amount of and charges for Spinning Reserve Service are referenced in ISO Tariff Sections 2.5.27.2, 2.5.28.2.

The ISO will calculate the user rate for Spinning Reserve in each Zone for each Settlement Period in accordance with ISO Tariff Section 2.5.28.2.

Non-Spinning Reserve Service

Non-Spinning Reserve Obligation:

The amount of Non-Spinning Reserve required as a component of Operating Reserves is specified in Section 5.1 of the Ancillary Services Requirements Protocol (ASRP).

Non-Spinning Reserve Rates:

The formulas for calculating the amount of and charges for Non-Spinning Reserve Service are referenced in ISO Tariff Sections 2.5.27.3, 2.5.28.3.

The ISO will calculate the user rate for Non-Spinning Reserve in each Zone for each Settlement Period in accordance with ISO Tariff Section 2.5.28.3.

Replacement Reserves

The formulas for calculating the amount of and charges for Replacement Reserve Service are referenced in ISO Tariff Sections 2.5.27.4 and 2.5.28.4.

Black Start Capability

The user rate per unit of purchased Black Start capability for each Settlement Period will be calculated in accordance with ISO Tariff Section 2.5.28.6.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

Imbalance Energy Charges

Rates for Imbalance Energy will be calculated in accordance with the formula in ISO Tariff Section 11.2.4.1.

Replacement Reserve Charge

The Replacement Reserve Charge will be calculated in accordance with ISO Tariff Sections 2.5.28.4 and 11.2.4.1.

Unaccounted for Energy

Rates for UFE will be calculated in accordance with ISO Tariff Section 11.2.4.1.

Transmission Losses Imbalance Charges

Transmission Losses for each hour will be calculated in accordance with ISO Tariff Sections 7.4.2.

Access Charges

The High Voltage Access Charge and Transition Charge is set forth in ISO Tariff Schedule 3 of Appendix F. The Low Voltage Access Charge of each Participating TO is set forth in that Participating TO's TO Tariff or comparable document.

Usage Charges

The amount payable by Scheduling Coordinators is determined in accordance with ISO Tariff Section 7.3.1.4.1. Usage Charges will be calculated in accordance with ISO Tariff Section 7.3.1.

Default Usage Charge

The Default Usage Charge will be used in accordance with ISO Tariff Section 7.3.1.3.

Grid Operations Charge for Intra-Zonal Congestion

Intra-Zonal Congestion during the initial period of operation will be managed in accordance with ISO Tariff Sections 7.2.6.1 and 7.2.6.2.

Wheeling Access Charges

The Wheeling Access Charge for transmission service is set forth in Section 7.1.4.1 of the ISO Tariff and Appendix II of the TO Tariffs.

Charge for Failure to Conform to Dispatch Instructions

The Charge for Failure to Conform to Dispatch Instructions will be determined in accordance with ISO Tariff Section 2.5.22.11.

Reliability Must-Run Charge

The Reliability Must-Run Charge will be determined in accordance with ISO Tariff Section 5.2.7.

FERC Annual Charge Recovery Rate

The FERC Annual Charge Recovery Rate will be determined in accordance with ISO Tariff Section 7.5.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: June 30, 2003 Effective: May 30, 2003

ISO Tariff Appendix F Schedule 3

High Voltage Access Charges

1. Objectives and Definitions

1.1 Objectives

- (a) The Access Charge will remain utility-specific until a New Participating TO executes the Transmission Control Agreement, at which time the Access Charge will change as discussed below.
- (b) The Access Charge is the charge assessed for using the ISO Controlled Grid. It consists of three components, the High Voltage Access Charge (HVAC), the Transition Charge and the Low Voltage Access Charge (LVAC).
- (c) The HVAC ultimately will be based on one ISO Grid-wide rate. Initially, the HVAC will be based on TAC Areas, which will transition 10% per year to the ISO Grid-wide rate. In the first year after the Transition Date described in Section 4.2 of this Schedule 3, the HVAC will be a blend based on 10% ISO Grid-wide and 90% TAC Area.
- (d) New High Voltage Facility additions and capital additions to Existing High Voltage Facilities will be immediately included in the ISO Grid-wide component of the HVAC. The Transmission Revenue Requirement for New High Voltage Facilities will not be included in the calculation of the Transition Charge.
- (e) The LVAC will remain utility-specific and will be determined by each Participating TO. Each Participating TO will charge for and collect the LVAC.
- (f) The cost-shift associated with transitioning from utility-specific rates to one ISO Grid-wide rate will be mitigated in accordance with the ISO Tariff, including this schedule.

1.2 Definitions

(a) Master Definition Supplement

Unless the context otherwise requires, any word or expression defined in the Master Definition Supplement shall have the same meaning where used in this Schedule 3.

(b) Special Definitions for this Appendix

When used in this Schedule 3 with initial capitalization, the following terms shall have the meanings specified below.

"High Voltage Utility-Specific Rate" means a Participating TO's High Voltage Transmission Revenue Requirement divided by such Participating TO's forecasted Gross Load.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2003 Effective: June 1, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Second Revised Sheet No. 379A
FIRST REPLACEMENT VOLUME NO. I
Superseding First Revised Sheet No. 379A

"TAC Benefit" means the amount, if any, for each year by which the cost of Existing High Voltage Transmission Facilities associated with deliveries of Energy to Gross Loads in the PTO Service Territory is reduced by the implementation of the High Voltage Access Charge

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 9, 2004 Effective: May 8, 2004

described in Schedule 3 to Appendix F. The Tac Benefit of a New Participating TO shall not be less than zero.

"Transition Date" means the date defined in Section 4.2 of this Schedule.

2. Assessment of High Voltage Access Charge and Transition Charge. All UDCs and MSS Operators in a PTO Service Territory serving Gross Loads directly connected to the transmission facilities or Distribution System of a UDC or MSS Operator in a PTO Service Territory shall pay to the ISO a charge for transmission service on the High Voltage Transmission Facilities included in the ISO Controlled Grid. The charge will be based on the High Voltage Access Charge applicable to the TAC Area in which the point of delivery is located and the applicable Transition Charge. A UDC or MSS Operator that is also a Participating TO shall pay, or receive payment of, if applicable, the difference between (i) the High Voltage Access Charge and Transition Charge applicable to its transactions as a UDC or MSS Operator; and (ii) the disbursement of High Voltage Access Charge revenues to which it is entitled pursuant to Section 7.1.3 of the ISO Tariff.

3. TAC Areas.

- 3.1 TAC Areas are based on the Control Areas in California prior to the ISO Operations Date. Three TAC Areas will be established based on the Original Participating TOs: (1) a Northern Area consisting of the PTO Service Territory of Pacific Gas and Electric Company and the PTO Service Territory of any entity listed in Section 3.3 or 3.5 of this Schedule; (2) an East Central Area consisting of the PTO Service Territory of Southern California Edison Company and the PTO Service Territory of any entity listed in Section 3.4, 3.5 or 3.6 (as indicated therein) of this Schedule 3; and (3) a Southern Area consisting of the PTO Service Territory of San Diego Gas & Electric Company. Participating TOs that are not in one of the above cited PTO Service Territories are addressed below.
- 3.2 If the Los Angeles Department of Water and Power joins the ISO and becomes a Participating TO, its PTO Service Territory will form a fourth TAC Area, the West Central Area.

Effective: May 8, 2004

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: May 21, 2004

- 3.3 If any of the following entities becomes a Participating TO, its PTO Service
 Territory will become part of the Northern Area: Sacramento Municipal Utility
 District, Western Area Power Administration Sierra Nevada Region, the
 Department of Energy California Labs, Northern California Power Agency, City of
 Redding, Silicon Valley Power, City of Palo Alto, City and County of San
 Francisco, Alameda Bureau of Electricity, City of Biggs, City of Gridley, City of
 Healdsburg, City of Lodi, City of Lompoc Utility Department, Modesto Irrigation
 District, Turlock Irrigation District, Plumas County Water Agency, City of
 Roseville Electric Department, City of Shasta Lake, and City of Ukiah or any
 other entity owning or having contractual rights to High Voltage or Low Voltage
 Transmission Facilities in Pacific Gas and Electric Company's Control Area prior
 to the ISO Operations Date.
- 3.4 If any of the following entities becomes a Participating TO, its PTO Service
 Territory will become part of the East Central Area: City of Anaheim Public Utility
 Department, City of Riverside Public Utility Department, City of Azusa Light and
 Water, City of Banning Electric, City of Colton, City of Pasadena Water and
 Power Department, The Metropolitan Water District of Southern California and
 City of Vernon or any other entity owning or having contractual rights to High
 Voltage or Low Voltage Transmission Facilities in Southern California Edison
 Company's Control Area prior to the ISO Operations Date.
- 3.5 If the California Department of Water Resources becomes a Participating TO, its High Voltage Transmission Revenue Requirements associated with High Voltage Transmission Facilities in the Northern Area would become part of the High Voltage Transmission Revenue Requirement for the Northern Area while the remainder would be included in the East Central Area.
- 3.6 If the City of Burbank Public Service Department (Burbank) and/or the City of Glendale Public Service Department (Glendale) become Participating TOs after or at the same time as the Los Angeles Department of Water and Power becomes a Participating TO, then the PTO Service Territory of Burbank and/or Glendale would become part of the West Central Area. Otherwise, if Burbank or Glendale becomes a Participating TO, prior to Los Angeles, its PTO Service Territory will become part of the East Central Area. Once either Burbank or Glendale are part of the East Central Area, they will not move to the West Central Area if such area is established.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 9, 2004 Effective: May 8, 2004

3.7 If the Imperial Irrigation District or an entity outside the State of California should apply to become a Participating TO, the ISO Governing Board will review the reasonableness of integrating the entity into one of the existing TAC Areas. If the entity cannot be integrated without the potential for significant cost shifts, the ISO Governing Board may establish a separate TAC Area.

4. Transition Date

- 4.1 New Participating TOs shall provide the ISO with a notice of intent to join and execute the Transmission Control Agreement by either January 1 or July 1 of any year and provide the ISO with an application within 15 days of such notice of intent.
- Participating TO's execution of the Transmission Control Agreement takes effect (Transition Date). The Transition Date shall be the same for the Northern Area, East Central Area and the Southern Area. The Transition Date shall also be the same for the West Central Area, should it come into existence in accordance with Section 3.2 of this Schedule 3, unless the ISO provides additional information demonstrating the need for a deferral. The 10-year transition defined in Section 5.8 of Schedule 3 shall start from that date. If the West Central TAC Area is created after the Transition Date, the applicable High Voltage Access Charge shall transition to an ISO Grid-wide High Voltage Access Charge over the period remaining from the Transition Date, on the same schedule as the other TAC Areas.
- 4.3 Application to Additional TAC Areas. For any TAC Areas other than those specified in Section 4.2 of this Schedule 3, created after the Transition Date, including any TAC Area created as a result of the application of Section 3.7 of this Schedule 3, whether and over what period the applicable High Voltage Access Charge shall transition to an ISO Grid-wide charge shall be determined by the ISO Governing Board.
- 4.4 Application to Wheeling Access Charges. The transition described in this Section 4 shall also apply, on the same schedule, to High Voltage Wheeling Access Charges.
- TO executes the Transmission Control Agreement, the ISO and potential New Participating TO that has an obligation to serve Load shall determine the amount of FTRs to be allocated to the New Participating TO for each Existing Right that the New Participating TO converts to Converted Rights. In making that determination, the ISO will consider the amount of contracted transmission capacity, the firmness of the contracted transmission capacity, and other characteristics of the contracted

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: June 1, 2003

FIRST REPLACEMENT VOLUME NO. I

Superseding Second Revised Sheet No. 383

transmission capacity to determine the amount of FTRs to be given to the New Participating TO in accordance with Section 9.4.3 of the ISO Tariff.

- 5. **Determination of the Access Charge.**
- 5.1 The Access Charge consists of a High Voltage Access Charge (HVAC) that is based on a TAC Area component and an ISO Grid-wide component, a Transmission Charge, and a Low Voltage Access Charge (LVAC) that is based on a utility-specific rate established by each Participating TO in accordance with its TO Tariff.
- 5.2 Each Participating TO will develop, in accordance with Section 6 of this Schedule 3, a High Voltage Transmission Revenue Requirement (HVTRR PTO) consisting of a Transmission Revenue Requirement for Existing High Voltage Facility (EHVTRR PTO) and a Transmission Revenue Requirement for New High Voltage Facility (NHVTRR PTO). The HVTRR PTO includes the TRBA adjustment described in Section 6.1 of this Schedule 3.
- 5.3 The Gross Load amount in MWh shall be established by each Participating TO and filed at FERC with each Participating TO's Transmission Revenue Requirement (GLPTO).
- 5.4 The HVAC applicable to each UDC or MSS Operator serving Gross Load in the PTO Service Territory, shall be based on a TAC Area component (HVAC_A) and an ISO Gridwide component (HVAC₁).

$$HVAC = HVAC_A + HVAC_I$$

5.5 The Existing Transmission Revenue Requirement for the TAC Area component (ETRR_A) is the summation of each Participating TO's EHVTRR PTO in that TAC Area. The Gross Load in the TAC Area (GLA) is the summation of each Participating TO's Gross Load in that TAC Area (GL_{PTO}). The TAC Area component will be based on the product of Existing Transmission Revenue Requirement for the TAC Area (ETRR_A) and the applicable annual transition percentage (%TA) in Section 5.8 of this Schedule 3, divided by the Gross Load in the TAC Area (GL_A).

ETRR
$$_{A} = \Sigma EHVTRR_{PTO}$$

$$GL_{A} = \Sigma GL_{PTO}$$

$$HVAC_{A} = (ETRR_{A} * \%TA) / GL_{A}$$

5.6 The Existing Transmission Revenue Requirement for the ISO Grid-wide component (ETRR_I) will be the summation of all TAC Areas' ETRR A multiplied by the applicable annual transition percentage (%IGW) in Section 5.8 of this Schedule 3. The New Transmission Revenue Requirement (NTRR) is the summation of each Participating TO's NHVTRR PTO. The ISO Grid-wide component will be based on the ETRR, plus the NTRR, divided by the summation of all Gross Loads in the TAC Areas (GL_A).

ETRR_I=
$$\Sigma$$
 ETRR_A * %IGW
HVAC_I = (ETRR_I + NTRR) / Σ GL_A

The foregoing formulas will be adjusted, as necessary to take account of new TAC Areas.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 21, 2004 Effective: May 8, 2004 5.7 The Transition Charge shall be calculated separately for each Participating TO by dividing (i) the net difference between (1) the Participating TO's payment responsibility, if any, under Section 8.6 of the ISO Tariff and Section 7 of this Schedule 3; and (2) the amount, if any, payable to the Participating TO in accordance with Section 8.6 of the ISO Tariff and Section 7 of this Schedule 3; by (ii) the total of all forecasted Gross Load in the PTO Service Territory of the Participating TO, including the UDC and/or MSS Operator. If greater than zero, the Transition Charge shall be collected with the High Voltage Access Charge. If less than zero, the Transition Charge shall be credited with the High Voltage Access Charge. The amount of

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 21, 2004 Effective: May 8, 2004

- each Participating TO's NHVTRR shall not be included in the Transition Charge calculation.
- The High Voltage Access Charge shall transition over a 10-year period from TAC Area to ISO Grid-wide. The transition percentage to be used for each year will be based on the following:

| Year | TAC Area | ISO Grid-Wide |
|------|--------------|---------------|
| | High Voltage | High Voltage |
| | (%TA) | (%IGW) |
| 1 | 90% | 10% |
| 2 | 80% | 20% |
| 3 | 70% | 30% |
| 4 | 60% | 40% |
| 5 | 50% | 50% |
| 6 | 40% | 60% |
| 7 | 30% | 70% |
| 8 | 20% | 80% |
| 9 | 10% | 90% |
| 10 | 0% | 100% |

- After the completion of the transition period described in Section 4 of this Schedule 3, the High Voltage Access Charge shall be equal to the sum of the High Voltage Transmission Revenue Requirements of all Participating TOs, divided by the sum of the Gross Loads of all Participating TOs.
- 6 High Voltage Transmission Revenue Requirement.
- 6.1 The High Voltage Transmission Revenue Requirement of a Participating TO will be determined consistent with ISO procedures posted on the ISO Home Page and shall be the sum of:
 - (a) the Participating TO's High Voltage Transmission Revenue Requirement (including costs related to Existing Contracts associated with transmission by others and deducting transmission revenues actually expected to be received by the Participating TO related to transmission for others in accordance with Existing Contracts, less the sum of the Standby Transmission Revenues); and

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2003 Effective: June 1, 2003

(b) the annual high voltage TRBA adjustment shall be based on the principal balance in the high voltage TRBA as of September 30, which shall be calculated as a dollar amount based on the projected Transmission Revenue Credits as adjusted for the true up of the prior year's difference between projected and actual credits. For a Participating TO that is not a UDC, MSS or a Scheduling Coordinator serving End-Use Customers and that does not have Gross Load in its TO Tariff in accordance with Appendix F, Schedule 3, Section 9, the Participating TO shall include any over- or under-recovery of its annual High Voltage Transmission Revenue Requirement in its high voltage TRBA. If the annual high voltage TRBA adjustment involves only a partial year of operations. the Participating TO's over- or under-recovery shall be based on a partial year revenue requirement, calculated by multiplying the Participating TO's High Voltage Transmission Revenue Requirement by the number of days the High Voltage Transmission Facilities were under the ISO's Operational Control divided by the number of days in the year.

7 Limitation

(a) During each year of the transition period described in this Schedule 3, the increase in the total payment responsibility applicable to Gross Loads in the PTO Service Territory of an Original Participating TO attributable to the total for the year of (i) the amount applicable for the Original Participating TO under Section 8.6 of the ISO Tariff; plus (ii) the amount applicable to the implementation of the High Voltage Access Charge shall not exceed the amount specified in paragraph (b) of this section. This limitation shall be calculated individually for each Original Participating TO, provided that, if the net effect of clauses (i) and (ii) of this paragraph is positive for one or more Original Participating TOs for any year, the combined net effect shall be allocated among all Original Participating TOs in proportion to the amounts specified in paragraph (b) of this section. This limitation shall be applied by the ISO's calculation annually of amounts payable by New Participating TOs to Original Participating TOs such that the combined effect of clauses (i) and (ii) of this paragraph, and the payments received by each Original Participating TO shall not exceed the amounts specified in paragraph (b) of this section. The amount receivable by the Original Participating TO from the New Participating TOs to implement the limitation in paragraph (b) of this section, shall be credited through the Transition Charge established pursuant to Section 5.7 of this Schedule 3.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 8, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I Original Sheet No. 385.01

Payment responsibility under this section, if any, shall be allocated among New Participating TOs in proportion to their TAC Benefits.

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: November 7, 2003 Effective: October 17, 2003

Original Sheet No. 385A

- (b) The maximum annual amounts for Original Participating TO shall be as follows:
 - (i) For Pacific Gas and Electric Company and Southern California Edison Company, the maximum annual amount shall be thirty-two million dollars (\$32,000,000.00) each; and
 - (ii) For San Diego Gas & Electric Company, the maximum annual amount shall be eight million dollars (\$8,000,000.00).

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 18, 2003 Effective: October 17, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Fifth Revised Sheet No. 386
FIRST REPLACEMENT VOLUME NO. I
Superseding Fourth Revised Sheet No. 386

8. Updates to High Voltage Access Charges.

- 8.1 High Voltage Access Charges and High Voltage Wheeling Access Charges shall be adjusted: (1) on January 1 and July 1 of each year when necessary to reflect the addition of any New Participating TO and (2) on the date FERC makes effective a change to the High Voltage Transmission Revenue Requirements of any Participating TO. Using the High Voltage Transmission Revenue Requirement accepted or authorized by FERC, consistent with Section 9 of this Schedule 3, for each Participating TO, the ISO will recalculate on a monthly basis the High Voltage Access Charge and Transition Charge applicable during such period. Revisions to the Transmission Revenue Balancing Account adjustment shall be made effective annually on January 1 based on the principal balance in the TRBA as of September 30 of the prior year and a forecast of Transmission Revenue Credits for the next year.
- 8.2 For service provided by a Participating TO prior to the Transition Date, no refund ordered by FERC or amount accrued to that Participating TO's Transmission Revenue Balancing Account related to such service shall be reflected in the High Voltage Access Charge, Low Voltage Access Charge, the High Voltage Transmission Revenue Requirement, or the Low Voltage Transmission Revenue Requirement of a Participating TO. For service provided by a Participating TO following the Transition Date, any refund associated with a Participating TO's Transmission Revenue Requirement that has been accepted by FERC, subject to refund, shall be provided as ordered by FERC. Such refund shall be invoiced separately from the Market Invoice.
- 8.3 If the Participating TO withdraws one or more of its transmission facilities from the ISO Operational Control in accordance with Section 3.4 of the Transmission Control Agreement, then the ISO will no longer collect the TRR for that transmission facility through the ISO's Access Charge effective upon the date the transmission facility is no longer under the Operational Control of the ISO. The withdrawing Participating TO shall be obligated to provide the ISO will all necessary information to implement the withdrawal of the Participating TO's transmission facilities and to make any necessary filings at FERC to revise its TRR. The ISO shall revise its transmission Access Charge to reflect the withdrawal of one or more transmission facilities from ISO Operational Control.

9. Approval of Updated High Voltage Revenue Requirements

9.1 Participating TOs will make the appropriate filings at FERC to establish their Transmission Revenue Requirements for their Low Voltage Access Charges and the applicable High Voltage Access Charges, and to obtain approval of any changes thereto. All such filings with the FERC will include a separate appendix that states the HVTRR,

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: June 1, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Fourth Revised Sheet No. 386A
FIRST REPLACEMENT VOLUME NO. I
Superseding Third Revised Sheet No. 386A

LVTRR (if applicable) and the appropriate Gross Load data and other information required by the FERC to support the Access Charges. The Participating TO will provide a copy of its filing to the ISO and the other Participating TOs in accordance with the notice provisions in the Transmission Control Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: June 1, 2003

- 9.2 Federal power marketing agencies whose transmission facilities are under ISO Operational Control shall develop their High Voltage Transmission Revenue Requirements pursuant to applicable federal laws and regulations, including filing with FERC. All such filings with FERC will include a separate appendix that states the HVTRR, LVTRR (if applicable) and the appropriate Gross Load data and other information required by the FERC to support the Access Charges. The procedures for public participation in a federal power marketing agency's ratemaking process shall be posted on the federal power marketing agency's website. The federal power marketing agency shall also post on the website the Federal Register Notices and FERC orders for rate making processes that impact the federal power marketing agency's High Voltage Transmission Revenue Requirement. The Participating TO will provide a copy of its filing to the ISO and the other Participating TOs in accordance with the notice provisions in the Transmission Control Agreement.
- 10. Disbursement of High Voltage Access Charge and Transition Charge Revenues.
- 10.1 High Voltage Access Charge and Transition Charge revenues shall be calculated for disbursement to each Participating TO on a monthly basis as follows:
 - (a) the amount determined in accordance with Section 7.1.2 of the ISO Tariff ("Billed HVAC/TC");

(b)

(i) for a Participating TO that is a UDC or MSS Operator and has Gross
Load in its TO Tariff in accordance with Appendix F, Schedule 3, Section
9, then calculate the amount each UDC or MSS Operator would have
paid and the Participating TO would have received by multiplying the
High Voltage Utility-Specific Rates for the Participating TO whose High
Voltage Facilities served such UDC and MSS Operator

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 21, 2004 Effective: May 8, 2004

- times the actual Gross Load of such UDCs and MSS Operators ("Utility-specific HVAC"); or
- (ii) for a Participating TO that is not a UDC or MSS Operator and that does not have Gross Load in its TO Tariff in accordance with Appendix F, Schedule 3, Section 9, then calculate the Participating TO's portion of the total Billed HVAC/TC in subsection (a) based on the ratio of the Participating TO's High Voltage Transmission Revenue Requirement to the sum of all Participating TOs' High Voltage Revenue Requirements.
- (c) if the total Billed HVAC/TC in subsection (a) received by the ISO less the total dollar amounts calculated in Utility-specific HVAC in subsection (b)(i) and subsection (b)(ii) is different from zero, the ISO shall allocate the positive or negative difference among those Participating TOs that are subject to the calculations in subsection (b)(i) based on the ratio of each Participating TO's High Voltage Transmission Revenue Requirement to the sum of all of those Participating TOs' High Voltage Transmission Revenue Requirements that are subject to the calculations in subsection (b)(i). This monthly distribution amount is the "HVAC Revenue Adjustment";
- (d) the sum of the HVAC revenue share determined in subsection (b) and the HVAC Revenue Adjustment in subsection (c) will be the monthly disbursement to the Participating TO.
- 10.2 If the same entity is both a Participating TO and a UDC or MSS Operator, then the monthly High Voltage Access Charge and Transition Charge amount billed by the ISO will be the charges payable by the UDC or MSS Operator in accordance with Section 7.1.2 of the ISO Tariff less the disbursement determined in accordance with Section 10.1(d). If this difference is negative, that amount will be paid by the ISO to the Participating TO.
- 11 Determination of Transmission Revenue Requirement Allocation Between High Voltage and Low Voltage Transmission Facilities.
- 11.1 Each Participating TO shall allocate its Transmission Revenue Requirement between the High Voltage Transmission Revneue Requirement and Low Voltage Transmission Revenue Requirement based on the Procedure for Division of Certain Costs Between the High and Low Voltage Transmission Access Charges contained in Section 12 of this Schedule.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 5, 2005 Effective: July 5, 2005

12 Procedure for Division of Certain Costs Between the High and Low Voltage Transmission Access Charges.

12.1 <u>Division of Costs:</u>

(a) Substations

Costs for substations and substation equipment, including transformers:

- (i) If the Participating TO has substation TRR information by facility and voltage, then the TRR for facilities and equipment at or above 200 kV should be allocated to the HVTRR and the TRR for facilities and equipment below 200 kV should be allocated to the LVTRR;
- (ii) If the Participating TO has substation TRR information by facility but not by voltage, then the TRR for facilities and equipment should be allocated to the HVTRR and to the LVTRR based on the ratio of gross substation investment allocated to HVTRR to gross substation investment allocated to LVTRR pursuant to Section 12.1(a)(i); or
- (iii) If the Participating TO does not have substation TRR information by facility or voltage, then the TRR for facilities and equipment should be allocated to the HVTRR and to the LVTRR based on the Participating TO's transmission system-wide gross plant ratio. The system-wide gross plant ratio is determined once the costs that can be split between High Voltage and Low Voltage for all facilities has been developed in accordance with Sections 12.1(a) through (c), then the resulting cost ratio between High Voltage and Low Voltage shall be used as the system-wide gross plant ratio.
- (iv) Costs of transformers that step down from high voltage (200 kV or above) to low voltage, to the extent the Participating TO does not have the revenue requirement information available on a voltage basis, should be allocated consistent with the procedures for substations addressed above.

(b) <u>Transmission Towers and Land with Circuits on Multiple Voltages</u>

For transmission towers that have both High Voltage and Low Voltage facilities on the same tower, the cost of these assets should be allocated two-thirds to the HVTRR and one-third to the LVTRR. If the transmission tower has only High Voltage facilities, then the costs of these assets should be allocated entirely to the HVTRR. If the transmission tower has only Low Voltage facilities, then the TRR of these assets should be allocated entirely to the LVTRR. Provided that the Participating TO does not have land cost information available on a voltage

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 5, 2005 Effective: July 5, 2005

basis, in which case the costs should be allocated based on the bright-line of the voltage levels, the costs for land used for transmission rights-of-way for towers that have both High Voltage and Low Voltage wires should be allocated two-thirds to the HVTRR component and one-third to the LVTRR.

(c) Operation and Maintenance, Transmission Wages & Salaries, Taxes,

Depreciation and Amortization, and Capital Costs

If the Participating TO can delineate costs for transmission operations and maintenance (O&M), transmission wages and salaries, taxes, depreciation and amortization, or capital costs on a voltage basis, the costs shall be applied on a bright-line voltage basis. If the costs for O&M, transmission wages and salaries, taxes, depreciation and amortization, or capital costs, are not available on voltage levels, the allocation to the HVTRR and the LVTRR should be based on the Participating TO's system-wide gross plant ratio defined in Section 12.1(a).

(d) Existing Transmission Contracts

If the take-out point for the Existing Contract is a High Voltage Transmission Facility, the Existing Contract revenue will be credited to the HVTRR of the Participating TO receiving such revenue. Similarly, the Participating TO that is paying charges under such an Existing Contract may include the costs in its HVTRR. If the take-out point for the Existing Contract is a Low Voltage Transmission Facility, the Existing Contract revenue will be credited to the HVTRR and the LVTRR of the receiving Participating TO based on the ratio of the Participating TO's HVTRR to its LVTRR, prior to any adjustments for such revenues. The Participating TO that is paying the charges under the Existing Contract will include the costs in its HVTRR and LVTRR in the same ratio as the revenues are recognized by the Participating TO receiving the payments.

(e) <u>Division of the TRBAA between HVTRR and LVTRR</u>

- (i) Wheeling revenues associated with transactions exiting the ISO
 Controlled Grid at High Voltage Scheduling Points or Take-Out Points shall be reflected as High Voltage components;
- (ii) Wheeling revenues associated with transactions exiting the ISO
 Controlled Grid at Low Voltage Scheduling Points or Take-Out Points
 shall be attributed between High Voltage and Low Voltage TRBAA
 components based on the High Voltage and Low Voltage Wheeling
 Access Charge rates assessed to such transactions by the ISO and/or
 the Participating TO;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 5, 2005 Effective: July 5, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 387A.03

Effective: July 5, 2005

- (iii) FTR revenues shall be assigned to High Voltage or Low Voltage components based on the voltage of the path related to the FTR;
- (iv) Usage Charge revenues shall be allocated between High Voltage and Low Voltage components on a gross plant basis; and
- (v) Other Transmission Revenue Credits shall be allocated between High Voltage and Low Voltage components on a gross plant basis.

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: July 5, 2005

Substitute Original Sheet No. 387B

ISO Tariff Appendix F

Schedule 4

Participating Intermittent Resources Forecasting Fee

A charge up to \$.10 per MWh shall be assessed on the metered Energy from Participating Intermittent Resources. The amount of the charge shall be specified in the ISO Protocols.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 11, 2002 Effective: April 1, 2002

ISO TARIFF APPENDIX G

Must-Run Agreements

To be filed upon settlement

Issued by: Roger Smith, Senior Regulatory Counsel

ISO TARIFF APPENDIX H

Methodology for Developing the Weighted Average Rate for Wheeling Service

Issued by: Roger Smith, Senior Regulatory Counsel

Methodology for Developing the Weighted Average Rate for Wheeling Service

The weighted average rate payable for Wheeling over joint facilities at each Scheduling Point shall be calculated as follows, applying the formula separately to the applicable Wheeling Access Charges:

WBAC =
$$\sum \left(P_n \times \frac{Q_n}{\sum Q_n}\right)$$

Where:

WBAC = Weighted-average Wheeling Access Charge for each ISO Scheduling Point

P_n = The applicable Wheeling Access Charge rate for a TAC Area or Participating TO_n in \$/kWh as set forth in Section 7.1.4 of the ISO Tariff and Section 5 of the TO Tariff.

Q_n = The Available Transfer Capacity (in MW), whether from transmission ownership or contractual entitlements, of each Participating TO_n for each ISO Scheduling Point which has been placed within the ISO Controlled Grid. Available Transfer Capacity shall not include capacity associated with Existing Rights of a Participating TO as defined in Section 2.4.4 of the ISO Tariff.

n = the number of Participating TOs from 1 to n

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

ISO TARIFF APPENDIX I ISO Congestion Management Zones

Issued by: Roger Smith, Senior Regulatory Counsel

Original Sheet No. 392

ISO Congestion Management Zones

1. Active Zones

A. Northern Zone (NP15)B. Central Zone (ZP26)C. Southern Zone (SP15)

2. Inactive Zones

A. Humboldt ZoneB. San Francisco Zone

Note: The ISO's Initial Congestion Management Zones were described in the Joint Application of the IOUs for Authorization to Convey Operational Control of Designated Jurisdictional Facilities to an ISO filed April 29, 1996, Docket No. EC96-19-000.

Issued by: Roger Smith, Senior Regulatory Counsel

ISO TARIFF APPENDIX J

End-Use Meter Standards & Capabilities

Issued by: Roger Smith, Senior Regulatory Counsel

End-Use Meter Standards & Capabilities Part A

END-USE METER STANDARDS & CAPABILITIES

End Use Meter Standards. All metering shall be of a revenue class metering accuracy in accordance with the ANSI C12 standards on metering and any other requirements of the relevant UDC or Local Regulatory Authority that may apply. Such requirements may apply to meters, current transformers and potential transformers, and associated equipment. ANSI C12 metering standards include the following:

ANSI C12.1 - American National Standard Code For Electricity Metering

ANSI C12.4 - American National Standard For Mechanical Demand Registers

ANSI C12.5 - American National Standard For Thermal Demand Meters

ANSI C12.6 - American National Standard For Marking And Arrangement Of Terminals For Phase-Shifting Devices Used In Metering

ANSI C12.7 - American National Standard For Watt-hour Meter Sockets

ANSI C12.8 - American National Standard For Test Blocks And Cabinets For installation Of Self-Contained A-Base Watt-hour Meters

ANSI C12.9 - American National Standard For Test Switches For Transformer-Rated Meters

ANSI C12.10 - American National Standard For Electromechanical Watt-hour Meters

ANSI C12.11 - American National Standard For Instrument Transformers For Revenue Metering, 10 kV BIL Through 350 kV BIL

ANSI C12.13 - American National Standard For Electronic Time-Of -Use Registers For Electricity Meters

ANSI C12.14 - American National Standard For Magnetic Tape Pulse Recorders For Electricity Meters

ANSI C12.15 - American National Standard For Solid-State Demand Registers For Electromechanical Watt-hour Meters

ANSI C12.16 - American National Standard For Solid-State Electricity Meters

Issued by: Roger Smith, Senior Regulatory Counsel

Original Sheet No. 395

ANSI C12.17 - American National Standard For Cartridge-Type Solid-State Pulse Recorders For Electricity Metering

ANSI C12.18 - American National Standard For Protocol Specification For ANSI Type 2 Optical Port

Part B

PARTICIPATING SELLERS METER STANDARDS AND CAPABILITIES

Issued by: Roger Smith, Senior Regulatory Counsel

ISO TARIFF APPENDIX K

Qualifying Facility Participating Generator Agreement

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR

AND

[name of QF PARTICIPATING GENERATOR]

QUALIFYING FACILITY PARTICIPATING GENERATOR AGREEMENT

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 21, 2004

Effective: October 21, 2004

Original Sheet No. 396B

and is entered into by and

QUALIFYING FACILITY PARTICIPATING GENERATOR AGREEMENT (QF PGA)

day of

The Participating Generator and the ISO are hereinafter referred to as the "Parties".

| between: | day of, and to officious line, by and |
|----------|--|
| (1) | [Full Legal Name], having its registered and principal place of business located at [Address] (the "Participating Generator"); |
| and | |
| (2) | California Independent System Operator Corporation , a California nonprofit public benefit corporation having a principal executive office located at such place in the State of California as the ISO Governing Board may from time to time designate, initially 151 Blue Ravine Road, Folsom, California 95630 (the "ISO"). |

Whereas:

THIS AGREEMENT is dated this

- A. The ISO Tariff provides that the ISO shall not schedule Energy or Ancillary Services generated by any Generating Unit interconnected to the ISO Controlled Grid, or to the Distribution System of a Participating TO or of a UDC or MSS Operator otherwise than through a Scheduling Coordinator.
- B. The ISO Tariff further provides that the ISO shall not be obliged to accept Schedules or Adjustment Bids or bids for Ancillary Services relating to Generation from any Generating Unit interconnected to the ISO Controlled Grid unless the relevant Generator undertakes in writing to the ISO to comply with all applicable provisions of the ISO Tariff.
- C. The Participating Generator wishes to be able to Schedule Energy and to submit Adjustment Bids, Supplemental Energy bids and bids for Ancillary Services from a Qualifying Facility Net Scheduled QF to the ISO through a Scheduling Coordinator and, therefore, wishes to undertake to the ISO that it will comply with the applicable provisions of the ISO Tariff, except as otherwise specified in this Agreement.
- **D**. It is the intent of the Parties that this Agreement will harmonize the special operational characteristics of the Participating Generator's Qualifying Facility with the ISO's Grid operation function. Nothing in this Agreement is intended to limit or restrict the rights of the Participating Generator under Section 5.1.5 of the ISO Tariff.
- E. The Parties are entering into this Agreement in order to establish the terms and conditions on which the ISO and the Participating Generator will discharge their respective duties and responsibilities under the ISO Tariff.

NOW THEREFORE, in consideration of the mutual covenants set forth herein, **THE PARTIES AGREE** as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE I DEFINITIONS AND INTERPRETATION

- **1.1 Master Definitions Supplement.** Unless defined in this Agreement, all capitalized terms and expressions used in this Agreement shall have the same meaning as those contained in the Master Definitions Supplement to the ISO Tariff.
- **1.2 Special Definitions for this Agreement**. In this Agreement, the following words and expressions shall have the meanings set forth below:
 - **"Existing QF Contract"** means an agreement for the sale of capacity, Energy, and/or Ancillary Services by the Participating Generator to an electric utility from a Qualifying Facility that became effective on or prior to December 20, 1995 or, in the case of a Participating Generator employing landfill gas technology, on or prior to December 31, 1996.
 - "Net Scheduled QF" means the Qualifying Facility identified in Schedule 1 of this Agreement operated as a single unit such that the Energy scheduled with the ISO is the net value of the aggregate electrical net output of the Qualifying Facility and the Self-provided Load.
 - "Point of Demarcation" means the point: (1) where the Participating Generator's electrical conductors contact an electric utility system or the ISO Controlled Grid; or (2) if dedicated utility distribution facilities are employed, where the dedicated facilities contact the electric utility system or the ISO Controlled Grid.
 - "Qualifying Facility" (QF) means a qualifying cogeneration facility or qualifying small power production facility, as defined in the Code of Federal Regulations, Title 18, Part 292 (18 C.F.R. § 292).
 - "Self-provided Load" means the portion of Load that is served by the Net Scheduled QF listed in Schedule 1 consistent with Section 218(b) of the California Public Utilities Code.
- **1.3 Rules of Interpretation.** The following rules of interpretation and conventions shall apply to this Agreement:
 - if there is any inconsistency between this Agreement and the ISO Tariff, the ISO Tariff
 will prevail to the extent of the inconsistency, except as expressly provided otherwise in
 this Agreement;
 - (b) the singular shall include the plural and vice versa;
 - (c) the masculine shall include the feminine and neutral and vice versa:
 - (d) "includes" or "including" shall mean "including without limitation";
 - (e) references to a Section, Article or Schedule shall mean a Section, Article or a Schedule of this Agreement, as the case may be, unless the context otherwise requires;
 - (f) a reference to a given agreement or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made;
 - (g) unless the context otherwise requires, references to any law shall be deemed references to such law as it may be amended, replaced or restated from time to time;
 - (h) unless the context otherwise requires, any reference to a "person" includes any individual, partnership, firm, company, corporation, joint venture, trust, association, organization or other entity, in each case whether or not having separate legal personality;

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 396D

- (i) unless the context otherwise requires, any reference to a Party includes a reference to its permitted successors and assigns;
- (j) any reference to a day, week, month or year is to a calendar day, week, month or year;and
- (k) the captions and headings in this Agreement are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Agreement.

ARTICLE II ACKNOWLEDGEMENTS OF PARTICIPATING GENERATOR AND ISO

- 2.1 ISO Responsibility. The Parties acknowledge that the ISO is responsible for the efficient use and reliable operation of the ISO Controlled Grid consistent with achievement of planning and operating reserve criteria no less stringent than those established by the Western Electricity Coordinating Council and the North American Electric Reliability Council and further acknowledges that the ISO may not be able to satisfy fully these responsibilities if the Participating Generator fails to fully comply with all of its obligations under this Agreement.
- 2.2 Scope of Application to Parties. The Participating Generator and ISO acknowledge that all Qualifying Facility Generators, except those specified in Section 2.2.1 of this Agreement, wishing to schedule Energy and to submit Adjustment Bids, Supplemental Energy bids and bids for Ancillary Services to the ISO through a Scheduling Coordinator shall first execute this Agreement or the standard Participating Generator Agreement applicable to non-QF Generators. The Parties acknowledge that execution of this Agreement by the Participating Generator satisfies the requirement of a written agreement as set forth in Section 5 of the ISO Tariff.
- 2.2.1 Exemption for Certain Generators. The Generator with a Net Scheduled QF with an existing power purchase agreement with a UDC is not required to sign a QF Participating Generator Agreement if: (a) the Generator sells all of its Energy (excluding any Energy consumed by auxiliary load equipment electrically connected to that Generator at the same point) and Ancillary Services to the UDC; (b) the Generator sells any Energy through "over the fence" arrangements as authorized under Section 218(b) of the California Public Utilities Code; or (c) the Generator employs landfill gas technology for the generation of electricity as authorized under 218(c) of the California Public Utilities Code. With respect to subsections (a) and (b), an existing power purchase agreement shall mean an agreement which has been entered into and is effective as of December 20, 1995. With respect to subsection (c), an existing power purchase agreement shall mean an agreement which has been entered into and is effective as of December 31, 1996.

ARTICLE III TERM AND TERMINATION

3.1 Effective Date. This Agreement shall remain in full force and effect until terminated pursuant to Section 3.2 of this Agreement and shall be effective as of the later of: (1) the date the Agreement is executed by the Parties; or (2) where the Participating Generator is a party to an existing Participating Generator Agreement, the date upon which termination of the existing Participating Generator Agreement is accepted for filing and made effective by FERC; or (3) where the Participating Generator is a party to an existing Participating Generator Agreement and this Agreement is required to be filed with FERC for acceptance, the later of the date upon which termination of the existing Participating Generator Agreement is accepted for filing and made effective by FERC, or the date this Agreement is accepted for filing and made effective by FERC.

Issued by: Charles F. Robinson, Vice President and General Counsel

Substitute Original Sheet No. 396E

3.2 Termination

- 3.2.1 Termination by ISO. Subject to Section 5.2, the ISO may terminate this Agreement by giving written notice of termination in the event that the Participating Generator commits any material default under this Agreement and/or the ISO Tariff which, if capable of being remedied, is not remedied within thirty (30) days after the ISO has given, to the Participating Generator, written notice of the default, unless excused by reason of Uncontrollable Forces in accordance with Article X of this Agreement. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within 30 days after receipt of such request. This Agreement shall terminate upon acceptance by FERC of such a notice of termination.
- 3.2.2 Termination by Participating Generator. In the event that the Participating Generator no longer wishes to schedule Energy or provide Ancillary Services through a Scheduling Coordinator over the ISO Controlled Grid, it may terminate this Agreement, on giving the ISO ninety (90) days written notice, provided, however, that in accordance with Section 4.1.3, the Participating Generator may modify Schedule 1 to eliminate generating resources which it no longer owns or no longer has contractual entitlement to and such modification shall be effective upon receipt by the ISO. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within 30 days of receipt of such request. This Agreement shall terminate upon acceptance by FERC of such a notice of termination.

ARTICLE IV GENERAL TERMS AND CONDITIONS

4.1 Net Scheduled QFs

- **4.1.1 Identification of Net Scheduled QF.** The Participating Generator has identified the Net Scheduled QF that it owns, operates or has a contractual entitlement to, in Schedule 1, as required by Section 5.3 of the ISO Tariff.
- **4.1.2 Technical Characteristics.** The Participating Generator shall provide to the ISO the required information regarding operating contacts, rated capacity, and operating characteristics of the Net Scheduled QF. Pursuant to Section 2.5.25 of the ISO Tariff, and the Existing QF Contract, if any, associated with that Net Scheduled QF, the ISO may verify, inspect and test the capacity and operating characteristics of the Net Scheduled QF. The performance of such inspection or test shall be conducted at a time mutually agreed upon by the Parties, which agreement shall not unreasonably be withheld.
- 4.1.3 Notification of Changes. Sixty (60) days prior to changing any technical information in Schedule 1, the Participating Generator shall notify the ISO of the proposed changes. Pursuant to Section 2.5.25 of the ISO Tariff, the ISO may verify, inspect and test the capacity and operating characteristics; provided that the performance of such inspection or test is conducted at a time mutually agreed upon by the Parties, which agreement shall not unreasonably be withheld. The ISO shall post on the ISO Home Page a schedule showing, for at least one year in advance: (i) the proposed dates on which the ISO's Master File will be updated, which dates shall occur at least every three months; (ii) the dates on which the information contained in the revised Master File will become effective; and (iii) the deadlines by which changed technical information must be submitted to the ISO in order to be tested and included in the next scheduled update of the ISO's

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 2, 2005 Effective: October 21, 2004

Filed to comply with order of the Federal Energy Regulatory Commission, Docket Nos. ER98-997-003, et

al., issued February 11, 2005, 110 FERC ¶ 61,122.

Master File. Unless the Participating Generator fails to test at the values in the proposed change(s), the change will become effective upon the effective date for the next scheduled update of the Master File, provided the Participating Generator submits the changed information by the applicable deadline. Subject to such notification this Agreement shall not apply to any Net Scheduled QF identified in Schedule 1 which the Participating Generator no longer owns nor has contractual entitlement.

- **Agreement Subject to ISO Tariff.** The Parties will comply with all applicable provisions of the ISO Tariff, including Sections 2.3.2, 2.5.3.4 and 5, except as expressly provided in Sections 4.2.1 through 4.2.5 of this Agreement.
- **4.2.1 Net Generation Metering.** Notwithstanding Sections 2.2.4.3 and 2.3.5 of the ISO Metering Protocol, the Participating Generator may net the value for the Generation produced by each Net Scheduled QF listed in Schedule 1 and the value for the Demand of the Self-provided Load that is (i) served by the Net Scheduled QF and (ii) electrically located on the same side of the Point of Demarcation.
- **4.2.2 Meter and Telemetry Location.** The Participating Generator may satisfy the provisions of the ISO Tariff and Metering Protocol for the installation of meters and telemetry by installing at the Point of Demarcation meters and telemetry for the purpose of recording the net impact of the Net Scheduled QF upon the ISO-Controlled Grid; provided that the installed meters and telemetry satisfy the technical functional and performance requirements for meters and telemetry set forth in the ISO Tariff and Metering Protocol.
- **4.2.3 Scheduling, Billing and Settlement.** For scheduling, billing, and settlement purposes regarding Net Scheduled QF Self-provided Load, measurements shall be made at the Point of Demarcation.
- **4.2.4 Operating Limitations.** Net Scheduled QF operating limitations shall be set forth in Schedule 1 of this Agreement, the resource data template used for transmittal of Participating Generator technical data to the ISO pursuant to the ISO Tariff, or as otherwise mutually agreed to by the Parties.
- 4.2.5 Limitations on ISO Operating Orders. The ISO will not knowingly issue an operating order that: (1) requires the Participating Generator to reduce its Generation below the delineated minimum operating limit, other than in a System Emergency; (2) conflicts with operating instructions provided by the Participating Generator; or (3) results in damage to the Participating Generator's equipment, provided that any such equipment limitation has been provided to the ISO and incorporated in the Participating Generator's operating instructions to the ISO. If the Participating Generator: (1) receives a Final Schedule which requires operation below the minimum operating limit, and (2) deviates from that Final Schedule to continue to operate at the minimum operating limit, it will not be subject to any penalties or sanctions as a result of operating at the minimum operating limit. The Participating Generator's consequences for deviating from Final Schedules in real-time will be governed by the ISO Tariff.
- 4.3 Obligations Relating to Ancillary Services
- **4.3.1 Submission of Bids.** When the Scheduling Coordinator on behalf of the Participating Generator submits a bid for Ancillary Services, the Participating Generator will, by the operation of this Section 4.3.1, warrant to the ISO that it has the capability to provide that service in accordance with the ISO Tariff and that it will comply with ISO Dispatch instructions for the provision of the service in accordance with the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 396G

- **4.3.2 Certification.** The Participating Generator shall not use a Scheduling Coordinator to submit a bid for the provision of an Ancillary Service or submit a schedule for the self provision of an Ancillary Service unless the Scheduling Coordinator serving that Participating Generator is in possession of a current certificate pursuant to Sections 2.5.6 and 2.5.24 of the ISO Tariff.
- 4.4 Obligations relating to Major Incidents
- **4.4.1 Major Incident Reports.** The Participating Generator shall promptly provide such information as the ISO may reasonably request in relation to major incidents, in accordance with Section 5.8.3 of the ISO Tariff.
- **4.5 Dispatch and Curtailment.** The ISO shall only dispatch or curtail a Net Scheduled QF of the Participating Generator: (a) to the extent the Participating Generator bids Energy or Ancillary Services from the Net Scheduled QF into the ISO's markets or the Energy is otherwise available to the ISO under Section 5.11.4 of the ISO Tariff; or (b) if the ISO must dispatch or curtail the Net Scheduled QF in order to respond to an existing or imminent System Emergency or condition that would compromise ISO Control Area integrity or reliability as provided in Sections 2.3, 5.1.3, and 11.2.4.2.1 of the ISO Tariff.
- 4.6 Information to Be Provided by Participating Generator. The Participating Generator shall provide to the ISO (a) a copy of the FERC order providing Qualifying Facility status to the Net Scheduled QF listed in Schedule 1, (b) a copy of any existing power purchase agreement with a UDC for the Net Scheduled QF listed in Schedule 1, and (c) a copy or a summary of the primary terms of any agreement for standby service with a UDC or MSS Operator. The Participating Generator shall notify the ISO promptly of any change in the status of any of the foregoing.

ARTICLE V PENALTIES AND SANCTIONS

- 5.1 Penalties. If the Participating Generator fails to comply with any provisions of this Agreement, the ISO shall be entitled to impose penalties and sanctions on the Participating Generator. No penalties or sanctions may be imposed under this Agreement unless a Schedule providing for such penalties or sanctions has first been filed with and made effective by FERC. Nothing in the Agreement, with the exception of the provisions relating to ADR, shall be construed as waiving the rights of the Participating Generator to oppose or protest any penalty proposed by the ISO to the FERC or the specific imposition by the ISO of any FERC-approved penalty on the Participating Generator.
- **5.2 Corrective Measures.** If the Participating Generator fails to meet or maintain the requirements set forth in this Agreement and/or in the ISO Tariff as limited by the provisions of this Agreement, the ISO shall be permitted to take any of the measures, contained or referenced in the ISO Tariff, which the ISO deems to be necessary to correct the situation.

ARTICLE VI COSTS

Operating and Maintenance Costs. The Participating Generator shall be responsible for all its costs incurred in connection with operating and maintaining the Net Scheduled QF identified in Schedule 1 for the purpose of meeting its obligations under this Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 396H

ARTICLE VII DISPUTE RESOLUTION

7.1 Dispute Resolution. The Parties shall make reasonable efforts to settle all disputes arising out of or in connection with this Agreement. In the event any dispute is not settled, the Parties shall adhere to the ISO ADR Procedures set forth in Section 13 of the ISO Tariff, which is incorporated by reference, except that any reference in Section 13 of the ISO Tariff to Market Participants shall be read as a reference to the Participating Generator and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE VIII REPRESENTATIONS AND WARRANTIES

- **8.1** Representation and Warranties. Each Party represents and warrants that the execution, delivery and performance of this Agreement by it has been duly authorized by all necessary corporate and/or governmental actions, to the extent authorized by law.
- **8.2 Necessary Approvals.** The Participating Generator represents that all necessary leases, approvals, permits, licenses, easements, rights of way or access to install, own and/or operate its Net Scheduled QF have been or will be obtained by the Participating Generator prior to the effective date of this Agreement.
- 8.3 Specific Warranty. The Participating Generator represents and warrants that: (1) the Net Scheduled QF listed in Schedule 1 is a Qualifying Facility or is operated as an integral part of a Qualifying Facility and (2) the Self-provided Load of the Participating Generator that is served by the Net Scheduling QF either has contracted for and continues through the term of this Agreement to have secured standby service from a UDC or MSS Operator under terms approved by the local regulatory authority or the Federal Energy Regulatory Commission, as applicable, or that the Self-provided Load shall be curtailed concurrently with any outage of the generation serving that Self-provided Load in an amount sufficient to cover that outage.

ARTICLE IX LIABILITY

9.1 Liability. The provisions of Section 14 of the ISO Tariff will apply to liability arising under this Agreement, except that all references in Section 14 of the ISO Tariff to Market Participants shall be read as references to the Participating Generator and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE X UNCONTROLLABLE FORCES

10.1 Uncontrollable Forces Tariff Provisions. Section 15 of the ISO Tariff shall be incorporated by reference into this Agreement except that all references in Section 15 of the ISO Tariff to Market Participants shall be read as a reference to the Participating Generator and references to the ISO Tariff shall be read as references to this Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 3961

ARTICLE XI MISCELLANEOUS

- 11.1 Assignments. Either Party may assign or transfer any or all of its rights and/or obligations under this Agreement with the other Party's prior written consent in accordance with Section 17 of the ISO Tariff. Such consent shall not be unreasonably withheld. Any such transfer or assignment shall be conditioned upon the successor in interest accepting the rights and/or obligations under this Agreement as if said successor in interest was an original Party to this Agreement.
- **11.2 Notices.** Any notice, demand or request which may be given to or made upon either Party regarding this Agreement shall be made in accordance with Section 20.1 of the ISO Tariff. A Party must update the information in Schedule 3 of this Agreement as information changes. Such changes shall not constitute an amendment to this Agreement.
- **11.3 Waivers.** Any waivers at any time by either Party of its rights with respect to any default under this Agreement, or with respect to any other matter arising in connection with this Agreement, shall not constitute or be deemed a waiver with respect to any subsequent default or other matter arising in connection with this Agreement. Any delay, short of the statutory period of limitations, in asserting or enforcing any right under this Agreement shall not constitute or be deemed a waiver of such right.
- 11.4 Governing Law and Forum. This Agreement shall be deemed to be a contract made under, and for all purposes shall be governed by and construed in accordance with, the laws of the State of California, except its conflict of law provisions. The Parties irrevocably consent that any legal action or proceeding arising under or relating to this Agreement to which the ISO ADR Procedures do not apply, shall be brought in any of the following forums, as appropriate: any court of the State of California, any federal court of the United States of America located in the State of California, or, where subject to its jurisdiction, before the Federal Energy Regulatory Commission.
- 11.5 Consistency with Federal Laws and Regulations. This Agreement shall incorporate by reference Section 20.8 of the ISO Tariff as if the references to the ISO Tariff were referring to this Agreement.
- **11.6 Merger.** This Agreement constitutes the complete and final agreement of the Parties with respect to the subject matter hereto and supersedes all prior agreements, whether written or oral, with respect to such subject matter.
- 11.7 Severability. If any term, covenant, or condition of this Agreement or the application or effect of any such term, covenant, or condition is held invalid as to any person, entity, or circumstance, or is determined to be unjust, unreasonable, unlawful, imprudent, or otherwise not in the public interest by any court or government agency of competent jurisdiction, then such term, covenant, or condition shall remain in force and effect to the maximum extent permitted by law, and all other terms, covenants, and conditions of this Agreement and their application shall not be affected thereby, but shall remain in force and effect and the Parties shall be relieved of their obligations only to the extent necessary to eliminate such regulatory or other determination unless a court or governmental agency of competent jurisdiction holds that such provisions are not separable from all other provisions of this Agreement.
- **11.8 Section Headings.** Section headings provided in this Agreement are for ease of reading and are not meant to interpret the text in each Section.
- 11.9 Amendments. This Agreement and the Schedules attached hereto may be amended from time to time by the mutual agreement of the Parties in writing. Amendments that require FERC approval shall not take effect until FERC has accepted such amendments for filing and made them effective. If the amendment does not require FERC approval, the amendment will be filed with FERC for information.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 396J

- **11.10 Counterparts.** This Agreement may be executed in one or more counterparts at different times, each of which shall be regarded as an original and all of which, taken together, shall constitute one and the same Agreement.
- **11.11 Rights Reserved.** Execution of this Agreement does not deprive the Participating Generator of any unexpressed legal right, either under law or under an existing power purchase agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 396K

IN WITNESS WHEREOF, the Parties hereto have caused this Agreement to be duly executed on behalf of each by and through their authorized representatives as of the date hereinabove written.

California Independent System Operator Corporation

| Ву: | |
|--------|-----------------------------|
| Name: | |
| Title: | |
| Date: | |
| INAME | OF PARTICIPATING GENERATOR] |
| [NAME | OF FARTION ATING GENERATOR) |
| Ву: | |
| Name: | |
| Title: | |
| Date: | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 396L

[The following page is a placeholder for Schedule 1, Section 1.]

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 396M

SCHEDULE 2

ISO IMPOSED PENALTIES AND SANCTIONS [Section 5.1]

[TO BE INSERTED UPON FERC APPROVAL]

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 396N

Effective: October 21, 2004

SCHEDULE 3

NOTICES (Section 11.2)

| Participating Generat | or | |
|-----------------------|----|--|
| Name of Primary | | |
| Representative: | | |
| Title: | | |
| Address: | | |
| City/State/Zip Code: | | |
| Email Address: | | |
| Phone: | | |
| Fax No: | | |
| | | |
| | | |
| Name of Alternative | | |
| Representative: | | |
| Title: | | |
| Address: | | |
| City/State/Zip Code: | | |
| Email Address: | | |
| Phone: | | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 21, 2004

Fax No:

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 396O

Effective: October 21, 2004

ISO

| Name of Primary | |
|----------------------|--|
| Representative: | |
| Title: | |
| Address: | |
| City/State/Zip Code: | |
| Email Address: | |
| Phone: | |
| Fax No: | |
| | |
| | |
| Name of Alternative | |
| Representative: | |
| Title: | |
| Address: | |
| City/State/Zip Code: | |
| Email Address: | |
| Phone: | |
| Fax No: | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 21, 2004

ISO TARIFF APPENDIX L

ISO Protocols

Issued by: Roger Smith, Senior Regulatory Counsel

INDEX

| Article Number | Provisions | Sheet No. |
|-----------------|---|-----------|
| APPENDIX L – | | |
| Ancillary Serv | vices Requirements Protocol (ASRP) | 398 |
| Ancillary Serv | vices Requirements Protocol Appendices | 423 |
| Demand Fore | ecasting Protocol (DFP) | 443 |
| Dispatch Prot | tocol (DP) | 453 |
| Market Monito | oring and Information Protocol (MMIP) | 490 |
| Outage Coord | dination Protocol (OCP) | 509 |
| Schedules an | nd Bids Protocol (SBP) | 536 |
| Scheduling C | Coordinator Application Protocol (SCAP) | 569 |
| Scheduling P | Protocol (SP) | 587 |
| Settlement ar | nd Billing Protocol (SABP) | 631 |
| Settlement ar | nd Billing Protocol Appendices | 656 |
| Settlement ar | nd Billing Protocol Annex | 715 |
| Metering Prof | tocol (MP) | 727 |
| Metering Prot | tocol Appendices | 761 |
| Eligible Intern | mittent Resources Protocol (EIRP) | 848 |
| Enforcement | Protocol | 858 |
| UDP Aggrega | ation Protocol | 879 |
| Dynamic Sch | eduling Protocol (DSP) | 934 |

INDEX

| Article Number | Provisions | Sheet No. |
|---------------------------------|--|-------------------|
| APPENDIX M – Participating Go | enerator Agreement | 970 |
| APPENDIX N - Meter Service A | Agreement for ISO Metered Entities | 985 |
| APPENDIX O – Meter Service A | agreement for Scheduling Coordinators | 1001 |
| APPENDIX P – Utility Distributi | on Company Operating Agreement | 1018 |
| APPENDIX Q – Participating Lo | oad Agreement | 1047 |
| APPENDIX R – Dynamic Sched | luling Agreement for Scheduling Coordi | nators 1061 |
| APPENDIX S – Dynamic Sched | uling Host Control Area Operating Agree | ement 1073 |
| APPENDIX T – Small Utility Dis | tribution Company Operating Agreemer | nt 1088 |
| APPENDIX U – Standard Large | Generator Interconnection Procedures | 1111 |
| APPENDIX V – Standard Large | Generator Interconnection Agreement | 1194 |
| APPENDIX W – Interconnection | n Procedures in Effect Prior to July 1, 20 | 05 |
| ("Amendment | 39 Procedures") | 1269 |

ANCILLARY SERVICES REQUIREMENTS PROTOCOL

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

First Revised Sheet No. 399 Superseding Original Sheet No. 399

ANCILLARY SERVICES REQUIREMENTS PROTOCOL

Table of Contents

| ASRP 1 | OBJECTIVES, DEFINITIONS AND SCOPE | 404 |
|----------|---|-----|
| ASRP 1.1 | Objectives | 404 |
| ASRP 1.2 | Definitions | 404 |
| ASRP | 1.2.1 Master Definitions Supplement | 404 |
| ASRP | 1.2.2 Special Definitions for this Protocol | 404 |
| ASRP | 1.2.3 Rules of Interpretation | 404 |
| ASRP 1.3 | Scope | 405 |
| | 1.3.1 Scope of Application to Parties | 405 |
| | 1.3.2 Liability of the ISO | 405 |
| ASRP 2 | ANCILLARY SERVICES STANDARDS | 405 |
| ASKP Z | ANCILLARY SERVICES STANDARDS | 405 |
| ASRP 2.1 | Basis of Standards | 405 |
| ASRP | 2.1.1 Basic criteria | 405 |
| ASRP 2.2 | Review of Standards | 406 |
| ASRP | 2.2.1 Grid Operations Committee Review | 406 |
| ASRP | 2.2.2 Contents of Grid Operations Committee Reviews | 406 |
| ASRP 2.3 | Communications | 406 |
| ASRP 3 | ANCILLARY SERVICE OBLIGATIONS FOR SCHEDULING | |
| AOIII 3 | COORDINATORS | 406 |
| ASRP 3.1 | Ancillary Service Obligations | 406 |
| | , | |
| ASRP 3.2 | Right to Self-Provide | 406 |
| ASRP 4 | REGULATION STANDARDS | 407 |
| 40DD 4.4 | Other dead for Demokritian Consultin No. 1. 1 | 40= |
| ASRP 4.1 | Standard for Regulation: Quantity Needed | 407 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 400

| ASRP 4.1.1 Basis for Standard | 407 |
|--|-----|
| ASRP 4.1.2 Determination of Regulation Quantity Needed | 407 |
| ASRP 4.1.3 Percentage Determination | 407 |
| ASRP 4.1.4 Publication of Estimated Percentage for Day-Ahead Market | 407 |
| ASRP 4.1.5 Publication of Estimated Percentage for Hour-Ahead Market | 407 |
| ASRP 4.1.6 Additional Regulation Requirement | 407 |
| / C. t. 1110 / taditional regulation requirement | .07 |
| ASRP 4.2 Standard for Regulation: Performance | 407 |
| ASRP 4.2.1 Operating Characteristics of Generating Unit | 407 |
| ASRP 4.2.2 Operational EMS/SCADA Equipment | 408 |
| | |
| ASRP 4.3 SC's Obligation for Regulation | 408 |
| ASRP 4.4 Standard for Regulation: Control | 408 |
| ASRP 4.4.1 Dynamic Scheduling of Regulation from External Resources | 408 |
| AGIN 4.4.1 Dynamic Geneduling of Negulation from External Nessources | 400 |
| ASRP 4.5 Standard for Regulation: Procurement | 409 |
| ASRP 4.5.1 Procurement of Non Self-Provided Regulation | 409 |
| ASRP 4.5.2 Certification and Testing Requirements | 409 |
| ASRP 4.5.3 [Not Used] | 409 |
| ASRP 4.5.4 [Not Used] | 409 |
| | |
| ASRP 5 OPERATING RESERVE STANDARDS | 409 |
| ASRP 5.1 Standard for Spinning Reserve: Quantity Needed | 409 |
| ASRP 5.1.1 Minimum Spinning Reserve Quantity | 409 |
| ASRP 5.1.2 Providing both Spinning Reserve and Regulation | 409 |
| The state of the s | |
| ASRP 5.2 Standard for Non-Spinning Reserve: Quantity Needed | 410 |
| ASRP 5.3 Standard for Spinning Reserve: Performance | 410 |
| ASRP 5.3.1 Spinning Reserve Capability | 410 |
| ASRP 5.3.2 Availability | 410 |
| | |
| ASRP 5.4 Standard for Non-Spinning Reserve Performance | 410 |
| ASRP 5.4.1 Non-Spinning Reserve Resources | 410 |
| ASRP 5.4.2 Non-Spinning Reserve Capability | 411 |
| | 111 |
| ASRP 5.4.3 Availability | 411 |
| ASRP 5.4.3 Availability | |
| ASRP 5.4.3 Availability ASRP 5.5 SC's Obligation for Operating Reserve | 411 |
| ASRP 5.4.3 Availability | |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

| ASRP 5.6 | Standard for Spinning Reserve: Control | 411 |
|----------|---|-----|
| ASRP 5.7 | Standard for Non-Spinning Reserve: Control | 411 |
| ASRP 5.8 | Standard for Operating Reserve: Procurement | 412 |
| ASRP 5 | 5.8.1 Procurement of Non Self-Provided Operating Reserve | 412 |
| ASRP 5 | 5.8.2 Not Limited to ISO Control Area | 412 |
| | 5.8.3 Spinning Reserve Certification and Testing Requirements | 412 |
| | 5.8.4 Non-Spinning Reserve Certification and Testing Requirements | 412 |
| ASRP 5 | 5.8.5 Self-Provision of Operating Reserve | 412 |
| ASRP 6 | REPLACEMENT RESERVE STANDARDS | 412 |
| | Standard for Replacement Reserve: Quantity Needed | 412 |
| | 5.1.1 Basis for Standard | 412 |
| ASRP 6 | 5.1.2 Replacement Reserve Requirements | 412 |
| | Standard for Replacement Reserve: Performance | 413 |
| | 6.2.1 Replacement Reserve Supply Capability | 413 |
| | 6.2.2 Replacement Reserve Availability | 413 |
| ASRP 6 | 6.2.3 Resources already Providing Ancillary Service | 413 |
| ASRP 6.3 | Scheduling Coordinator's Obligation for Replacement Reserve | 413 |
| ASRP 6.4 | Standard for Replacement Reserve: Control | 413 |
| ASRP 6.5 | Standard for Replacement Reserve: Procurement | 414 |
| | 6.5.1 Procurement of Non Self-Provided Replacement Reserve | 414 |
| | 6.5.2 Procurement Not Limited to ISO Control Area | 414 |
| | 6.5.3 Self-Provision of Replacement Reserve | 414 |
| ASRP 6 | 5.5.4 Certification and Testing Requirements | 414 |
| ASRP 7 | VOLTAGE SUPPORT STANDARDS | 414 |
| ASRP 7.1 | Standard for Voltage Support: Quantity Needed | 414 |
| ASRP 7.2 | Standard for Voltage Support: Performance | 414 |
| | 7.2.1 Automatic Voltage Regulation Requirement | 414 |
| ASRP | 7.2.2 Compensation for Operating Outside of Range | 415 |
| ASRP 7.3 | Standard for Voltage Support: Distribution and Location | 415 |
| ASRP 7.4 | Standard for Voltage Support: Control | 415 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 402 Superseding Original Sheet No. 402

| | Standard for of Voltage Support: Procurement | 415 |
|----------|---|------------|
| | .5.1 Long-Term Voltage Support | 415 |
| ASRP 7 | .5.2 Certification and Testing Requirements | 415 |
| ASRP 8 | BLACK START STANDARDS | 415 |
| ASRP 8.1 | Standard for Black Start: Quantity Needed | 415 |
| ASRP 8 | .1.1 Determination of Black Start Capability | 415 |
| | .1.2 Factoring in Failed Starts | 416 |
| ASRP 8 | .1.3 Submission of Load Restoration Time Requirements | 416 |
| | Standard for Black Start: Performance | 416 |
| | .2.1 10-Minute Start-Up Capability | 416 |
| | .2.2 Reactive Capability | 416 |
| ASRP 8 | .2.3 12-Hour Minimum Output Capability | 416 |
| ASRP 8.3 | Standard for Black Start: Location | 416 |
| ASRP 8.4 | Standard for Black Start: Control | 416 |
| | .4.1 Voice Communication Requirement | 416 |
| ASRP 8 | .4.2 ISO Confirmation | 416 |
| | Standard for Black Start: Procurement | 417 |
| | .5.1 Initial Procurement | 417 |
| ASRP 8 | .5.2 Certified Generating Units Requirement | 417 |
| ASRP 9 | TESTING FOR STANDARD COMPLIANCE | 417 |
| ASRP 9.1 | Compliance Testing for Regulation | 417 |
| ASRP 9.2 | Compliance Testing for Spinning Reserve | 417 |
| | Compliance Testing for Non-Spinning Reserve | 417 |
| ASRP 9 | .3.1 Compliance Testing of a Generating Unit, System Unit or System | 447 |
| A SDD O | Resource 3.2 Compliance Testing of Curtailable Demand | 417 418 |
| | .3.2 Compliance Testing of Curtailable Demand | 410 |
| | Compliance Testing for Replacement Reserve | 418 |
| | .4.1 Compliance Testing of a Generating Unit | 418 |
| ASRP 9 | .4.2 Compliance Testing of a Curtailable Demand | 418 |
| | Compliance Testing for Voltage Support | 418 |
| | .5.1 Compliance Testing of a Generating Unit | 418 |
| ASRP 9 | .5.2 Compliance Testing of Other Reactive Devices | 418 |
| ASRP 9.6 | Compliance Testing for Black Start | 418 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004

Effective: October 13, 2000

| ASRP 9.7 Consequences of Failure to Pass Compliance Testing ASRP 9.7.1 Notification of Compliance Testing Results ASRP 9.7.2 Penalties for Failure to Pass Compliance Testing | 419 419 419 |
|--|--------------------------|
| ASRP 10 PERFORMANCE AUDITS FOR STANDARD COMPLIANCE | 419 |
| ASRP 10.1 Performance Audit for Regulation | 419 |
| ASRP 10.2 Performance Audit for Spinning Reserve | 419 |
| ASRP 10.3 Performance Audit for Non-Spinning Reserve | |
| ASRP 10.4 Performance Audit for Replacement Reserve | |
| ASRP 10.5 Performance Audit for Voltage Support | 420 |
| ASRP 10.6 Performance Audit for Black Start | 421 |
| ASRP 10.7 Consequences of Failure to Pass Performance Audits ASRP 10.7.1 Notification of Performance Audit Results ASRP 10.7.2 Penalties for Failure to Pass Performance Audit | 421 421 421 |
| ASRP 11 SANCTIONS FOR POOR PERFORMANCE | 421 |
| ASRP 11.1 Warning Notice | 421 |
| ASRP 11.2 Scheduling Coordinator's Option to Test | |
| ASRP 11.3 Duration of Warning Notice | |
| ASRP 11.4 Second failure | |
| ASRP 12 AMENDMENTS TO THE PROTOCOL | 422 |
| ASRP APPENDIX A CERTIFICATION FOR REGULATION | 424 |
| ASRP APPENDIX B CERTIFICATION FOR SPINNING RESERVE | 428 |
| ASRP APPENDIX C CERTIFICATION FOR NON-SPINNING RESERVE | 431 |
| ASRP APPENDIX D CERTIFICATION FOR REPLACEMENT | 434 |
| ASRP APPENDIX E CERTIFICATION FOR VOLTAGE SUPPORT | 437 |
| ASRP APPENDIX F CERTIFICATION FOR BLACK START | 440 |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

ANCILLARY SERVICES REQUIREMENTS PROTOCOL (ASRP)

ASRP 1 OBJECTIVES, DEFINITIONS AND SCOPE

ASRP 1.1 Objectives

- (a) The ISO needs to have available to it sufficient Ancillary Services of a standard necessary to enable it to maintain the reliability of the ISO Controlled Grid.
- (b) This Protocol describes the ISO's basis for determining its Ancillary Services requirements and the required standard for each Ancillary Service.
- (c) These requirements and standards apply to all Ancillary Services whether self-provided or procured by the ISO.
- (d) This Protocol also describes the means by which the ISO will monitor performance of these Ancillary Services to ensure that the required standards are met and maintained.

ASRP 1.2 Definitions

ASRP 1.2.1 Master Definitions Supplement

Any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. A reference to a Section or an Appendix is to a Section or an Appendix of the ISO Tariff. References to ASRP are to this Protocol or to the stated paragraph of or Appendix to this Protocol.

ASRP 1.2.2 Special Definitions for this Protocol

In this Protocol, the following expression shall have the meaning set opposite it:

"Area Control Error (ACE)" means the sum of the instantaneous difference between the actual net interchange and the scheduled net interchange between the ISO Control Area and all adjacent Control Areas and the ISO Control Area's frequency correction and time error correction obligations.

"Dynamic Schedule" means a telemetered reading or value which is updated in real time and which is used as a schedule in the ISO EMS calculation of ACE and the integrated value of which is treated as a schedule for interchange accounting purposes.

ASRP 1.2.3 Rules of Interpretation

(a) Unless the context otherwise requires, if the provisions of this Protocol and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency. The provisions of

Issued by: Charles F. Robinson, Vice President and General Counsel

- the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.
- (b) A reference in this Protocol to a given agreement, ISO Protocol or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made.
- (c) The captions and headings in this Protocol are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.
- (d) This Protocol shall be effective as of the ISO Operations Date.

ASRP 1.3 Scope

ASRP 1.3.1 Scope of Application to Parties

This Protocol applies to the ISO and to the following:

- (a) Participating Generators
- (b) Operators
- (c) UDCs
- (d) Providers of Curtailable Demand
- (e) Scheduling Coordinators
- (f) Metered Subsystem Operators.

ASRP 1.3.2 Liability of the ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

ASRP 2 ANCILLARY SERVICES STANDARDS

ASRP 2.1 Basis of Standards

ASRP 2.1.1 Basic criteria

- (a) The ISO shall base its Ancillary Services standards upon the Western Electricity Coordinating Council (WECC) Minimum Operating Reliability Criteria (MORC) and North American Electric Reliability Council (NERC) Criteria to the extent they are applicable to the ISO Controlled Grid.
- (b) The ISO may adjust the Ancillary Services standards temporarily to take into account, among other things, variations in system conditions, real-time Dispatch constraints, contingencies, and voltage and dynamic stability assessments.

Issued by: Charles F. Robinson, Vice President and General Counsel

ASRP 2.2 Review of Standards

ASRP 2.2.1 Grid Operations Committee Review

The ISO Grid Operations Committee shall periodically undertake a review of the ISO Controlled Grid operations to determine any revision to the Ancillary Services standards to be used in the ISO Control Area. As a minimum the ISO Technical Advisory Committee shall conduct such reviews to accommodate revisions to WECC and NERC standards.

ASRP 2.2.2 Contents of Grid Operations Committee Reviews

Periodic reviews may include, but are not limited to:

- (a) analysis of the deviation between actual and forecast Demand;
- (b) analysis of patterns of unplanned Generating Unit Outages;
- (c) analysis of compliance with NERC and WECC Criteria;
- (d) analysis of operation during system disturbances;
- (e) analysis of patterns of shortfalls between Final Day-Ahead Schedules and actual Generation and Demand; and
- (f) analysis of patterns of unplanned transmission Outages.

ASRP 2.3 Communications

A Participating Generator or provider of Curtailable Demand wishing to offer any Ancillary Service must provide a direct ring down voice communications circuit (or a dedicated telephone line available 24 hours a day every day of the year) between the control room operator for the Generating Unit or Curtailable Demand providing the Ancillary Service and the ISO Control Center. Each Participating Generator must also provide an alternate method of voice communications with the ISO from the control room in addition to the direct communication link required above.

ASRP 3 ANCILLARY SERVICE OBLIGATIONS FOR SCHEDULING COORDINATORS

ASRP 3.1 Ancillary Service Obligations

The ISO shall assign to each Scheduling Coordinator a share of the ISO's total Regulation, Spinning Reserve, Non-Spinning Reserve and Replacement Reserve requirements. The ISO will calculate the share for which each Scheduling Coordinator is responsible (its "obligation") in accordance with the standards set forth in the ASRP.

ASRP 3.2 Right to Self-Provide

Each Scheduling Coordinator may self-provide all, or a portion, of its Regulation and Reserve obligation within each Zone or adjust its obligation through Inter-Scheduling Coordinator Ancillary Service Trades

Issued by: Charles F. Robinson, Vice President and General Counsel

ASRP 4 REGULATION STANDARDS

ASRP 4.1 Standard for Regulation: Quantity Needed

ASRP 4.1.1 Basis for Standard

The ISO needs sufficient Generating Units immediately responsive to Automatic Generation Control (AGC) in order to allow the ISO Control Area to meet the WECC and NERC control performance criteria by continuously balancing Generation to meet deviations between actual and scheduled Demand and to maintain interchange schedules.

ASRP 4.1.2 Determination of Regulation Quantity Needed

The quantity of Regulation capacity needed for each Settlement Period of the Day-Ahead Market and the Hour-Ahead Markets shall be determined as a percentage of the aggregate scheduled Demand for that Settlement Period.

ASRP 4.1.3 Percentage Determination

The exact percentage required for each Settlement Period of the Day-Ahead Market and the Hour-Ahead Markets shall be determined by the ISO based upon its need to meet the WECC and NERC control performance criteria.

ASRP 4.1.4 Publication of Estimated Percentage for Day-Ahead Market

In accordance with the requirements of SP 3.2.1, the ISO will publish on WEnet its estimate of the percentage it will use for determining the quantity of Regulation it requires for each Settlement Period of the Day-Ahead Market for that Trading Day.

ASRP 4.1.5 Publication of Estimated Percentage for Hour-Ahead Market

The ISO will publish on WEnet its estimate of the percentage it will use to determine the quantity of Regulation it requires for each Hour-Ahead Market.

ASRP 4.1.6 Additional Regulation Requirement

Additional Regulation capacity may be procured by the ISO for the real-time operating period if needed to meet the WECC and NERC control performance criteria.

ASRP 4.2 Standard for Regulation: Performance

ASRP 4.2.1 Operating Characteristics of Generating Unit

A Generating Unit offering Regulation must have the following operating characteristics and technical capabilities:

(a) it must be capable of being controlled and monitored by the ISO Energy Management System (EMS) by means of the installation and use of a standard ISO direct communication and direct control system, a description of which and criteria for any temporary exemption from which, the ISO shall publish on the ISO internet "Home Page;"

Issued by: Charles F. Robinson, Vice President and General Counsel

- it must be capable of achieving at least the ramp rates (increase and decrease in MW/minute) stated in its bid for the full amount of Regulation capacity offered;
- (c) the Regulation capacity offered must not exceed the maximum ramp rate (MW/minute) of that Unit times a value within a range from a minimum of ten minutes to a maximum of thirty minutes, which value shall be specified by the ISO and published on the ISO's internet "Home Page;"
- (d) the Generating Unit to ISO Control Center telemetry must in a manner meeting ISO standards include indications of whether the Generating Unit is on or off AGC at the Generating Unit terminal equipment; and
- (e) the Generating Unite must be capable of the full range of movement within the amount of Regulation capability offered without manual Generating Unit operator intervention of any kind.

ASRP 4.2.2 Operational EMS/SCADA Equipment

Each Participating Generator must ensure that the ISO EMS control and related SCADA equipment for its generating facility are operational throughout the time period during which Regulation is required to be provided.

ASRP 4.3 SC's Obligation for Regulation

Each Scheduling Coordinator's Obligation for Regulation for each Settlement Period of the Day-Ahead Market and for each Hour-Ahead Market in each Zone shall be calculated based upon the ratio of metered Demand (excluding exports) by each Scheduling Coordinator in each identified Zone for that Settlement Period to the total metered Demand (excluding exports) for that Settlement Period in that Zone.

ASRP 4.4 Standard for Regulation: Control

The ACE will be calculated by the ISO EMS. Control signals will be sent from the ISO EMS to raise or lower the output of Generating Units or System Reources providing Regulation when ACE exceeds the allowable ISO Control Area dead band for ACE. Use of dynamic schedules to provide Regulation from System Resources must be certified and approved by the ISO.

ASRP 4.4.1 Dynamic Scheduling of Regulation from External Resources

Scheduling Coordinators are allowed to bid or self-provide their Regulation obligation in whole or in part from resources located outside the ISO Control Area by dynamically scheduling such resources; if it can be demonstrated that the control function will use dedicated communication links (either directly or through EMS computers) for ISO computer control and telemetry to provide this

Issued by: Roger Smith, Senior Regulatory Counsel

function in accordance with the ISO's standards and procedures posted on the ISO Home Page.

ASRP 4.5 Standard for Regulation: Procurement

ASRP 4.5.1 Procurement of Non Self-Provided Regulation

Regulation necessary to meet ISO requirements not met by self-provided Regulation will be procured by the ISO as described in the ISO Tariff.

ASRP 4.5.2 Certification and Testing Requirements

Each Generating Unit and System Unit used to bid Regulation or used to self-provide Regulation must have been certified and tested by the ISO using the process defined in Appendix A to this Protocol.

ASRP 4.5.3 [Not Used]

ASRP 4.5.4 [Not Used]

ASRP 5 OPERATING RESERVE STANDARDS

The ISO needs, as a minimum, Operating Reserve, consisting of Spinning Reserve and Non-Spinning Reserve, sufficient to meet WECC MORC. The Operating Reserve requirement shall be equal to (a) 5% of the Demand (except the Demand covered by firm purchases from outside the ISO Control Area) to be met by Generation from hydroelectric resources, plus 7% of the Demand (except the Demand covered by firm purchases from outside the ISO Control Area) to be met by Generation from other resources, or (b) the single largest Contingency, if this is greater or (c) by reference to such more stringent criteria as the ISO may determine from time to time. This Operating Reserve requirement does not include the Operating Reserve required to cover the Generation or services described in ASRP 5.2(a) and (b).

ASRP 5.1 Standard for Spinning Reserve: Quantity Needed

ASRP 5.1.1 Minimum Spinning Reserve Quantity

The Spinning Reserve component of Operating Reserve shall be no less than one-half the Operating Reserve required for each Settlement Period of the Day-Ahead Market, the Hour-Ahead Market and the Real Time Market.

ASRP 5.1.2 Providing both Spinning Reserve and Regulation

Spinning Reserve and Regulation may be provided as separate services from the same Generating Unit, provided that the sum of Spinning Reserve and Regulation provided is not greater than the maximum ramp rate of the Generating Unit (MW/minute) times ten.

Issued by: Charles F. Robinson, Vice President and General Counsel

ASRP 5.2 Standard for Non-Spinning Reserve: Quantity Needed

The required quantity of Non-Spinning Reserve shall be equal to the required quantity of Operating Reserve less the quantity of Spinning Reserve determined in ASRP 5.1 plus;

- (a) an amount of Non-Spinning Reserve equal to Interruptible Imports (which must either be self-provided by the Scheduling Coordinators responsible for the Interruptible Imports from resources within the ISO Controlled Grid or purchased from the ISO); and
- (b) an amount of Non-Spinning Reserve equal to on-demand obligations to other entities or Control Areas (which must be selfprovided by the Scheduling Coordinators responsible for the ondemand obligations from resources within the ISO Controlled Grid).

Scheduling Coordinators may self-provide their allocated quantity of Non-Spinning Reserve under ASRP 5.2(a) and (b) from Spinning Reserve not already committed to the ISO, if they wish.

ASRP 5.3 Standard for Spinning Reserve: Performance

ASRP 5.3.1 Spinning Reserve Capability

Each Generating Unit or external import of a System Resource scheduled to provide Spinning Reserve must be capable of converting the full capacity reserved to Energy production within ten minutes after the issue of the Dispatch instruction by the ISO, and of maintaining that output or scheduled interchange for at least two hours.

ASRP 5.3.2 Availability

Each Participating Generator shall ensure:

- that its Generating Units scheduled to provide Spinning Reserve are available for Dispatch throughout the Settlement Period for which it has been scheduled; and
- (b) that its Generating Units scheduled to provide Spinning Reserve are responsive to frequency deviations throughout the Settlement Period for which they have been scheduled.

ASRP 5.4 Standard for Non-Spinning Reserve Performance

ASRP 5.4.1 Non-Spinning Reserve Resources

Non-Spinning Reserve may be provided by, among others, the following resources:

- (a) Demand which can be reduced by Dispatch;
- (b) interruptible exports;
- (c) on-demand rights from other entities or Control Areas;
- (d) off line Generating Units qualified to provide Non-Spinning Reserve; and

Issued by: Charles F. Robinson, Vice President and General Counsel

(e) external imports of System Resources.

ASRP 5.4.2 Non-Spinning Reserve Capability

Each resource providing Non-Spinning Reserve must be capable of converting the full capacity reserved to Energy production within ten minutes after the issue of the Dispatch instruction by the ISO, and of maintaining that output for at least two hours.

ASRP 5.4.3 Availability

Each provider of Non-Spinning Reserve must ensure that its resources scheduled to provide Non-Spinning Reserve are available for Dispatch throughout the Settlement Period for which they have been scheduled.

ASRP 5.5 SC's Obligation for Operating Reserve

ASRP 5.5.1 Obligation for Spinning and Non-Spinning Reserve

Except for the requirement for Non-Spinning Reserve referred to in paragraph ASRP 5.5.2, each Scheduling Coordinator's Operating Reserve obligation in each Zone shall be pro rata based upon the same proportion as the product of its percentage obligation based on metered output and the sum of its metered Demand and firm exports bears to the total of such products for all Scheduling Coordinators in the Zone. The Scheduling Coordinator's percentage obligation based on metered output shall be calculated as the sum of 5% of its Demand (except the Demand covered by firm purchases from outside the ISO Control Area) met by Generation from hydroelectric resources plus 7% of its Demand (except the Demand covered by firm purchases from outside the ISO Control Area) met by Generation from non-hydroelectric resources in that Zone.

ASRP 5.5.2 Additional Non-Spinning Reserve Requirements

Additional Non-Spinning Reserve required pursuant to ASRP 5.2(a) and (b) is the responsibility of the Scheduling Coordinator implementing such Schedules and is in addition to the obligation provided in paragraph ASRP 5.5.1.

ASRP 5.6 Standard for Spinning Reserve: Control

Each provider of Spinning Reserve must be capable of receiving a Dispatch instruction within one minute from the time the ISO Control Center elects to Dispatch the Spinning Reserve resource and must ensure that its resource can be at the Dispatched operating level within ten minutes after issue of the Dispatch instruction.

ASRP 5.7 Standard for Non-Spinning Reserve: Control

Each provider of Non-Spinning Reserve must be capable of receiving a Dispatch instruction within one minute from the time the ISO Control Center elects to Dispatch the Non-Spinning Reserve resource and must ensure that its resource can be at the Dispatched operating level or condition within ten minutes after issue of the Dispatch instruction.

Issued by: Roger Smith, Senior Regulatory Counsel

FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 412 Superseding Original Sheet No. 412

ASRP 5.8 Standard for Operating Reserve: Procurement

ASRP 5.8.1 Procurement of Non Self-Provided Operating Reserve

Operating Reserve necessary to meet ISO requirements not met by self-provided Operating Reserve will be procured by the ISO as described in the ISO Tariff.

ASRP 5.8.2 Procurement Not Limited to ISO Control Area

The ISO will procure Spinning and Non-Spinning Reserves from Generating Units operating within the ISO Control Area and external imports of System Resources.

ASRP 5.8.3 Spinning Reserve Certification and Testing Requirements

Spinning Reserve may only be provided from

- (1) Generating Units;
- (2) System Resources from external imports; or
- (3) System Units;

which have been certified and tested by the ISO using the process defined in Appendix B to this Protocol.

ASRP 5.8.4 Non-Spinning Reserve Certification and Testing Requirements

Non-Spinning Reserve may only be provided from resources including

- (1) Loads;
- (2) Generating Units;
- (3) System Resources from external imports; and
- (4) System Units;

which have been certified and tested by the ISO using the process defined in Appendix C to this Protocol.

ASRP 5.8.5 Self-Provision of Operating Reserve

Scheduling Coordinators may self-provide Spinning and Non-Spinning Reserves from resources outside the ISO Control Area.

ASRP 6 REPLACEMENT RESERVE STANDARDS

ASRP 6.1 Standard for Replacement Reserve: Quantity Needed

ASRP 6.1.1 Basis for Standard

The ISO needs sufficient Replacement Reserve to be available to allow restoration of Dispatched Operating Reserve within sixty minutes to its Set Point scheduled for the Settlement Period concerned.

ASRP 6.1.2 Replacement Reserve Requirements

The ISO shall have discretion to determine the quantity of Replacement Reserve it requires in each Zone. The ISO shall

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Sheet No. 413 Superseding Original Sheet No. 413

make its determination of the required quantity of Replacement Reserve based on:

- (a) analysis of the deviation between aggregate forecast Demands supplied by Scheduling Coordinators and that forecast by ISO;
- (b) analysis of patterns of unplanned Generating Unit Outages;
- (c) analysis of patterns of shortfalls between Final Day-Ahead Schedules and actual Generation and Demand;
- (d) analysis of patterns of unexpected transmission Outages;
- (e) analysis of seasonal variations that may require additional Replacement Reserves; and
- (f) other factors influencing the ISO Controlled Grid's ability to meet Applicable Reliability Criteria.

ASRP 6.2 Standard for Replacement Reserve: Performance

ASRP 6.2.1 Replacement Reserve Supply Capability

Each resource providing Replacement Reserve must be capable of supplying any level of output up to and including its full reserved capacity within sixty minutes after issue of Dispatch instructions by the ISO.

ASRP 6.2.2 Replacement Reserve Availability

Each resource providing Replacement Reserve must be capable of sustaining the instructed output for at least two hours.

ASRP 6.2.3 Resources already Providing Ancillary Service

Replacement Reserve may be supplied from resources already providing another Ancillary Service, such as Spinning Reserve, but only to the extent that the ability to provide the other Ancillary Service is not restricted in any way by the provision of Replacement Reserve. The sum of Ancillary Service capacity supplied by the same resource cannot exceed the capacity of said resource.

ASRP 6.3 Scheduling Coordinator's Obligation for Replacement Reserve

Scheduling Coordinator's Obligation for Replacement Reserve for each Settlement Period of the Day-Ahead Market and for each Hour-Ahead Market in each Zone shall be based upon the ratio of the metered Demand (excluding exports) by each Scheduling Coordinator in each identified Zone for that Settlement Period to the total metered Demand (excluding exports) for that Settlement Period in that Zone.

ASRP 6.4 Standard for Replacement Reserve: Control

Each provider of Replacement Reserve must be capable of receiving a Dispatch instruction within one minute from the time the ISO Control Center elects to Dispatch the Replacement Reserve resource and must ensure that its resource can be at the Dispatched operating level or condition within sixty minutes after issue of the Dispatch instruction.

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Sheet No. 414

ASRP 6.5 Standard for Replacement Reserve: Procurement

ASRP 6.5.1 Procurement of Non Self-Provided Replacement Reserve

Replacement Reserve necessary to meet ISO requirements not met by self-provided Replacement Reserve will be procured by the ISO as described in the ISO Tariff.

ASRP 6.5.2 Procurement Not Limited to ISO Control Area

The ISO will procure Replacement Reserves from Generating Units operating within the ISO Control Area and external imports of System Resources.

ASRP 6.5.3 Self-Provision of Replacement Reserve

Scheduling Coordinators may self-provide Replacement Reserves as external imports from System Resources located outside the ISO Control Area.

ASRP 6.5.4 Certification and Testing Requirements

Replacement Reserve may only be provided from resources including

- (1) Loads;
- (2) Generating Units;
- (3) System Resources from external imports; and
- (4) System Units

which have been certified and tested by the ISO using the process defined in Appendix C to this Protocol.

ASRP 7 VOLTAGE SUPPORT STANDARDS

ASRP 7.1 Standard for Voltage Support: Quantity Needed

The ISO shall determine on a daily basis for each Settlement Period for each Trading Day the quantity and location of Voltage Support required to maintain voltage levels and reactive margins within WECC and NERC criteria using a power flow study based on the quantity and location of Demand scheduled in each Settlement Period of the Day-Ahead Market. The ISO shall issue daily voltage schedules (Dispatch instructions) to Generators, Participating TOs and UDCs for each Trading Day, which are required to be maintained for ISO Controlled Grid reliability.

ASRP 7.2 Standard for Voltage Support: Performance

ASRP 7.2.1 Automatic Voltage Regulation Requirement

A Generating Unit providing Voltage Support must be under the control of generator automatic voltage regulators throughout the time period during which Voltage Support is required to be provided. A Generating Unit may be required to operate underexcited (absorb reactive power) at periods of light system Demand to avoid potential high voltage conditions, or overexcited

Issued by: Charles F. Robinson, Vice President and General Counsel

(produce reactive power) at periods of heavy system Demand to avoid potential low voltage conditions.

ASRP 7.2.2 Compensation for Operating Outside of Range

The ISO will not compensate Generators for operating their Generating Units within the power factor band of 0.90 lag to 0.95 lead. If the ISO requires additional Voltage Support in the short term it may instruct a reduction in a Generating Unit's MW output so that it operates outside its specified power factor range. The ISO will compensate Generators for this service as provided in the ISO Tariff.

ASRP 7.3 Standard for Voltage Support: Distribution and Location

The ISO shall determine on an hourly basis for each day the quantity of Voltage Support required at various locations on the ISO Controlled Grid to maintain voltage levels and reactive margins within WECC and NERC criteria using a power flow study based on the quantity and location of scheduled Demand. The ISO shall issue daily voltage schedules based on that determination to any Generators and Loads that are requested to change their voltage levels. Each Generating Unit owned by a Participating Generator shall maintain the ISO specified voltage schedule at the transmission interconnection points to the extent possible while operating within the power factor range required by Section 2.5.3.4 (within a band of 0.90 lag and 0.95 lead unless otherwise specified in an agreement specified in that Section). Other Generating Units shall operate within the power factor range required by Section 2.5.3.4. Each Load directly connected to the ISO Controlled Grid shall maintain voltage levels and power factors as required under Section 2.5.3.4 (within a power factor band of 0.97 lag to 0.99 lead). Each UDC shall maintain reactive power flow at the Scheduling Points with which it is interconnected with the ISO Controlled Grid within the range of 0.97 lag to 0.99 lead, unless otherwise specified in its UDC agreement.

ASRP 7.4 Standard for Voltage Support: Control

Generating Units providing Voltage Support must have automatic voltage regulators which can correct the bus voltages to be within the prescribed voltage limits and within the machine capability in less than one minute.

ASRP 7.5 Standard for of Voltage Support: Procurement

ASRP 7.5.1 Long-Term Voltage Support

As of the ISO Operations Date, the ISO will contract for long-term Voltage Support service with Owners of Reliability Must-Run Units under Reliability Must-Run Contracts.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: December 20, 2004 Effective: November 19, 2004

ASRP 7.5.2 Certification and Testing Requirements

Voltage Support may only be provided from resources including Loads, Generating Units and System Units which have been certified and tested by the ISO using the process defined in Appendix E to this Protocol.

ASRP 8 BLACK START STANDARDS

ASRP 8.1 Standard for Black Start: Quantity Needed
ASRP 8.1.1 Determination of Black Start Capability

The ISO shall determine the amount and location of Black Start capability it requires by reference to contingency studies which will be used as the basis of the ISO's emergency plans.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: December 20, 2004 Effective: November 19, 2004

ASRP 8.1.2 Factoring in Failed Starts

The ISO shall, in determining the quantity needed, account for the probability that some Black Start Generating Units may fail to start or that transmission system damage may prevent some Black Start Generating Units from serving their intended loads.

ASRP 8.1.3 Submission of Load Restoration Time Requirements

Scheduling Coordinators shall provide the ISO with their load restoration time requirements for any resources that provide emergency services.

ASRP 8.2 Standard for Black Start: Performance

ASRP 8.2.1 10-Minute Start-Up Capability

Each Black Start Generating Unit must be able to start up with a dead primary and station service bus within ten minutes of issue of a Dispatch instruction by the ISO requiring a Black Start.

ASRP 8.2.2 Reactive Capability

Each Black Start Generating Unit must provide sufficient reactive capability to keep the energized transmission bus voltages within emergency voltage limits over the range of no-load to full load.

ASRP 8.2.3 12-Hour Minimum Output Capability

Each Black Start Generating Unit must be capable of sustaining its output for a minimum period of 12 hours from the time when it first starts delivering Energy.

ASRP 8.3 Standard for Black Start: Location

The ISO will select Black Start capacity in locations where adequate transmission capacity can be made readily available (assuming no transmission damage) to connect the Black Start Generating Unit to the station service bus of a Generating Unit designated by the ISO.

ASRP 8.4 Standard for Black Start: Control

ASRP 8.4.1 Voice Communication Requirement

Each supplier of Black Start capability must ensure that normal and emergency voice communications are available to permit effective Dispatch of the Black Start capability.

ASRP 8.4.2 ISO Confirmation

No load served by the Black Start Generating Unit or by any designated Generating Unit or by any transmission facility used for Black Start service may be restored until the ISO has confirmed that the need for such service has passed.

Issued by: Roger Smith, Senior Regulatory Counsel

ASRP 8.5 Standard for Black Start: Procurement

ASRP 8.5.1 Initial Procurement

Black Start capability will initially be procured by the ISO through individual contracts with Scheduling Coordinators for Reliability Must-Run Units and other Generating Units which have Black Start capability.

ASRP 8.5.2 Certified Generating Units Requirement

Black Start capability may only be provided from Generating Units which have been certified and tested by the ISO using the process defined in Appendix F to this Protocol.

ASRP 9 TESTING FOR STANDARD COMPLIANCE

The ISO shall periodically conduct unannounced tests of resources providing Ancillary Services to confirm the ability of such resources to meet the applicable Ancillary Service standard for performance and control. Scheduling Coordinators for Ancillary Service resources being tested will be compensated for Energy output or Demand reduction provided pursuant to such tests in accordance with the ISO Tariff.

ASRP 9.1 Compliance Testing for Regulation

The ISO may test the capability of any Generating Unit or System Resource providing Regulation by using the ISO EMS to move that Generating Unit's or System Resource's output over the full range of its Regulation capacity within a ten-minute period.

ASRP 9.2 Compliance Testing for Spinning Reserve

The ISO may test the capability of any Generating Unit, System Unit or external import of a System Resource providing Spinning Reserve by issuing unannounced Dispatch instructions requiring the Generating Unit, System Unit or external import of a System Resource to ramp up to its stated ten minute capability in accordance with the Scheduling Coordinator's Bid. Such tests may not necessarily occur on the hour. The ISO shall measure the response of the Generating Unit, System Unit or external import of a System Resource to determine compliance with its stated capabilities.

ASRP 9.3 Compliance Testing for Non-Spinning Reserve

ASRP 9.3.1 Compliance Testing of a Generating Unit, System Unit or System Resource

The ISO may test the Non-Spinning Reserve capability of a Generating Unit, System Unit or an external import of a System Resource by issuing unannounced Dispatch instructions requiring the Generating Unit or System Unit to come on line and ramp up or, in the case of a System Resource, to affirmatively respond to real-time interchange schedule adjustment; all in accordance with the Scheduling Coordinator's bid. Such tests may not necessarily

Issued by: Roger Smith, Senior Regulatory Counsel

occur on the hour. The ISO shall measure the response of the Generating Unit, System Unit or external import of a System Resource to determine compliance with its stated capabilities.

ASRP 9.3.2 Compliance Testing of Curtailable Demand

The ISO may test the Non-Spinning Reserve capability of a Load providing Curtailable Demand by issuing unannounced Dispatch instructions requiring the operator of the Load to report the switchable Demand of that Load actually being served by the operator at the time of the instruction. No Load will be disconnected as part of the test.

ASRP 9.4 Compliance Testing for Replacement Reserve

ASRP 9.4.1 Compliance Testing of a Generating Unit or System Resource

The ISO may test the Replacement Reserve capability of a Generating Unit, System Unit or an external import of a System Resource by issuing unannounced Dispatch instructions requiring the Generating Unit or System Unit to come on line and ramp up or, in the case of a System Resource, to affirmatively respond to a real-time interchange schedule adjustment; all in accordance with the Scheduling Coordinator's bid. Such tests may not necessarily occur on the hour. The ISO shall measure the response of the Generating Unit, System Unit or external import of a System Resource to determine compliance with its stated capabilities.

ASRP 9.4.2 Compliance Testing of a Curtailable Demand

The ISO may test the Replacement Reserve capability of a Load providing Curtailable Demand by issuing unannounced Dispatch instructions requiring the operator of the Load to report the switchable Demand of that Load actually being served by the operator at the time of the instruction. No Load will be disconnected as part of a test.

ASRP 9.5 Compliance Testing for Voltage Support

ASRP 9.5.1 Compliance Testing of a Generating Unit

The ISO may test the Voltage Support capability of a Generating Unit by issuing unannounced Dispatch instructions requiring the Generating Unit to adjust its power factor outside the specified power factor band of 0.90 lag to 0.95 lead, but within the limits of the Generating Unit capability curve.

ASRP 9.5.2 Compliance Testing of Other Reactive Devices

The ISO may test the Voltage Support capability of other reactive devices (shunt capacitors, static var compensators, synchronous condensers) by issuing unannounced Dispatch instructions requiring operation of such devices.

ASRP 9.6 Compliance Testing for Black Start

The ISO may test the Black Start capability of a Generating Unit by unannounced tests, which may include issuing Dispatch

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

First Revised Sheet No. 419

FIRST REPLACEMENT VOLUME NO. II Superseding Original Sheet No. 419

instructions to start and synchronize the resource, testing of all communications circuits, simulating switching needed to connect the Black Start Generating Unit to the transmission system, and testing the features unique to each facility that relate to Black Start service.

ASRP 9.7 Consequences of Failure to Pass Compliance Testing

ASRP 9.7.1 Notification of Compliance Testing Results

If a Generating Unit, Load, or System Resource fails a compliance test, the ISO shall notify the Scheduling Coordinator whose resource was the subject of the test and the Ancillary Service Provider or owner or operator of a System Resource providing Ancillary Services of such failure by any means as soon as reasonably practicable after the completion of the test. In addition, regardless of the outcome of the test, the ISO shall provide the Scheduling Coordinator whose resource was subject to a compliance test written notice of the results of such test. The ISO shall at the same time send a copy of the notice to the Ancillary Service Provider or owner or operator of a System Resource providing Ancillary Services.

ASRP 9.7.2 Penalties for Failure to Pass Compliance Testing

The Scheduling Coordinator whose resource fails a compliance test shall be subject to the financial penalties provided for in the ISO Tariff. In addition, the ISO shall institute the sanctions described in ASRP 11.

ASRP 10 PERFORMANCE AUDITS FOR STANDARD COMPLIANCE

In addition to testing under ASRP 9, the ISO will periodically audit the performance of resources providing Ancillary Services to confirm the ability of such resources to meet the applicable Ancillary Service standard for performance and control.

ASRP 10.1 Performance Audit for Regulation

The ISO will audit the performance of a Generating Unit providing Regulation by monitoring its response to ISO EMS control or, in the case of an external import of a System Resource providing Regulation, by monitoring the dynamic interchange response to ISO EMS control around its Set Point within its rated MW/minute capability over the range of Regulation capacity scheduled for the current Settlement Period.

ASRP 10.2 Performance Audit for Spinning Reserve

The ISO will audit the performance of a Generating Unit or external import of a System Resource providing Spinning Reserve by auditing its response to Dispatch instructions and by analysis of Meter Data associated with the Generating Unit. Such audits may not necessarily occur on the hour. A Generating Unit providing Spinning Reserve shall be evaluated on its ability to respond to a Dispatch instruction, move at the MW/minute capability stated in its bid, reach the amount of Spinning Reserve capacity scheduled for the current Settlement Period within ten minutes of issue of the Dispatch instruction by the ISO, and respond to system frequency deviations outside the allowed frequency deadband. An external import of a System Resource providing Spinning Reserve shall be evaluated on its ability to respond to a Dispatch instruction, move at the MW/minute capability stated in its bid, reach the amount of Spinning Reserve capacity scheduled for the current Settlement Period within ten minutes of issue of the Dispatch instruction by the ISO.

Issued by: Charles F. Robinson, Vice President and General Counsel

ASRP 10.3 Performance Audit for Non-Spinning Reserve

The ISO will audit the performance of a Generating Unit, Load, or System Resource providing Non-Spinning Reserve by auditing its response to Dispatch instructions, and by analysis of Meter Data associated with the resource. Such audits may not necessarily occur on the hour. A Generating Unit providing Non-Spinning Reserve shall be evaluated on its ability to respond to a Dispatch instruction, move in accordance with the time delay and MW/minute capability stated in its bid, and reach the amount of Non-Spinning Reserve capacity under the control of the ISO scheduled for the current Settlement Period within ten minutes of issue of the Dispatch instruction by the ISO. An external import of a System Resource providing Non-Spinning Reserve shall be evaluated on its ability to respond to a Dispatch instruction, move in accordance with the time delay and MW/minute capability stated in its bid, and reach the amount of Non-Spinning Reserve capacity scheduled for the current Settlement Period within ten minutes of issue of the Dispatch instruction by the ISO. A Load providing Non-Spinning Reserve from Curtailable Demand shall be evaluated on its ability to respond to a Dispatch instruction, move in accordance with the time delay and MW/minute capability stated in its bid, and reach the amount of Non-Spinning Reserve capacity scheduled for the current Settlement Period within ten minutes of issue of the Dispatch instruction by the ISO.

ASRP 10.4 Performance Audit for Replacement Reserve

The ISO will audit the performance of a Generating Unit, Load, or System Resource providing Replacement Reserve by auditing its response to Dispatch instructions, and by analysis of Meter Data associated with the resource. Such audits may not necessarily occur on the hour. A Generating Unit providing Replacement Reserve shall be evaluated on its ability to respond to a Dispatch instruction, start within the designated time delay, move at the MW/minute capability stated in its bid, reach the amount of Replacement Reserve capacity scheduled for the Settlement Period concerned within sixty minutes of issue of the Dispatch instruction, and sustain operation at this level for a sufficient time to assure availability over the specified period. An external import of a System Resource providing Replacement Reserve shall be evaluated on its ability to respond to a Dispatch instruction, start within the designated time delay, move at the MW/minute capability stated in its bid, reach the amount of Replacement Reserve capacity scheduled for the Settlement Period concerned within sixty minutes of issue of the Dispatch instruction, and sustain operation at this level for a sufficient time to assure availability over the specified period. A Load providing Replacement Reserve from Curtailable Demand shall be evaluated on its ability to respond to a Dispatch instruction, start within the designated time delay, move at the MW/minute capability stated in its bid, reach the amount of Replacement Reserve capacity scheduled for the Settlement Period concerned within sixty minutes of issue of the Dispatch instruction, and sustain operation at this level for a sufficient time to assure availability over the specified period.

ASRP 10.5 Performance Audit for Voltage Support

The ISO will audit the performance of a resource providing Voltage Support by auditing of its response to Dispatch instructions, and by analysis of Meter Data associated with the resource. A resource providing Voltage Support shall be evaluated on its ability to provide reactive support over the stated power factor range of the resource, provide reactive support within the prescribed time periods, and demonstrate the effective function of automatic voltage control equipment for

Issued by: Charles F. Robinson, Vice President and General Counsel

the amount of Voltage Support under the control of the ISO for the current Settlement Period.

ASRP 10.6 Performance Audit for Black Start

The ISO will audit the performance of a Black Start Generating Unit by analysis of Meter Data and other records to determine that the performance criteria relating to the Black Start from that Black Start Generating Unit were met when required.

ASRP 10.7 Consequences of Failure to Pass Performance Audits

ASRP 10.7.1 Notification of Performance Audit Results

The ISO shall give the Scheduling Coordinator for an Ancillary Service Provider whose resource was subject to a performance audit written notice of the results of such audit. The ISO will at the same time send a copy of the notice to the Ancillary Service Provider

ASRP 10.7.2 Penalties for Failure to Pass Performance Audit

The Scheduling Coordinator for an Ancillary Service Provider whose resource fails a performance audit shall be subject to the financial penalties provided for in the ISO Tariff. In addition the sanctions described in ASRP 11 shall come into effect.

ASRP 11 SANCTIONS FOR POOR PERFORMANCE

ASRP 11.1 Warning Notice

If an Ancillary Service resource fails a compliance test or a performance audit, the ISO will issue a warning notice to the Scheduling Coordinator for that resource and at the same time will send a copy of the notice to the owner and operator of the resource.

ASRP 11.2 Scheduling Coordinator's Option to Test

On receipt of a warning notice the Ancillary Service Provider for the resource concerned may request the ISO, through its Scheduling Coordinator, to test the capability of the Ancillary Service resource concerned. The ISO shall carry out such test as soon as practicable and the cost of such test shall be paid by the Scheduling Coordinator irrespective of the result of the test.

ASRP 11.3 Duration of Warning Notice

A warning notice shall continue in effect until:

- (a) the Ancillary Service resource is next tested by the ISO whether such a test is called for by the Scheduling Coordinator under ASRP 11.2 or carried out by the ISO under ASRP 9; or
- (b) the expiry of a period of six calendar months from the date upon which the ISO notified the Scheduling Coordinator that the Ancillary Service resource failed the test or the

Issued by: Roger Smith, Senior Regulatory Counsel

First Revised Sheet No. 422 Superseding Original Sheet No. 422

performance audit which gave rise to the issue of the warning notice, whichever is the earlier.

ASRP 11.4 Second failure

An Ancillary Service resource which fails a compliance test or a performance audit conducted during the period when a warning notice for that resource is in effect shall be disqualified immediately from providing the Ancillary Service concerned whether as part of the ISO's auction or as part of a self-provision arrangement, and shall not be permitted to submit a bid to the ISO or be part of a self-provision arrangement until such time as it has successfully repassed the approval and certification procedure described in the relevant Appendix to this ASRP.

ASRP 12 AMENDMENTS TO THE PROTOCOL

If the ISO determines a need for an amendment to this Protocol, the ISO will follow the requirements as set forth in Section 16 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Effective: October 13, 2000

ANCILLARY SERVICES REQUIREMENTS PROTOCOL

APPENDICES A-F

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

First Revised Sheet No. 424 Superseding Original Sheet No. 424

APPENDIX A

Certification for Regulation

A 1 A Generator wishing to provide Regulation as an Ancillary Service from a Generating Unit whether pursuant to the ISO's auction or as part of a self-provision arrangement must meet the following operating characteristics and technical requirements in order to be certified by the ISO to provide Regulation service unless granted a temporary exemption by the ISO in accordance with criteria which the ISO shall publish on the ISO's internet "Home Page;"

A 1.1 Operating Characteristics

- A 1.1.1 the rated capacity of the Generating Unit must be 1 MW or greater unless the Generating Unit is participating in an aggregation arrangement approved by the ISO;
- A 1.1.2 the maximum amount of Regulation to be offered must be reached within a period that may range from a minimum of 10 minutes to a maximum of 30 minutes, as such period may be specified by the ISO and published on the ISO's internet "Home Page;"

A 1.2 Technical Requirements

A 1.2.1 Control

- a direct, digital, unfiltered control signal generated from the ISO EMS through a standard ISO direct communication and direct control system, must meet the minimum performance standards for communications and control which will be developed and posted by the ISO on its internet "Home Page;"
- the Generating Unit power output response (in MW) to a control signal must meet the minimum performance standards for control and unit response which will be developed and posted by the ISO on its internet "Home Page." As indicated by the Generating Unit power output (in MW), the Generating Unit must respond immediately, without manual Generating Unit operator intervention, to control signals and must sustain its specified ramp rate, within specified Regulation limits, for each minute of control response (MW/minute):

A 1.2.2 Monitoring:

the Generating Unit must have a standard ISO direct communication and direct control system to send signals to the ISO EMS to dynamically monitor, at a minimum the following:

- A 1.2.2.1 actual power output (MW);
- A 1.2.2.2 high limit, low limit and rate limit values as selected by the Generating Unit operator; and
- A 1.2.2.3 in-service status indication confirming availability of Regulation service.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000 Effective: January 1, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 424A

A 1.2.3 Voice Communications:

ISO approved primary and back-up voice communication must be in place between the ISO Control Center and the operator controlling the Generating Unit at the generating site and between the Scheduling

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000 Effective: January 1, 2001

Coordinator and the operator. The primary dedicated voice communication between the ISO Control Center and the operator controlling the Generating Unit at the generating site must be digital voice communication, as provided by a standard ISO direct communication and direct control system; and

- A 1.3 the communication and control system and the Generating Unit must pass a qualification test to demonstrate the overall ability to provide Regulation meeting the performance requirements of the ASRP for Regulation.
- A 2 A Generator wishing to be considered for certification for Regulation service by the ISO must make a written request to the ISO, giving details of the technical capability of the Generating Units concerned and identifying the Scheduling Coordinator through whom the Generator intends to offer Regulation service. The Generator shall at the same time send a copy of its request to that Scheduling Coordinator. Technical review request forms will be available from the ISO.
- A 3 No later than one week after receipt of the Generator's request, the ISO shall provide the Generator with a listing of required interface equipment for Regulation, including a standard ISO direct communication and direct control system. The ISO shall send a copy of the listing to the Generator's Scheduling Coordinator.
- A 4 The Generator may propose alternatives that the Generator believes may provide an equivalent level of communication and control for consideration by the ISO. Such proposals shall be in writing and contain sufficient detail for the ISO to make a determination of suitability. The ISO may request additional information, if required, to assist in its evaluation of the proposal.
- A 5 The ISO shall respond by accepting the alternative proposal, rejecting the alternative proposal, or suggesting modifications to the alternative proposal. Such acceptance, rejection, or suggested revision must be provided not later than six weeks after the proposal is received by the ISO. The Generator and the ISO shall keep the Scheduling Coordinator informed of this process by each sending to the Scheduling Coordinator a copy of any written communication which it sends to the other.
- A 6 Upon agreement as to any alternative method of communication and control to be used by the Generator, the ISO shall provisionally approve the proposal in writing providing a copy to the Generator's Scheduling Coordinator at the same time. If agreed by the ISO, the Generator may then proceed to procure and install the equipment and make arrangements for the required communication and control.
- A 7 Design, acquisition, and installation of the ISO-approved communication and control equipment shall be under the control of the ISO. The ISO shall bear no cost responsibility or functional

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000 Effective: January 1, 2001

responsibility for such equipment, except that the ISO shall arrange for and monitor the maintenance of the communication and control system at the Generator's expense, unless otherwise agreed by the ISO and the Generator. The ISO shall be responsible for the design, acquisition and installation of any necessary modifications to the ISO EMS at its own cost.

- A 8 The ISO, in cooperation with the Generator shall perform testing of the communication and control equipment to ensure that the communication and control system performs to meet the ISO requirements.
- When the ISO is satisfied that the communication and control systems meet the ISO's requirements, the Generator shall request in writing that the ISO conduct a certification test with a suggested primary date and time and at least two alternative dates and times. The ISO shall, within two Business Days of receipt of the Generator's request, accept a proposed time if possible or suggest at least three alternatives to the Generator. If the ISO responds by suggesting alternatives, the Generator shall, within two Business Days of receipt of the ISO's response, respond in turn by accepting a proposed alternative if possible or suggesting at least three alternatives, and this procedure shall continue until agreement is reached on the date and time of the test. The Generator shall inform its Scheduling Coordinator of the agreed date and time of the test.
- A 10 Testing shall be performed by the ISO, with the cooperation of the Generator. Such tests shall include, but not be limited to, the following:
- **A 10.1** confirmation of control communication path performance;
- A 10.2 confirmation of primary and secondary voice circuits for receipt of Dispatch instructions:
- A 10.3 confirmation of the Generating Unit control performance; and
- A 10.4 confirmation of the ISO EMS control to include changing the Generating Unit output over the range of Regulation proposed at different Set Points, from minimum to maximum output, and at different rates of change from the minimum to the maximum permitted by the design of the Generating Unit.
- A 11

 Upon successful completion of the test, the ISO shall certify the Generating Unit as being permitted to provide Regulation as an Ancillary Service and shall provide a copy of the certificate to the Scheduling Coordinator at the same time. The ISO shall change its Generating Unit data base to reflect the permission for the Generating Unit to provide Regulation service.
- A 12 The Scheduling Coordinator may bid Regulation service from the certified Generating Unit into the Markets starting with the Day-Ahead Market for the hour ending 0100 on the second Trading Day after the ISO issues the certificate.

Issued by: Roger Smith, Senior Regulatory Counsel

- A 13 The certification to provide Regulation shall remain in force until:
 - (a) withdrawn by the Scheduling Coordinator or the Generator by written notice to the ISO to take effect at the time notified in the notice, which must be the end of a Trading Day; or
 - (b) if the Generating Unit obtained ISO certification on the basis of a prior communication and control technology, until revoked by the ISO for failure to comply with the requirement set forth in A 13.1 that the Generating Unit install an ISO-specified standard ISO direct communication and direct control system (unless exempted by the ISO).
- A 13.1 Unless exempted by the ISO, if the Generating Unit obtained ISO certification on the basis of a prior communication and control technology, the ISO shall provide written notice to the Generator of the Generator's obligation to install an ISO-specified standard direct communication and direct control system along with a required date for said work to be completed as mutually agreed upon by the ISO and the Generator. Failure to meet the completion date shall be grounds for the revocation of certification, provided that the ISO must provide the Generator with at least ninety (90) days advance notice of the proposed revocation.
- A 14 The certification may be revoked by the ISO only under provisions of the ASRP or the ISO Tariff.

Issued by: Roger Smith, Senior Regulatory Counsel

FIRST REPLACEMENT VOLUME NO. II

APPENDIX B

Certification for Spinning Reserve

- **B** 1 A Generator wishing to provide Spinning Reserve as an Ancillary Service from a Generating Unit or System Resource whether pursuant to the ISO's auction or as part of a self-provision arrangement must meet the following requirements in order to be certified by the ISO to provide Spinning Reserve service:
- **B** 1.1 the rated capacity of the Generating Unit must be 1 MW or greater unless the Generating Unit is participating in an aggregation arrangement approved by the ISO;
- B 1.2 the minimum governor performance of the Generating Unit or System Resource shall be as follows:
- B 1.2.1 5% drop:
- B 1.2.2 governor deadband must be plus or minus 0.036Hz; and
- B 1.2.3 the power output must change within one second for any frequency deviation outside the governor deadband.
- B 1.3 the operator of the Generating Unit or System Resource must have a means of receiving Dispatch instructions to initiate an increase in real power output (MW) within one minute of the ISO Control Center determination that Energy from Spinning Reserve capacity must be Dispatched:
- **B 1.4** the Generating Unit or System Resource must be able to increase its real power output (MW) by the maximum amount of Spinning Reserve to be offered within ten minutes;
- **B 1.5** ISO approved voice communications services must be in place to provide both primary and alternate voice communication between the ISO Control Center and the operator controlling the Generating Unit or System Resource; and
- **B 1.6** The communication system and the Generating Unit or System Resource must pass a qualification test to demonstrate the overall ability to meet the performance requirements of the ASRP for Spinning Reserve.
- **B** 2 A Generator or System Unit wishing to be considered for certification for Spinning Reserve service by the ISO must make a written request to the ISO, giving details of the technical capability of the Generating Units or System Resources concerned and identifying the Scheduling Coordinator through whom the Generator or System Unit intends to offer Spinning Reserve service. The Generator or System Unit shall at the same time send a copy of its request to that Scheduling Coordinator. Technical review request forms will be available from the ISO.

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 428A

B 3 No later than one week after receipt of the request, the ISO shall provide the Generator or System Unit with a listing of acceptable communication options and interface equipment options for Spinning Reserve. The ISO shall send a copy of the listing to the Generator's or System Unit's Scheduling Coordinator.

Issued by: Roger Smith, Senior Regulatory Counsel

- B 4 The Generator or System Unit may elect to implement any of the approved options defined by the ISO, and, if it wishes to proceed with its request for certification, shall give written notice to the ISO of its selected communication option, with a copy to its Scheduling Coordinator.
- When it receives the Generator's or System Unit's notice, the ISO shall notify the Generator or System Unit and the Scheduling Coordinator in writing no later than two weeks after receipt of the notice confirming receipt of the notice and issuing provisional approval of the selected options. Upon receipt of the ISO acknowledgment, the Generator or System Unit may proceed as indicated below to secure the necessary facilities and capabilities required.
- The Generator or System Unit may also propose alternatives that it believes may provide an equivalent level of control for consideration by the ISO. Such proposals shall be in writing and contain sufficient detail for the ISO to make a determination of suitability. The ISO may request additional information, if required, to assist in its evaluation of the proposal.
- B 7 The ISO shall respond by accepting the alternative proposal, rejecting the alternative proposal, or suggesting modifications to the alternative proposal. Such acceptance, rejection, or suggested revision must be provided not later than six weeks after the proposal is received by the ISO. The Generator or the System Unit and the ISO shall keep the Scheduling Coordinator informed of this process by each sending to the Scheduling Coordinator a copy of any written communication which it sends to the other.
- B 8 Upon agreement as to the method of communication and control to be used by the Generator or System Resource, the ISO shall provisionally approve the Generator's proposal or the System Resource's proposal in writing providing a copy to the Generator's or System Resource's Scheduling Coordinator at the same time. The Generator or System Resource may then proceed to procure and install the equipment and make arrangements for the required communication.
- B 9 Design, acquisition, and installation of the Generator's equipment or the System Resource's equipment shall be under the control of the respective Generator or System Resource. The ISO shall bear no cost responsibility or functional responsibility for such equipment. The ISO shall be responsible for the design, acquisition and installation of any necessary modifications to its own equipment at its own cost.
- The Generator or System Resource shall perform its own testing of its equipment to ensure that the control system performs to meet the ISO requirements.

Issued by: Roger Smith, Senior Regulatory Counsel

| B 11 | When it is satisfied that its plant, equipment and communication systems meet the ISO's requirements, the Generator or System Resource shall request in writing that the ISO conduct a certification test with a suggested primary date and time and at least two alternative dates and times. The ISO shall, within two Business Days of receipt of the request, accept a proposed time if possible or suggest at least three alternatives to the Generator or System Resource. If the ISO responds by suggesting alternatives, the Generator or System Resource shall, within two Business Days of receipt of the ISO's response, respond in turn by accepting a proposed alternative if possible or suggesting at least three alternatives, and this procedure shall continue until agreement is reached on the date and time of the test. The Generator or System Resource shall inform its Scheduling Coordinator of the agreed date and time of the test. |
|--------|---|
| B 12 | Testing shall be performed under the direction of the ISO. Such tests shall include, but not be limited to, the following: |
| B 12.1 | confirmation of control communication path performance for Dispatch instruction; |
| B 12.2 | confirmation of primary and secondary voice circuits for receipt of Dispatch instructions; |
| B 12.3 | confirmation of the Generating Unit or System Resource performance to include changing the Generating Unit or System Resource output over the range of Spinning Reserve proposed from minimum to maximum output, and at different rates of change from the minimum to the maximum permitted by the design of the Generating Unit or System Resource; and |
| B 12.4 | testing the drop characteristic of the Generating Unit or System Resource by simulating frequency excursions outside the allowed deadband and measuring the response of the Generating Unit or System Resource. |
| B 13 | Upon successful completion of the test the ISO shall certify the Generating Unit or System Resource as being permitted to provide Spinning Reserve as an Ancillary Service and shall provide a copy of the certificate to the Scheduling Coordinator at the same time. The ISO shall change the Generating Unit or System Resource data base to reflect the ability of the Generating Unit to provide Spinning Reserve. |
| B 14 | The Scheduling Coordinator may bid Spinning Reserve from the certified Generating Unit or System Resource into the Markets starting with the Day-Ahead Market for the hour ending 0100 on the Second Trading Day after the ISO issues the certificate. |
| B 15 | The certification to provide Spinning Reserve shall remain in force until withdrawn by the Scheduling Coordinator or the Generator or System Resource by written notice to the ISO to take effect at the time notified in the notice, which must be the end of a Trading Day. |
| B 16 | The certification may be revoked by the ISO only under provisions |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

of the ASRP or the ISO Tariff.

First Revised Sheet No. 431 Superseding Original Sheet No. 431

APPENDIX C

Certification for Non-Spinning Reserve

- An Ancillary Service Provider wishing to provide Non-Spinning Reserve as an Ancillary Service from a Generating Unit or System Resource whether pursuant to the ISO's auction or as part of a self-provision arrangement must meet the following requirements in order to be certified by the ISO to provide Non-Spinning Reserve service:
- the rated capacity of the Generating Unit or System Resource must be 1 MW or greater unless the Generating Unit is participating in an aggregation arrangement approved by the ISO;
- the Generating Unit must be able to increase output as soon as possible to the value indicated in a Dispatch instruction, reaching the indicated value within ten minutes after issue of the instruction and be capable of maintaining output for 2 hours.
- An Ancillary Service Provider wishing to provide Non-Spinning Reserve as an Ancillary Service from Curtailable Demand whether pursuant to the ISO's auction or as part of a self-provision arrangement must meet the following requirements in order to be certified by the ISO to provide Non-Spinning Reserve service:
- **C 2.1** the operator must be able to completely disconnect the required Load pursuant to a Dispatch instruction within ten minutes after issue of the instruction;
- **C 2.2** the minimum change in the electrical consumption of the Load must be at least 1 MW; and
- **C 2.3** the Load must be capable of being interrupted for at least two hours.
- An Ancillary Service Provider wishing to provide Non-Spinning Reserve as an Ancillary Service, whether pursuant to the ISO's auction or as part of a self-provision arrangement, must also meet the following requirements in order to be certified by the ISO to provide Non-Spinning Reserve service:
- the operator of the Generating Unit, System Resource or the Curtailable Demand must have a means of receiving a Dispatch instruction to initiate an increase in real power output or a reduction in Demand (MW) within one minute of the ISO Control Center's determination that Non-Spinning Reserve capacity must be Dispatched; and
- the communication system and the Generating Unit, System Resource or Load must pass a qualification test to demonstrate the overall ability to meet the performance requirements of the ASRP for Non-Spinning Reserve.

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 431A

An Ancillary Service Provider wishing to be considered for certification for Non-Spinning Reserve service must make a written request to the ISO, giving details of the technical capability of the Generating Unit, System Resource or Load concerned and identifying the Scheduling Coordinator through whom the Ancillary Service Provider intends to offer Non-Spinning Reserve. The Ancillary Service Provider shall at the

Issued by: Roger Smith, Senior Regulatory Counsel

same time send a copy of the request to that Scheduling Coordinator. Technical Review request forms will be available from the ISO.

- C 5 No later than one week after receipt of the Ancillary Service Provider's request, the ISO shall provide the Ancillary Service Provider with a listing of acceptable communication options and interface equipment options for Non-Spinning Reserve. The ISO shall send a copy of the listing to the Ancillary Service Provider's Scheduling Coordinator.
- C 6 The Ancillary Service Provider may elect to implement any of the certification, the Ancillary Service Provider shall give written notice to the ISO of its selected communication option and interface equipment option, with a copy to its Scheduling Coordinator.
- When it receives the Ancillary Service Provider's notice, the ISO shall notify the Ancillary Service Provider and the Scheduling Coordinator in writing no later than two weeks after receipt of the notice confirming receipt of the notice and issuing provisional approval of the selected options. Upon receipt of the ISO acknowledgment the Ancillary Service Provider may proceed as indicated below to secure the necessary facilities and capabilities required.
- The Ancillary Service Provider may also propose alternatives that it believes may provide an equivalent level of control for consideration by the ISO. Such proposals shall be in writing and contain sufficient detail for the ISO to make a determination of suitability. The ISO may request additional information, if required, to assist in its evaluation of the proposal.
- The ISO shall respond by accepting the alternative proposal, rejecting the alternative proposal, or suggesting modifications to the alternative proposal. Such acceptance, rejection, or suggested revision must be provided not later than six weeks after the proposal is received by the ISO. The Ancillary Service Provider and the ISO shall keep the Scheduling Coordinator informed of this process by each sending to the Scheduling Coordinator a copy of any written communication which it sends to the other.
- Upon agreement as to the method of communication and control to be used by the Ancillary Service Provider, the ISO shall provisionally approve the proposal in writing providing a copy to the Ancillary Service Provider's Scheduling Coordinator at the same time. The Ancillary Service Provider may then proceed to procure and install the equipment and make arrangements for the required communication.
- Design, acquisition, and installation of the Ancillary Service Provider's equipment shall be under the control of the Ancillary Service Provider. The ISO shall bear no cost responsibility or functional responsibility for such equipment. The ISO shall be responsible for the design, acquisition and installation of any necessary modifications to the ISO's equipment at its own cost.

Issued by: Roger Smith, Senior Regulatory Counsel

| C 12 | The Ancillary Service Provider shall perform its own testing of its equipment to ensure that the control system performs to meet the ISO requirements. |
|--------|--|
| C 13 | When it is satisfied that its plant, equipment and communication systems meet the ISO's requirements, the Ancillary Service Provider shall request in writing that the ISO conduct a certification test with a suggested primary date and time and at least two alternative dates and times. The ISO shall, within two Business Days of receipt of the Ancillary Service Provider's request, accept a proposed time if possible or suggest at least three alternatives. If the ISO responds by suggesting alternatives, the Ancillary Service Provider shall, within two Business Days of receipt of the ISO's response, respond in turn by accepting a proposed alternative if possible or suggesting at least three alternatives, and this procedure shall continue until agreement is reached on the date and time of the test. The Ancillary Service Provider shall inform its Scheduling Coordinator of the agreed date and time of the test. |
| C 14 | Testing shall be performed under the direction of the ISO. Such tests shall include, but not be limited to, the following: |
| C 14.1 | confirmation of control communication path performance; |
| C 14.2 | confirmation of primary and secondary voice circuits for receipt of Dispatch instructions; |
| C 14.3 | confirmation of the Generating Unit, System Resource or Load control performance; and |
| C 14.4 | confirmation of the range of Generating Unit or System Resource control to include changing the output over the range of Non-Spinning Reserve proposed. |
| C 15 | Upon successful completion of the test, the ISO shall certify the Generating Unit, System Resource or Load as being permitted to provide Non-Spinning Reserve as an Ancillary Service and shall provide a copy of the certificate to the Scheduling Coordinator at the same time. The ISO shall change its data base to reflect the permission for the Generating Unit or Load to provide Non-Spinning Reserve service. |
| C 16 | The Scheduling Coordinator may bid Non-Spinning Reserve service from the certified Generating Unit or Load into the Markets starting with the Day-Ahead Market for the hour ending 0100 on the second Trading Day after the ISO issues the certificate. |
| C 17 | The certification to provide Non-Spinning Reserve shall remain in force until withdrawn by the Scheduling Coordinator or the Ancillary Service Provider by written notice to the ISO to take effect at the time notified in the notice, which must be the end of a Trading Day. |
| C 18 | The certification may be revoked by the ISO only under provisions of the ASRP or the ISO Tariff. |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: December 29, 2000 Effective: January 1, 2001

First Revised Sheet No. 434 Superseding Original Sheet No. 434

APPENDIX D

Certification for Replacement Reserve

- An Ancillary Service Provider wishing to provide Replacement Reserve as an Ancillary Service from a Generating Unit or System Resource whether pursuant to the ISO's auction or as part of a self-provision arrangement must meet the following requirements in order to be certified by the ISO to provide Replacement Reserve service:
- D 1.1 the rated capacity of the Generating Unit or System Resource must be 1 MW or greater unless the Generating Unit is participating in an aggregation arrangement approved by the ISO;
- D 1.2 the operator of the Generating Unit must be able to increase output as quickly as possible to a value indicated in a Dispatch instruction, reaching the indicated value in sixty minutes or less after issue of the instruction.
- D 2 An Ancillary Service Provider wishing to provide Replacement Reserve as an Ancillary Service from Curtailable Demand whether pursuant to the ISO's auction or as part of a self-provision arrangement must meet the following requirements in order to be certified by the ISO to provide Replacement Reserve service:
- D 2.1 the operator must be able to completely disconnect the required Load pursuant to a Dispatch instruction within sixty minutes after issue of the instruction;
- **D 2.2** the minimum change in the electrical consumption of the Load must be at least 1 MW; and
- **D 2.3** the Load must be capable of being interrupted for at least two hours.
- An Ancillary Service Provider wishing to provide Replacement Reserve as an Ancillary Service, whether pursuant to the ISO's auction or as part of a self-provision arrangement, must also meet the following requirements in order to be certified by the ISO to provide Replacement Reserve service:
- D 3.1 the operator of the Generating Unit, System Resource or the Curtailable Demand must have a means of receiving a Dispatch instruction to initiate an increase in real power output or a reduction in Demand (MW) within one minute of the ISO Control Center's determination that Replacement Reserve capacity must be Dispatched; and
- D 3.2 the communication system and the Generating Unit or Load must pass a qualification test to demonstrate the overall ability to meet the performance requirements of the ASRP for Replacement Reserve.
- An Ancillary Service Provider wishing to be considered for certification for Replacement Reserve service must make a written request to the ISO, giving details of the technical capability of the Generating Unit, System Resource or the Load concerned and identifying the Scheduling Coordinator through whom the Ancillary Service Provider intends to offer Replacement Reserve. The Ancillary Service Provider shall at the

Issued by: Roger Smith, Senior Regulatory Counsel

same time send a copy of its request to that Scheduling Coordinator. Technical Review request forms will be available from the ISO.

- D 5 No later than one week after receipt of the Ancillary Service Provider's request, the ISO shall provide the Ancillary Service Provider with a listing of acceptable communication options and interface equipment options for Replacement Reserve. The ISO shall send a copy of the listing to the Ancillary Service Provider's Scheduling Coordinator.
- D 6 The Ancillary Service Provider may elect to implement any of the options defined by the ISO, and, if it wishes to proceed with its request for certification, the Ancillary Service Provider shall give written notice to the ISO of its selected communication option and interface equipment option, with a copy to its Scheduling Coordinator.
- When it receives the Ancillary Service Provider's notice, the ISO shall notify the Ancillary Service Provider and the Scheduling Coordinator in writing no later than two weeks after receipt of the notice confirming receipt of the notice and issuing provisional approval of the selected options. Upon receipt of the ISO acknowledgment the Ancillary Service Provider may proceed as indicated below to secure the necessary facilities and capabilities required.
- D 8 The Ancillary Service Provider may also propose alternatives that it believes may provide an equivalent level of control for consideration by the ISO. Such proposals shall be in writing and contain sufficient detail for the ISO to make a determination of suitability. The ISO may request additional information, if required, to assist in its evaluation of the proposal.
- The ISO shall respond by accepting the alternative proposal, rejecting the alternative proposal, or suggesting modifications to the alternative proposal. Such acceptance, rejection, or suggested revision shall be provided not later than six weeks after the proposal is received by the ISO. The Ancillary Service Provider and the ISO shall keep the Scheduling Coordinator informed of this process by each sending to the Scheduling Coordinator a copy of any written communication which it sends to the other.
- Upon agreement as to the method of communication and control to be used by the Ancillary Service Provider, the ISO shall provisionally approve the proposal in writing providing a copy to the Ancillary Service Provider's Scheduling Coordinator at the same time. The Ancillary Service Provider may then proceed to procure and install the equipment and make arrangements for the required communication.
- Design, acquisition, and installation of the Ancillary Service Provider's equipment shall be under the control of the Ancillary Service Provider. The ISO shall bear no cost responsibility or functional responsibility for such equipment. The ISO shall be responsible for the design, acquisition and installation of any necessary modifications to the ISO's equipment at its own cost.

Issued by: Roger Smith, Senior Regulatory Counsel

| D 12 | The Ancillary Service Provider shall perform its own testing of its equipment to ensure that the control system performs to meet the ISO requirements. |
|--------|--|
| D 13 | When it is satisfied that its plant, equipment and communication systems meet the ISO's requirements, the Ancillary Service Provider shall request in writing that the ISO conduct a certification test with a suggested primary date and time and at least two alternative dates and times. The ISO shall, within two Business Days of receipt of the Ancillary Service Provider's request, accept a proposed time if possible or suggest at least three alternatives. If the ISO responds by suggesting alternatives, the Ancillary Service Provider shall, within two Business Days of receipt of the ISO's response, respond in turn by accepting a proposed alternative if possible or suggesting at least three alternatives, and this procedure shall continue until agreement is reached on the date and time of the test. The Ancillary Service Provider shall inform its Scheduling Coordinator of the agreed date and time of the test. |
| D 14 | Testing shall be performed under the direction of the ISO. Such tests shall include, but not be limited to, the following: |
| D 14.1 | confirmation of control communication path performance; |
| D 14.2 | confirmation of primary and secondary voice circuits for receipt of Dispatch instructions; |
| D 14.3 | confirmation of the Generating Unit, System Resource or Load control performance; and |
| D 14.4 | confirmation of the range of Generating Unit or System Resource control to include changing the Generating Unit output over the range of Replacement Reserve proposed. |
| D 15 | Upon successful completion of the test the ISO shall certify the Generating Unit, System Resource or Load as being permitted to provide Replacement Reserve as an Ancillary Service and shall provide a copy of the certificate to the Scheduling Coordinator at the same time. The ISO shall change its data base to reflect the permission for the Generating Unit or Load to provide Replacement Reserve service. |
| D 16 | The Scheduling Coordinator may bid Replacement Reserve service from the certified Generating Unit or Load into the Markets starting with the Day-Ahead Market for the hour ending 0100 on the second Trading Day after the ISO issues the certificate. |
| D 17 | The certification to provide Replacement Reserve shall remain in force until withdrawn by the Scheduling Coordinator or the Ancillary Service Provider by written notice to the ISO to take effect at the time notified in the notice, which must be the end of a Trading Day. |
| D 18 | The certification may be revoked by the ISO only under provisions of the ASRP or the ISO Tariff. |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: December 29, 2000 Effective: January 1, 2001

First Revised Sheet No. 437 Superseding Original Sheet No. 437

APPENDIX E

Certification for Voltage Support

- A Generator wishing to provide Voltage Support as an Ancillary Service from a Generating Unit must meet the following requirements in order to be certified by the ISO to provide Voltage Support service:
- the rated capacity of the Generating Unit must be 1 MW or greater unless the Generating Unit is participating in an aggregation arrangement approved by the ISO;
- the Generating Unit must be able to produce VARs at lagging power factors less than 0.90 and absorb VARs at leading power factors more than 0.95 within the safe operating parameters for the Generating Unit;
- the Generating Unit must be able to produce or absorb VARs outside the 0.90 lag to 0.95 lead bandwidth over a range of real power outputs which the Generator expects to produce when offering Voltage Support;
- the Generating Unit must be able to produce or absorb VARs at the boundary of the Generating Unit's capability curve by reducing real power output to either absorb or produce additional VARs within the safe operating parameters for the Generating Unit; and
- E 1.5 metering and SCADA equipment must be in place to provide both real and reactive power data from the Generating Unit providing Voltage Support to the ISO Control Center.
- A Generator wishing to be considered for certification for Voltage Support service by the ISO must make a written request to the ISO, giving details of the technical capability of the Generating Unit concerned and identifying the Scheduling Coordinator through whom the Generator intends to offer Voltage Support service. The Generator shall at the same time send a copy of its request to that Scheduling Coordinator. The details of the Generating Unit's technical capability must include the Generating Unit name plate data, performance limits, and capability curve. The Generator must also define the operating limitations in both real and reactive power (lead and lag) to be observed when Voltage Support is being provided to the ISO for both normal and reduced real power output conditions. Technical Review request forms will be available from the ISO.
- No later than one week after receipt of the Generator's request, the ISO shall provide the Generator with a listing of acceptable communication options and interface equipment options for Voltage Support. The ISO shall send a copy of the listing to the Generator's Scheduling Coordinator.
- E 4 The Generator may elect to implement any of the approved options defined by the ISO, and, if it wishes to proceed with its request for certification, the Generator shall give written notice to the ISO of its selected communication option and interface equipment option, with a copy to its Scheduling Coordinator.


Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 437A

When it receives the Generator's notice the ISO shall notify the Generator and the Scheduling Coordinator in writing no later than two weeks after receipt of the notice confirming receipt of the notice and

Issued by: Roger Smith, Senior Regulatory Counsel



- The Generator may also propose alternatives that the Generator believes may provide an equivalent level of control for consideration by the ISO. Such proposals shall be in writing no later than two weeks after receipt of the notice and contain sufficient detail for the ISO to make a determination of suitability. The ISO may request additional information, if required, to assist in its evaluation of the proposal.
- E 7 The ISO shall respond by accepting the alternative proposal, rejecting the alternative proposal, or suggesting modifications to the alternative proposal. Such acceptance, rejection, or suggested revision shall be provided not later than six weeks after the proposal is received by the ISO. The Generator and the ISO shall keep the Scheduling Coordinator informed of this process by each sending to the Scheduling Coordinator a copy of any written communication which it sends to the other.
- Upon agreement as to the method of communication and control to be used by the Generator, the ISO shall provisionally approve the proposal in writing providing a copy to the Generator's Scheduling Coordinator at the same time. The Generator may then proceed to procure and install the equipment and make arrangements for the required communication.
- E 9 Design, acquisition, and installation of the Generator's equipment are under the control of the Generator. The ISO shall bear no cost responsibility or functional responsibility for such equipment.
- E 10 The ISO shall be responsible for the design, acquisition and installation of any necessary modifications to the ISO's equipment at its own cost.
- E 11 The Generator shall perform its own testing of its equipment to ensure that the control system performs to meet the ISO requirements.
- When it is satisfied that its plant, equipment and communication systems meet the ISO's requirements, the Generator shall request in writing that the ISO conduct a certification test with a suggested primary date and time and at least two alternative dates and times. The ISO shall, within two Business Days of receipt of the Generator's request, accept a proposed time if possible or suggest at least three alternatives to the Generator. If the ISO responds by suggesting alternatives, the Generator shall, within two Business Days of receipt of the ISO's response, respond in turn by accepting a proposed alternative if possible or suggesting at least three alternatives, and this procedure shall continue until agreement is reached on the date and time of the test. The Generator shall inform its Scheduling Coordinator of the agreed date and time of the test.

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 439

| E 13 | Testing shall be performed under the direction of the ISO. Such tests shall include, but not be limited to, the following: |
|--------|--|
| E 13.1 | confirmation of control communication path performance; |
| E 13.2 | confirmation of primary and secondary voice circuits for receipt of Dispatch instructions; |
| E 13.3 | confirmation of the Generating Unit automatic voltage regulator performance; and |
| E 13.4 | confirmation of the range of Voltage Support service over a range of Generating Unit real power outputs to verify the ability to both produce and absorb reactive power at different operating levels including minimum and maximum real power output. |
| E 14 | Upon successful completion of the test, the ISO shall certify the Generating Unit as being permitted to provide Voltage Support as an Ancillary Service and shall provide a copy of the certificate to the Scheduling Coordinator at the same time. The ISO shall change the Generating Unit data base to reflect the permission for the Generating Unit to provide Voltage Support. |
| E 15 | The Scheduling Coordinator may bid Supplemental Energy for Voltage Support from the certified Generating Unit into the market starting with the market for the hour ending 0100 on the first Trading Day after the ISO issues the certificate. |
| E 16 | The certification to provide Voltage Support shall remain in force until withdrawn by the Scheduling Coordinator or the Generator by written notice to the ISO to take effect at the time notified in the notice, which must be the end of a Trading Day. |
| E 17 | The certification may be revoked by the ISO only under provisions of the ASRP or the ISO Tariff. |

APPENDIX F

Certification for Black Start

- A Generator wishing to provide Black Start capacity from a Generating Unit as an Ancillary Service must meet the requirements stated in Appendix D of the ISO Tariff in order to be certified by the ISO to provide Black Start capacity. In addition, the Generating Unit must have a rated capacity 1 MW or greater unless the Generating Unit is participating in an aggregation arrangement approved by the ISO.
- F 2 A Generator wishing to be considered for certification for Black Start service by the ISO must make a written request to the ISO. Such request must clearly identify the facilities related to the Generating Unit from which the Generator wishes to provide Black Start and shall identify the Scheduling Coordinator through whom the Generator wishes to offer Black Start service. The Generator shall send a copy of its request to its Scheduling Coordinator at the same time as it sends it to the ISO. The Generator's written request must include at least the following:
- **F 2.1** identification of the Generating Unit including Location Code;
- **F 2.2** a single-line electrical diagram of the Generating Unit connections including auxiliary power busses and the connection to the station switchyard;
- **F 2.3** a description of the fuel supply used for Black Start including on-site storage and resupply requirements;
- **F 2.4** a single-line electrical diagram showing the transmission connection from the Generating Unit station switchyard to a connection point on the ISO Controlled Grid:
- **F 2.5** a description of the Generating Unit capability to provide both real and reactive power, any start-up and shut-down requirements, any staffing limitations; and
- **F 2.6** a description of the primary, alternate and emergency back-up communications systems currently available to the Generator for communications to the ISO Control Center.
- F 3 Upon receipt of the Generator's written request the ISO shall review the information provided and respond in writing within two weeks of receipt of the request, providing a copy of its response to the Generator's Scheduling Coordinator. The ISO response may be any of the following:
- **F 3.1** acceptance of the proposal as presented;
- **F 3.2** rejection of the proposal as presented with a rationale for such rejection; or

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 440A

F 3.3 a request for additional information needed by the ISO to properly evaluate the request.

F 4 A Generator receiving a rejection may submit a written request for reconsideration by the ISO within 60 days of the date of the rejection

Issued by: Roger Smith, Senior Regulatory Counsel

| notice. A request for reconsideration must address the rationale |
|--|
| provided by the ISO. The ISO shall respond to a request for |
| reconsideration within 60 days of the date of that request. |
| |

- A Generator receiving a request for additional information shall provide such information within 60 days of such request providing a copy at the same time to its Scheduling Coordinator. The ISO shall review the information and respond within 120 days of the date of the ISO's request for additional information providing a copy at the same time to the Generator's Scheduling Coordinator.
- Upon acceptance by the ISO of the Generator's request and agreement as to the method of communication and control to be used by the Generator, the ISO shall provisionally approve the proposal in writing providing a copy at the same time to the Generator's Scheduling Coordinator. The Generator may then proceed to procure and install the equipment and make arrangements for the required communication.
- F 7 Design, acquisition, and installation of the Generator's equipment shall be under the control of the Generator. The ISO shall bear no cost responsibility or functional responsibility for such equipment. The ISO shall be responsible for the design, acquisition and installation of any necessary modifications to its own equipment at its own cost.
- **F 8** The Generator shall perform its own testing of its equipment to ensure that the Black Start system performs to meet the ISO requirements.
- When it is satisfied that its plant, equipment and communication systems meet the ISO's requirements, the Generator shall request in writing that the ISO conduct a certification test with a suggested primary date and time and at least two alternative dates and times. The ISO shall, within two Business Days of receipt of the Generator's request, accept a proposed time if possible or suggest at least three alternatives to the Generator. If the ISO responds by suggesting alternatives, the Generator shall, within two Business Days of receipt of the ISO's response, respond in turn by accepting a proposed alternative if possible or suggesting at least three alternatives, and this procedure shall continue until agreement is reached on the date and time of the test. The Generator shall inform its Scheduling Coordinator of the agreed date and time of the test.
- F 10 Testing shall be performed under the direction of the ISO. Such tests shall include, but not be limited to, the following:
- **F 10.1** confirmation of control communication path performance;
- **F 10.2** confirmation of primary, secondary, and emergency voice circuits for receipt of Dispatch instructions;
- **F 10.3** confirmation of the Generating Unit performance; and
- **F 10.4** simulation of a Black Start event.

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 442

| F 11 | Upon successful completion of the test, the ISO shall certify the |
|------|---|
| | Generating Unit as being permitted to provide Black Start capacity as |
| | an Ancillary Service and shall provide a copy of the certificate to the |
| | Scheduling Coordinator at the same time. The ISO shall change its |
| | Generating Unit data base to reflect the permission for the Generating |
| | Unit to provide Black Start service. |

- F 12 The certification to provide Black Start shall remain in force until withdrawn by the Scheduling Coordinator or the Generator by written notice to the ISO to take effect at the time noticed in the notice, which must be the end of a Trading Day.
- **F 13** The certification may be revoked by the ISO only under provisions of the ASRP or the ISO Tariff.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

DEMAND FORECASTING PROTOCOL

DEMAND FORECASTING PROTOCOL

Table of Contents

| DFP 1 | OBJECTIVES, DEFINITIONS AND SCOPE | | 446 | |
|---|--|--------------------------------------|-----|--|
| DFP 1.1 | Objectives | | 446 | |
| DFP 1.2 | Definition | s | 446 | |
| DFP 1.2 | .1 Maste | r Definitions Supplement | 446 | |
| DFP 1.2 | .2 Specia | al Definitions for this Protocol | 446 | |
| DFP 1.2 | .3 Rules | of Interpretation | 447 | |
| DFP 1.3 | Scope | | 447 | |
| DFP 1.3 | .1 Scope | of Application to Parties | 447 | |
| DFP 1.3 | .2 Liabilit | y of the ISO | 447 | |
| DFP 2 SCHEDULING COORDINATOR DEMAND FORECAST RESPONSIBILITIES | | 447 | | |
| DFP 2.1 | Data to be Submitted to the ISO by SCs | | | |
| DFP 2.2 | Format of | Demand Forecasts | 447 | |
| DFP 2.3 | Timing of | Submission of Demand Forecasts | 448 | |
| DFP 2.4 | Forecast | Standards | 448 | |
| DFP 2.4 | .1 Avoidi | ng Duplication | 448 | |
| DFP 2.4 | .2 Requi | red Performance | 448 | |
| DFP 2.4 | .3 Incom | plete or Unsuitable Demand Forecasts | 448 | |
| DFP 3 | UDC RES | PONSIBILITIES | 448 | |
| DFP 3.1 | Data to be | Submitted to the ISO by UDCs | 448 | |
| DFP 3.2 | Format of | Demand Forecasts | 448 | |
| DFP 3.3 | Timing of | Submission of Demand Forecasts | 449 | |

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 445

| DFP 3.4 | Forecast Standards | 449 |
|--|---|-----|
| DFP 3 | s.4.1 Avoiding Duplication | 449 |
| DFP 3 | .4.2 Required Performance | 449 |
| DFP 4 | ISO RESPONSIBILITIES | 449 |
| DFP 4.1 | Advisory Control Area Demand Forecasts | 449 |
| DFP 4.2 | ISO Demand Forecasts | 449 |
| DFP 5 | AMENDMENTS TO THE PROTOCOL | 450 |
| DFP SCHEDULE 1 – SC DEMAND FORECAST FORMAT | | 451 |
| DFP SCHE | EDULE 2 – UDC DEMAND FORECAST FORMAT | 452 |

DEMAND FORECASTING PROTOCOL (DFP)

DFP 1 Objectives, Definitions and Scope

DFP 1.1 Objectives

The objective of the DFP is to set forth procedures for submission of Demand Forecasts which will provide information to the ISO for projecting future Demand requirements to be served by the ISO Controlled Grid. The ISO shall utilize such forecasts to enable it to assess System Reliability and carry out its functions under the Scheduling Protocol (SP) and the Outage Coordination Protocol (OCP).

DFP 1.2 Definitions

DFP 1.2.1 Master Definitions Supplement

Any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. A reference to a Section or an Appendix refers to a Section or an Appendix of the ISO Tariff unless otherwise indicated. References to DFP are to this Protocol or to the stated paragraph of this Protocol.

DFP 1.2.2 Special Definitions for this Protocol

In this Protocol, the following words and expressions shall have the meaning set opposite them:

"Annual Peak Demand Forecast" means a Demand Forecast of the highest Hourly Demand in any hour in a calendar year, in MW.

"Congestion Zone" means a Zone identified as an Active Zone in Appendix I of the ISO Tariff.

"Hourly Demand" means the average of the instantaneous Demand integrated over a single clock hour, in MW.

"Weekly Peak Demand Forecast" means a Demand Forecast of the highest Hourly Demand in any hour in a period beginning at the start of the hour ending 0100 on Sunday and ending at the end of the hour ending 2400 the following Saturday, in MW.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

DFP 1.2.3 Rules of Interpretation

- (a) Unless the context otherwise requires, if the provisions of this Protocol and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency. The provisions of the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.
- (b) A reference in this Protocol to a given agreement, ISO Protocol or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made.
- (c) The captions and headings in this Protocol are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.
- (d) This Protocol shall be effective as of the ISO Operations Date.

DFP 1.3 Scope

DFP 1.3.1 Scope of Application to Parties

The DFP applies to the following entities:

- (a) Scheduling Coordinators (SCs);
- (b) Utility Distribution Companies (UDCs); and
- (c) the ISO.

DFP 1.3.2 Liability of the ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

DFP 2 Scheduling Coordinator Demand Forecast Responsibilities

DFP 2.1 Data to be Submitted to the ISO by SCs

At the time specified in DFP 2.3, each SC shall submit to the ISO its Weekly Peak Demand Forecast by Congestion Zone reflecting (1) the Weekly Peak Demand Forecasts of the UDCs that it proposes to Schedule and (2) any other non-UDC Demand that it proposes to Schedule. All Weekly Peak Demand Forecasts submitted shall include Demand Forecasts for the following 52 weeks.

DFP 2.2 Format of Demand Forecasts

Demand Forecasts must be submitted to the ISO electronically in the format set forth in Schedule 1 of this Protocol.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

DFP 2.3 Timing of Submission of Demand Forecasts

The Demand Forecasts described in DFP 2.1 shall be submitted by SCs to the ISO on a monthly basis by noon of the 18th working day of the month.

DFP 2.4 Forecast Standards

DFP 2.4.1 Avoiding Duplication

SCs submitting Demand Forecasts to the ISO shall ensure, to the best of their ability, that any Demand they are forecasting is not included in another SC's Demand Forecasts. To accomplish this, each SC's Demand Forecasts should only reflect those End-Use Customers who they actually have under contract and who have notified their UDC or previous SC of their intention to change to another SC, and which are actually scheduled to convert.

DFP 2.4.2 Required Performance

SCs submitting its Demand Forecasts to the ISO shall take all necessary actions to provide Demand Forecasts that reflect the best judgment of the submitting SC to help avoid potential System Reliability concerns and to enable the ISO to administer a meaningful market for Energy and Ancillary Services. From time to time the ISO may publish information on the accuracy of SC Demand Forecasts.

DFP 2.4.3 Incomplete or Unsuitable Demand Forecasts

If the Demand Forecasts supplied by a SC to the ISO are, in the ISO's opinion, incomplete or otherwise unsuitable for use, or a particular Demand Forecast has not been supplied by a SC to the ISO as required under this Protocol, the ISO will substitute the last valid Demand Forecast received from the SC in replacement for any incomplete, unsuitable or not supplied Demand Forecasts.

DFP 3 UDC Responsibilities

DFP 3.1 Data to be Submitted to the ISO by UDCs

At the time specified in DFP 3.3, each UDC shall submit to the ISO its Weekly Peak Demand Forecasts by Congestion Zone reflecting the Weekly Peak Demand Forecast for Load expected to be served by facilities under the control of the UDC. All Weekly Peak Demand Forecasts submitted shall include Demand Forecasts for the following 52 weeks.

DFP 3.2 Format of Demand Forecasts

Demand Forecasts must be submitted to the ISO electronically in the format set forth in Schedule 2 of this Protocol.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

DFP 3.3 Timing of Submission of Demand Forecasts

The Demand Forecasts described in DFP 3.1 shall be submitted by UDC to the ISO on a monthly basis by noon of the twelfth working day of the month.

DFP 3.4 Forecast Standards

DFP 3.4.1 Avoiding Duplication

Each UDC submitting Demand Forecasts to the ISO and its SC shall ensure, to the best of its ability, that any Demand Forecasts that it is submitting to the ISO and its SC are not duplicated in another SC's Demand Forecasts.

DFP 3.4.2 Required Performance

Each UDC submitting its Demand Forecasts to the ISO and its SC shall take all necessary actions to provide Demand Forecasts that reflect the best judgment of the submitting UDC to help avoid potential System Reliability concerns and to enable the ISO to administer a meaningful market for Energy and Ancillary Services. The ISO may publish information on the accuracy of UDC Demand Forecasts from time to time.

DFP 4 ISO Responsibilities

DFP 4.1 Advisory Control Area Demand Forecasts

The ISO will publish on WEnet and supply to the SCs advisory Control Area Demand Forecasts comprised of Hourly Demand Forecasts for each Congestion Zone for each Settlement Period of the relevant Trading Day. The ISO will publish this information in accordance with the timing requirements set forth in the SP.

DFP 4.2 ISO Demand Forecasts

The ISO shall publish monthly on WEnet the following two (2) Demand Forecasts for the next 52 weeks.

- (i) Consolidated SC Forecast. This forecast will be developed by adding together the Weekly Peak Demand Forecasts of the individual SCs.
- (ii) Independent ISO Forecast. This forecast will be developed by the ISO.

The ISO may, at its discretion, publish on WEnet additional Demand Forecasts for two or more years following the next year.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 450

DFP 5 **AMENDMENTS TO THE PROTOCOL**

If the ISO determines a need for an amendment to this Protocol, the ISO will follow the requirements as set forth in Section 16 of the ISO Tariff.

Original Sheet No. 451

SCHEDULE 1

SC DEMAND FORECAST FORMAT

SC 52 Weeks Load Forecast (for the next 52 operating weeks)

This template is used to post 52 Weeks Load Forecast.

- (a) SC's ID code
- (b) Forecast Weekly Maximum Generation capacity for each of the next 52 weeks
- (c) Forecast Weekly Maximum Demand for each of the next 52 weeks

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

SCHEDULE 2

UDC DEMAND FORECAST FORMAT

SC/UDC Direct-Access Load Forecast

This template is for use by the SCs to forecast their direct-access loads for each UDC. The forecast must be for seven (7) future days including the current Day-Ahead Market.

- (a) SC's ID code
- (b) Trading Day of current Day-Ahead Market (month/day/year)
- (c) UDC's ID code
- (d) Hourly Demand Forecast for the 168 hours beginning with the first hour of the current Day-Ahead Market

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

DISPATCH PROTOCOL

First Revised Sheet No. 454 Superseding Original Sheet No. 454

DISPATCH PROTOCOL

Table of Contents

| DP 1 | OBJEC | OBJECTIVES, DEFINITIONS AND SCOPE | |
|--------|---|--|---------------------------------|
| DP 1.1 | Object | Objectives | |
| DP 1.2 | Definit DP 1.2.1 DP 1.2.2 DP 1.2.3 | Master Definitions Supplement Special Definitions for this Protocol | 460 460 460 461 |
| DP 1.3 | Scope DP 1.3.1 DP 1.3.2 | | 462 462 |
| DP 2 | STANE | DARDS TO BE OBSERVED | 462 |
| DP 2.1 | DP 2.1.1 DP 2.1.2 | Local Reliability Criteria (Standards) | 462 462 463 463 |
| DP 2.2 | Ancilla | ary Services | 463 |
| DP 2.3 | ISO St | andards | 464 |
| DP 2.4 | Good I | Utility Practice (Standards) | 464 |
| DP 2.5 | Existin | ng Contracts | 464 |
| DP 2.6 | The Ro | ole of Participants | 464 |
| DP 3 | SCHE | DULING AND REAL-TIME INFORMATION | 465 |
| DP 3.1 | Final S | Schedules | 465 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004

Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT/VOLUME NO. II

Original Sheet No. 455

| DP 3.2 | Suppl | emental Energy | 465 |
|--------|----------|---|-----|
| DP 3.3 | SC Int | tertie Schedules | 465 |
| DP 3.4 | | nation to be Supplied by SCs | 465 |
| | DP 3.4.1 | • | 465 |
| | DP 3.4.2 | • | 465 |
| | DP 3.4.3 | | 466 |
| | DP 3.4.4 | · · · · · · · · · · · · · · · · · · · | 400 |
| | | Inadequate Response | 466 |
| DP 3.5 | Inforn | nation to be Supplied by UDCs | 466 |
| | DP 3.5.1 | 3 | 466 |
| | | UDC Outage Scheduling | 466 |
| | DP 3.5.3 | UDC Outage Emergency Scheduling | 467 |
| DP 3.6 | Inform | nation to be Supplied by PTOs | 467 |
| | DP 3.6.1 | Transmission Status Change | 467 |
| | DP 3.6.2 | Transmission Outage Scheduling | 467 |
| | DP 3.6.3 | PTO Emergency Outage Scheduling | 467 |
| DP 3.7 | Inform | nation to be Supplied by Generators | 467 |
| | | Generator Status Change | 467 |
| | DP 3.7.2 | Generator Schedules | 468 |
| DP 3.8 | Inform | nation to be Supplied by Control Area Operators | 468 |
| | DP 3.8.1 | System Status Change | 468 |
| | DP 3.8.2 | • | 468 |
| | | Data Exchange | 468 |
| | DP 3.8.4 | Operational Metering | 469 |
| DP 3.9 | [Not U | Jsed] | 469 |
| | DP 3.9.1 | [Not Used] | 469 |
| | DP 3.9.2 | [Not Used] | 469 |
| | | [Not Used] | 469 |
| | | [Not Used] | 469 |
| | DP 3.9.5 | [Not Used] | 469 |
| DP 4 | METH | IODS OF COMMUNICATIONS | 469 |
| DP 4.1 | Metho | ods of Transmitting Dispatch Instructions | 469 |
| | DP 4.1.1 | Full-Time Communications Facility Requirement | 469 |

| DP 4.2 | Record | ling of Dispatch Instructions | 469 |
|--------|---|---|---------------------------------|
| DP 4.3 | Conter | nts of Dispatch Instructions | 469 |
| DP 4.4 | Ackno | wledgement of Dispatch Instructions | 470 |
| DP 5 | ISO FA | CILITIES AND EQUIPMENT | 470 |
| DP 5.1 | ISO Fa | cility and Equipment Outages | 470 |
| | | Unavailable Unavailable Critical Functions of WEnet Communications during WEnet Unavailability | 470 470 470 |
| | Primar DP 5.3.1 DP 5.3.2 | | 471 471 471 |
| | | Backup ISO Control Center Response | 471 471 471 471 |
| | (EMS) DP 5.5.1 | y ISO Control Center - ISO Energy Management System Unavailable Notification of Loss of EMS Notification of Restoration of EMS | 471 471 472 |
| | Backu DP 5.6.1 DP 5.6.2 | | 472 472 472 |
| | Unava DP 5.7.1 DP 5.7.2 DP 5.7.3 | Notification of Loss of Backup ISO Control Center Primary ISO Control Center Response | 472 472 472 473 |
| DE 3.0 | USE OF | 1003 LIICIUV CUIIIIUI CEIIICI CUIIDUICIS | 4/3 |

| DP 6 | ROUTINE OPERATION OF THE ISO CONTROLLED GRID | 473 |
|---------------|--|---------------------------------|
| DP 6.1 | Overview/Responsibility | 473 |
| | ISO Controlled Facilities P 6.2.1 General P 6.2.2 Primary ISO Control Center P 6.2.3 Backup ISO Control Center | 473 473 473 473 |
| DP 6.3 | Clearing Equipment for Work | 473 |
| DP 6.4 | Equipment De-energized for Work | 474 |
| DP 6.5 | Hot-Line Work | 474 |
| DP 6.6 | Intertie Switching | 474 |
| | Operating Voltage Control Equipment P 6.7.1 Operating Voltage Control Equipment Under ISO Control P 6.7.2 Operating Voltage Control Equipment Under UDC Control P 6.7.3 Special ISO Voltage Control Requirements | 474 474 474 474 |
| DP 6.8 | Outages | 474 |
| | Security Monitoring P 6.9.1 Reliability Coordinator P 6.9.2 Authority of WECC Reliability Coordinators | 475 475 475 |
| DP 7 | REAL-TIME OPERATIONAL ACTIVITIES – THE HOUR PRIOR TO THE SETTLEMENT PERIOD | 475 |
| DP 7.1 | Schedule Confirmation | 475 |
| DP 7.2 | Confirm Interchange Transaction Schedules (ITSs) | 476 |
| DP 7.3 | Supplemental Energy Bids | 476 |
| DP 7.4 | Intra-Zonal Congestion Management | 476 |
| DP 8 | REAL-TIME OPERATIONAL ACTIVITIES – THE SETTLEMENT PERIOD | 477 |
| DP 8.1 | Settlement Period P 8.1.1 Responsibility of the ISO in Real-Time Dispatch | 477 477 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 458 Superseding Original Sheet No. 458

| | DP 8.1.2 | Utilization of BEEP | 477 | | |
|--------|---|---|--|--|--|
| DP 8.2 | Generating Units, Loads and Interconnection Schedules Dispatched for Congestion | | | | |
| DP 8.3 | | o | 477 477 | | |
| | DP 8.3.3 | or Reduce Demand Selection of Generating Unit to Reduce Generation | 477 477 | | |
| DP 8.4 | Intra-Z | Zonal Congestion | 478 | | |
| DP 8.5 | Additi | onal Congestion Relief | 478 | | |
| DP 8.6 | DP 8.6.1 DP 8.6.2 | Fime Dispatch Application Real-Time Dispatch Utilization of the Merit Order Stack Basis for Real-Time Dispatch | 478 478 478 479 | | |
| DP 8.7 | Ancilla DP 8.7.1 DP 8.7.2 DP 8.7.3 DP 8.7.4 DP 8.7.5 DP 8.7.6 | Replacement Reserve Replacement of Operating Reserve | 480 480 481 481 482 482 | | |
| DP 8.8 | Real-T | Time Management of Overgeneration Conditions | 482 | | |
| DP 9 | DISPA | ATCH INSTRUCTIONS | 482 | | |
| DP 9.1 | DP 9.1.1 | ispatch Authority Range of ISO Authority Exercise of the ISO's Authority | 482 482 483 | | |
| DP 9.2 | Partic DP 9.2.1 DP 9.2.2 | ipant Responsibilities Compliance with Dispatch Instructions Notification of Non-Compliance with a Dispatch Instruction | 483 483 483 | | |
| DP 9.3 | Dispat Dema | tch Instructions for Generating Units and Curtailable nd | 483 | | |
| DP 9.4 | Respo DP 9.4.1 DP 9.4.2 | onse Required by Generators to ISO Dispatch Instructions Action Required by Generators Qualifying Facilities | 484 484 484 | | |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 459

| DP 9.5 | DP 9.5.1 | e to Comply with Dispatch Instructions Obligation to Comply Sanctions | 484 484 485 | |
|------------------------------|------------------------|---|--------------------------|--|
| DP 10 | EMER | GENCY OPERATIONS | 485 | |
| DP 10.1 Notifications by ISO | | | | |
| | DP 10.1.1 | System alert | 485 | |
| | DP 10.1.2 | System warning | 485 | |
| | DP 10.1.3 | System Emergency | 485 | |
| DP 10.2 | 2 Manag | ement of System Emergencies | 486 | |
| | DP 10.2.1 | Declaration of System Emergencies | 486 | |
| | | Emergency Procedures | 486 | |
| | DP 10.2.3 | Intervention in Market Operations | 486 | |
| | DP 10.2.4 | Emergency Guidelines | 487 | |
| | DP 10.2.5 | Implementation of Dispatch Instructions | 487 | |
| | DP 10.2.6 | Periodic Tests of Emergency Procedures | 487 | |
| | DP 10.2.7 DP 10.2.8 | | 487 | |
| | | System Emergencies | 487 | |
| DP 10.3 | 3 Extern | al Support/Assistance | 488 | |
| DP 10.4 | 4 UDC E | mergency Procedures | 488 | |
| | DP 10.4.1 | Use of UDC's Existing Load Curtailment Programs. | 488 | |
| | DP 10.4.2 | Load Curtailment | 489 | |
| DP 11 | ALGO | RITHMS TO BE USED | 489 | |
| DP 12 | INFOR | MATION MANAGEMENT | 489 | |
| DP 13 | AMEN | DMENTS TO THE PROTOCOL | 489 | |

DISPATCH PROTOCOL (DP)

DP 1 OBJECTIVES, DEFINITIONS AND SCOPE

DP 1.1 Objectives

The objectives of this Protocol are:

- (a) to implement those sections of the ISO Tariff which involve real-time and emergency operations;
- to describe the real-time Dispatch of the Ancillary Services specified in the Ancillary Services Requirements Protocol (ASRP);
- (c) to describe the operational activities of the ISO after all commitments have been made in the Hour-Ahead Market as described in the Scheduling Protocol (SP);
- (d) to describe the use of Supplemental Energy bids received by the ISO in accordance with the Schedules and Bids Protocol (SBP); and
- (e) to describe how the ISO will meet the operational requirements of NERC and WECC guidelines.

DP 1.2 Definitions

DP 1.2.1 Master Definitions Supplement

Any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. A reference to a Section or an Appendix is a reference to a Section or an Appendix of the ISO Tariff. References to DP are to this Protocol or to the stated paragraph of this Protocol.

DP 1.2.2 Special Definitions for this Protocol

In this Protocol, the following words and expressions shall have the meanings set opposite them:

"Backup ISO Control Center" means the ISO Control Center located in Alhambra, California.

Issued by: Charles F. Robinson, Vice President and General Counsel

- "Control Area Operator" means the person responsible for managing the real-time operations of a Control Area.
- "Dispatch Instruction" means an operating order that is issued by the ISO to a Participant pertaining to real-time operations.
- "GCC" means the single point of contact at the grid control center of Southern California Edison Company.
- "Primary ISO Control Center" means the ISO Control Center located in Folsom, California.
- "Participant" means any of those entities referred to in DP 1.3.1(a)-(f).
- "Power System Stabilizer (PSS)" means an electronic control system applied on a Generating Unit that helps to damp out dynamic oscillations on a power system. The PSS senses Generator variables, such as voltage, current and shaft speed, processes this information and sends control signals to the Generator voltage regulator.
- "Qualifying Facility" means a qualifying co-generation or small power production facility recognized by FERC.
- "Reliability Coordinator" means the person responsible for Security Monitoring in real time for the California Area.
- "TOC" means the single point of contact at the transmission operations center of Pacific Gas & Electric Company.
- "Total Transfer Capability (TTC)" means the amount of power that can be transferred over an interconnected transmission network in a reliable manner while meeting all of a specific set of defined precontingency and post-contingency system conditions.
- "Western Interconnection" means a network of transmission lines embodied within the WECC Region.

DP 1.2.3 Rules of Interpretation

(a) Unless the context otherwise requires, if the provisions of this Protocol and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency. The provisions of the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.

Issued by: Charles F. Robinson, Vice President and General Counsel

- (b) A reference in this Protocol to a given agreement, ISO Protocol or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made.
- (c) The captions and headings in this Protocol are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.
- (d) This Protocol shall be effective as of the ISO Operations Date.
- (e) Time references in this Protocol are references to prevailing Pacific time.

DP 1.3 Scope

DP 1.3.1 Scope of Application to Parties

This Protocol applies to the ISO and to the Participants:

- (a) Scheduling Coordinators (SCs);
- (b) Utility Distribution Companies (UDCs);
- (c) Participating Transmission Owners (PTOs);
- (d) Participating Generators;
- (e) Control Area Operators, to the extent the agreement between the Control Area Operator and the ISO so provides; and
- (f) Metered Subsystem (MSS) Operators.

DP 1.3.2 Liability of the ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

DP 2 STANDARDS TO BE OBSERVED

DP 2.1 Applicable Reliability Criteria

The ISO shall exercise Operational Control over the ISO Controlled Grid in compliance with all Applicable Reliability Criteria. Applicable Reliability Criteria are defined as the standards established by NERC, WECC and Local Reliability Criteria and include the requirements of the Nuclear Regulatory Commission (NRC).

DP 2.1.1 WECC Criteria (Standards)

(a) Western Interconnection

The WECC set of standards for the Western Interconnection, which are based on the NERC standards. The WECC further

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 463 Superseding Original Sheet No. 463

defines procedures and policies applicable to the Western Interconnection. WECC guidelines include:

- (i) Part 1 Reliability Criteria for Transmission System Planning
- (ii) Part 2 Power Supply Design Criteria
- (iii) Part 3 Minimum Operating Reliability Criteria (MORC)
- (iv) Part 4 Definitions

(b) Operating Procedures

The WECC Operating Procedures submitted to WECC by individual utilities and the ISO to address specific operating problems in their respective grids that could affect operations of the interconnected grid.

(c) Dispatcher's Handbook

The WECC Dispatcher's Handbook supplied by WECC to all utilities and Control Areas as a reference for dispatchers to use during normal and emergency operations of the grid.

DP 2.1.2 NERC Policies and Standards

(a) National Standards

The NERC national level standards for all utilities to follow to allow for safe and reliable operation of electric systems.

(b) Operating Manual

The NERC Operating Manual supplied by NERC to all utilities and Control Areas as a reference for dispatchers to use during normal and emergency operations of the grid.

DP 2.1.3 Local Reliability Criteria (Standards)

The reliability criteria unique to the transmission systems of each of the PTOs established at the later of: (1) the ISO Operations Date or (2) the date upon which a new Participating TO places its facilities under the control of the ISO. Each Participating TO must provide its Local Reliability Criteria to the ISO, as required by the TCA.

DP 2.1.4 NRC (Standards)

The reliability standards published by the NRC from time to time.

DP 2.2 Ancillary Services

The ISO will base its standards for the Dispatch of Ancillary Services upon WECC MORC and ISO Controlled Grid reliability requirements.

Issued by: Charles F. Robinson, Vice President and General Counsel

DP 2.3 ISO Standards

The ISO Governing Board may establish guidelines more stringent than those established by NERC and WECC as needed for the secure and reliable operation of the ISO Controlled Grid.

DP 2.4 Good Utility Practice (Standards)

When the ISO is exercising Operational Control of the ISO Controlled Grid, the ISO and Participants shall comply with Good Utility Practice. The ISO Tariff defines Good Utility Practice which, for ease of use of the DP, is repeated as follows:

"Any of the practices, methods, and acts engaged in or approved by a significant portion of the electric utility industry during the relevant time period, or any of the practices, methods and acts which, in the exercise of reasonable judgement in light of the facts known at the time the decision was made, could have been expected to accomplish the desired result at a reasonable cost consistent with good business practices, reliability, safety, and expedition. Good Utility Practice is not intended to be any one of a number of the optimum practices, methods, or acts to the exclusion of all others, but rather to be acceptable practices, methods, or acts generally accepted in the region."

DP 2.5 Existing Contracts

The ISO will implement Sections 2.4.3 and 2.4.4 of the ISO Tariff with respect to Existing Contracts after the close of the Hour-Ahead Market and in real time.

DP 2.6 The Role of Participants

In issuing the Dispatch Instructions, the ISO will not intentionally request UDCs, Participating Generators, Generating Unit operators, or SCs to exceed any inherent plant rating or local restriction imposed by the plant or transmission owner in order to protect the design and/or operational integrity of its plant or equipment. In issuing Dispatch Instructions to PTOs, the ISO will comply with Section 5.1.7 of the TCA. Any conflict that may arise between an ISO issued Dispatch Instruction and a plant or transmission owner's restriction as mentioned above must be immediately brought to the ISO's attention by the person receiving such Dispatch Instruction prior to any attempt to implement that Dispatch Instruction.

Issued by: Charles F. Robinson, Vice President and General Counsel

DP 3 SCHEDULING AND REAL-TIME INFORMATION

DP 3.1 Final Schedules

The scheduling process described in the SP will produce for the ISO real-time dispatchers for each Settlement Period of the Trading Day a Final Schedule consisting of the combined commitments contained in the Final Day-Ahead Schedules and the Final Hour-Ahead Schedules for the relevant Settlement Period. The Final Schedule will include information with respect to:

- (a) Generation schedules;
- (b) Demand schedules;
- (c) Ancillary Services schedules based on the ISO's Ancillary Services auction;
- (d) Ancillary Services schedules, based on SCs' ISO accepted schedules and forecast load, for self-provided Ancillary Services:
- (e) Interconnection schedules between the ISO Control Area and other Control Areas; and
- (f) Inter-Scheduling Coordinator Energy Trades.

DP 3.2 Supplemental Energy

In addition to the Final Schedules, Supplemental Energy bids will be available to the ISO real-time dispatchers, as described in the SBP, by sixty-two (62) minutes prior to the start of the Settlement Period to which such Supplemental Energy bids apply.

DP 3.3 SC Intertie Schedules

In accordance with the SBP and the SP, SCs shall provide the ISO with Interconnection schedules prepared in accordance with all NERC, WECC and ISO requirements. The provisions of the SBP and the SP shall apply to real-time changes in Interconnection schedules under Existing Contracts.

DP 3.4 Information to be Supplied by SCs

DP 3.4.1 SC Dispatch

Each SC shall be responsible for the scheduling and Dispatch of Generation and Demand in accordance with its Final Schedule.

DP 3.4.2 Generator or Interconnection Schedule Change

Each SC shall keep the ISO appraised of any change or potential change in the current status of all Generating Units, Interconnection schedules and Inter-Scheduling Coordinator Energy Trades. This will

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 8, 2005 Effective: April 9, 2005

include any changes in Generating Unit capacity that could affect planned Dispatch and conditions that could affect the reliability of a Generating Unit. Each SC shall immediately pass to the ISO any information which it receives from a Generator which the Generator provides to the SC pursuant to DP 3.7. Each SC shall immediately pass to the ISO any information it receives from a MSS Operator which the MSS Operator provides to the SC pursuant to DP 3.9.

DP 3.4.3 Verbal and Electronic Communication with Generators

Normal verbal and electronic communication of Dispatch Instructions between the ISO and Generators will be via the relevant SC. Each SC must immediately pass on to the Generator concerned any communication for the Generator which it receives from the ISO. If the ISO considers that there has been a failure at a particular point in time or inadequate response over a particular period of time by the Generating Units to the Dispatch Instruction, the ISO will notify the relevant SC. The ISO may, with the prior permissions of the Scheduling Coordinator concerned, communicate with and give Dispatch Instructions to the operators of Generating Units and Loads directly without having to communicate through their appointed Scheduling Coordinator. In situations of deteriorating system conditions or emergency, the ISO reserves the right to communicate directly with the Generator(s) as required to ensure System Reliability.

DP 3.4.4 Consequences of a Failure to Respond or Inadequate Response

The ISO may apply penalties, fines, economic consequences or the sanctions referred to in DP 9.5.2 for any failure or inadequate response under DP 3.4.3 to the SC representing the Generator responsible for such failure or inadequate response (which may be appropriately weighted to reflect its seriousness) subject to any necessary FERC approval.

DP 3.5 Information to be Supplied by UDCs

DP 3.5.1 UDC Status Change

Each UDC shall keep the ISO informed of any change or potential change in the status of its transmission lines and station equipment at the point of interconnection with the ISO Controlled Grid. Each UDC shall keep the ISO informed as to any event or circumstance in the UDC's service territory that could affect the reliability of the ISO Controlled Grid. This would include adverse weather conditions, fires, bomb threats, etc.

DP 3.5.2 UDC Outage Scheduling

Each UDC shall schedule all equipment Outages (or Outages of other equipment that could affect the ISO Controlled Grid) at the point of

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

interconnection with the ISO using the appropriate Outage scheduling procedures described in the OCP.

DP 3.5.3 UDC Outage Emergency Scheduling

Each UDC shall coordinate any requests for emergency Outages on point of interconnection equipment directly with the appropriate ISO Control Center as specified in DP 6.2.

DP 3.6 Information to be Supplied by PTOs

DP 3.6.1 Transmission Status Change

Each PTO shall report any change or potential change in equipment status of the PTO's transmission assets turned over to the control of the ISO or in equipment that affects transmission assets turned over to the control of the ISO immediately to the ISO (this will include line and station equipment, line protection,

Remedial Action Schemes and communication problems, etc.). Each PTO shall also keep the ISO immediately informed as to any change or potential change in the PTO's transmission system that could affect the reliability of the ISO Controlled Grid. This would include adverse weather conditions, fires, bomb threats, etc.

DP 3.6.2 Transmission Outage Scheduling

Each PTO shall schedule all Outages of its lines and station equipment which are under the Operational Control of the ISO in accordance with the appropriate procedure under the OCP.

DP 3.6.3 PTO Emergency Outage Scheduling

Each PTO shall coordinate any requests for or responses to Forced Outages on its transmission lines or station equipment which are under the Operational Control of the ISO directly with the appropriate ISO Control Center as defined in DP 6.2.

DP 3.7 Information to be Supplied by Generators

DP 3.7.1 Generator Status Change

Each Generator shall immediately inform the ISO, through its respective SC, of any change or potential change in the current status of any Generating Units that are under the Dispatch control of the ISO. This will include, but not be limited to, any change in status of equipment that could affect the maximum output of a Generating Unit, the minimum load of a Generating Unit, the ability of a Generating Unit to operate with automatic voltage regulation, operation of the PSSs (whether in or out of service), the availability of a Generating Unit governor, or a Generating Unit's ability to provide Ancillary Services as required. Each Generator shall immediately report to the ISO, through

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

First Revised Sheet No. 468 Superseding Original Sheet No. 468

its SC any actual or potential concerns or problems that it may have with respect to Generating Unit direct digital control equipment, Generating Unit voltage control equipment, or any other equipment that may impact the reliable operation of the ISO Controlled Grid.

DP 3.7.2 Generator Schedules

In the event that a Generator cannot meet its Generation schedule, whether due to a Generating Unit trip or the loss of a piece of equipment causing a reduction in capacity or output, the Generator shall notify the ISO, through its SC at once. If a Generator will not be able to meet a time commitment or requires the cancellation of a Generating Unit start up, it shall notify the ISO, through its SC at once.

DP 3.8 Information to be Supplied by Control Area Operators

DP 3.8.1 System Status Change

The ISO and each adjacent Control Area Operator shall keep each other informed of any change or potential change in the status of the Interconnection and any changes in the Interconnection's TTC. The ISO and each adjacent Control Area Operator shall keep each other informed of situations such as adverse weather conditions, fires, etc., that could affect the reliability of any Interconnection. Each Control Area Operator of the Control Areas in the California area, as defined by the WECC Regional Security Plan, shall keep the ISO informed of all information required by WECC for use by the Reliability Coordinator.

DP 3.8.2 Scheduling Procedure

The ISO and each adjacent Control Area Operator shall follow all applicable NERC and WECC scheduling procedures. This will include checking the Interconnection schedules for the next Settlement Period prior to the start of the Energy ramp going into that hour. The ISO and each adjacent Control Area Operator shall check and agree on actual MWh net interchange after the hour for the previous Settlement Period. One Control Area shall change its actual number to reflect that of the other Control Area in accordance with WECC standard procedures.

DP 3.8.3 Data Exchange

The ISO and each adjacent Control Area Operator shall exchange MW, MVar, terminal and bus voltage data with each other on a four second update basis. MWh data for the previous hour shall be exchanged once per hour. All MW and MWh data for both the ISO Control Area and the adjacent Control Areas must originate from the same metering equipment.

Issued by: Charles F. Robinson, Vice President and General Counsel

DP 4.1.1

DP 3.8.4 Operational Metering

All provisions in this section DP 3.8 refer to information and data obtained from metering used for Control Area operations and not metering used for billing and settlement.

| DP 3.9 | [Not Used] |
|----------|--|
| DP 3.9.1 | [Not Used] |
| DP 3.9.2 | [Not Used] |
| DP 3.9.3 | [Not Used] |
| DP 3.9.4 | [Not Used] |
| DP 3.9.5 | [Not Used] |
| DP 4 | METHODS OF COMMUNICATIONS |
| DP 4.1 | Methods of Transmitting Dispatch Instructions |
| | |

Each Participant must provide a communications facility manned twenty-four (24) hours a day, seven (7) days a week capable of receiving Dispatch Instructions issued by the ISO.

Full-Time Communications Facility Requirement

DP 4.2 Recording of Dispatch Instructions

The ISO shall maintain records of all electronic, fax and verbal communications related to a Dispatch instruction. The ISO shall maintain a paper or electronic copy of all Dispatch instructions delivered by fax and all Dispatch instructions delivered electronically. The ISO shall record all voice conversations that occur related to Dispatch instructions on the Dispatch Instruction communication equipment. These records, copies and recordings may be used by the ISO to audit the Dispatch Instruction, and to verify the response of the Participant concerned to the Dispatch Instruction.

DP 4.3 Contents of Dispatch Instructions

Dispatch Instructions shall include the following information as appropriate:

- (a) exchange of operator names;
- (b) specific resource being Dispatched;
- (c) specific MW value and price point of the resource being Dispatched;
- (d) specific type of instruction (action required);
- (e) time the resource is required to begin initiating the Dispatch Instruction:
- (f) time the resource is required to achieve the Dispatch Instruction:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

FIRST REPLACEMENT VOLUME NO. II

Third Revised Sheet No. 470 Superseding Second Revised Sheet No. 470

- (g) time of notification of the Dispatch Instruction; and
- (h) any other information which the ISO considers relevant.

DP 4.4 Acknowledgement of Dispatch Instructions

The recipient of a Dispatch Instruction shall confirm the Dispatch Instruction. Dispatch Instructions communicated by the ISO either electronically or by fax shall be confirmed electronically in accordance with ISO procedures. Dispatch instructions communicated verbally shall be confirmed by repeating the Dispatch instructions to the ISO.

DP 5 ISO FACILITIES AND EQUIPMENT

DP 5.1 ISO Facility and Equipment Outages

The ISO has installed redundant control centers, communication systems and computer systems. Most, but not necessarily all, equipment problems or failures should be transparent to Participants. This DP 5 addresses some situations when Participants could be affected, but it is impossible to identify and plan for every type of equipment problem or failure. Real time situations will be handled by the real time ISO dispatchers. The ISO control room in Folsom is the Primary ISO Control Center and the ISO control room in Alhambra is the Backup ISO Control Center.

DP 5.2 WEnet Unavailable

DP 5.2.1 Unavailable Critical Functions of WEnet

During a total disruption of the WEnet several critical functions of the ISO will not be available including:

- the Scheduling Infrastructure (SI) computer will not be able to communicate with SCs to receive any type of updated Schedule information;
- (b) the SI computer will not be able to communicate Congestion Management information and Schedule changes to the SCs; and
- (c) the ISO will not be able to communicate general information, including emergency information, to any Participants.

DP 5.2.2 Communications during WEnet Unavailability

During any period of WEnet unavailability, the ISO shall:

 (a) make all reasonable efforts to keep Participants aware of current ISO Controlled Grid status using voice communications;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

- use the most recent set of Balanced Schedules for each SC for the current and all future Settlement Periods and/or Trading Days until the WEnet is restored; and
- (c) attempt to take critical Schedule changes from SCs via voice communications as time and manpower allows.

DP 5.3 Primary ISO Control Center – Loss of all Voice Communications

DP 5.3.1 Notification of Loss of Voice Communication

In the event of loss of all voice communication at the Primary ISO Control Center, the Primary ISO Control Center will use alternate communications to notify the Backup ISO Control Center of the loss of voice communications. The Backup ISO Control Center will post information on the situation on the WEnet. Additional voice notifications will be made as time permits.

DP 5.3.2 Notification of Restoration of Voice communication

Once voice communications have been restored to the Primary ISO Control Center, the ISO will post this information on the WEnet.

DP 5.4 Primary ISO Control Center – Control Center Completely Unavailable

DP 5.4.1 Notification of Loss of Primary ISO Control Center

In the event that the Primary ISO Control Center becomes completely unavailable, the Primary ISO Control Center will use alternate communications to notify the Backup ISO Control Center that the Primary ISO Control Center is unavailable. The Backup ISO Control Center will post information on the situation on the WEnet. Additional voice notifications will be made as time permits.

DP 5.4.2 Backup ISO Control Center Response

The Backup ISO Control Center will post confirmation on the WEnet that all computer systems are functioning normally (if such is the case) and take complete control of the ISO Controlled Grid. The Backup ISO Control Center will notify the TOC by direct voice communication of the situation.

DP 5.4.3 Notification of Restoration of Primary ISO Control Center

Once the Primary ISO Control Center is again available, all functions will be transferred back, and the Primary ISO Control Center will notify all Participants via the WEnet.

DP 5.5 Primary ISO Control Center - ISO Energy Management System (EMS) Unavailable

DP 5.5.1 Notification of Loss of EMS

Should an outage occur to the redundant EMS computer systems in the Primary ISO Control Center, an auto transfer should occur to transfer EMS operation to the redundant EMS back up computers at the Backup

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

ISO Control Center. Due to the severity of a total ISO EMS computer outage, the Primary ISO Control Center will post information on the WEnet that the Primary ISO Control Center EMS computer is unavailable and that EMS control has been transferred to the Backup ISO Control Center.

DP 5.5.2 Notification of Restoration of EMS

When the Primary ISO Control Center EMS computer is restored, the Backup ISO Control Center will initiate a transfer back of the EMS system to the Primary ISO Control Center. The Primary ISO Control Center will post information on the restored EMS computer system status on the WEnet.

DP 5.6 Backup ISO Control Center – Loss of all Voice Communications

DP 5.6.1 Notification of Loss of Voice Communication

In the event of a loss of all voice communications at the Backup ISO Control Center, the Backup ISO Control Center will use alternate communications to notify the Primary ISO Control Center of the loss of voice communications. The Primary ISO Control Center will post information on the situation via the WEnet. Additional voice notifications will be made as time permits.

DP 5.6.2 Notification of Restoration of Voice Communication

Once voice communications have been restored to the Backup ISO Control Center, the Primary ISO Control Center will post this information on the WEnet.

DP 5.7 Backup ISO Control Center – Control Center Completely Unavailable

DP 5.7.1 Notification of Loss of Backup ISO Control Center

In the event that the Backup ISO Control Center becomes completely unavailable, the Backup ISO Control Center will use alternate communications to notify the Primary ISO Control Center that the Backup ISO Control Center is unavailable. The Primary ISO Control Center will post information on the situation on the WEnet. Additional voice notifications will be made as time permits.

DP 5.7.2 Primary ISO Control Center Response

The Primary ISO Control Center will post confirmation on the WEnet that all computer systems are functioning normally (if such is the case) and take complete control of the ISO Controlled Grid. The Primary ISO Control Center will notify the SCE GCC by direct voice communications of the situation.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

DP 5.7.3 Notification of Restoration of Backup ISO Control Center

Once the Backup ISO Control Center is again available all functions will be transferred back, and the Backup ISO Control Center will notify all Participants via the WEnet.

DP 5.8 Use of IOUs' Energy Control Center Computers

The ISO and the IOUs will comply with the procedures for the utilization by the ISO of the IOUs' Energy control center computers when developed. The ISO will post such procedures on the WEnet when agreed.

DP 6 ROUTINE OPERATION OF THE ISO CONTROLLED GRID

DP 6.1 Overview/Responsibility

The ISO shall operate the ISO Controlled Grid in accordance with the standards described in DP 2 and within the limit of all applicable Nomograms and established operating limits and procedures.

DP 6.2 ISO Controlled Facilities

DP 6.2.1 General

The ISO shall have Operational Control of all transmission lines and associated station equipment that have been transferred to the ISO Controlled Grid from the PTOs as listed in the ISO Register.

DP 6.2.2 Primary ISO Control Center

The Primary ISO Control Center shall have Operational Control over:

- (a) all transmission lines greater than 230kV and associated station equipment on the ISO Controlled Grid;
- (b) all Interconnections; and
- (c) all 230 kV and lower voltage transmission lines and associated station equipment identified in the ISO Register as that portion of the ISO Controlled Grid located in the PG&E PTO Service Territory.

DP 6.2.3 Backup ISO Control Center

The Backup ISO Control Center shall have Operational Control over all 230 kV and lower voltage transmission lines and associated station equipment identified in the ISO Register as that portion of the ISO Controlled Grid located in the SCE and SDGE PTO Service Territories.

DP 6.3 Clearing Equipment for Work

The clearance procedures of the ISO and the relevant UDC and PTO must be adhered to by all parties, to ensure the safety of all personnel working on ISO Controlled Grid transmission lines and equipment. In accordance with the OCP, no work shall start on any equipment or line which is under the Operational Control of the ISO unless final approval has first been obtained from the appropriate ISO Control Center. Prior

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 8, 2004

to starting the switching to return any line or equipment to service the ISO shall confirm that all formal requests to work on the cleared line or equipment have been released.

DP 6.4 Equipment De-energized for Work

In some circumstances, System Reliability requirements may require a recall capability that can only be achieved by allowing work to proceed with the line or equipment de-energized only (i.e. not cleared and grounded). Any personnel working on such de-energized lines and equipment must take all precautions as if the line or equipment were energized. Prior to energizing any such lines or equipment deenergized for work, the ISO shall confirm that all formal requests to work on the de-energized line or equipment have been released.

DP 6.5 Hot-Line Work

The ISO has full authority to approve requests by PTOs to work on energized equipment under the Operational Control of the ISO, and no such work shall be commenced until the ISO has given its approval.

DP 6.6 Intertie Switching

The ISO and the appropriate single point of contact for the relevant PTO and the adjacent Control Area shall coordinate during the deenergizing or energizing of any Interconnection.

DP 6.7 Operating Voltage Control Equipment

DP 6.7.1 Operating Voltage Control Equipment Under ISO Control

The ISO will direct each PTO's single point of contact in the operation of voltage control equipment that is under the ISO's Operational Control.

DP 6.7.2 Operating Voltage Control Equipment Under UDC Control

Each UDC must operate voltage control equipment under UDC control in accordance with existing UDC voltage control guidelines.

DP 6.7.3 Special ISO Voltage Control Requirements

The ISO may request a PTO via its single point of contact or a UDC via its single point of contact to operate under special voltage control requirements from time to time due to special system conditions.

DP 6.8 Outages

The ISO will coordinate and approve Maintenance Outages and coordinate responses to Forced Outages of all transmission facilities in the ISO Controlled Grid and Reliability Must-Run Units in accordance with the OCP.

Any scheduled Outages that are cancelled by ISO real-time operations due to system requirements must be rescheduled with the ISO Outage Coordination Department in accordance with the OCP.

Issued by: Charles F. Robinson, Vice President and General Counsel

DP 6.9 Security Monitoring

The ISO shall be the Reliability Coordinator for the California Area. As Reliability Coordinator, the ISO, in conjunction with the other WECC Reliability Coordinators, will be responsible for the stable and reliable operation of the Western Interconnection in accordance with the WECC Regional Security Plan.

DP 6.9.1 Reliability Coordinator

As Reliability Coordinator, the ISO may direct activities as appropriate to curtail Schedules, Dispatch Generation or impose transfer limitations as necessary to relieve grid Congestion, mitigate potential overloads or eliminate operation outside of existing Nomogram criteria.

DP 6.9.2 Authority of WECC Reliability Coordinators

- (a) The Reliability Coordinator has the final authority to direct operations before, during and after problems or disturbances that have regional impacts. The WECC Security Monitoring plans include collaboration with sub-regional Reliability Coordinators and Control Area operators to determine actions for anticipated problems. If there is insufficient time, or mutual concurrence is not reached, the Reliability Coordinator is authorized to direct actions and the control area operators must comply.
- (b) In the event of any situation occurring which is outside those problems already identified in the list of known problems, the Reliability Coordinator shall have the responsibility and authority to implement whatever measures are necessary to maintain System Reliability. Those actions include but are not limited to; interchange curtailment, generation Dispatch adjustment (real power, reactive power and voltage), transmission configuration adjustments, special protection activation, load curtailment and any other action deemed necessary to maintain System Reliability.
- (c) The Reliability Coordinator shall also have the responsibility and authority to take action in its sub-region for problems in another sub-region that it may help resolve. This must be accomplished at the request of and in coordination with the Reliability Coordinators of the other sub-regions.

DP 7 REAL-TIME OPERATIONAL ACTIVITIES – THE HOUR PRIOR TO THE SETTLEMENT PERIOD

DP 7.1 Schedule Confirmation

In the hour prior to the beginning of the Settlement Period, the ISO will review and evaluate the current system operating conditions to ensure sufficient Energy and Ancillary Services resources are available for the next Settlement Period. The ISO will:

Issued by: Charles F. Robinson, Vice President and General Counsel

- verify that each SC's Ancillary Services obligations are scheduled as required. The ISO will procure additional Ancillary Services if insufficient resources are scheduled;
- (b) verify any Supplemental Energy bids received up to thirty (30) minutes prior to the Settlement Period, for increases or decreases in Energy output which it may require for the Settlement Period; and
- (c) verify that with currently anticipated operating conditions there is sufficient transfer capacity on the ISO Controlled Grid to implement all Final Schedules.

DP 7.2 Confirm Interchange Transaction Schedules (ITSs)

Also in the hour prior to the beginning of the Settlement Period the ISO will:

- (a) adjust interchange transaction schedules (ITSs) as required under Existing Contracts in accordance with the procedures in the SBP and the SP for the management of Existing Contracts;
- (b) adjust ITSs as required by changes in transfer capability of transmission paths occurring after close of the Hour-Ahead Market: and
- (c) agree on ITS changes with adjacent Control Area Operators.

DP 7.3 Supplemental Energy Bids

Supplemental Energy bids may be submitted to the ISO no later than sixty-two (62) minutes prior to the beginning of the Settlement Period in accordance with the format and content requirements of the SBP. These Supplemental Energy bids cannot be withdrawn after sixty-two (62) inutes prior to the beginning of the Settlement Period. A System Resource that identifies its bid as a Hourly Pre-Dispatch bid will only be pre-dispatched and will not be subject to any intra-hour Redispatch except as necessary to maintain inter-Control Area transmission reliability.

DP 7.4 Intra-Zonal Congestion Management

In the hour prior to the beginning of the Settlement Period the ISO may adjust SCs' Final Schedules to alleviate Intra-Zonal Congestion. Except in those instances where the ISO calls Reliability Must-Run Units as provided in Section 5.2 of the ISO Tariff, the ISO will adjust resources in accordance with DP 8.4 and DP 8.5.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 8, 2005 Effective: April 9, 2005

DP 8 REAL-TIME OPERATIONAL ACTIVITIES – THE SETTLEMENT PERIOD

DP 8.1 Settlement Period

DP 8.1.1 Responsibility of the ISO in Real-Time Dispatch

During real-time Dispatch, the ISO, using RTD Software will be responsible for Dispatching Generating Units, Curtailable Demands and Interconnection schedules to meet real-time imbalances between actual and scheduled Demand and Generation and to relieve Congestion, if necessary, to ensure System Reliability and to maintain Applicable Reliability Criteria.

DP 8.1.2 [Not Used]

DP 8.2 Generating Units, Loads and Interconnection Schedules Dispatched for Congestion

The ISO will use the RTD Software to alleviate Inter-Zonal Congestion as described in DP 8.3. The ISO will manage Intra-Zonal Congestion in real time as set forth in Section 7.2.6.

DP 8.3 Inter-Zonal Congestion

DP 8.3.1 Treatment by Zone

If there is Inter-Zonal Congestion in real time, the ISO's RTD Software shall increase Generation and/or reduce Demand separately for each Zone to optimally Dispatch available resources to resolve the Congestion.

DP 8.3.2 Selection of Generating Unit or Load to Increase Generation or Reduce Demand

Where the ISO determines that it is necessary to increase Generation or reduce Demand in a Zone in order to relieve Inter-Zonal Congestion the ISO shall select in merit order, the Generating Unit within the Zone (or the Interconnection schedule in a Control Area adjacent to the Zone) with a non-zero capacity remaining to increment which has the lowest incremental bid price (\$/MWh) or the Curtailable Demand located within the Zone (or the Interconnection schedule in a Control Area adjacent to the Zone) with a non-zero capacity remaining to reduce which has the lowest Demand reduction bid price.

DP 8.3.3 Selection of Generating Unit to Reduce Generation

Where the ISO determines that it is necessary to reduce Generation in a Zone in order to relieve Inter-Zonal Congestion, the ISO shall select in merit order the Generating Unit within the Zone with a non-zero capacity remaining to decrement which has the highest decremental bid price.

Issued by: Charles F. Robinson, Vice President and General Counsel

DP 8.4 Intra-Zonal Congestion

Except as provided in Section 5.2 of the ISO Tariff, in the event of Intra-Zonal Congestion, the ISO shall adjust Generating Units and Curtailable Demands (or Interconnection schedules of System Resources in the Control Areas) to alleviate the Constraints as described in Section 7.2.6.

DP 8.5 Additional Congestion Relief

In the event that there are insufficient resources which provide financial bids to mitigate Inter-Zonal and Intra-Zonal Congestion, Final Schedules which do not rely on Existing Contracts will be adjusted in real time by allocating transmission capacity on a pro rata basis. Final Schedules which rely on Existing Contracts will be adjusted in real time by allocating transmission capacity in accordance with the operating instructions submitted under SBP 3.3. With respect to facilities financed with Local Furnishing Bonds the ISO shall adjust Final Schedules in real time in a fashion consistent with Section 2.1.3 and 7.1.6.3 of the ISO Tariff, Appendix B of the TCA, and Operating Procedures governing the use of such facilities.

DP 8.6 Real-Time Dispatch Application

DP 8.6.1 Real-Time Dispatch

During real time, the ISO shall Dispatch Generating Units, Curtailable Demands and Interconnection schedules to meet imbalances between actual and scheduled Demand and Generation.

In addition, the ISO may need to purchase additional Ancillary Services if Ancillary Services arranged in advance are used to provide balancing Energy, and such depletion needs to be recovered to meet System Reliability contingency requirements.

DP 8.6.2 Utilization of the Energy Bids

The ISO will use the Energy Bids to Dispatch Supplemental Energy and Ancillary Services to procure balancing Energy for:

- (a) satisfying needs for Imbalance Energy;
- (b) mitigating Inter-Zonal Congestion;
- (c) allowing resources providing Regulation service to return to the preferred operating point within their regulating ranges;
- (d) allowing recovery of Operating Reserves utilized in real-time operations;
- (e) procuring additional Voltage Support required from resources beyond their power factor ranges in real time; and

Issued by: Charles F. Robinson, Vice President and General Counsel

(f) Dispatching System Resources and Dispatchable Loads and increasing Generating Units' output to manage Intra-Zonal Congestion in real time using Energy Bids Dispatched out of sequence.

DP 8.6.3 Basis for Real-Time Dispatch

The ISO shall base real-time Dispatch of Generating Units, Curtailable Demands and Interconnection schedules on the following principles:

- (a) the ISO shall Dispatch Generating Units and Dispatchable Interconnection schedules providing Regulation service to meet WECC and NERC Area Control Error (ACE) performance criteria;
- (b) in each Dispatch Interval, following the loss of a resource and once ACE has returned to zero, the ISO shall determine if the Regulation Generating Units and Dispatchable Interconnection schedules are operating at a point away from their Set Point. The ISO shall then adjust the output of Generating Units, Curtailable Demands, and Dispatchable Interconnection schedules (either providing Spinning Reserve, Non-Spinning Reserve, Replacement Reserve, or Supplemental Energy) to return the Regulation Generating Units and Dispatchable Interconnection schedules to their Set Points to restore their full regulating margin;
- (c) in each Dispatch Interval, the ISO shall Dispatch Generating Units, Curtailable Demands and Dispatchable Interconnection schedules to meet its balancing Energy requirements and eliminate any Price Overlap between Energy Bids, thereby, Dispatching the relevant resources in real time for economic trades either between SCs or within a SC's portfolio;
- (d) the ISO shall select the Generating Units, Curtailable Demands and Dispatchable Interconnection schedules to be Dispatched to meet its balancing Energy requirements in merit order according to their Energy Bids;
- (e) the ISO shall not discriminate between Generating Units, Curtailable Demands and Dispatchable Interconnection schedules other than based on price, and the effectiveness (location and ramp rate) of the resource concerned to respond to the fluctuation in Demand or Generation, or to resolve Inter-Zonal Congestion;
- (f) Generating Units, Curtailable Demands or Dispatchable Interconnection schedules shall be Dispatched during the Settlement Period only until the next variation in Generation or Demand or the end of the Settlement Period, whichever is sooner. In Dispatching such resources, the ISO may make commitments beyond the current Settlement Period;
- (g) The ISO will not differentiate between Ancillary Services procured by the ISO and Ancillary Services which are being self-provided;

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Second Revised Sheet No. 479A Superseding First Revised Sheet No. 479A

(h) [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: July 8, 2003 Effective: Upo

Effective: Upon Notice After September 6, 2003

FIRST REPLACEMENT VOLUME NO. II

- (i) The operational ramp rate(s) of a resource will be considered by the RTD Software in determining the amount of Instructed Imbalance Energy by Dispatch Interval, and such consideration may result in Instructed Imbalance Energy in Dispatch Intervals prior to or subsequent to the Dispatch Interval to which the Dispatch Instruction applies;
- (j) System Resources identified as Dispatchable within the operating hour pursuant to SBP Section 6.1.3 shall be Dispatched optimally through the RTD Software. Such bids will be settled pursuant to Section 11.2.4.1.1.2;
- (k) The ISO will pre-dispatch Energy Bids from System Resources, subject to Hourly Pre-Dispatch as indicated in SBP 6.1.3, prior to the beginning of each hour consistent with applicable WECC interchange scheduling practices, assuring that any Price Overlap between such decremental and incremental Energy Bids will be eliminated. Such bids will be settled pursuant to Section 11.2.4.1.1.2.

DP 8.7 Ancillary Services Requirements

The following requirements apply to the Dispatch of Ancillary Services in real time:

DP 8.7.1 Regulation

(a) Regulation provided from Generating Units or System Resources must meet the standards specified in the ASRP;

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II Supe

First Revised Sheet No. 480A Superseding Original Sheet No. 480A

- (b) the ISO will Dispatch Regulation in merit order of Energy bid prices as determined by the EMS;
- (c) in the event of an unscheduled increase in system Demand or a shortfall in Generation output and Regulation margin drops below a predetermined value, the ISO will use scheduled Operating Reserve, Replacement Reserve or Supplemental Energy to restore Regulation margin; and
- (d) when scheduled Operating Reserve is used for restoration of Regulation reserve, the ISO shall arrange for the replacement of that Operating Reserve (see DP 8.7.4);

DP 8.7.2 Operating Reserve

- (a) Spinning Reserve:
 - Spinning Reserve provided from Generating Units and Interconnection schedules must meet the standards specified in the ASRP;
 - the ISO will Dispatch Spinning Reserve as may be required to meet the Applicable Reliability Criteria;
 - (iii) the ISO may Dispatch Spinning Reserve as balancing Energy to return Regulation Generating Units to their Set Points and restore full Regulation margin; and
 - (iv) the ISO will Dispatch Spinning Reserve in merit order of Energy bid prices as determined by the RTD Software;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

FIRST REPLACEMENT VOLUME NO. II

- (b) Non-Spinning Reserve:
 - Non-Spinning Reserve provided from Generating Units, Demands, and external imports of System Resources must meet the standards specified in the ASRP;
 - (ii) the ISO may Dispatch Non-Spinning Reserve in place of Spinning Reserve to meet Applicable Reliability Criteria;
 - (iii) the ISO will Dispatch Non-Spinning Reserve in merit order of Energy bid prices as determined by the RTD Software; and
 - (iv) the ISO may Dispatch Non-Spinning Reserve to replace Spinning Reserve if there is a shortfall in Spinning Reserve because of a deficiency of balancing Energy;

DP 8.7.3 Replacement Reserve

- (a) Replacement Reserve provided from Generating Units, Curtailable Demands and Interconnection schedules must meet the standards specified in the ASRP;
- (b) the ISO will utilize Replacement Reserve to replace Operating Reserve that has been Dispatched due to a shortfall in Generation or an increase in Demand:
- (c) the ISO may Dispatch Replacement Reserve to replace Operating Reserve that has been Dispatched for balancing Energy; and
- (d) the ISO will Dispatch Replacement Reserve in merit order of Energy Bid prices as determined by RTD;

DP 8.7.4 Replacement of Operating Reserve

- in the event of an un-forecasted increase in system Demand or a shortfall in Generation output, the ISO shall utilize Replacement Reserve to restore Operating Reserve;
- (b) if pre-arranged Operating Reserve is used to meet balancing Energy requirements, the ISO may replace such Operating Reserve by Dispatch of additional balancing Energy available from Supplemental Energy bids;
- (c) any additional Operating Reserve needs may also be met the same way;
- (d) where the ISO elects to rely upon Supplemental Energy bids, the ISO shall select the resources with the lowest incremental Energy Bid price as established by RTD; and
- if the ISO restores Operating Reserve through utilization of Replacement Reserve, the ISO is not required to replace the utilized Replacement Reserve;

Issued by: Charles F. Robinson, Vice President and General Counsel

DP 8.7.5 Voltage Support

- (a) Voltage Support provided from Generating Units shall meet the standards specified in the ASRP;
- (b) the ISO may Dispatch Generating Units to increase or decrease MVar output within the power factor limits of 0.9 lagging to 0.95 leading (or within other limits specified by the ISO in any exemption granted pursuant to Section 2.5.3.4 of the ISO Tariff) at no cost to the ISO when required for System Reliability;
- (c) may Dispatch each Generating Unit to increase or decrease MVar output outside of established power factor limits, but within the range of the Generating Unit's capability curve, at a price calculated in accordance with ISO Tariff;
- (d) If Voltage Support is required in addition to that provided pursuant to DP 8.7.5 (b) and (c), the ISO will reduce output of Participating Generators certified in accordance with the ASRP. The ISO will select Participating Generators in the vicinity where such additional Voltage Support is required; and
- (e) the ISO will monitor voltage levels at Interconnections to maintain them in accordance with the applicable Inter-Control Area Agreements.

DP 8.7.6 Black Start

- (a) Black Start shall meet the standards specified for Black Start in the ASRP; and
- (b) the ISO will Dispatch Black Start as required in accordance with the applicable Black Start agreement.

DP 8.8 Real-Time Management of Overgeneration Conditions

In the event that Overgeneration conditions occur during real time, the ISO will direct the SCs to take the steps described in Section 2.3.4 of the ISO Tariff and SCs shall implement ISO directions without delay.

DP 9 DISPATCH INSTRUCTIONS

DP 9.1 ISO Dispatch Authority

DP 9.1.1 Range of ISO Authority

The ISO has full authority to:

- direct the physical operation of the ISO Controlled Grid, including (without limitation) circuit breakers, switches, voltage control equipment, protective relays, metering and Load Shedding equipment;
- (b) commit Reliability Must-Run Generation, except that the ISO shall only commit Reliability Must-Run Generation for Ancillary Services capacity according to Section 5.2 of the Tariff;

Issued by: Charles F. Robinson, Vice President and General Counsel

- FIRST REPLACEMENT VOLUME NO. II
 - (c) order a change in operating status of voltage control equipment;
 - take required action to prevent against uncontrolled losses of load or Generation;
 - (e) control the output of Generating Units and Interconnection schedules scheduled to provide Ancillary Services or offering Supplemental Energy;
 - (f) Dispatch Curtailable Demand which has been scheduled to provide Non-Spinning Reserve or Replacement Reserve; and
 - (g) require the operation of resources which are at the ISO's disposal in a System Emergency, as described in DP 10.

DP 9.1.2 Exercise of the ISO's Authority

The ISO will exercise its authority under DP 9.1.1 by issuing Dispatch Instructions to the relevant Participants using the relevant communications method described in DP 4.

DP 9.2 Participant Responsibilities

DP 9.2.1 Compliance with Dispatch Instructions

All Participants within the ISO Control Area and all dynamically scheduled System Resources shall comply fully and promptly with the ISO's Dispatch Instructions unless such operation would impair public health or safety. Shedding Load for a System Emergency does not constitute impairment to public health or safety.

DP 9.2.2 Notification of Non-Compliance with a Dispatch Instruction

In the event that, in carrying out the Dispatch Instruction, an unforeseen problem arises (relating to plant operations or equipment, personnel or the public safety), the recipient of the Dispatch Instruction must notify the ISO or, in the case of a Generator, the relevant SC immediately. The relevant SC shall notify the ISO of the problem immediately.

DP 9.3 Dispatch Instructions for Generating Units and Curtailable Demand

The ISO may issue Dispatch Instructions covering:

- (a) Ancillary Services;
- (b) Supplemental Energy, which may be used for:
 - (i) Congestion Management;
 - (ii) provision of Imbalance Energy; or

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 483A

- (iii) replacement of an Ancillary Service;
- (c) agency operation of Generating Units, Curtailable Demands or Interconnection schedules, for example:
 - output or Demand that can be Dispatched to meet Applicable Reliability Criteria;
 - (ii) Generating Units that can be Dispatched for Black Start;

Issued by: Charles F. Robinson, Vice President and General Counsel

- (iii) Generating Units that can be Dispatched to maintain governor control regardless of their Energy schedules;
- (d) the operation of voltage control equipment applied on Generating Units as described in the ASRP.

DP 9.4 Response Required by Generators to ISO Dispatch Instructions

DP 9.4.1 Action Required by Generators

Generators must:

- (a) comply with Dispatch Instructions immediately upon receipt and shall respond in accordance with Good Utility Practice;
- (b) meet voltage criteria in accordance with the provisions specified in the ISO Tariff and ASRP;
- (c) meet the applicable operational ramp rates as provided for in SBP 6.5;
- (d) respond to Dispatch Instructions for Ancillary Services within the time periods required by ASRP except in a System Emergency, when DP 10 will apply; and (in the case of Generating Units providing Regulation) respond to electronic signals from the EMS; and
- (e) respond to a Dispatch Instruction issued for the start-up or shut down of a Generating Unit, within the time frame stated in the Instruction.

DP 9.4.2 Qualifying Facilities

Where a Qualifying Facility ("QF") has entered into an agreement with a PTO before March 31, 1997 for the supply of Energy to the PTO (an "Existing Agreement"), the ISO will follow the instructions provided by the parties to the Existing Agreement regarding the provisions of the Existing Agreement in the performance of its functions relating to Outage Coordination, and not require a QF to take any action that would interfere with the QF's obligations under the Existing Agreement. Each QF will make reasonable efforts to comply with the ISO's instructions during a System Emergency without penalty for failure to do so.

DP 9.5 Failure to Comply with Dispatch Instructions

DP 9.5.1 Obligation to Comply

All entities providing Ancillary Services (whether self-provided or procured by the ISO) or whose Supplemental Energy bids have been accepted by the ISO shall be obligated to respond to the ISO's Dispatch Instructions in accordance with their terms. If a Dispatched Generating Unit, Curtailable Demand or System Resource fails to respond to a Dispatch Instruction in accordance with its terms, the Generating Unit, Curtailable Demand or System Resource:

 shall be declared and labeled as non-conforming to the Dispatch Instruction;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

Second Revised Sheet No. 485 Superseding First Revised Sheet No. 485

(b) shall not be eligible to set the Dispatch Interval Ex Post Price.

DP 9.5.2 Sanctions

The ISO will develop additional mechanisms to deter Generating Units and Loads in the ISO or other Control Areas from failing to respond at a particular time or adequately respond over a particular period of time to a Dispatch Instruction or failing to perform according to Dispatch Instructions, for example, reduction in payments to SCs or suspension of the SC's Ancillary Services certificate for the Generating Unit, Curtailable Demand or System Resource concerned.

DP 10 EMERGENCY OPERATIONS

DP 10.1 Notifications by ISO

The ISO will provide the following notifications to Participants to communicate unusual system conditions or emergencies.

DP 10.1.1 System alert

ISO will give a system Alert Notice when the operating requirements of the ISO Controlled Grid are marginal because of Demand exceeding forecast, loss of major Generation or loss of transmission capacity that has curtailed imports into the ISO Control Area, or if the Hour-Ahead Market is short on scheduled Energy and Ancillary Services for the ISO Control Area.

DP 10.1.2 System warning

The ISO will give a system warning notice when the operating requirements for the ISO Controlled Grid are not being met in the Hour-Ahead Market, or the quantity of Regulation, Spinning Reserve, Non-Spinning Reserve, Replacement Reserve and Supplemental Energy available to the ISO is not acceptable for the Applicable Reliability Criteria. This system warning notice will notify Participants that the ISO will, acting in accordance with Good Utility Practice, take such steps as it considers necessary to ensure compliance with Applicable Reliability Criteria, including the negotiation of Generation through processes other than competitive bids.

DP 10.1.3 System Emergency

When, in the judgement of the ISO, the System Reliability of the ISO Controlled Grid is in danger of instability, voltage collapse or underfrequency caused by transmission or Generation trouble in the ISO Control Area, or events outside of the ISO Control Area that could result in a cascade of events throughout the WECC grid, the ISO will declare a System Emergency. This declaration may include a notice to suspend the Day-Ahead, Hour-Ahead and Real Time Markets, authorize full use of Black Start Generation, initiate full control of manual Load Shedding, authorize the curtailment of Curtailable Demand (even though not scheduled as an Ancillary Service). The ISO will reduce the System Emergency declaration to a lower alert status when it is satisfied, after conferring with Reliability Coordinators within the WECC that the major contributing factors have been corrected, all

Issued by: Charles F. Robinson, Vice President and General Counsel

involuntarily interrupted Demand is back in service (except interrupted Curtailable Demand selected as an Ancillary Service). This reduction in alert status will reinstate the competitive markets if they have been suspended.

DP 10.2 Management of System Emergencies

DP 10.2.1 Declaration of System Emergencies

The ISO shall, when it determines that a System Emergency exists, declare the existence of such System Emergency. A declaration of System Emergency by the ISO shall be binding on all Participants until the ISO announces that the System Emergency no longer exists.

DP 10.2.2 Emergency Procedures

In the event of a System Emergency, the ISO shall:

- (a) take action as it considers necessary to preserve or restore stable operation of the ISO Controlled Grid;
- act in accordance with Good Utility Practice to preserve or restore reliable, safe and efficient service as quickly as reasonably practicable;
- (c) keep adjacent Control Area Operators informed as to the nature and extent of the System Emergency in accordance with WECC procedures; and
- (d) where practicable, keep the Participants within the ISO Control Area informed.

DP 10.2.3 Intervention in Market Operations

- (a) The ISO may intervene in the operation of the Day-Ahead, Hour-Ahead or Real Time Markets and set the Administrative Price if the ISO determines that such intervention is necessary in order to contain or correct the System Emergency.
- (b) The ISO will not intervene in the operation of the Day-Ahead Market unless there has been a total or major collapse of the ISO Controlled Grid and the ISO is in the process of restoring it.
- (c) Before any such intervention, the ISO must (in the following order):
 - (i) Dispatch all scheduled Generation and all other Generation offered or available to it, regardless of price (including all Supplemental Energy bids, and Ancillary Services);
 - (ii) Dispatch all interruptible Loads made available by UDCs to the ISO in accordance with the UDC Operating Agreements;

Issued by: Charles F. Robinson, Vice President and General Counsel

- (iii) Dispatch or curtail all price-responsive Curtailable
 Demand that has been bid into any of the markets and
 exercise its rights under all Load curtailment contracts
 available to it; and
- (iv) exercise Load Shedding to curtail Demand on an involuntary basis to the extent that the ISO considers necessary.
- (d) The Administrative Price in relation to each of the markets for Imbalance Energy, Ancillary Services and Congestion Management shall be set at the applicable Market Clearing Price or appropriate charge, as the case may be, in the Settlement Period immediately preceding the Settlement Period in which the intervention took place.
- (e) The intervention will cease as soon as the ISO has restored all Demand that was curtailed on an involuntary basis as specified in (c).

DP 10.2.4 Emergency Guidelines

The ISO shall issue procedures for all Participants to follow during a System Emergency. These guidelines shall be consistent with the specific obligations of SCs and Participants referred to in DP 10.2.8, and DP 10.4

DP 10.2.5 Implementation of Dispatch Instructions

All Participants shall respond to ISO Dispatch Instructions with an immediate response during System Emergencies.

DP 10.2.6 Periodic Tests of Emergency Procedures

The ISO shall develop and administer periodic unannounced tests of System Emergency procedures. The purpose of such tests will be to ensure that the Participants are capable of responding to actual System Emergencies.

DP 10.2.7 Prioritized Schedule for Shedding and Restoring Load

The ISO shall, in consultation with Participants, develop a prioritized schedule for Load Shedding if a System Emergency requires such action. Such a schedule will include a prioritization of restoring Load if multiple Participants are affected.

DP 10.2.8 Obligations of Participating Generators Relating to System Emergencies

All Generating Units are subject to control by the ISO during a System Emergency. The ISO shall have the authority to:

- (a) instruct a Participating Generator to shut down any of its Generating Units which the Participating Generator does not require, or start any of its Generating Units that can be started in time to assist with the System Emergency;
- (b) instruct a Participating Generator to increase or curtail the output of any of its Generating Units; and

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

First Revised Sheet No. 488 Superseding Original Sheet No. 488

(c) instruct the alteration of scheduled deliveries of Energy and/or Ancillary Services into or out of the ISO Controlled Grid,

if such an instruction is reasonably necessary to prevent an imminent System Emergency or to retain Operational Control over the ISO Controlled Grid during an actual System Emergency, and provided that the ISO has, where reasonably practicable, utilized Ancillary Services which it has the contractual right to instruct and which are capable of contributing to or containing or correcting actual, imminent or threatened System Emergencies prior to issuing such instructions.

DP 10.3 External Support/Assistance

If, on a real-time basis, the ISO is unable to comply with the Applicable Reliability Criteria, the ISO shall take such steps as it considers necessary, to ensure compliance, including the negotiation of contracts for Ancillary Services through processes other than competitive solicitations. If the ISO is unable to obtain such resources from within the ISO Controlled Grid, the ISO may solicit Ancillary Services from other Control Areas on a real-time basis.

DP 10.4 UDC Emergency Procedures

In the event of a System Emergency, each UDC shall comply with all directions from the ISO concerning the management and alleviation of the System Emergency and shall comply with all procedures outlined in this Protocol.

DP 10.4.1 Use of UDC's Existing Load Curtailment Programs.

(a) UDC Electrical Emergency Plans

The ISO shall have the authority to implement a UDC's Electrical Emergency Plan in consultation with the UDC, when Energy reserve margins are forecast to be at the levels specified in the existing plan.

(b) UDC Under-Frequency Load Shedding Programs (UFLS):

The ISO shall:

- with the UDC, review that UDC's UFLS program periodically to ensure compliance with Applicable Reliability Criteria;
- (ii) perform periodic audits of each UDC's UFLS to verify that the system is properly configured for each UDC; and
- (iii) use reasonable endeavors to ensure that the total ISO UFLS is coordinated among the UDCs so that no UDC bears a disproportionate share of the total ISO UFLS program.

Issued by: Charles F. Robinson, Vice President and General Counsel

Second Revised Sheet No. 489 Superseding First Revised Sheet No. 489

(c) UDC Disconnect Load

The ISO shall have the authority to direct a UDC to disconnect Load from the ISO Controlled Grid if necessary to avoid an anticipated System Emergency or to regain Operational Control over the ISO Controlled Grid during an actual System Emergency.

(d) UDC Load Curtailment Programs

As an additional resource for maintaining reliability and managing System Emergencies, the ISO may notify UDCs when the conditions exist which require the UDCs to implement their Load curtailment programs. The UDCs will exercise their best efforts, including seeking any necessary regulatory approvals, to enable the ISO to rely on their curtailment rights at specified levels of Operating Reserve.

DP 10.4.2 Load Curtailment

A SC may specify that Load will be reduced at specified Market Clearing Prices or offer the right to exercise Load curtailment to the ISO as an Ancillary Service or utilize Load curtailment itself (by way of self-provision of Ancillary Services) as Non-Spinning Reserve or Replacement Reserve. The ISO, at its discretion, may require direct control over such Curtailable Demand to assume response capability for managing System Emergencies. The ISO may establish standards for automatic communication of curtailment instructions to implement Load curtailment as a condition for accepting any offered Load curtailment as an Ancillary Service.

DP 11 ALGORITHMS TO BE USED

The ISO shall develop Dispatch algorithms for use by the ISO for Dispatching Generating Units and Curtailable Demands in accordance with the ISO Tariff.

DP 12 INFORMATION MANAGEMENT

The ISO shall provide all Participants with non-discriminatory access to information concerning the status of the ISO Controlled Grid by posting such information on the WEnet, or other similar computer communications device, or by telephone or facsimile in the event of computer systems failure.

DP 13 AMENDMENTS TO THE PROTOCOL

If the ISO determines a need for an amendment to this Protocol, the ISO will follow the requirements as set forth in Section 16 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Effective: October 13, 2000

ISO MARKET MONITORING & INFORMATION **PROTOCOL**

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

FIRST REPLACEMENT VOLUME NO. II

Second Revised Sheet No. 491 Superseding First Revised Sheet No. 491

ISO MARKET MONITORING AND INFORMATION PROTOCOL

Table of Contents

| MMIP 1 | OBJECTIVES, DEFINITIONS, AND SCOPE | 494 |
|------------|---|---------------|
| MMIP 1.1 | Objectives | 494 |
| MMIP 1.1.1 | Means and Actions | 494 |
| MMIP 1.1.2 | Reporting Requirements | 494 |
| MMIP 1.2 | Definitions | 494 |
| MMIP 1.2.1 | Master Definitions Supplement | 494 |
| MMIP 1.2.2 | Special Terms for This Protocol | 495 |
| MMIP 1.2.3 | Rules of Interpretation | 495 |
| MMIP 1.3 | Scope | 495 |
| MMIP 1.3.1 | Scope of Application to Parties | 495 |
| MMIP 1.3.2 | 2 Liability of ISO | 495 |
| MMIP 2 | PRACTICES SUBJECT TO SCRUTINY | 495A |
| MMIP 2.1 | Practices Subject to Scrutiny – General | 495A |
| MMIP 2.1.1 | Abuse of Reliability Must-Run Unit Status | 496 |
| MMIP 2.1.2 | ISO and Other Market Design Flaws | 497 |
| MMIP 2.1.3 | Market Structure Flaws | 497 |
| MMIP 2.2 | Scrutiny of Participant Changes Potentially Affecting Structure | Market 497 |
| MMIP 2.2.1 | Exercises of Horizontal Market Power | 497 |
| MMIP 2.3 | Response Action by ISO | 498 |
| MMIP 2.3.1 | Corrective Actions | 498 |
| MMIP 2.3.2 | 2 Further Actions | 498 |
| MMIP 2.3.3 | Adverse Effects of Transition Mechanisms | 499 |
| | | |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: May 20, 2004 Effect Effective: Upon Commission Approval

| MMIP 3 | ISO DEPARTMENT OF MARKET ANALYSIS | 500 |
|-----------------|--|-----|
| MMIP 3.1 | Establishment | 500 |
| MMIP 3.2 | Composition | 500 |
| MMIP 3.3 | Accountability and Responsibilities | 500 |
| MMIP 3.3.1 | Department of Market Analysis | 500 |
| MMiIP 3.3.2 | 2 CEO and MSC | 500 |
| MMIP 3.3.3 | Chief Executive Officer (CEO) | 500 |
| MMIP 3.3.4 | Regulatory and Antitrust Enforcement Agencies | 501 |
| MMIP 3.3.5 | Complaints | 501 |
| MMIP 4 | SPECIFIC FUNCTIONS OF ISO DEPARTMENT OF MARKET ANALYSIS | 501 |
| MMIP 4.1 | Information Gathering and Market Monitoring Indices for Evaluation | 501 |
| MMIP 4.1.1 | Information System | 501 |
| MMIP 4.1.2 | Data Categories | 501 |
| MMIP 4.1.3 | Catalog of Market Monitoring Indices | 502 |
| MMIP 4.2 | Evaluation of Information | 502 |
| MMIP 4.2.1 | Ongoing Evaluation | 502 |
| MMIP 4.2.2 | Submission of Evaluation Results | 502 |
| MMIP 4.3 | Review of Rules of Conduct | 502 |
| MMIP 4.4 | Reports and Recommendations | 502 |
| MMIP 4.4.1 | ISO CEO and Governing Board | 502 |
| MMIP 4.4.2 | Regulatory Agencies | 503 |
| MMIP 4.4.3 | ISO Market Surveillance Committee | 503 |
| MMIP 4.5 | Market Participants | 503 |
| MMIP 4.5.1 | Collection of Data | 503 |
| MMIP 4.5.2 | Dissemination of Data | 504 |
| MMIP 4.6 | External Consulting Assistance and Expert Advice | 504 |
| MMIP 4.7 | Liability for Damages | 505 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: July 22, 2003 Effective: February 21, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 493 Superseding Original Sheet No. 493

| MMIP 5 | MARKET SURVEILLANCE COMMITTEE | 505 |
|-----------------|---|-----|
| MMIP 5.1 | Establishment | 505 |
| MMIP 5.2 | Composition | 505 |
| MMIP 5.2.1 | Qualifications | 505 |
| MMIP 5.2.2 | Criteria for Independence | 505 |
| MMIP 5.3 | Appointments to the MSC | 506 |
| MMIP 5.4 | Compensation and Reimbursements | 506 |
| MMIP 5.5 | Liability for Damages | 506 |
| MMIP 6 | SPECIFIC FUNCTIONS OF MARKET SURVEILLANCE COMMITTEE (MSC) | 506 |
| MMIP 6.1 | Information Gathering and Evaluation Criteria | 506 |
| MMIP 6.2 | Evaluation of Information | 506 |
| MMIP 6.3 | Reports and Recommendations | 507 |
| MMIP 6.3.1 | Required Reports | 507 |
| MMIP 6.3.2 | Additional Reports | 507 |
| MMIP 6.4 | Publication of Reports and Recommendations | 507 |
| MMIP 7 | IMPLEMENTATION OF RECOMMENDATIONS | 507 |
| MMIP 7.1 | Plan and Rules of Conduct Changes | 507 |
| MMIP 7.2 | Tariff Changes | 507 |
| MMIP 7.3 | Sanctions and Penalties | 507 |
| MMIP 8 | PUBLICATION OF INFORMATION | 508 |
| MMIP 8.1 | Market Monitoring Data and Indices | 508 |
| MMIP 8.2 | Reports to Regulators | 508 |
| MMIP 9 | AMENDMENTS | 508 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: July 22, 2003

Effective: February 21, 2004

ISO Market Monitoring and Information Protocol (MMIP)

MMIP 1 OBJECTIVES, DEFINITIONS, AND SCOPE

MMIP 1.1 Objectives

This Protocol (MMIP) sets forth the workplan and, where applicable, the rules under which the ISO Department of Market Analysis and ISO Market Surveillance Committee will monitor the ISO Markets to identify abuses of market power, to ensure to the extent possible the efficient working of the ISO Markets immediately upon commencement of their operation, and to provide for their protection from abuses of market power in both the short term and the long term, and from other abuses that have the potential to undermine their effective functioning or overall efficiency in accordance with Section 16.3 of the ISO Tariff. Such monitoring activities will be carried out by, among other ISO departments, the ISO Department of Market Analysis and the ISO Market Surveillance Committee to be established and to operate under the terms of this Protocol, as set forth below. These protocols provide a general framework for the operation of the Department of Market Analysis and the Market Surveillance Committee and are not intended to limit the activities or remedies available to these entities or to the ISO as a whole elsewhere in the ISO Tariff or otherwise under law.

MMIP 1.1.1 Means and Actions

This Protocol sets forth general means of data collection, analysis, decision-making, and formulation of corrective actions, that will be instituted or undertaken by the ISO Department of Market Analysis and ISO Market Surveillance Committee. It describes implementation mechanisms to be created by the ISO to serve these purposes.

MMIP 1.1.2 Reporting Requirements

This Protocol sets forth the information dissemination, publication and reporting activities and other means of providing information that the ISO generally undertakes to meet its reporting requirements to regulatory agencies, Market Participants and others. The goal of the reporting provisions of this Protocol is to adequately inform regulatory agencies, law enforcement agencies, policymakers, Market Participants and others of the state of the ISO Markets, especially their competitiveness and efficiency. This function is designed to facilitate efficient corrective actions to be taken by the appropriate body or bodies when required.

MMIP 1.2 Definitions

MMIP 1.2.1 Master Definitions Supplement

Any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. References to a Section or Appendix are to a Section or an Appendix of the ISO Tariff. References to MMIP are to this Protocol or to the stated section, paragraph or appendix of this Protocol.

Issued by: Charles F. Robinson, Vice President and General Counsel

MMIP 1.2.2 Special Terms for This Protocol

In this Protocol, the following words and expressions shall have the meanings set opposite them:

"Department of Market Analysis (DMA)" means the unit established under MMIP 3.1.

"Rules of Conduct" has the same meaning as provided for in the Enforcement Protocol.

"Market Surveillance Committee (MSC)" means the committee established under MMIP 5.1.

"ISO Home Page" means the ISO internet home page at http://www.caiso.com or such other internet address as the ISO shall publish from time to time.

MMIP 1.2.3 Rules of Interpretation

- MMIP 1.2.3.1 Unless the context otherwise requires, if the provisions of this Protocol conflict with the ISO Tariff and/or the Enforcement Protocol, the ISO Tariff and the Enforcement Protocol will prevail to the extent of the inconsistency. The provisions of the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.
- MMIP 1.2.3.2 A reference in this Protocol to a given agreement, ISO Protocol or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made.
- **MMIP 1.2.3.3** The captions and headings in this MMIP are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.
- MMIP 1.2.3.4 This Protocol shall be effective as of January 1, 1998. Any amendment to this Protocol shall be effective as of the date of such amendment, or as of the date such amendment is approved by FERC.
- MMIP 1.3 Scope
- MMIP 1.3.1 Scope of Application to Parties

The MMIP applies to:

- MMIP 1.3.1.1 All ISO Market Participants;
- **MMIP 1.3.1.2** The ISO;
- MMIP 1.3.1.3 The Market Surveillance Committee.
- MMIP 1.3.2 Liability of ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 495A

MMIP 2 PRACTICES SUBJECT TO SCRUTINY

Practices Subject to Scrutiny - General

MMIP 2.1

The Department of Market Analysis shall monitor the activities of Market Participants

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Second Revised Sheet No. 496 FIRST REPLACEMENT VOLUME NO. II Superseding First Revised Sheet No. 496

that affect the operation of the ISO Markets and that provide indications of the phenomena set forth below in this Section 2.1. Where appropriate, it will take such further action as it considers necessary under Section 2.3.

MMIP 2.1.1 Abuse of Reliability Must-Run Unit Status

Where Generating Units are determined by the ISO to be Reliability Must-Run Units, circumstances that indicate that such Generating Units are being operated in a manner that will adversely affect the competitive nature and efficient workings of the ISO Markets.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: Upon Commission Approval

MMIP 2.1.2 ISO and Other Market Design Flaws

Design flaws and inefficiencies in the ISO Tariff, ISO Protocols and operational rules and procedures of the ISO, including the potential for problems between the ISO and other independent power markets or exchanges insofar as they affect the ISO Markets.

MMIP 2.1.3 Market Structure Flaws

With respect to flaws in the overall structure of the California energy markets that may reveal undue concentrations of market power in Generation or other structural flaws, the Department of Market Analysis shall provide such information or evidence of such flaws and such analysis as it may conduct to the ISO CEO and/or to the ISO Governing Board, subject to due protections of confidential or commercially sensitive information. After due internal consultation, if instructed by any of such ISO institutions or persons, the Department of Market Analysis shall also provide such information or evidence to the Market Surveillance Committee, the appropriate regulatory and antitrust enforcement agency or agencies, subject to due protections of confidential or commercially sensitive information. The Department of Market Analysis shall, at the direction of the ISO CEO and/or the ISO Governing Board, or their designee, provide such other evidence. views, analyses or testimony as may be appropriate or required and as it is reasonably capable of providing to assist the investigations of such agencies.

MMIP 2.2 Scrutiny of Participant Changes Potentially Affecting Market Structure

The Department of Market Analysis may undertake the following measures to monitor the special circumstances that may affect the operation of the ISO Markets due to corporate reorganizations including bankruptcies or changes in affiliate relationships and may recommend corrective actions as provided in Section 2.3.

MMIP 2.2.1 Exercises of Horizontal Market Power

The Department of Market Analysis may analyze the impact of changes in market structure on the ability of Market Participants to exercise short-term horizontal market power.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: Upon Commission Approval

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF

Second Revised Sheet No. 498

FIRST REPLACEMENT VOLUME NO. II

Superseding First Revised Sheet No. 498

MMIP 2.3 Response Action by ISO

MMIP 2.3.1 Corrective Actions

Where the monitoring activities or any consequent investigations carried out by the Department of Market Analysis pursuant to MMIP 2 and MMIP 4 reveal a significant possibility of the presence of or potential for exercises of market power that would adversely affect the operation of the ISO Markets, or other markets interconnected or interdependent on the ISO Markets, the Department of Market Analysis shall take the appropriate measures under this section and under MMIP 4, 6, and 7 to institute the corrective action most effective and appropriate for the situation or, in the case of markets interconnected to or interdependent on the ISO Markets, the Department of Market Analysis may recommend corrective actions to the appropriate regulatory agencies.

MMIP 2.3.2 Further Actions

Where the monitoring activities of or any consequent investigations carried out by the Department of Market Analysis pursuant to MMIP 2.1 and 2.2 reveal that activities or behavior of Market Participants in the ISO Markets have the effect of, or potential for, undermining the efficiency, workability or reliability of the ISO Markets to give or to serve such Market Participants an unfair competitive advantage over other Market Participants, the Department of Market Analysis shall fully investigate and analyze the effect of such activities or behavior and make recommendations to the ISO CEO and the ISO Governing Board for further action by the ISO or, where necessary, by other entities. The Department of Market Analysis may, where appropriate, make specific recommendations to the ISO CEO and to the ISO Governing Board for amendment to rules and protocols under its control, or for changes to the structure of the ISO Markets, and the Department of Market Analysis may recommend actions, including fines or suspensions, against specific entities in order to deter such activities or behavior.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: December 20, 2004 Effective: November 19, 2004

MMIP 2.3.3 Adverse Effects of Transition Mechanisms

Should the monitoring and analysis conducted under MMIP 2.2.3 reveal significant adverse effects of transition mechanisms on competition in or the efficient operation of the ISO Markets, the Department of Market Analysis shall examine and fully assess the efficacy of all possible measures that may be taken by the ISO, in order to prevent or to mitigate such adverse effects. The Department of Market Analysis shall make such recommendations to the CEO of the ISO and to the ISO Governing Board as it considers appropriate for action by the ISO and/or for referral to regulatory or law enforcement agencies. Such proposed measures may include, but shall not be limited to the following:

- **MMIP 2.3.3.1** the use of direct bid caps as a mechanism to prevent or mitigate artificially high Market Clearing Prices caused by abuses of market power;
- **MMIP 2.3.3.2** the use of contracts for differences for eliminating the incentive for Generators to bid ISO prices to artificially high levels enabled by the presence of market power:
- **MMIP 2.3.3.3** calling upon Reliability Must-Run Units to operate; and to modify Reliability Must-Run Contracts;
- **MMIP 2.3.3.4** bid floors to prevent or mitigate the possible exercise of below-cost bidding or predatory pricing.

In the event that the ISO Governing Board adopts, and where necessary obtains regulatory approval for, any

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: Upon Commission Approval

measure proposed pursuant to MMIP 2.3.3, the Department of Market Analysis shall monitor the implementation and effect of such measure on the state of the ISO Markets and shall periodically report on them to the CEO and the ISO Governing Board.

MMIP 3 ISO DEPARTMENT OF MARKET ANALYSIS

MMIP 3.1 Establishment

There shall be established on or before ISO Operations Date within the ISO a Department of Market Analysis that shall be responsible for the ongoing development, implementation, and execution of the ISO Market monitoring and information scheme described in this MMIP and the adherence to its objectives, as set forth in MMIP 1.1.

MMIP 3.2 Composition

The Department of Market Analysis shall be adequately staffed by the ISO with full-time ISO staff with the experience and qualifications necessary to fulfill the functions referred to in this MMIP. Such qualifications may include professional training pertinent to and experience in the operation of markets analogous to ISO Markets, in the electric power industry, and in the field of competition and antitrust law, economics and policy. The Department of Market Analysis shall be under the general management of the ISO CEO, provided that the CEO may designate another ISO officer (currently the General Counsel) for day-to-day oversight of the Department.

MMIP 3.3 Accountability and Responsibilities

MMIP 3.3.1 Department of Market Analysis

The Department of Market Analysis shall report to and be accountable to the ISO CEO and his or her designee on all matters pertaining to policy and other matters that may affect the effectiveness and integrity of the monitoring function referred to in this Protocol, including matters pertaining to market monitoring, information development and dissemination and pertaining to generic or entity-specific investigations, corrective actions or enforcement.

MMIP 3.3.2 CEO and MSC

The ISO CEO and the MSC shall each have the independent authority to refer any of the matters referred to in MMIP 3.3.1 to the ISO Governing Board for approval of recommended actions.

MMIP 3.3.3 Chief Executive Officer (CEO)

MMIP 3.3.3.1 The Department of Market Analysis shall report to and be accountable to the ISO CEO and his or her designee on all matters relating to administration of the Department and the internal resources and organization of the ISO in accordance with MMIP 3.3.3.2.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: Upon Commission Approval

MMIP 3.3.3.2 The ISO, through its CEO and Governing Board, shall determine that the Department of Market Analysis has adequate resources and full access to data and the full cooperation of all parts of the ISO organization in developing the database necessary for the effective functioning of the Department of Market Analysis and the fulfillment of its monitoring function.

MMIP 3.3.4 Regulatory and Antitrust Enforcement Agencies

Where considered necessary and appropriate, or where so ordered by the regulatory or antitrust agency with jurisdiction over the matter in question, or by a court of competent jurisdiction, the ISO shall refer a matter to the regulatory or antitrust enforcement agency concerned, e.g., in cases of serious abuse requiring expeditious investigation or action by the agency. In all such cases of direct referral, the ISO CEO shall promptly inform the ISO Governing Board and the MSC of the fact of and the content of the referral.

MMIP 3.3.5 Complaints

Any Market Participant, or any other interested entity, may at any time submit information to or make a complaint to the Department of Market Analysis concerning any matter that it believes may be relevant to the Department of Market Analysis's monitoring responsibilities. Such submissions or complaints may be made on a confidential basis in which case the Department of Market Analysis shall preserve the confidentiality thereof. The Department of Market Analysis, at its discretion, may request further information from such entity and carry out any investigation that it considers appropriate as to the concern raised. The Department of Market Analysis shall periodically make reports to the ISO CEO and ISO Governing Board on complaints received.

MMIP 4 SPECIFIC FUNCTIONS OF ISO DEPARTMENT OF MARKET ANALYSIS

MMIP 4.1 Information Gathering and Market Monitoring Indices for Evaluation

MMIP 4.1.1 Information System

The Department of Market Analysis shall be responsible for developing an information system and criteria for evaluation that will permit it to effectively monitor the ISO Markets to identify and investigate abuses of that market, whether caused by exercises of market power or by other actions or inactions.

MMIP 4.1.2 Data Categories

To develop the information system set forth in MMIP 4.1.1, the Department of Market Analysis shall initially develop, and shall refine on the basis of experience, a detailed catalog of all the categories of data it will have the means of acquiring, and the procedures it will use (including procedures for protecting confidential data) to handle such data.

Issued by: Charles F. Robinson, Vice President and General Counsel

MMIP 4.1.3 Catalog of Market Monitoring Indices

The Department of Market Analysis shall initially develop, and shall refine on the basis of experience, a catalog of the ISO Market monitoring indices that it will use to evaluate the data so collected.

MMIP 4.2 Evaluation of Information

MMIP 4.2.1 Ongoing Evaluation

The Department of Market Analysis shall evaluate and reevaluate on an ongoing basis the data categories and market monitoring indices that it has developed under MMIP 4.1.2 and 4.1.3, and the information it collects and receives from various other sources, including and in particular the ISO's operation of the ISO Markets. Such ongoing evaluations shall provide the basis for its reporting and publication responsibilities as set forth in this Protocol, for recommendations on proposed changes to the ISO Tariff and ISO Protocols and other potential rules affecting the ISO Markets, and for the development of criteria or standards for the initiation of proposed corrective or enforcement actions. In evaluating such information, the Department of Market Analysis may consult the MSC or such external bodies as may be appropriate.

MMIP 4.2.2 Submission of Evaluation Results

The final results of the Department of Market Analysis's ongoing evaluations under MMIP 4.2.1 shall routinely and promptly be submitted to the ISO CEO and to the MSC for comment.

MMIP 4.3 Review of Rules of Conduct

The Department of Market Analysis shall review Rules of Conduct for their effectiveness and consistency with its market monitoring activities and standards. The Department of Market Analysis may at that time, and from time to time thereafter based on its experience in monitoring the ISO Markets, propose to the ISO CEO and/or the ISO Governing Board that changes be made in such Rules of Conduct.

MMIP 4.4 Reports and Recommendations

MMIP 4.4.1 ISO CEO and Governing Board

On the basis of the evaluation conducted under MMIP 4.2 or the review conducted under MMIP 4.3, the Department of Market Analysis shall prepare periodic reports, as required by the ISO CEO, and specific ad hoc reports as appropriate, for the ISO CEO and ISO Governing Board on the state of competition in or the efficiency of the ISO Markets; and on its monitoring activities, the results of its evaluation and review activities, and its development and implementation of recommendations. Where appropriate, the ISO Department of Market Analysis may recommend to the ISO CEO and/or the ISO Governing Board actions to be taken, including the amendment of the ISO Tariff and ISO Protocols and corrective or enforcement action against specific entities. Such reports shall be made not less frequently than quarterly in the case of the ISO CEO and annually in

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Sheet No. 503 Superseding Original Sheet No. 503

the case of the ISO Governing Board and shall contain such information and be in such form as specified by such entities. Such reports shall be made public and publicized as specified by such entities except to the extent that they contain confidential or commercially sensitive information or to the extent such entities determine that effective enforcement of the monitoring function dictates otherwise.

MMIP 4.4.2 Regulatory Agencies

As required in the ISO Tariff or by the ISO CEO and ISO Governing Board, or as required by the regulatory agency with jurisdiction over the matters in question, the Department of Market Analysis shall prepare reports to the FERC and other regulatory agencies, which shall be reviewed and approved by the ISO CEO or his or her designee and then submitted as required. When publicly available reports are made to one regulatory agency with competent jurisdiction, such as the FERC, the Department of Market Analysis may simultaneously make such reports available to other regulatory agencies with legitimate interests in their contents, such as the Electricity Oversight Board, the California Public Utilities Commission, the California Energy Commission and/or the California Attorney General.

MMIP 4.4.3 ISO Market Surveillance Committee

All reports and recommendations to be made to regulatory agencies under MMIP 4.4.2, unless urgency requires otherwise, shall first be submitted to the MSC for comments, which comments shall be reflected in any submittal to the ISO Governing Board seeking approval of any such reports or recommendations. All final reports made to external regulatory agencies shall be simultaneously submitted to the MSC.

MMIP 4.5 Market Participants

MMIP 4.5.1 Collection of Data

The Department of Market Analysis may request that Market Participants or other entities whose activities may affect the operation of the ISO markets submit any information or data determined by the Department of Market Analysis to be potentially relevant. This data will be subject to due safeguards to protect confidential and commercially sensitive data. Failures by Market Participants to provide such data shall be treated under the Enforcement Protocol. In the event of failures by other entities to provide such data, the ISO may take whatever action is available to it and appropriate for it to take, including reporting the failure to the pertinent regulatory agency, after providing such entity the opportunity to respond in writing as to the reason for the alleged failure.

Issued by: Charles F. Robinson, Vice President and General Counsel

and may include possible exclusion from the ISO Markets or termination of any relevant ISO agreements or certifications. Before any such action is taken, the ISO Participant shall be provided the opportunity to respond in writing as to the reason for the alleged failure.

MMIP 4.5.2 Dissemination of Data

Any Market Participant may request that the ISO provide data that the ISO has collected concerning that Market Participant; and, such data may, subject to constraints on the ISO's resources and at the ISO's sole discretion, be provided by the ISO subject to due safeguards to protect confidential and commercially sensitive data. Where such activity imposes a significant burden or expense on the ISO, the data may be provided on the condition that a reasonable contribution to the cost incurred by the ISO is made to the ISO by the requesting party.

MMIP 4.6 External Consulting Assistance and Expert Advice

In carrying out any of its responsibilities under this MMIP 4, including the development of an information system, market monitoring indices and evaluation criteria, and the catalogs associated therewith, and in its analysis and ongoing evaluation of these catalogs and of the Rules of Conduct under MMIP 4.3, the Department of Market Analysis may hire consulting assistance subject to the budgetary approval of the ISO CEO and may seek such expert external advice as it believes necessary.

Issued by: Charles F. Robinson, Vice President and General Counsel

MMIP 4.7 Liability for Damages

As provided in Section 14.1 and 14.2 of the ISO Tariff, the Department of Market Analysis, the MSC, the ISO CEO and other ISO staff, and the ISO Governing Board shall not be liable to any Market Participant under any circumstances whatsoever for any matter described in those sections, including but not limited to any financial loss or loss of economic advantage resulting from the performance or non-performance by such ISO entities of their functions under this Protocol.

MMIP 5 MARKET SURVEILLANCE COMMITTEE

MMIP 5.1 Establishment

There shall be established on or before ISO Operations Date a Market Surveillance Committee (MSC), whose role it shall be to provide independent external expertise on the ISO market monitoring process as described in this Protocol and, in particular, to provide independent expert advice and recommendations to the ISO CEO and Governing Board. Members of the Committee shall not be, and shall not be understood to be, employees or agents of the ISO.

MMIP 5.2 Composition

MMIP 5.2.1 Qualifications

The MSC shall comprise a body of three or more independent and recognized experts whose combined professional expertise and experience shall encompass the following:

- **MMIP 5.2.1.1** economics, with emphasis on antitrust, competition, and market power issues in the electricity industry;
- **MMIP 5.2.1.2** experience in operational aspects of Generation and transmission in electricity markets;
- MMIP 5.2.1.3 experience in antitrust or competition law in regulated industries; and
- **MMIP 5.2.1.4** financial expertise relevant to energy or other commodity trading.

MMIP 5.2.2 Criteria for Independence

Each member of the MSC must meet the following criteria for independence:

- MMIP 5.2.2.1 no material affiliation, through employment, consulting or otherwise, with any Market Participant or Affiliate thereof consistent with the pertinent FERC Standards of Conduct; and
- **MMIP 5.2.2.2** no material financial interest in any Market Participant or Affiliate thereof consistent with the pertinent FERC Standards of Conduct.
- during their time on the Committee, members may not provide paid expert witness testimony or other commercial services to the ISO or to any other party in connection with any legal or regulatory proceeding relating to the ISO or any trade or other transaction involving the ISO markets (except that the Committee may consult with and make

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: February 21, 2004

First Revised Sheet No. 506 Superseding Original Sheet No. 506

recommendations concerning the functioning of the markets to ISO Management or the ISO Governing Board in connection with legal or regulatory proceedings).

MMIP 5.3 Appointments to the MSC

For each position on the MSC, the ISO CEO shall conduct a thorough search and requisite due diligence to develop a nomination to the ISO Governing Board, which nomination shall be consistent with meeting the combined professional expertise and experience of the MSC set forth in MMIP 5.2.1 and with the criteria for independence set forth in MMIP 5.2.2. The ISO Governing Board shall expeditiously consider such nominations. If the nomination is approved, the ISO CEO shall appoint the candidate so nominated to the MSC. If the nomination is rejected, the ISO CEO shall expeditiously proceed to develop another nomination in accordance with this MMIP.

MMIP 5.4 Compensation and Reimbursements

Members of the MSC shall be compensated on such basis as the ISO Governing Board shall from time to time determine.

Members of the MSC shall receive prompt reimbursement for all expenses reasonably incurred in the execution of their responsibilities under this MMIP 5.

MMIP 5.5 Liability for Damages

As provided in Section 14.1 and 14.2 of the ISO Tariff, the Department of Market Analysis, the MSC, the ISO CEO and other ISO staff, and the ISO Governing Board shall not be liable to any Market Participant under any circumstances whatsoever for any matter described in those sections, including but not limited to any financial loss or loss of economic advantage resulting from the performance or non-performance by such ISO entities of their functions under this Protocol.

MMIP 6 SPECIFIC FUNCTIONS OF MARKET SURVEILLANCE COMMITTEE (MSC)

MMIP 6.1 Information Gathering and Evaluation Criteria

The MSC shall review the initial catalogs of information and data and of evaluation criteria developed by the Department of Market Analysis pursuant to MMIP 4 and shall propose such changes, additions or deletions to such catalogs or items therein as it sees fit. In so doing, the MSC shall have full discretion to specify database items or evaluation criteria for inclusion in the pertinent catalog.

MMIP 6.2 Evaluation of Information

The MSC may, upon request of the Department of Market Analysis, the ISO Management or the ISO Governing Board, or on its own volition, evaluate such information or data, including as may be collected by the Department of Market Analysis on the basis of the evaluation criteria developed by the Department of Market Analysis or on such further articulated evaluation criteria developed by the MSC.

Issued by: Charles F. Robinson, Vice President and General Counsel

MMIP 6.3 Reports and Recommendations

MMIP 6.3.1 Required Reports

All evaluations carried out by the MSC pursuant to MMIP 6.2, and any recommendations emanating from such evaluations, shall be embodied by the MSC in written reports to the ISO CEO and ISO Governing Board and shall be made publicly available subject to due restrictions on dissemination of confidential or commercially sensitive information. The MSC may submit any MSC report to FERC, subject to due restrictions on dissemination of confidential or commercially sensitive information.

MMIP 6.3.2 Additional Reports

The MSC may make such additional reports and recommendations as it sees fit relating to the monitoring program referred to in this Protocol, the analysis of information, the evaluation criteria or any corrective or enforcement actions proposed by the Department of Market Analysis or proposed of its own volition.

MMIP 6.4 Publication of Reports and Recommendations

Upon request of the MSC, the ISO shall publish reports and recommendations of the MSC or incorporate them, if consistent, into the ISO's own reports or recommendations.

MMIP 7 IMPLEMENTATION OF RECOMMENDATIONS

MMIP 7.1 Plan and Rules of Conduct Changes

Following a recommendation of the MSC, the ISO Governing Board may make such changes as it believes are appropriate to any ISO Protocol or Agreement or to any Rules of Conduct applicable in accordance with MMIP 9.

MMIP 7.2 Tariff Changes

Upon recommendation of the MSC, the ISO Governing Board shall consider and may adopt proposed ISO Tariff changes in accordance with MMIP 9.

MMIP 7.3 Sanctions and Penalties

Upon recommendation of the MSC, the ISO may impose such sanctions or penalties as it believes necessary and as are permitted under the ISO Tariff and related protocols approved by FERC; or it may make any such referral to such regulatory or antitrust agency as it sees fit to recommend the imposition of sanctions and penalties.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II Supe

First Revised Sheet No. 508 Superseding Original Sheet No. 508

MMIP 8 PUBLICATION OF INFORMATION

MMIP 8.1 Market Monitoring Data and Indices

The ISO Department of Market Analysis shall, pursuant to MMIP 4.1, develop a catalog of data and indices. Upon approval of the ISO CEO, such catalogs shall be duly published on the ISO Home Page and disseminated to all Market Participants.

MMIP 8.2 Reports to Regulators

The ISO shall develop annual reports of market performance for delivery to FERC, and such other reports as may be required by FERC, which shall be submitted for review to the MSC. The Department of Market Analysis shall prepare and submit such reports to the ISO CEO, ISO Governing Board and to the regulatory agency concerned.

MMIP 9 AMENDMENTS

If the ISO determines a need for an amendment to this Protocol, the ISO will follow the requirements as set forth in Section 16 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

APPENDIX A

ISO Market Monitoring Plan

Market Mitigation Measures

1 PURPOSE AND OBJECTIVES

- 1.1 These ISO market power mitigation measures ("Mitigation Measures") are intended to provide the means for the ISO to mitigate the market effects of any conduct that would substantially distort competitive outcomes in the ISO Real Time Market while avoiding unnecessary interference with competitive price signals. These Mitigation Measures are intended to minimize interference with an open and competitive market, and thus to permit, to the maximum extent practicable, price levels to be determined by competitive forces under the prevailing market conditions. To that end, the Mitigation Measures authorize the mitigation only of specific conduct that exceeds well-defined thresholds specified below.
- In addition, the ISO shall monitor the markets it administers for conduct that it determines constitutes an abuse of market power but does not trigger the thresholds specified below for the imposition of mitigation measures by the ISO. If the ISO identifies any such conduct, and in particular conduct exceeding the thresholds for presumptive market effects specified below, it shall make a filing under Section 205 of the Federal Power Act, 16 U.S.C. § 824d, with FERC requesting authorization to apply appropriate mitigation measures. Any such filing shall identify the particular conduct the ISO believes warrants mitigation, shall propose a specific mitigation measure for the conduct, and shall set forth the ISO's justification for imposing that mitigation measure.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 1, 2002

Third Revised Sheet No. 508B

2 CONDUCT WARRANTING MITIGATION

2.1 Definitions

The following definitions are applicable to this Appendix A:

"Economic Market Clearing Prices" are the Market Clearing Prices for a particular resource at the location of that particular resource at the time the resource was either Scheduled or was Dispatched by the ISO. Economic Market Clearing Prices may originate from the Day-Ahead Energy market, the Hour-Ahead Energy market (when these markets are in place), or ISO real-time Imbalance Energy market. The Economic Market Clearing Price for the ISO real-time Imbalance Energy market shall be the Dispatch Interval Ex Post Price, unless the resource cannot change output level within the hour (i.e., the resource is not amenable to intra-hour real-time Dispatch instructions), or it is a System Resource. Economic Market Clearing Prices for the ISO real-time Imbalance Energy market for resources that cannot change output level within one Dispatch Interval and System Resources shall be the simple average of the relevant Dispatch Interval Ex Post Prices for each hour.

"Electric Facility" shall mean an electric resource, including a Generating Unit, System Unit, or a Participating Load.

2.2 Conduct Subject to Mitigation

Mitigation Measures may be applied: (i) to the bidding, scheduling, or operation of an "Electric Facility"; or (ii) as specified in Section 2.4 below.

2.3 Conditions for the Imposition of Mitigation Measures

2.3.1 In general, the ISO shall consider a Market Participant's conduct to be inconsistent with competitive conduct if the conduct would not be in the economic interest of the Market Participant in the absence of market power. The categories of conduct that are inconsistent with competitive conduct include, but may not be limited to, the three categories of conduct specified in Section 2.4 below.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Second Revised Sheet No. 508C
FIRST REPLACEMENT VOLUME NO. II
Superseding First Revised Sheet No. 508C

2.4 Categories of Conduct that May Warrant Mitigation

2.4.1 The following categories of conduct, whether by a single firm or by multiple firms acting in concert, may cause a material effect on prices or generally the outcome of the ISO Real Time Market if exercised from a position of market power. Accordingly, the ISO shall monitor the ISO Markets for the following categories of conduct, and shall impose appropriate Mitigation Measures if such conduct is detected and the other applicable conditions for the imposition of Mitigation Measures are met:

- or schedule the output of or services provided by an Electric Facility capable of serving an ISO Market. Such withholding may include, but not be limited to: (i) falsely declaring that an Electric Facility has been forced out of service or otherwise become totally or partially unavailable, (ii) refusing to offer bids or schedules for an Electric Facility when it would be in the economic interest, absent market power, of the withholding entity to do so, (iii) declining real-time bids called upon by the ISO (unless the ISO is informed in accordance with established procedures that the relevant resource for which the bid is submitted has undergone a forced outage or derate), or (iv) operating a Generating Unit in real time to produce an output level that is less than the ISO's Dispatch instruction.
- (2) Economic withholding of an Electric Facility, that is, submitting bids for an Electric Facility that are unjustifiably high (relative to known operational characteristics and/or the known operating cost of the resource) so that: (i) the Electric Facility is not or will not be dispatched or scheduled, or (ii) the bids will set a Market Clearing Price.
- (3) Uneconomic production from an Electric Facility, that is, increasing the output of an Electric Facility to levels that would otherwise be uneconomic in order to cause, and obtain benefits from, a transmission constraint.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 1, 2002

FIRST REPLACEMENT VOLUME NO. II Superseding Third Revised Sheet No. 508D

2.4.2 Mitigation Measures may also be imposed to mitigate the market effects of a rule, standard,

procedure, design feature, or known software imperfection of an ISO Market that allows a Market

Participant to manipulate market prices or otherwise impair the efficient operation of that market, pending

the revision of such rule, standard, procedure design feature, or software defect to preclude such

manipulation of prices or impairment of efficiency.

2.4.3 Taking advantage of opportunities to sell at a higher price or buy at a lower price in a market

other than an ISO Market shall not be deemed a form of withholding or otherwise inconsistent with

competitive conduct.

2.4.4 The ISO shall monitor ISO Markets for other categories of conduct, whether by a single firm or by

multiple firms acting in concert, that have material effects on prices in an ISO Market or other payments.

The ISO shall: (i) seek to amend the foregoing list as may be appropriate to include any such conduct

that would substantially distort or impair the competitiveness of any of the ISO Markets; and (ii) seek such

other authorization to mitigate the effects of such conduct from the FERC as may be appropriate.

3 CRITERIA FOR IMPOSING MITIGATION MEASURES

3.1 Identification of Conduct Inconsistent with Competition

Conduct that may potentially warrant the imposition of a mitigation measure includes the

categories described in Section 2.4 above. The thresholds listed in Section 3.1.1 below shall be used to

identify substantial departures from competitive conduct indicative of an absence of workable

competition.

3.1.1 Conduct Thresholds for Identifying Economic Withholding

The following thresholds shall be employed by the ISO to identify economic withholding that may

warrant the mitigation of the bid from a resource and shall be determined with respect to a reference level

determined as specified in Section 3.1.1.1:

For Energy Bids to be Dispatched as Imbalance Energy through the RTD Software: the lower of a

200 percent increase or \$100/MWh increase in the bid with respect to its Reference Level.

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Second Revised Sheet No. 508E
FIRST REPLACEMENT VOLUME NO. II
Superseding First Revised Sheet No. 508E

3.1.1.1 Reference Levels

- (a) For purposes of establishing reference levels, bid segments shall be defined as follows:
 - the capacity of each generation resource shall be divided into 10 equal Energy bid segments between its minimum (Pmin) and maximum (Pmax) operating point.

A reference level for each bid segment shall be calculated each day for peak and off-peak periods on the basis of the following methods, listed in the following order of preference subject to the existence of sufficient data, where sufficient data means at least one data point per time period (peak or off-peak) for the bid segment. Peak periods shall be the periods Monday through Saturday from Hour Ending 0700 through Hour Ending 2200, excluding holidays. Off-Peak periods are all other hours.

- 1. Excluding proxy and mitigated bids, the accepted bid, or the lower of the mean or the median of a resource's accepted bids if such a resource has more than one accepted bid in competitive periods over the previous 90 days for peak and off-peak periods, adjusted for monthly changes in fuel prices using the proxy figure for natural gas prices posted on the ISO Home Page. Accepted and justified bids above the applicable soft cap, as set forth in Section 28.1.2 of this Tariff, will be included in the calculation of reference prices.
- 2. If the resource is a gas-fired unit that does not have significant energy limitations, the unit's default Energy Bid determined monthly as set forth in Section 5.11.5 (based on the incremental heat rate submitted to the ISO, adjusted for gas prices, and the variable O&M cost on file with the ISO, or the default O&M cost of \$6/MWh).
- For non gas-fired units and gas-fired units that have significant energy limitations, a level determined in consultation with the Market

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 29, 2002 Effective: October 30, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 508E.01

Participant submitting the bid or bids at issue, provided such consultation

has occurred prior to the occurrence of the conduct

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 29, 2002 Effective: October 30, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II

Superseding First Revised Sheet No. 508F

Second Revised Sheet No. 508F

being examined by the ISO, and provided the Market Participant has provided sufficient data on a unit's energy limitations and operating costs (opportunity cost for energy limited resources) in accordance with specifications provided by the ISO.

- 4. The mean of the Economic Market Clearing Prices for the units' relevant location (Zone or node commensurate with the pricing granularity in effect) during the lowest-priced 25 percent of the hours that the unit was dispatched or scheduled over the previous 90 days for peak and off-peak periods, adjusted for changes in fuel prices; or
- 5. If sufficient data do not exist to calculate a reference level on the basis of the first, second, or fourth methods and the third method is not applicable or an attempt to determine a reference level in consultation with a Market Participant has not been successful, the ISO shall determine a reference level on the basis of:
 - i. the ISO's estimated costs of an Electric Facility, taking into account available operating costs data, opportunity cost, and appropriate input from the Market Participant, and the best information available to the ISO; or
 - ii. an appropriate average of competitive bids of one or more similar Electric Facilities.
- (b) The reference levels (\$/MWh bid price) for the different bid segments of each resource (or import bid curve of a Scheduling Coordinator at a Scheduling Point) shall be made monotonically non-decreasing by the ISO by proceeding from the lowest MW bid segment moving through each higher MW bid segment. The reference level of each succeeding bid segment shall be the higher of the reference level of the preceding bid segment or the reference level determined according to paragraph (a) above.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 1, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II

Fourth Revised Sheet No. 508G

Superseding Third Revised Sheet No. 508G

3.2 Material Price Effects

3.2.1 Market Impact Thresholds

In order to avoid unnecessary intervention in the ISO Market, Mitigation Measures for economic

withholding shall not be imposed unless conduct identified as specified above causes or contributes to a

material change in one or more of the ISO Market Clearing Prices (MCPs). Initially, the thresholds to be

used by the ISO to determine a material price effect shall be as follows:

For Energy Bids to be Dispatched as Imbalance Energy through the RTD Software: the lower of

an increase of 200 percent or \$50 per MWh in the projected Hourly Ex Post Price at any location (Zone or

node) commensurate with the relevant pricing structure in effect in accordance with the ISO Tariff.

For Energy Bids to be Dispatched out of economic merit order to manage Intra-Zonal

Congestion: if the price of the bid is \$50/MWh or 200 percent greater than the Dispatch Interval Ex Post

Price at that location (Zone or node) commensurate with the relevant pricing structure in effect in

accordance with the ISO Tariff.

Accepted and justified bids above the applicable soft cap, as set forth in Section 28.1.2 of this Tariff, will

not be eligible to set the Market Clearing Price. Such bids shall be included in the Market Impact test,

however, and, for purposes of this test only, shall be assumed to be eligible to set the Market Clearing

Price.

3.2.2 Price Impact Analysis

3.2.2.1 Bids to be Dispatched as Imbalance Energy.

The ISO shall determine the effect on prices of questioned conduct through automated computer

modeling and analytical methods. An Automatic Mitigation Procedure (AMP) shall identify bids that have

exceeded the conduct thresholds and shall compute the change in projected Hourly Ex Post Prices as a

result of simultaneously setting all such bids to their Reference Levels. If a change in the projected

Hourly Ex Post Price exceeds the Impact threshold stated in Section 3.2.1, those bids would be kept

mitigated at their default bid levels as specified in Section 4.2.2 below.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

Superseding Second Revised Sheet No. 508G.01

3.2.2.2 Bids to be Dispatched out of economic merit order to manage Intra-Zonal Congestion. If

the price of the bid is \$50/MWh or 200 percent greater than the Dispatch Interval Ex Post Price at that

location (Zone or node) commensurate with the relevant pricing structure in effect in accordance with the

ISO Tariff, the bid price shall be mitigated to the reference price and the Scheduling Coordinator for that

resource shall be paid the greater of the reference price or the relevant Dispatch Interval Ex Post Price.

Bids mitigated in accordance with this Section 3.2.2.2 shall not set the Dispatch Interval Ex Post Price.

3.2.3 Section 205 Filings

In addition, the ISO shall make a filing under Section 205 of the Federal Power Act with FERC

seeking authorization to apply an appropriate mitigation measure to conduct that departs significantly

from the conduct that would be expected under competitive market conditions but does not rise to the

thresholds specified in Section 3.1.1 above, unless the ISO determines, from information provided by the

Market Participant or Parties that would be subject to mitigation or other information available to the ISO

that the conduct is attributable to legitimate competitive market forces or incentives. The following are

examples of conduct that are deemed to depart significantly from the conduct that would be expected

under competitive market conditions:

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II Sup

First Revised Sheet No. 508H Superseding Original Sheet No. 508H

(1) bids that vary with unit output in a way that is unrelated to the known performance

characteristics of the unit, or

(2) bids that vary over time in a manner that appears unrelated to the change in the unit's

performance or to changes in the supply environment that would induce additional risk or

other adverse shifts in the cost basis.

The conducts listed above are intended to be examples rather than a comprehensive list.

3.3 Consultation with a Market Participant

If a Market Participant anticipates submitting bids in an ISO Market administered by the ISO that

will exceed the thresholds specified in Section 3.1 above for identifying conduct inconsistent with

competition, the Market Participant may contact the ISO to provide an explanation of any legitimate basis

for any such changes in the Market Participant's bids. If a Market Participant's explanation of the reasons

for its bidding indicates to the satisfaction of the ISO, that the questioned conduct is consistent with

competitive behavior, no further action will be taken. Upon request, the ISO shall also consult with a

Market Participant with respect to the information and analysis used to determine reference levels under

Section 3.1.1 above for that Market Participant.

4 MITIGATION MEASURES

4.1 Purpose

If conduct is detected that meets the criteria specified in Section 3, the appropriate mitigation

measures described in this Section 4 shall be applied by the ISO. The conduct specified in Section 3.1.1

shall be remedied by the prospective application of a default bid measure as described in Section 4.2 for

the specific hour that they violate the price and market impact thresholds.

4.2 Sanctions for Economic Withholding

4.2.1 Default Bid

A default bid shall be designed to cause a Market Participant to bid as if it faced workable

competition during a period when: (i) the Market Participant does not face workable competition and (ii)

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 1, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

Third Revised Sheet No. 5081 Second Revised Sheet No. 5081

FIRST REPLACEMENT VOLUME NO. II Superseding Second Revised Sheet No. 508I

has responded to such condition by engaging in the economic withholding of an Electric Facility. In designing and implementing default bids, the ISO shall seek to avoid causing an Electric Facility to bid below its marginal cost.

4.2.2 Implementation

- (a) If the criteria contained in Section 3 are met, the ISO may substitute a default bid for a bid submitted for an Electric Facility. The default bid shall establish a maximum value for each component of the submitted bid, equal to a reference level for that component determined as specified in Section 3.1.1 above.
- (b) The Mitigation Measures will be applied to 1) all incremental bids submitted to the real-time Imbalance Energy market during the pre-dispatch process prior to the real-time Imbalance Energy market based on the projected real-time MCPs that are computed during this process; and 2) to the Day-Ahead and the Hour-Ahead Energy markets when these markets are made operational.
- An Electric Facility subject to a default bid shall be paid the MCP applicable to the output from the facility. Accordingly, a default bid shall not limit the price that a facility may receive unless the default bid determines the MCP applicable to that facility.
- (d) The ISO shall not use a default bid to determine revised MCPs for periods prior to the imposition of the default bid, except as may be specifically authorized by FERC.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 30, 2002

FIRST REPLACEMENT VOLUME NO. II

The Mitigation Measures shall not be applied to Energy Bids projected to be Dispatched as Imbalance Energy through the RTD Software in the hours in which all Zonal Ex Post Prices are projected to be below \$91.87/MWh. If the Zonal Dispatch Interval Ex Post Price is projected to be above \$91.87/MWh in any ISO Zone, the Mitigation Measures shall be applied to all bids, except those from System Resources, in all ISO Zones. The ISO will apply Mitigation Measures to all bids taken out of merit order to address Intra-Zonal Congestion.

- (f) The Mitigation Measures shall not be applied to bids below \$25/MWh.
- (g) The posting of the MCP may be delayed if necessary for the completion of automated mitigation procedures.
- (h) Bids not mitigated under these Mitigation Measures shall remain subject to mitigation by other procedures specified in the ISO Tariff as may be appropriate.

4.3 Sanctions for Physical Withholding

The ISO may report a Market Participant the ISO determines to have engaged in physical withholding, including providing the ISO false information regarding the derating or outage of an Electric Facility, to the Federal Energy Regulatory Commission in accordance with Section 2.3.3.9.5 of the ISO Tariff. In addition, a Market Participant that fails to operate a Generating Unit in conformance with ISO Dispatch Instructions shall be subject to the penalties set forth in Section 11.2.4.1.2 of the ISO Tariff.

4.4 Duration of Mitigation Measures

Bids will be mitigated only in the specific hour that they violate the price and market impact thresholds.

5 FERC-ORDERED MEASURES

In addition to any mitigation measures specified above, the ISO shall administer, and apply when appropriate in accordance with their terms, such other mitigation measures as it may be directed to implement by order of the FERC.

6 DISPUTE RESOLUTION

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 508K

Superseding Original Sheet No. 508K

If a Market Participant has reasonable grounds to believe that it has been adversely affected

because a Mitigation Measure has been improperly applied or withheld, it may seek a determination in

accordance with the dispute resolution provisions of the ISO Tariff. In no event, however, shall the ISO

be

liable to a Market Participant or any other person or entity for money damages or any other remedy or

relief except and to the extent specified in the ISO Tariff.

7 **EFFECTIVE DATE**

These Mitigation Measures shall be effective as of the date they are approved by the FERC.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 29, 2002

Effective: October 30, 2002

OUTAGE COORDINATION PROTOCOL

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

ssued on: October 13, 2000 Effective: October 13, 2000

OUTAGE COORDINATION PROTOCOL

Table of Contents

| OCP 1 | BJECTIVES, DEFINITIONS, AND SCOPE | 514 |
|---------------------|---|-----|
| OCP 1.1 Objectives | | 514 |
| OCP 1.1. | 1 The Role of the ISO | 514 |
| OCP 1.1. | 2 ISO Outage Coordination Office | 514 |
| OCP 1.2 Definitions | | 515 |
| OCP 1.2. | 1 Master Definitions Supplement | 515 |
| OCP 1.2. | 2 Special Definitions for this Protocol | 515 |
| OCP 1.2. | 3 Rules of Interpretation | 515 |
| OCP 1.3 S | cope | 516 |
| OCP 1.3. | 1 Scope of Application to Parties | 516 |
| OCP 1.3. | 2 Scope of Application to Plant and Systems | 516 |
| OCP 1.3. | 3 Liability of the ISO | 516 |
| OCP 2 | LANNING OF GENERATING UNIT OUTAGES | 516 |
| OCP 2.1 F | Reporting for Regulatory Must-Take Generation | 516 |
| OCP 2.2 | eata to ISO | 516 |
| OCP 2.2. | 1 Provisional Program | 516 |
| OCP 2.2. | Quarterly Updates to Provisional Planned Generator Outage Program | 517 |
| OCP 2.2. | 3 Changes to Generator Outage Program | 517 |
| OCP 2.2. | 4 Changes to Planned Maintenance Outages | 517 |
| OCP 2.2. | 5 Additional Information Requests | 517 |
| OCP 2.3 | SO Analysis of Generating Unit Outage Plans | 517 |
| OCP 2.3. | 1 Calculation of Aggregate Generating Capacity | 517 |
| OCP 2.3. | 2 System Adequacy Reports | 518 |
| OCP 2.3. | 3 Approval of Reliability Must-Run Generation Outages | 518 |
| OCP 3 | PLANNING OF ISO CONTROLLED GRID MAINTENANCE | 518 |
| OCP 3.1 | Data to ISO | 518 |

| OCP | 3.1.1 | Provisional Program | 518 |
|---|-------|---|-----|
| OCP | 3.1.2 | Quarterly Update | 519 |
| OCP | 3.1.3 | Changes to Planned Maintenance Outages | 519 |
| OCP | 3.1.4 | Nature of Maintenance Outage Information | 519 |
| OCP | 3.1.5 | Additional Information | 520 |
| OCP | 3.1.6 | Adjacent Control Areas | 520 |
| OCP 3.2 | ISC | Analysis of ISO Controlled Grid Outage Plans | 520 |
| OCP | 3.2.1 | Review of Planned Maintenance Outages | 520 |
| OCP | 3.2.2 | Suggested Amendments by the ISO | 520 |
| OCP | 3.2.3 | Direction by the ISO | 520 |
| OCP 4 | | HEDULING AND APPROVAL OF GENERATOR MAINTENANCE TAGES 521 | |
| OCP 4.1 | Re | gulatory Must-Take Generation | 521 |
| OCP 4.2 | | hedule Confirmation and Final Approval of Scheduled Outages quired Under the ISO Tariff | 521 |
| OCP 4.3 | Re | liability Must-Run Generator Outage Scheduling and Approval | 522 |
| OCP | 4.3.1 | Data Required | 522 |
| OCP | 4.3.2 | Delay | 522 |
| OCP | 4.3.3 | Acceptance or Rejection of Outage Schedule | 522 |
| OCP | 4.3.4 | Withdrawal or Modification of Request | 523 |
| OCP | 4.3.5 | Rejection Notice | 523 |
| OCP | 4.3.6 | Approval Mandatory | 523 |
| OCP | 4.3.7 | Priority of Participating Generator Outage Requests | 523 |
| OCP | 4.3.8 | Final ISO Approval | 523 |
| OCP | 4.3.9 | Withholding of Final Approval and Rescheduling of Outage | 523 |
| OCP 4.4 Non-Reliability Must-Run Generator Outage Scheduling and Approval | | 524 | |
| OCP | 4.4.1 | Size Exclusions | 524 |
| OCP | 4.4.2 | Scheduling Maintenance Outages for Generating Units | 524 |
| OCP | 4.4.3 | Delay | 524 |
| OCP | 4.4.4 | Acceptance or Rejection of Outage Schedule | 524 |
| OCP | 4.4.5 | Withdrawal or Modification of Request | 524 |
| OCP | 4.4.6 | Rejection Notice | 525 |
| OCP | 4.4.7 | Approval Mandatory | 525 |
| OCP | 4.4.8 | Priority of Participating Generator Outage Requests | 525 |

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 512

| OCP 4 | .4.9 Final ISO Approval | 525 |
|---------|---|-----|
| OCP 4 | .4.10 Withholding of Final Approval and Rescheduling of Outage | 525 |
| OCP 5 | ISO Controlled Grid Maintenance Scheduling and Approval | 525 |
| OCP 5.1 | Schedule Confirmation and Final Approval of Scheduled Outages Required Under the ISO Tariff | 525 |
| OCP 5.2 | Adjacent Control Areas | 526 |
| OCP 5.3 | Data Required | 526 |
| OCP 5 | .3.1 Three (3) Day Prior Notification | 526 |
| OCP 5 | .3.2 One (1) Day Prior Notification | 527 |
| OCP 5 | .3.3 Priority of Transmission Facility Outage Requests | 527 |
| OCP 5 | .3.4 Delay | 527 |
| OCP 5.4 | Acceptance or Rejection of Outage Schedule | 527 |
| OCP 5.5 | Withdrawal or Modification of Request | 528 |
| OCP 5.6 | Rejection Notice | 528 |
| OCP 5 | OCP 5.6.1 Failure to Meet Requirements | |
| OCP 5.7 | Final Approval Mandatory | 528 |
| OCP 5.8 | Final ISO Approval | 528 |
| OCP 5.9 | Withholding of Final Approval and Rescheduling of Outage | 529 |
| OCP 6 | MANAGEMENT OF FORCED OUTAGES OR IMMEDIATE NATURE MAINTENANCE | 529 |
| OCP 6.1 | Immediate Forced Outage | 529 |
| OCP 6.2 | Imminent Forced Outage | 529 |
| OCP 7 | Communication of Scheduled Maintenance Requests | 529 |
| OCP 7.1 | Single Point of Contact | 529 |
| OCP 7.2 | Method of Communications | 530 |
| OCP 7.3 | Confirmation | 530 |
| OCP 7.4 | Communication of Approval or Rejection | 530 |
| OCP 8 | OUTAGE COORDINATION FOR NEW FACILITIES | 530 |
| OCP 8.1 | Coordination by ISO | 530 |

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 513

| OCP 8.2 | Types of Work Requiring Coordination | 530 |
|---|---|-----|
| OCP 8.3 | Uncomplicated Work | 531 |
| OCP 8.4 | Special Procedures for More Complex Work | 531 |
| OCP 8 | .4.1 Responsibility for Preparation | 531 |
| OCP 8 | 4.2 Information to be Provided to the ISO | 531 |
| OCP 8 | 4.3 Approval of the Procedure | 531 |
| OCP 8 | .4.4 Changes to Procedure | 531 |
| OCP 8 | 4.5 Approval of Work Requiring Coordination | 532 |
| OCP 9 | RECORDS AND REPORTS | 532 |
| OCP 9.1 | Records of Approved Maintenance Outages | 532 |
| OCP 10 | AMENDMENTS TO THE PROTOCOL | 532 |
| APPENDIX A - PROGRAM PREPARATION OUTLINE FOR NEW FACILITIES | | 533 |

OUTAGE COORDINATION PROTOCOL (OCP)

OCP 1 OBJECTIVES, DEFINITIONS, AND SCOPE

OCP 1.1 Objectives

The objective of the OCP is to enable the ISO to coordinate maintenance outages as far as possible in advance to allow the ISO to maintain System Reliability and to minimize the quantity and effect of Congestion on the ISO Controlled Grid and Interconnections.

OCP 1.1.1 The Role of the ISO

The ISO Tariff authorizes the ISO to coordinate outage schedules for maintenance, repair and construction of Generating Units, sections of the ISO Controlled Grid, and Interconnections. This Protocol is designed to enable the ISO to perform this role.

The Facility Owner shall remain solely and directly responsible for the performance of all maintenance work, whether on energized or deenergized facilities, including all activities related to providing a safe working environment.

OCP 1.1.2 ISO Outage Coordination Office

The ISO Outage Coordination Office will be operational Monday through Friday, except holidays, and will accept, schedule, and approve or deny Maintenance Outage requests as necessary for the reliable operation of the ISO Controlled Grid. The Outage Coordination Office is located in Folsom. Each office and the areas of responsibility of that office are detailed in the most recent version of the applicable ISO Operating Procedures, which are posted on the ISO Home Page.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 29, 2001

OCP 1.2 Definitions

OCP 1.2.1 Master Definitions Supplement

Any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. A reference to a Section or an Appendix refers to a Section or an Appendix of the ISO Tariff unless otherwise indicated. References to OCP are to this Protocol or to the stated paragraph of this Protocol.

OCP 1.2.2 Special Definitions for this Protocol

In this Protocol, the following words and expressions shall have the meaning set opposite them:

"Final Approval" means a statement of consent by the ISO Control Center to initiate a scheduled Outage.

OCP 1.2.3 Rules of Interpretation

- (a) Unless the context otherwise requires, if the provisions of this Protocol and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency. The provisions of the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.
- (b) Unless the context otherwise requires, if the provisions of this Protocol and that of an existing contract conflict, the existing contract will prevail to the extent of the inconsistency.
- (c) A reference in this Protocol to a given agreement, ISO Protocol or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made.
- (d) The captions and headings in this Protocol are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.
- (e) This Protocol shall be effective as of the ISO Operations Date.
- (f) The Operating Procedures referenced in this Protocol, as may be amended from time to time, shall be posted on the ISO Home Page and such references in this Protocol shall be to the Operating Procedures then posted on the ISO Home Page.

Issued by: Charles F. Robinson, Vice President and General Counsel

OCP 1.3 Scope

OCP 1.3.1 Scope of Application to Parties

OCP applies to the ISO and to the following:

- (a) Operators:
- (b) Participating Generators;
- (c) Connected Entities, to the extent the agreement between the Connected Entity and the ISO so provides; and
- (d) Utility Distribution Companies (UDCs).

OCP 1.3.2 [Not Used]

OCP 1.3.3 Liability of the ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

OCP 1.3.4 California Department of Water Resources

The provisions of Section 2.3., and the provisions of the Outage Coordination Protocol, shall apply to the California Department of Water Resources("CDWR"). However, the ISO's authority to deny a requested change to an Approved Maintenance Outage, or cancel an Approved Maintenance Outage, relating to hydroelectric Generating Units owned and operated by the CDWR, shall be limited as set forth in Section 2.3.3.1.1 of the ISO Tariff.

OCP 2 PLANNING OF GENERATING UNIT OUTAGES

OCP 2.1 Reporting for Regulatory Must-Take Generation

Information regarding planned outages for resources providing Regulatory Must-Take Generation shall be provided to the ISO Outage Coordination Office by the Participating TO or UDC having an existing contract with such resource or by a Participating Generator. Information provided will be that obtained by the Participating TO, UDC or a Participating Generator pursuant to the terms of the existing agreement with the Regulatory Must-Take Generation resource or as requested by the ISO.

OCP 2.2 Data to ISO

All information submitted in relation to planned Generating Unit Outages must be submitted in accordance with OCP 7.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 5, 2005 Effective: July 22, 2004

OCP 2.2.1 Long-Range Planning Program

By October 15 of each year, each Generator will provide the ISO in writing with a proposed Outage schedule for each of its Generating Units (including its Reliability Must-Run Units) and System Units for the following calendar year. The following information is required for each Generating Unit:

- (a) the Generating Unit name and Location Code;
- (b) the MW capacity unavailable;
- (c) the scheduled start and finish date for each Outage; and

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 22, 2004 Effective: July 22, 2004

(d) where there is a possibility of flexibility, the earliest start date and the latest finish date, along with the actual duration of the Outage once it commences.

OCP 2.2.1.1 Additional Maintenance Outages

If conditions require, a Participating Generator may, upon seventy-two (72) hours advance notice (or within the notice period in the Operating Procedures posted on the ISO Home Page), schedule with the ISO Outage Coordination Office a Maintenance Outage affecting any of its units. The Participating Generator shall supply to the ISO the data set out in OCP 2.2.1 and applicable ISO Operating Procedures as posted on the ISO Home Page.

OCP 2.2.2 Quarterly Updates to Planned Generator Outage Program

Each Participating Generator will provide the ISO with quarterly updates of its long-range Outage schedule referred to in OCP 2.2.1 for Generating Units and System Units by the close of business on the fifteenth (15th) day of each January, April, and July. These updates must identify known changes to any previously planned Generating Unit Outages and any additional Outages anticipated over the next twelve months from the time of this report. In this report, each Participating Generator must include all known planned Outages for the following twelve months.

OCP 2.2.3 Changes to Generator Outage Program

In addition to changes made at quarterly Outage submittals, each Participating Generator shall notify the ISO in writing of any known changes to a Generating Unit or System Unit Outage scheduled to occur within the next 90 days.

Participating Generators must obtain the approval of the ISO Outage Coordination Office in accordance with OCP 4 and Section 2.3.3 of the ISO Tariff. Such approval may be withheld only for reasons of System Reliability or security.

OCP 2.2.4 Changes to Planned Maintenance Outages

A Participating Generator may submit changes to its planned Maintenance Outage schedule at any time. Changes must be approved by the ISO Outage Coordination Office. Such approval may be withheld only for reasons of System Reliability or security.

OCP 2.2.5 Additional Information Requests

The ISO may request additional information or seek clarification from Participating Generators of the information submitted in relation to a planned Generating Unit and System Unit Outage. This information may be used to assist the ISO in prioritizing conflicting requests for Outages.

Issued by: Charles F. Robinson, Vice President and General Counsel

OCP 2.3 ISO Analysis of Generating Unit Outage Plans OCP 2.3.1 Calculation of Aggregate Generating Capacity

The ISO will use the long-range Generating Unit or System Unit Outage schedule referenced in OCP 2.2.1 and, as appropriate, additional approved Outage requests scheduled to start within 90 days, to calculate the aggregate Generation capacity projected to be available in the following time frames:

Issued by: Roger Smith, Senior Regulatory Counsel

(a) on an annual and quarterly basis, the ISO will calculate the aggregate weekly peak Generation capacity projected to be available during each week of the following year and quarter, respectively; and

(b) on a monthly basis, the ISO will calculate the aggregate daily peak Generation capacity projected to be available during the month.

OCP 2.3.2 System Adequacy Reports

The ISO will publish the following reports comparing the projected aggregate Generation capacity to the peak forecast Demands, as calculated in accordance with the Demand Forecast Protocol (DFP):

- (a) on an annual basis and within eight weeks after receiving the annual or updated long-range planned Outage schedules from all Participating Generators, the ISO shall publish on the ISO Home Page a report comparing the aggregated weekly peak Generation capacity to the weekly peak forecast Demand for the next 52 weeks;
- (b) on a quarterly basis, the ISO shall publish on the ISO Home Page a report comparing the aggregated weekly peak Generation capacity to the weekly peak forecast Demand for the next 3 months; and
- (c) on a monthly basis, the ISO shall publish on the ISO Home Page a report comparing the aggregated weekly peak Generation capacity to the weekly peak forecast Demand for the next month.

OCP 2.3.3 Approval of Generation Outages

The information relating to each Maintenance Outage submitted by a Participating Generator in accordance with OCP 2.2 constitutes a request for a long-range Maintenance Outage and is not considered an Approved Maintenance Outage until the ISO has notified that Participating Generator of such approval pursuant to OCP 4.3.

OCP 3 PLANNING OF ISO CONTROLLED GRID MAINTENANCE

OCP 3.1 Data to ISO

All information submitted in relation to planned Outages of ISO Controlled Grid facilities must be submitted in accordance with OCP 7.

OCP 3.1.1 Long-Range Program

By October 15 of each year, each Participating TO will provide the ISO in writing with its list of proposed Maintenance Outages for the next calendar year. This list shall include the following data:

Issued by: Roger Smith, Senior Regulatory Counsel

- (a) the identification of the facility and location;
- (b) the nature of the proposed Maintenance Outage;
- (c) the preferred start and finish date for each Maintenance Outage; and
- (d) where there is a possibility of flexibility, the earliest start date and the latest finish date, along with the actual duration of the Outage once it commences.

OCP 3.1.1.1 Additional Maintenance Outages

If conditions require, a Participating TO may, upon seventy-two (72) hours advance notice (or as specified in the Operating Procedures on the ISO Home Page), schedule with the ISO Outage Coordination Office a Maintenance Outage on its system. The Participating TO shall supply to the ISO the data set out in OCP 3.1.1.

OCP 3.1.2 Quarterly Update

Each Participating TO will provide the ISO with quarterly updates of the data provided under OCP 3.1.1 by close of business on the fifteenth (15th) day of each January, April, and July. These updates must identify known changes to any previously planned ISO Controlled Grid facility Maintenance Outages and any additional Outages anticipated over the next twelve months from the time of the report. As part of this update, each Participating TO must include all known planned Outages for the following twelve months.

OCP 3.1.3 Changes to Planned Maintenance Outages

A Participating TO may submit changes to its planned Maintenance Outage information at any time, provided, however, that if the Participating TO cancels an Approved Maintenance Outage after 5:00 a.m. of the day prior to the day upon which the Outage is scheduled to commence and the ISO determines that the change was not required to preserve System Reliability, the ISO may disregard the availability of the affected facilities in determining the availability of transmission capacity in the Day-Ahead Market. The ISO will, however, notify Market Participants and reflect the availability of transmission capacity in the Hour-Ahead Market as promptly as practicable.

OCP 3.1.4 Nature of Maintenance Outage Information

The information relating to each Maintenance Outage submitted by a Participating TO in accordance with OCP 3.1 constitutes a request for a long-range Maintenance Outage and is not considered an Approved Maintenance Outage until the ISO has notified the Participating TO of such approval pursuant to OCP 5.4.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II Sub. First Revised Sheet No. 520 Superseding Original Sheet No. 520

OCP 3.1.5 Additional Information

The ISO may request additional information or seek clarification from Participating TOs of the information submitted in relation to a planned Maintenance Outage. This information may be used to assist the ISO in prioritizing conflicting requests for Outages.

OCP 3.1.6 Adjacent Control Areas

The ISO will coordinate the exchange of proposed ISO Controlled Grid Maintenance Outages, as appropriate, with the operators of adjacent Control Areas.

OCP 3.2 ISO Analysis of ISO Controlled Grid Outage Plans

OCP 3.2.1 Review of Planned Maintenance Outages

The ISO Outage Coordination Office will review the Maintenance Outages submitted under OCP 2.2 and OCP 3.1 to determine if any one or a combination of Maintenance Outage requests relating to ISO Controlled Grid facilities, Generating Units or System Units may cause the ISO to violate the Applicable Reliability Criteria. This review will take consideration of factors including, but not limited to, the following:

- (a) forecast peak Demand conditions;
- (b) other Maintenance Outages, previously Approved Maintenance Outages, and anticipated Generating Unit Outages;
- (c) potential to cause Congestion;
- (d) impacts on the transfer capability of Interconnections; and
- (e) impacts on the market.

If in the ISO's determination, any of the proposed Maintenance Outages would cause the ISO to violate the Applicable Reliability Criteria, the ISO will notify the relevant Operator. The Operator then will revise the proposed Maintenance Outage and inform the ISO of the changes pursuant to OCP 2.2 and 3.1.

OCP 3.2.2 Suggested Amendments by the ISO

The ISO Outage Coordination Office may provide each Operator in writing with any suggested amendments to those Maintenance Outage requests rejected by the ISO Outage Coordination Office. Any such suggested amendments will be considered as an ISO maintenance request and will be approved in accordance with the process set forth in Section 2.3.3.6 of the ISO Tariff.

OCP 3.2.3 Direction by the ISO

The ISO Outage Coordination Office may, by providing notice no later than 5:00 a.m. of the day prior to the day upon which the Outage is scheduled to commence, direct the Operator to cancel an Approved Maintenance Outage, when necessary to preserve or maintain System Reliability or, with respect

Issued by: Charles F. Robinson, Vice President and General Counsel

to Reliability Must-Run Units or facilities that form part of the ISO Controlled Grid, to avoid unduly significant market impacts that would arise if the outage were to proceed as scheduled. The ISO will compensate the applicable Participating TO or Participating Generator, pursuant to the provisions of Section 2.3.3.6.3 of the ISO Tariff, for the direct and verifiable costs incurred by that Participating TO or Participating Generator as a result of the ISO's cancellation of an Approved Maintenance Outage. The Operator, acting in accordance with Good Utility Practice, shall comply with the ISO's direction. The ISO shall give notice of any such direction to Market Participants prior to the deadline for submission of initial Preferred Day-Ahead Schedules for the day on which the Outage was to have commenced.

OCP 4 SCHEDULING AND APPROVAL OF GENERATOR MAINTENANCE OUTAGES

OCP 4.1 Regulatory Must-Take Generation

Scheduling and approvals of Maintenance Outages for resources providing Regulatory Must-Take Generation shall continue to be coordinated as detailed in the applicable contract with the Participating TO or UDC, provided the Regulatory Must-Take Generator has not executed a Participating Generator Agreement. The Participating TO or UDC will advise the ISO Outage Coordination Office of scheduled and approved Maintenance Outages on resources providing Regulatory Must-Take Generation pursuant to existing contracts. If the Regulatory Must-Take Generator has executed a Participating Generator Agreement, it shall comply with OCP 2 and other provisions applicable to Participating Generators.

OCP 4.2 Schedule Confirmation and Final Approval of Scheduled Outages Required Under the ISO Tariff

Each Participating Generator which has scheduled a planned Maintenance Outage pursuant to OCP 2 must schedule and receive approval of the Outage from the ISO Outage Coordination Office in accordance with OCP 4 prior to initiating the Approved Maintenance Outage.

Issued by: Charles F. Robinson, Vice President and General Counsel

Under no circumstance shall an Operator start any Approved Maintenance Outage without receiving Final Approval from the ISO Control Center being requested and given in accordance with OCP 4.3.8.

OCP 4.3 Generator Outage Scheduling and Approval

OCP 4.3.1 Data Required

The Operator of a Participating Generator owned or controlled by a Participating Generator shall submit to the ISO pursuant to OCP 7 its request to confirm the schedule of a planned Maintenance Outage or to change the schedule of a planned Maintenance Outage. Such request must be made to the ISO Outage Coordination Office by no later than 11:30 am three (3) working days prior to the starting date of the proposed Outage (or as specified on the ISO Home Page). Such schedule confirmation request shall specify the following:

- (a) the Generating Unit or System Unit name and Location Code;
- (b) the nature of the maintenance to be performed;
- (c) the date and time the Outage is to begin;
- (d) the date and time the Outage is to be completed;
- (e) the time required to terminate the Outage and restore the Generating Unit to normal capacity;
- (f) identification of primary and alternate telephone numbers for the Operator's single point of contact; and
- (g) in the case of a request for a change to an Approved Maintenance Outage, the date and time of the original Approved Maintenance Outage.

OCP 4.3.2 Delay

The ISO Outage Coordination Office may delay its approval of a scheduled Maintenance Outage for a Participating Generator if sufficient or complete information is not received by the ISO Outage Coordination Office within the time frames set forth in OCP 4.3.1.

OCP 4.3.3 Acceptance or Rejection of Outage Schedule

The ISO Outage Coordination Office shall acknowledge receipt of each request to confirm or approve a Maintenance Outage for a Generating Unit, System Unit or Aggregated Unit and approve or reject such request in accordance with the Operating Procedures posted on the ISO Home Page.

Issued by: Charles F. Robinson, Vice President and General Counsel

OCP 4.3.4 Withdrawal or Modification of Request

The Operator of a Participating Generator may withdraw a request at any time prior to actual commencement of the Outage. The Operator of a Participating Generator may modify a request at any time prior to receipt of any acceptance or rejection notice from the ISO Outage Coordination Office or pursuant to OCP 4.3.1, but the ISO Outage Coordination Office shall have the right to reject such modified request for reasons of System Reliability, system security or market impact, because of the complexity of the modifications proposed, or due to insufficient time to assess the impact of such modifications.

OCP 4.3.5 Rejection Notice

The ISO Outage Coordination Office shall, in a rejection notice, identify the ISO's reliability, security and market concerns which prompt the rejection and suggest possible remedies or schedule revisions which might mitigate any such concerns.

OCP 4.3.6 Approval Mandatory

The Operator of a Participating Generator shall not initiate a Generating Unit Outage without receiving Final Approval as prescribed in OCP 4.3.8.

OCP 4.3.7 Priority of Participating Generator Outage Requests

Outage requests which are listed in the long-range maintenance schedules submitted to and approved by the ISO will be given a priority in the scheduling and approval of Outage requests over those which have not been listed.

OCP 4.3.8 Final ISO Approval

On the day when an Approved Maintenance Outage is scheduled to commence the relevant Operator shall contact the ISO Control Center for Final Approval of the requested Outage including the starting time and return time. No such Outage shall commence without such Final Approval being obtained from the ISO Control Center, whose decision shall be final.

OCP 4.3.9 Withholding of Final Approval and Rescheduling of Outage

The ISO Control Center shall have the authority to withhold a Final Approval for an Approved Maintenance Outage for reasons of System Reliability. The ISO Control Center shall immediately notify the relevant Operator of its intention to withhold the Final Approval. The Generator Maintenance Outage will then be rescheduled pursuant to the Outage Coordination Protocol and Dispatch Protocol.

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 524 Superseding Original Sheet No. 524

| OCP 4.4 | [Not Used] |
|-----------|------------|
| OCP 4.4.1 | [Not Used] |
| OCP 4.4.2 | [Not Used] |
| OCP 4.4.3 | [Not Used] |
| OCP 4.4.4 | [Not Used] |
| OCP 4.4.5 | [Not Used] |

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 525 Superseding Original Sheet No. 525

| OCP 4.4.6 | [Not Used] |
|------------|---|
| OCP 4.4.7 | [Not Used] |
| OCP 4.4.8 | [Not Used] |
| OCP 4.4.9 | [Not Used] |
| OCP 4.4.10 | [Not Used] |
| OCP 5 | ISO Controlled Grid Maintenance Scheduling and Approval |
| OCP 5.1 | Schedule Confirmation and Final Approval of Scheduled Outages Required Under the ISO Tariff |
| | |

Each Participating TO which has scheduled a Maintenance Outage pursuant to OCP 3 must schedule and receive approval of the Outage from the ISO Outage Coordination Office in accordance with OCP 5.4 prior to initiating the Approved Maintenance Outage.

Under no circumstance shall an Operator start any Approved Maintenance Outage without Final Approval from the ISO Control Center. Such Final Approval shall be requested and given in accordance with OCP 5.7.

OCP 5.2 Adjacent Control Areas

The ISO will coordinate the scheduling of ISO Controlled Grid facilities and approvals, as necessary, with the operators of adjacent Control Areas.

OCP 5.3 Data Required

All Participating TOs shall submit a formal request to confirm or change an Approved Maintenance Outage with respect to any ISO Controlled Grid facility to the ISO Outage Coordination Office in accordance with OCP 5.3.1 and OCP 5.3.2.

A request to confirm a planned Maintenance Outage or to change an Approved Maintenance Outage shall specify:

- (a) the identification of the transmission system element(s) to be maintained including location;
- (b) the nature of the maintenance to be performed;
- (c) the date and time the Maintenance Outage is to begin;
- (d) the date and time the Maintenance Outage is to be completed;
- (e) the time required to terminate the maintenance and restore the transmission system to normal operation;
- (f) identification of primary and alternate telephone numbers for the Operator's single point of contact; and
- (g) in the case of a request for a change to an Approved Maintenance Outage, the date and time of the original Approved Maintenance Outage.

OCP 5.3.1 Three (3) Day Prior Notification

Any request to confirm an Approved Maintenance Outage that may affect the transfer capability of any part of the ISO Controlled Grid must be submitted no later than 11:30 am at least three (3) working days prior to the starting date of the Approved Maintenance Outage (or as posted on the ISO Home Page). OCP 5.3.1 applies to facilities as described on the ISO Home Page.

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Sheet No. 527 Superseding Original Sheet No. 527

Failure to submit a request for an Outage by the proper time may mean a delay in approval from the ISO or may cause that Outage to be designated as a Forced Outage based on the nearness of the request to the requested Outage date.

OCP 5.3.2 One (1) Day Prior Notification

Any request to confirm or change the Schedule for an Approved Maintenance Outage requiring only one day notice (as detailed on the ISO Home Page) must be submitted no later than 11:30 am at least one (1) day prior to the starting date of the Outage (or as specified on the ISO Home Page).

Failure to submit a request for an Outage by the proper time may mean a delay in approval from the ISO or may cause that Outage to be designated as a Forced Outage.

OCP 5.3.3 Priority of Transmission Facility Outage Requests

Outage requests which are listed in the long-range planned maintenance schedule submitted to the ISO will be given a priority in scheduling and approval of Outage requests over those which have not been listed.

OCP 5.3.4 Delay

The ISO Outage Coordination Office may delay its approval of an Approved Maintenance Outage schedule if sufficient or complete information is not received by the ISO Outage Coordination Office within the time frames provided in OCP 5.3.1 and 5.3.2.

OCP 5.4 Acceptance or Rejection of Outage Schedule

The ISO Outage Coordination Office shall acknowledge receipt of each request to confirm or approve a Maintenance Outage for ISO Controlled Grid facilities and approve or reject such request in accordance with the Operating Procedures posted on the ISO Home Page.

Issued by: Roger Smith, Senior Regulatory Counsel

OCP 5.5 Withdrawal or Modification of Request

A Participating TO's Operator may withdraw a request at any time prior to actual initiation of the Outage. A Participating TO's Operator may modify a request at any time prior to receipt of any acceptance or rejection notice from the ISO Outage Coordination Office or pursuant to OCP 5.3.1 and 5.3.2, but the ISO Outage Coordination Office shall have the right to reject such modified request because of the complexity of the modifications proposed or insufficient time to assess the impact of such modifications.

OCP 5.6 Rejection Notice

The ISO Outage Coordination Office shall, in a rejection notice, identify the ISO's reliability, security and market concerns which prompt the rejection and suggest possible remedies or schedule revisions which might mitigate any such concerns.

OCP 5.6.1 Failure to Meet Requirements

Any request to consider maintenance that does not meet the notification requirements contained in OCP 5.3.1 and 5.3.2 will be rejected without further consideration, unless OCP 6 applies.

OCP 5.7 Final Approval Mandatory

Under no circumstance shall any Outage be initiated for which an approval is required, under this Protocol without the relevant Operator receiving Final Approval of that Outage in accordance with OCP 5.8.

OCP 5.8 Final ISO Approval

On the day when an Approved Maintenance Outage is scheduled to commence the relevant Operator shall contact the ISO Control Center for Final Approval of the requested Outage including the starting time and return time. No such Outage shall commence without such Final Approval being obtained from the ISO Control Center, whose decision shall be final.

Issued by: Roger Smith, Senior Regulatory Counsel

OCP 5.9 Withholding of Final Approval and Rescheduling of Outage

The ISO Control Center shall have the authority to withhold a Final Approval for reasons of System Reliability, security or system status of the ISO Controlled Grid or market impact. The ISO Control Center shall immediately notify the relevant Operator of its intention to withhold the Final Approval. The ISO Controlled Grid facility Maintenance Outage will then be rescheduled in accordance with this Protocol.

OCP 6 MANAGEMENT OF FORCED OUTAGES OR IMMEDIATE NATURE MAINTENANCE

OCP 6.1 Immediate Forced Outage

Any Operator, upon identification of a situation likely to result in a Forced Outage within the next twenty-four (24) hours unless immediate corrective action is taken, where such action requires the removing from service or restricting an operating Generating Unit or removing a transmission facility from service, shall communicate directly with the ISO Control Center as set forth in the emergency procedures of the Dispatch Protocol.

OCP 6.2 Imminent Forced Outage

Any Operator, upon identification of a situation likely to result in a Forced Outage but of a nature not requiring a removal from service until some time more than twenty-four (24) hours in the future will be subject to the provisions of OCP 4 and OCP 5 with respect to any necessary Outage except the requirements imposing time limits for notification will be waived and the request will be expedited by the ISO provided notice is given as soon as possible.

OCP 7 Communication of Scheduled Maintenance Requests

OCP 7.1 Single Point of Contact

All communications concerning a Maintenance Outage request or a request to confirm or change an Approved Maintenance Outage shall be between the ISO and the designated single point of contact for each Operator. The Operator shall provide in its initial request the identification of the single point of contact along with primary and alternate means of communication. This identification will be confirmed in all communications with the ISO in relation to Outage requests, including any request to the ISO for confirmation, change or Final Approval of an Outage.

Issued by: Roger Smith, Senior Regulatory Counsel

OCP 7.2 Method of Communications

The primary method of communication from an Operator to the ISO will be as described in the Operating Procedure on the ISO Home Page. Emergency capabilities, to be used only as a back-up if the primary communication method is unavailable, will include:

- (a) voice;
- (b) fax; and
- (c) electronic (E-mail, FTP file, etc.).

OCP 7.3 Confirmation

When fax or electronic communication is utilized, confirmation from the ISO must be received by the Operator to validate the receipt of the request pursuant to OCP 7.2.

OCP 7.4 Communication of Approval or Rejection

The ISO shall use the same methods in communicating the approval or rejection of an Outage request or approval of a request to change an Approved Maintenance Outage to the relevant Operator.

OCP 8 OUTAGE COORDINATION FOR NEW FACILITIES

OCP 8.1 Coordination by ISO

The procedure to energize and place in service any new or relocated piece of equipment, connected to the ISO Controlled Grid, must be set out by the Operator or Connected Entity in a written procedure and coordinated by the ISO Outage Coordination Office.

OCP 8.2 Types of Work Requiring Coordination

The types of work which the ISO will coordinate under OCP 8 includes any new addition, replacement or modification to the ISO Controlled Grid, including:

- (a) transmission lines forming part of the ISO Controlled Grid;
- (b) equipment including circuit breakers, transformers, disconnects, reactive devices, wave traps, forming part of the ISO Controlled Grid:
- (c) Generating Unit interconnections; and
- (d) protection and control schemes, including RAS, SCADA, EMS, or AGC.

Issued by: Roger Smith, Senior Regulatory Counsel

OCP 8.3 Uncomplicated Work

When line rearrangements and/or station equipment work is uncomplicated and easily understood, the ISO Outage Coordination Office may determine that the work can be accomplished using Outages approved in accordance with OCP 5. The ISO Outage Coordination Office will make this determination in coordination with the respective requesting Operator or Connected Entity.

OCP 8.4 Special Procedures for More Complex Work

OCP 8.4.1 Responsibility for Preparation

In cases to which OCP 8.3 does not apply, it is the responsibility of the requesting Operator or Connected Entity to prepare a written procedure to enable the ISO to approve Outages in a manner that enables the necessary work to proceed. The ISO Outage Coordination Office must approve the procedure.

OCP 8.4.2 Information to be Provided to the ISO

The written procedure must be received by the ISO Outage Coordination Office a minimum of four (4) weeks prior to the start of procedure. Adequate drawings will be attached to the procedure to help clarify the work being performed and the Outages that will be required to complete the work must be specified. The procedure shall include all of the information referred to on the ISO Home Page.

OCP 8.4.3 Approval of the Procedure

Upon receipt of the procedure and drawings referred to in OCP 8.4.2, the ISO Outage Coordination Office will review the procedure and notify the Operator or Connected Entity of any required modifications. The ISO Outage Coordination Office may, at its discretion, require changes to and more detail to be inserted in the procedure. The requesting Operator or Connected Entity will consult with other entities likely to be affected and will revise the procedure, following any necessary or appropriate discussions with the ISO to reflect the requirements of the ISO. Following the ISO approval, an approved copy of the procedure will then be transmitted to the Operator or Connected Entity and the other entities likely to be affected.

OCP 8.4.4 Changes to Procedure

Once the procedure is approved by the ISO Outage Coordination Office any modifications to the procedure will require the requesting Operator or Connected Entity to notify the ISO Outage Coordination Office with as much lead time as possible

Issued by: Roger Smith, Senior Regulatory Counsel

First Revised Sheet No. 532 Superseding Original Sheet No. 532

of the recommended changes. The modified procedure will then have to be approved by the ISO Outage Coordination Office in accordance with OCP 8.4.2 and 8.4.3.

OCP 8.4.5 Approval of Work Requiring Coordination

No work can begin pursuant to any approved procedure unless approved by the ISO Outage Coordination Office and only in accordance with OCP 4 and OCP 5.

OCP 9 RECORDS AND REPORTS

OCP 9.1 Records of Approved Maintenance Outages

The ISO Outage Coordination Office will maintain a record of each Approved Maintenance Outage as it is implemented. Such records are available for inspection by Operators and Connected Entities at the ISO Outage Coordination Office. Only those records pertaining to the equipment or facilities owned by the relevant Operator or Connected Entity will be made available for inspection at the ISO Outage Coordination Office, and such records will only be made available provided notice is given in writing to the ISO fifteen (15) days in advance of the requested inspection date.

OCP 10 AMENDMENTS TO THE PROTOCOL

If the ISO determines a need for an amendment to this Protocol, the ISO will follow the requirements as set forth in Section 16 of the ISO Tariff.

Issued by: Roger Smith, Senior Regulatory Counsel

OUTAGE COORDINATION PROTOCOL

APPENDIX A

[Not Used]

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF First Revised Sheet No. 534 FIRST REPLACEMENT VOLUME NO. II Superseding Original Sheet No. 534

[Page Not Used]

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF First Revised Sheet No. 535 FIRST REPLACEMENT VOLUME NO. II Superseding Original Sheet No. 535

[Page Not Used]

SCHEDULES AND BIDS PROTOCOL

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000 FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 537 Superseding Original Sheet No. 537

SCHEDULES AND BIDS PROTOCOL

Table of Contents

| SBP 1 | ОВ | JECTIVES, DEFINITIONS AND SCOPE | 540 | |
|---------------|-------------|---|-----|--|
| SBP 1.1 | Ob | Objectives | | |
| SBP 1.2 | Definitions | | 540 | |
| SBP 1. | 2.1 | Master Definitions Supplement | 540 | |
| SBP 1. | 2.2 | [Not used] | 540 | |
| SBP 1. | 2.3 | Rules of Interpretation | 540 | |
| SBP 1.3 Scope | | | | |
| SBP 1. | 3.1 | Scope of Application to Parties | 541 | |
| SBP 1. | 3.2 | Liability of the ISO | 541 | |
| SBP 2 | sc | HEDULES AND NOTIFICATIONS | 541 | |
| SBP 2.1 | Со | ntents of Schedules and Adjustment Bid Data | 541 | |
| SBP 2. | 1.1 | Generation Section of a Balanced Schedule and Adjustment Bid Data | 541 | |
| SBP 2. | 1.2 | Demand Section of a Balanced Schedule and Adjustment Bid Data | 542 | |
| SBP 2. | 1.3 | External Import/Export Section of a Balanced Schedule and Adjustment Bid Data | 543 | |
| SBP 2. | 1.4 | Inter-Scheduling Coordinator Trades ("Internal Imports/Exports") Section of a Balanced Schedule | 544 | |
| SBP 2. | 1.5 | Inter-Scheduling Coordinator Energy Trades ("Internal Imports/Exports") Section of a Balanced Schedule | 544 | |
| SBP 2. | 1.6 | Inter-Scheduling Coordinator Ancillary Service Trades ("Internal Imports/Exports") Section of a Balanced Schedule | 545 | |
| SBP 2.2 | Val | lidation of Balanced Schedules | 547 | |
| SBP 2. | 2.1 | Stage One Validation | 547 | |
| SBP 2. | 2.2 | Stage Two Validation | 548 | |
| SBP 2.3 | | | 548 | |
| SBP 3 | EX | ISTING CONTRACTS FOR TRANSMISSION SERVICE | 548 | |
| SBP 3.1 | Аp | plication of SBP 3 to Rights under Existing Contracts | 548 | |
| SBP 3. | 1.1 | Existing Rights and Non-Converted Rights | 548 | |
| SBP 3. | 1.2 | Converted Rights | 549 | |
| SBP 3.2 | Re | sponsible Participating Transmission Owners | 549 | |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 538

| SB | P 3.3 | Ins | tructions Defining Transmission Service Rights | 549 |
|--------------------------------|--|------------------------|---|-----|
| | SBP 3. | 3.1 | Data Requirements | 549 |
| SBP 3.3.2 | | 3.2 | Curtailment under Non-Emergency Conditions | 551 |
| | SBP 3.3.3 | | [Not Used] | 551 |
| | SBP 3. | 3.4 | Instructions that cannot be Exercised Independent of the ISO's Day-to-Day Involvement | 551 |
| | SBP 3. | 3.5 | Timing of Submission of Instructions to ISO | 552 |
| SB | P 3.4 | Va | lidation of Existing Contract Schedules | 552 |
| SB | P 4 | ΑD | JUSTMENT BIDS | 553 |
| SB | P 4.1 | Со | ntent of Adjustment Bids | 553 |
| SB | P 4.2 | Fo | rmat of Adjustment Bids | 553 |
| SB | P 4.3 | Tin | ning of Submission of Adjustment Bids | 554 |
| SB | P 4.4 | Ad | justment Bids Not Published | 554 |
| SBP 4.5 Vali | | Va | lidation of Adjustment Bids | 554 |
| | SBP 4. | 5.1 | Invalidation | 554 |
| | SBP 4. | 5.2 | Validation Checks | 554 |
| SB | P 4.6 | [No | ot Used] | 554 |
| SB | P 5 | ΑN | ICILLARY SERVICES | 555 |
| SB | P 5.1 | Со | ntent of Ancillary Services Schedules and Bids | 555 |
| | SBP 5. | 1.1 | Regulation | 555 |
| | SBP 5. | 1.2 | Spinning Reserve | 557 |
| SBP 5.1.3 | | 1.3 | Non-Spinning Reserve | 558 |
| | SBP 5. | 1.4 | Replacement Reserve | 560 |
| SB | P 5.2 | Va | lidation of Ancillary Services Bids | 562 |
| | SBP 5. | 2.1 | Stage One Validation | 562 |
| | SBP 5. | 2.2 | Stage Two Validation | 562 |
| | SBP 5. | 2.3 | Validation Checks | 563 |
| SB | SBP 5.3 Buy Back of Ancillary Services | | | |
| SBP 6 SUPPLEMENTAL ENERGY BIDS | | PPLEMENTAL ENERGY BIDS | 563 | |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 539

| SBP 6.1 | | Content of Supplemental Energy Bids | | 563 |
|--|---------|--|---|-----|
| | SBP 6. | 1.1 | Generation Section of Supplemental Energy Bid Data | 563 |
| | SBP 6. | 1.2 | Demand Section of Supplemental Energy Bid Data | 564 |
| | SBP 6. | 1.3 | External Import Section of Supplemental Energy Bid Data | 564 |
| | SBP 6.2 | Fo | rmat of Supplemental Energy Bids | 564 |
| | SBP 6.3 | Tin | ning of Submission of Supplemental Energy Bids | 565 |
| SBP 6.4 | | Validation of Supplemental Energy Bids | | 565 |
| SBP 7 | | INTERFACE REQUIREMENTS | | 565 |
| SBP 7.1 | | WEnet | | 565 |
| | SBP 7.2 | Tei | mplates | 565 |
| | SBP 7.3 | Pul | blic/Private Information | 566 |
| | SBP 7.4 | Ind | lividual SC Communication Failure | 566 |
| | SBP 7.5 | Fai | lure/Corruption of WEnet | 566 |
| SBP 8 | | AMENDMENTS TO THE PROTOCOL | | 566 |
| SBP APPENDIX – TRANSMISSION RIGHTS/CURTAILMENT INSTRUCTIONS TEMPLATE | | | 567 | |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

SCHEDULES AND BIDS PROTOCOL (SBP)

SBP 1 OBJECTIVES, DEFINITIONS AND SCOPE

SBP 1.1 Objectives

The objectives of this Protocol are:

- (a) to require the provision of scheduling data to enable the ISO to undertake its scheduling process as described in the ISO Tariff and in the Scheduling Protocol (SP) taking into account the exercise of Firm Tranmission Rights and rights under Existing Contracts for transmission service;
- (b) to require the provision of Ancillary Services Schedules and bidding data required by the ISO to enable the ISO to conduct its Ancillary Services auction as described in the ISO Tariff and in the SP; and
- (c) to specify the contents of Schedules and to specify in detail the bidding data referred to in the ISO Tariff. The scheduling process and timing of the submission of data referred to are set forth in the SP.

SBP 1.2 Definitions

SBP 1.2.1 Master Definitions Supplement

Any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. A reference to a Section or an Appendix is to a Section or an Appendix of the ISO Tariff unless otherwise specified. References to SBP are to this Protocol or to the stated paragraph of this Protocol.

SBP 1.2.2 [Not Used]

SBP 1.2.3 Rules of Interpretation

- (a) Unless the context otherwise requires, if the provisions of this Protocol and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency. The provisions of the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.
- (b) A reference in this Protocol to a given agreement, ISO Protocol or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

- (c) The captions and headings in this Protocol are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.
- (d) This Protocol shall be effective as of the ISO Operations Date.
- (e) References to time are references to the prevailing Pacific Time.

SBP 1.3 Scope

SBP 1.3.1 Scope of Application to Parties

The SBP applies to the following entities:

- (a) Scheduling Coordinators (SCs);
- (b) Participating Transmission Owners (PTOs); and
- (c) the Independent System Operator (ISO).

SBP 1.3.2 Liability of the ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

SBP 2 SCHEDULES AND NOTIFICATIONS

SBP 2.1 Contents of Schedules and Adjustment Bid Data

SCs must comply with the ISO Data Templates and Validation Rules document, which contains the format for submission of Schedules and bid. Except as noted, each of the following data sections can be submitted up to seven (7) days in advance.

SBP 2.1.1 Generation Section of a Balanced Schedule and Adjustment Bid Data

The Generation section of a Balanced Schedule will include the following information for each Generating Unit:

- (a) SC's ID code;
- (b) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (c) name of Generating Unit scheduled;
- (d) type of Schedule: Preferred or Revised (refer to the SP for details);
- (e) priority type, if applicable, to the Settlement Period (use OTHER if scheduling the use of Existing Contract rights or RLB_MUST_RUN) for Reliability Must-Run Generation;
- (f) contract reference number for Reliability Must-Run Generation;
- (g) transmission loss self-provision flag (LOSS CMP FLG): "Yes" indicates that Dispatch Instructions provided to the Generating

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II Super

Superseding Original Sheet No. 541A

First Revised Sheet No. 541A

Unit will include Transmission Losses associated with the unit's Final Hour-Ahead Schedule as determined by the relevant GMM;

(h) Congestion Management flag – "Yes" indicates that any Adjustment Bid submitted under item (l) below should be used in the Day-Ahead or Hour-Ahead Market;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. II

- (i) publish Adjustment Bid flag, which will not be functional on the ISO Operations Date. In the future, "Yes" will indicate that the SC wishes the ISO to publish its Adjustment Bids;
- (j) Generating Unit ramp rate in MW/minute;
- (k) hourly scheduled Generating Unit output in MWh (the ISO will multiply these values by the hourly Generation Meter Multipliers), including any zero values, for each Settlement Period of the Trading Day (in the case of a Day-Ahead Schedule) and for the relevant Settlement Period (in the case of an Hour-Ahead Schedule); and
- (I) the MW and \$/MWh values for each Generating Unit for which an Adjustment Bid is being submitted consistent with SBP 4.

SBP 2.1.2 Demand Section of a Balanced Schedule and Adjustment Bid Data

The Demand section of a Balanced Schedule will include the following information for each Demand location:

- (a) SC's ID code;
- (b) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (c) Demand ID Demand location (which must be the name of a Demand Zone, Load group or bus);
- (d) type of Schedule: Preferred or Revised (refer to the SP for details);
- (e) hourly scheduled MWh for each Settlement Period of the Trading Day that uses the Existing Contract indicated in (e) above (which values should be less than or equal to the values indicated in (i) below);
- (f) Congestion Management flag "Yes" indicates that any
 Adjustment Bid submitted for a Dispatchable Load under item
 (i) below should be used;
- (g) publish Adjustment Bid flag, which will not be functional on the ISO Operations Date. In the future, "Yes" will indicate that the SC wishes the ISO to publish its Adjustment Bids;
- (h) hourly scheduled MWh, including any zero values, for each Settlement Period of the Trading Day (in the case of a Day-Ahead Schedule) and for the relevant Settlement Period (in the case of an Hour-Ahead Schedule);
- the MW and \$/MWh values for each Dispatchable Load for which an Adjustment Bid is being submitted consistent with SBP 4; and
- (j) requisite NERC tagging data.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

SBP 2.1.3 External Import/Export Section of a Balanced Schedule and Adjustment Bid Data

The external import/export section of a Balanced Schedule will include the following information for each import or export:

- (a) SC's ID code;
- (b) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (c) Scheduling Point (the name);
- (d) type of Schedule: Preferred or Revised (refer to the SP for details);
- (e) interchange ID (the name of the selling entity, the buying entity, and a numeric identifier);
- (f) Energy type firm (FIRM), non-firm (NFRM) or dynamic (DYN) or Wheeling (WHEEL);
- (g) external Control Area ID;
- (h) priority type, if applicable, to the Settlement Period (use OTHER if scheduling the use of Existing Contract rights or RLB_MUST_RUN for Reliability Must-Run Generation);
- (i) contract reference number for Reliability Must-Run Generation or Existing Contract (or set of interdependent Existing Contracts):
- (j) contract type transmission (TRNS), Energy (ENGY) or both (TR_EN);
- (k) Schedule ID (NERC ID number);
- (I) Congestion Management flag "Yes" indicates that any Adjustment Bid submitted for an external import/export in item (q) below should be used;
- (m) publish Adjustment Bid flag, which will not be functional on the ISO Operations Date. In the future, "Yes" will indicate that the SC wishes the ISO to publish its Adjustment Bids;
- (n) complete WECC tag;
- (o) hourly scheduled external imports/exports in MWh (the ISO will multiply these values by the hourly Generation Meter Multipliers), including any zero values, for each Settlement Period of the Trading Day (in the case of a Day-Ahead Schedule) and for the relevant Settlement Period (in the case of an Hour-Ahead Schedule) and with external imports into the ISO Controlled Grid reported as negative quantities and external exports from the ISO Controlled Grid reported as positive quantities:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

- (p) the MW and \$/MWh values for each external import/export for which an Adjustment Bid is being submitted consistent with SBP 4; and
- (q) for dynamically scheduled imports only, the transmission loss self-provision flag (LOSS_CMP_FLG): "Yes" indicates that Dispatch Instructions provided to the resource will include Transmission Losses associated with the resource's Final Hour-Ahead Schedule as determined by the relevant GMM.

SBP 2.1.4 Inter-Scheduling Coordinator Energy Trades ("Internal Imports/Exports") Section of a Balanced Schedule

In the event of an Inter-Scheduling Coordinator Energy Trade, the SCs who are parties to that trade must agree on a Zone in which the trade will be deemed to take place ("Trading Zone") and notify the ISO accordingly. The purpose of designating a Trading Zone is to provide for the allocation of Usage Charges which may arise in connection with the trade. The Inter-Scheduling Coordinator Energy Trades section of a Schedule will include the following information for each Inter-Scheduling Coordinator Trade:

- (a) SC's ID code:
- (b) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (c) trading SC (buyer or seller);
- (d) type of Schedule: Preferred or Revised (refer to the SP for details);
- (e) Trading Zone;
- (f) Schedule type Energy (ENGY);
- (g) hourly scheduled MWh, including any zero values, for each Settlement Period of the Trading Day (in the case of a Day-Ahead Schedule) and for the relevant Settlement Period (in the case of an Hour-Ahead Schedule), with internal imports into the SC reported as negative quantities and internal exports from the SC reported as positive quantities;
- (h) Congestion Management flag "Yes" indicates that Adjustment Bid submitted under (k) below should be used:
- (i) publish Adjustment Bid flag "Yes" indicates that the SC wishes the ISO to publish its Adjustment Bid.
- (j) the Generating Unit or Dispatchable Load that is the source or recipient of Energy traded; and
- (k) the MW and \$/MWh values for each Generating Unit or Dispatchable Load that is the source or recipient of Energy traded.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 544A

SBP 2.1.5 Inter-Scheduling Coordinator Ancillary Service Trades ("Internal Imports/Exports") Section of a Balanced Schedule

In the event of an Inter-Scheduling Coordinator Ancillary Service Trade, the SCs who are parties to that trade must agree on a Trading Zone in which the trade is deemed to take place and notify the ISO accordingly. The Ancillary Service obligations in the Trading Zone of each

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

Scheduling Coordinator will be adjusted to reflect the trade. The Inter-Scheduling Coordinator Ancillary Service Trades section of a Schedule will include the following information for each Inter-Scheduling Coordinator Ancillary Service Trade.

- (a) SC's ID code;
- (b) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (c) Trading SC (buyer or seller);
- (d) Trading Zone;
- (e) Schedule type-Regulation Up (ARGU), Regulation Down (ARGD), Spinning Reserve (ASPN), Non-Spinning Reserve (ANSP) or Replacement Reserve (AREP); and
- (f) Contracted MW amount of traded Ancillary Service obligation.

SBP 2.1.6 Contract Usage Template Associated with a Balanced Schedule that Includes the Use of Existing Contract Rights or Firm Transmission Rights

The contract usage template can be submitted the day prior to the Trading Day, as set forth in the timing requirements of the SP. The contract usage template can be submitted seven days in advance. However, the contract usage template will not be validated till the trade day. Each contract usage template must include the following information, in compliance with the ISO Data Templates and Validation Rules document which contains the format for submission of contract usage templates:

- (a) SC's ID code:
- (b) Type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (c) From Zone (must be different than "to Zone"), is the Zone in which all sources specified in the contract usage template must be located:
- (d) To Zone (must be different than "from Zone"), is the Zone in which all sinks specified in the contract usage template must be located:
- (e) Contract reference number for each Inter-Zonal Interface for which transmission capacity has been reserved under Existing Contract or Firm Transmission Right. Up to four contract reference numbers can be specified in this field, delimited by commas, for either Existing Contract usage or Firm Transmission Right usage, but not for both (i.e. Existing Contract rights and Firm Transmission Rights cannot be used together in linking sources and sinks on contract usage template). If the use of multiple Inter-Zonal Interfaces are being scheduled, the contract reference numbers must represent a contiguous string of contracts rights from one Zone to the next

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

(although the contract reference numbers need not be listed in any particular order since they will be arranged by the ISO's scheduling program to connect the "from Zone" to "to Zone");

- (f) Usage ID (a unique identifier that allows a SC to submit multiple usages for a given Inter-Zonal Interface);
- (g) Contract usage, in hourly scheduled MW, for the 24 hours of the Trading Day (for Generators, contract usage can be either positive or negative [i.e., for pumps]; for loads, contract usage must be positive; for external imports and inter-Scheduling Coordinator trade imports, contract usage must be negative; for external exports, contract usage must be positive). Each contract usage amount must be less than or equal to the amount of Existing Contract rights specified by the relevant Participating Transmission Owner(s) of Firm Transmission Rights, whichever the case may be. Additionally, any Adjustment Bids that may also be submitted for any particular resource (source or sink) that is also identified on a contract usage template must not overlap the contract usages specified for a particular resource in a contract usage template;
- (h) Priority usage, relative to all contract usages specified in a SC's Balanced Schedule, as expressed on a scale of one to ten (with 1 having least priority and 10 having highest priority). For Existing Contracts, this priority will be used to adjust usage quantities when scheduled usages exceed the reserved existing transmissions reservations; and
- (i) Sources or sinks, of hourly scheduled MWH (in the case of Energy usages) or MW (in the case of Ancillary Services usages), specified on the contract usage template must be balanced (except for Ancillary Services which need not be specified with sinks). Each Energy schedule or Ancillary Service bid or self-provided schedule associated with a particular source or sink must have an hourly usage schedule that is greater than or equal to the amounts specified on contract usage templates. The source/sink section of a contract usage template will include the following information (up to five combinations of sources and sinks can be specified on a single contract usage template if an SC is submitting the templates in accordance with SBP 7.2(a), or up to 20 combinations of sources and sinks if an SC is submitting the templates in accordance with SBP 7.2(b) or SBP 7.2(c));
 - Type of resource Generation (GEN), load (LOAD), interchange (INTRCHNGE) or inter-Scheduling Coordinator trade (INTER_SC);
 - (2) Resource_ID generator_ID, load_ID, tie_point or trading SC;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

- (3) Resource_ID2 (required only for individual interchange schedules and inter-Scheduling Coordinator trades);
- (4) Energy type firm (FIRM), non-firm (NFIRM), Wheeling (WHEEL), dynamic (DYN), Energy (ENGY), Spinning Reserve (CSPN), Non-Spinning Reserve (CNSPN) or Replacement Reserve (CRPLC); and
- (5) Hourly scheduled Energy or Ancillary Service, utilizing the same sign convention as set forth in (g) above.
- SBP 2.1.7 No Scheduling Coordinator shall submit a Circular Schedule. The ISO may periodically provide examples of such Circular Schedules under the ISO Home Page.

SBP 2.2 Validation of Balanced Schedules

Each SC will be assigned a workspace within the ISO's scheduling system. Each workspace will have a work area for Day-Ahead and Hour-Ahead Schedules, Adjustment Bids and Supplemental Energy bids. The SC shall only be allowed to access and manipulate its Schedule and bid data within this workspace. Each area is organized into segments. A segment is used to hold the SC's Schedules relating to the same Trading Day. The Schedule validation process is divided into two stages. The ISO shall carry out the first stage validation immediately after it has received a Schedule. The ISO shall carry out the second stage validation ten (10) minutes before (pre-validation) and immediately after each deadline (as specified in the SP) for submission of Schedules. However, a SC can also initiate the stage two validation at any time prior to that deadline, as described in more detail in the SP. If the SC adds a new Schedule or modifies an existing Schedule, that Schedule must be re-validated. SCs must comply with the ISO Data Templates and Validation Rules document, which contains the validation criteria for Balanced Schedules.

SBP 2.2.1 Stage One Validation

During stage one validation, each incoming Schedule will be validated to verify proper content, format and syntax. The ISO will check that the SC had not exceeded its Security Amount and verify that the SC is certified in accordance with the ISO Tariff. The ISO will further verify that the SC has inputted valid Generating Unit and Demand location identification. Scheduled Reliability Must-Run Generation will be verified against the contract reference numbers in the ISO's Scheduling Coordinator database. A technical validation will be performed verifying that a scheduled Generating Unit's output is not beyond it's declared capacity and/or operating limits. If there is an error found during stage one validation, the SC will be notified immediately through WEnet. The SC can then look at the notification messages to review the detailed list of errors, make changes, and resubmit the Schedule if it is still within the timing requirements of the SP. Additionally, if the ISO detects an invalid contract usage (of either Existing Contract rights or Firm Transmission Rights), the ISO will issue an error message in similar manner to the SC and allow the SC to view the message(s), to make changes, and to resubmit the contract usage template(s) if it is still

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: February 21, 2004

First Revised Sheet No. 548 Superseding Original Sheet No. 548

within the timing requirements of the SP. The SC is also notified of successful validation via WEnet.

SBP 2.2.2 Stage Two Validation

During stage two validation, Schedules will be checked to determine whether each SC's aggregate Generation and external imports (adjusted for Transmission Losses) and Inter-Scheduling Coordinator Energy Trades (whether purchases or sales) equals the SC's aggregate Demand Forecast, including external exports. The SC must take into account the applicable Generation Meter Multipliers (GMMs) as described in the SP. The SC will be notified if the counterpart trade to any Inter-Scheduling Coordinator Ancillary Service Trade has not been submitted, or is infeasible (i.e. if both SCs are selling or both are buying). Mismatches in Inter-Scheduling Coordinator Ancillary Service Trades shall be adjusted to be equal to the amount specified by the selling SC. This validation is performed in accordance with the timing requirement described in the SP. An SC can also check whether its Schedules will pass the ISO's stage two validation by manually initiating validation of its Preferred Schedules or Revised Schedules, as described in the SP, at any time prior to the deadline for submission of Preferred Schedules or Revised Schedules (as the case may be). It is the SC's responsibility to perform such checks, if desired. The SC will be notified immediately through WEnet of any validation errors. For each error detected, an error message will be generated by the ISO in the SC's notification screen which will specify the nature of the error. If the ISO detects a mismatch in Inter-Scheduling Coordinator Trades. the ISO will notify both SCs of the mismatch in Energy quantity and/or location. The SC can then look at the notification messages to review the detailed list of errors, make changes, and resubmit the Schedule if it is still within the timing requirements of the SP. The SC is also notified of successful validation via WEnet.

SBP 2.3 The Generation section of a Balanced Schedule, and any associated Adjustment Bids, must accurately reflect the physical capability of each Generating Unit identified in the Schedule (including each Generating Unit's ability to ramp from one hour to the next). For example, a 500 MW Generating Unit specified with a ramp rate of 2 MW/min and an operating point of 100 MWh for the current operating hour is not physically capable of generating 300 MWh in the next operating hour. Likewise, Adjustment Bids sumbitted for a Generating Unit, applicable to a particular operating hour, should be physically achievable within the applicable operating hour.

SBP 3 EXISTING CONTRACTS FOR TRANSMISSION SERVICE

SBP 3.1 Application of SBP 3 to Rights under Existing Contracts

SBP 3.1.1 Existing Rights

The provisions of Sections 2.4.3 and 2.4.4 of the ISO Tariff shall, with respect to the exercise of Existing Rights following the ISO Operations

Issued by: Charles F. Robinson, Vice President and General Counsel

Date, be implemented in accordance with this SBP 3 and such other operational protocols as may be developed on a case by case basis pursuant to these sections. The objective of this SBP 3 is to properly treat Existing Rights in accordance with the ISO Tariff and to minimize the need for other operational protocols.

SBP 3.1.2 Converted Rights

This SBP 3 shall have no application to the exercise of Converted Rights other than as set forth in Section 2.4.4.3 of the ISO Tariff.

SBP 3.2 Responsible Participating Transmission Owners

For each Existing Contract, the party providing transmission service (the "Responsible PTO") shall be responsible for the submission of transmission rights/curtailment instructions ("instructions") to the ISO under this SBP on behalf of the holders of Existing Rights, unless the parties to the Existing Contract agree otherwise. For the purposes of this Protocol, such otherwise agreed party will be acting in the role of Responsible PTO. In accordance with the ISO Tariff, the parties to Existing Contracts will attempt to jointly develop and agree on any instructions that will be submitted to the ISO. To the extent there is more than one PTO providing transmission service under an Existina Contract or there is a set of Existing Contracts which are interdependent from the point of view of submitting instructions to the ISO involving more than one PTO, the relevant PTOs will designate a single PTO as the Responsible PTO and will notify the ISO accordingly. If no such Responsible PTO is designated by the relevant PTOs or the ISO is not notified of such designation, the ISO shall designate one of them as the Responsible PTO and notify the relevant PTOs accordingly.

SBP 3.3 Instructions Defining Transmission Service Rights

SBP 3.3.1 Data Requirements

The Responsible PTO with respect to an Existing Contract or set of interdependent Existing Contracts is required to submit to the ISO, in accordance with the timing requirements of SBP 3.3.5, the instructions that are necessary to implement the exercise of the Existing Rights in accordance with the ISO Tariff. These instructions will be submitted to the ISO electronically, by the Responsible PTO, utilizing a form provided by the ISO in a format similar to the one set out in the Appendix to this Protocol (the "Transmission Rights/Curtailment Instructions Template"). The instructions will include the following information at a minimum and such other information as the ISO may reasonably require to enable it to carry out its functions under the ISO Tariff and ISO Protocols (the letters below correspond with the letters of the instructions template in the Appendix to this Protocol):

(a) a unique contract reference number (Existing Contract reference number that will be assigned by the ISO and communicated to the Responsible PTO on the completed

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

FIRST REPLACEMENT VOLUME NO. II

instruction and that references a single Existing Contract or a set of interdependent Existing Contracts; the provisions of SBP 3.4 will apply to the validation of scheduled uses of Existing Contract transmission rights);

- (b) whether the instruction can be exercised independent of the ISO's day-to-day involvement (Yes/No);
- (c) name of an operational single point of contact for instructions and a 24-hour a day telephone number for the Responsible PTO:
- (d) name(s) and number(s) of Existing Contract(s);
- (e) path name(s) and location(s) (described in terms of the Zones in which the point(s) of receipt and point(s) of delivery are located);
- (f) names of the party(ies) to the Existing Contract(s);
- (g) SC ID code: the ID number of the SC who will submit Schedules which make use of the Existing Contract(s) for the party(ies) indicated in (f);
- (h) type(s) of rights, by rights holder, by Existing Rights;
- type(s) of service, by rights holder, by Existing Contract (firm, conditional firm, or non-firm), with priorities for firm and conditional firm transmission services indicated in Schedules using Adjustment Bids as described in the SP;
- (j) amount of transmission service, by rights holder, by Existing Contract expressed in MW;
- (k) for Day-Ahead scheduling purposes, the time of the day preceding the Trading Day at which the SC submits Schedules to the ISO referencing the Existing Contract(s) identified in the instructions;
- (I) for Hour-Ahead or real-time scheduling purposes, the number of minutes prior to the start of the Settlement Period of delivery at which the SC may submit Schedule adjustments to the ISO regarding the Existing Rights under the Existing Contract(s) identified in the instructions;
- (m) whether or not real-time modifications to Schedules associated with Existing Rights are allowed at any time during the Settlement Period;
- (n) Service period(s) of the Existing Contract(s);
- (o) any special procedures which would require curtailments to be implemented by the ISO in any manner different than that specified in SBP 3.3.2. Any such instructions submitted to the ISO must be clear, unambiguous, and not require the ISO to make any judgments or interpretations as to the meaning,

Issued by: Charles F. Robinson, Vice President and General Counsel

intent, results, or purpose of the curtailment procedures or the Existing Contract (otherwise, they will not be accepted by the ISO); and

(p) any special procedures relating to curtailments during emergency conditions. Any such instructions submitted to the ISO must be clear, unambiguous, and not require the ISO to make any judgments or interpretations as to the meaning, intent, results, or purpose of the curtailment procedures or the Existing Contract (otherwise, they will not be accepted by the ISO).

SBP 3.3.2 Curtailment under Emergency and Non-Emergency Conditions

SBP 3.3.2.1 Emergency Conditions

To the extent practicable, the ISO shall allocate necessary curtailments of Existing Rights or Non-Converted Rights under emergency conditions in accordance with the instructions submitted by the Responsible PTO pursuant to SBP 3.3.1. If circumstances prevent the ISO's compliance with such instructions, the ISO shall allocate such curtailments in a non-discriminatory manner consistent with Good Utility Practice.

SBP 3.3.2.2 Non-Emergency Conditions

Unless otherwise specified by the Responsible PTO in the instructions that it submits to the ISO under SBP 3.3.1, the ISO will allocate any necessary curtailments under non-emergency conditions, *pro rata*, among holders of Existing Rights, at particular Scheduling Points and/or on particular contract paths, in the order of: (1) non-firm, (2) each priority of conditional firm, and (3) each priority of firm rights. Priorities for firm and conditional firm transmission service are indicated using contract usage templates, as described in the SBP 2.1.6 and in the SP.

SBP 3.3.3 [Not Used]

SBP 3.3.4 Instructions that cannot be Exercised Independent of the ISO's Day-to-Day Involvement

Those instructions that define the transmission rights within which uses may be scheduled or curtailed and that cannot be exercised independent of the ISO's day-to-day involvement must be submitted to the ISO in accordance with SBP 3.3.1. These instructions will be provided by the Responsible PTO to the ISO for implementation unless the parties to the Existing Contracts otherwise agree that the rights holder will do so. For these instructions, the SCs representing the holders of Existing Rights will submit their Schedules to the ISO for implementation in accordance with the instructions.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000 Effective: February 27, 2001

SBP 3.3.5 Timing of Submission of Instructions to ISO

SBP 3.3.5.1 Initial Submittal of Instructions

The Responsible PTOs shall submit instructions to the ISO associated with Existing Contracts or sets of interdependent Existing Contracts thirty (30) days prior to either (a) the ISO Operations Date or (b) the date on which the scheduling or curtailment of the use of the Existing Rights is to commence pursuant to Sections 2.4.3 or 2.4.4 of the ISO Tariff.

SBP 3.3.5.2 Changes to Instructions

Updates or changes to the instructions must be submitted to the ISO by the Responsible PTO, on an as needed or as required basis determined by the parties to the Existing Contracts. The ISO will implement the updated or changed instructions as soon as practicable but not later than seven (7) days after receiving clear and unambiguous details of the updated or changed instructions. If the ISO finds the instructions to be inconsistent with respect to the ISO Protocols or the ISO Tariff, the ISO will notify the Responsible PTO within forty-eight (48) hours after receipt of the updated or changed instructions indicating the nature of the problem and allowing the Responsible PTO to resubmit the instructions as if they were new, updated or changed instructions to which the provisions of this SBP 3.3 will apply. If the ISO finds the updated or changed instructions to be acceptable, the ISO will time-stamp the updated instructions as received, confirm such receipt to the Responsible PTO, and indicate the time at which the updated instructions take effect if prior to the seven (7) day deadline referred to above.

SBP 3.4 Validation of Existing Contract Schedules

Each Schedule submitted to the ISO by a SC representing a rights holder to an Existing Contract must include a valid contract reference number in accordance with SBP 3.3. If the Schedule includes an Inter-Scheduling Coordinator Trade, only one of the SCs should submit a contract reference number. If a match of the Schedule's contract reference number is found in the ISO's database and the Schedule is consistent with the instructions submitted previously by the Responsible PTO, the Schedule will be implemented in accordance with the instructions. If a match of the Schedule's contract reference number cannot be found in the ISO's database or if both SCs which are parties to an Inter-Scheduling Coordinator Trade submit contract reference numbers, the ISO will issue an error message to the SC via the WEnet (as described in SBP 2.2.1) and indicate the nature of the problem. The ISO will assist the SC, within reason, in resolving the problem so that the SC is able to submit the Schedule successfully as soon as possible within the timing requirements of the SP. If the SC uses a contract reference number for which the responsible PTO has not reserved transmission capacity on a particular path (i.e., the contract reference Number(s) included on a contract usage template

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

cannot be found in the ISO's scheduling applications table of contract reference numbers), the scheduled use will be invalidated and the SC notified by the ISO's issuance of an invalidated usage information template.

SBP 4 ADJUSTMENT BIDS

Adjustment Bids will be used by the ISO for Inter-Zonal Congestion Management as described in the SP and are initially valid only for the markets into which they are bid, being the Day-Ahead Market or the Hour-Ahead Market. These Adjustment Bids will <u>not</u> be transformed into Supplemental Energy bids.

SBP 4.1 Content of Adjustment Bids

Adjustment Bids are contained in Preferred Schedules and Revised Schedules submitted by SCs for particular Generating Units (including Physical Scheduling Plants), Dispatchable Loads, external imports/exports, and Generating Units and Dispatchable Loads supporting Inter-Scheduling Coordinator Energy Trades.

Each SC is required to submit a preferred operating point for each Generating Unit, Dispatchable Load and external import/export (these quantities are presented in the SC's submitted Schedule as "Hourly MWh"). The SC's preferred operating point for each Generating Unit, Dispatchable Load and external import/export must be within the range of any Adjustment Bids to be used by the ISO. The minimum MW output level, which may be zero MW (or negative for pumped storage resources), and the maximum MW output level must be physically achievable.

SBP 4.2 Format of Adjustment Bids

Adjustment Bids will be presented in the form of a monotonically non-decreasing staircase function for Generating Units and external imports. Adjustment Bids will be presented in the form of a monotonically non-increasing staircase function for Dispatchable Loads and external exports. These staircase functions will be composed of up to eleven (11) ordered pairs (i.e., ten (10) steps or price bands) of quantity/price information. Adjustment Bids are submitted as an integral part of the SC's Balanced Schedule and must be related to each Generating Unit, Dispatchable Load and external import/export. SCs must comply with the ISO Data Templates and Validation Rules document, which contains the format for submission of Adjustment Bids.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 5, 2003

SBP 4.3 Timing of Submission of Adjustment Bids

The specific timeline requirements for the submission of Adjustment Bids in both the Day-Ahead Market and the Hour-Ahead Market are described in the SP. During the ISO's Day-Ahead scheduling process, in accordance with the SP, the MW range of the Adjustment Bids specified in the Preferred Day-Ahead Schedule, but not the price values, may be changed by the SC in its Revised Day-Ahead Schedule, if any.

SBP 4.4 Publication of Adjustment Bids

The ISO will publish Adjustment Bids in accordance with applicable provisions of the ISO Tariff governing the disclosure of bid data.

SBP 4.5 Validation of Adjustment Bids

SBP 4.5.1 Invalidation

The absence of an Adjustment Bid in a SC's Preferred Schedule or Revised Schedule will not affect the validation since SCs are not required to submit Adjustment Bids. If an Adjustment Bid is contained in the SC's Preferred Schedule or Revised Schedule but is not in the form described above, both the Schedule and the Adjustment Bid will be rejected. The SC will be notified immediately, via WEnet, of any validation errors. For each error detected, an error message will be generated by the ISO in the SC's notification screen which will specify the nature of the error. The SC can then look at the notification messages to review the detailed list of errors, make changes, and resubmit if it is still within the timing requirements of the SP. The SC is also notified of successful validation via WEnet. The SCs must comply with the ISO Data Templates and Validation Rules document, which contains the validation criteria for Adjustment Bids.

SBP 4.5.2 Validation Checks

The ISO's stage one validation checks are performed automatically, whenever Schedules and Adjustment Bids are submitted, as described in the SP. The ISO's stage two validation is performed automatically in accordance with the timing requirements described in the SP. An SC can also check whether its Adjustment Bids will pass the ISO's stage two validation by manually initiating validation of its Preferred Schedule or Revised Schedule, as described in the SP, at any time prior to the deadline for submission of Preferred Schedules or Revised Schedules. It is a SC's responsibility to perform such checks.

SBP 4.6 [NOT USED]

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

SBP 5 ANCILLARY SERVICES

SCs must comply with the ISO Data Templates and Validation Rules document, which contains the format for submission of Ancillary Services schedules and bids. Additionally, SCs should refer to the Ancillary Services bid evaluation and scheduling principles contained in the SP. As also described in the SP, the resources constituting a System Unit which submitted Ancillary Services bids or schedules and which, as a result, has been accepted by the ISO to supply Ancillary Services in a Settlement Period must be disclosed to the ISO one (1) hour prior to the start of the Settlement Period.

SBP 5.1 Content of Ancillary Services Schedules and Bids

Ancillary Services in the Day-Ahead Market and the Hour-Ahead Market are comprised of the following: Regulation, Spinning Reserve, Non-Spinning Reserve and Replacement Reserve. Each Generating Unit (including Physical Scheduling Plants), System Unit, Curtailable Demand or System Resource for which a SC wishes to submit Ancillary Services Schedules and bids must meet the requirements set forth in the Ancillary Services Requirements Protocol (ASRP). The same resource capacity may be offered into more than one ISO Ancillary Service auction at the same time (the sequential evaluation of such multiple offers between Ancillary Services markets to eliminate double counting of capacity is described in the SP). In each category of Ancillary Service, the reference to "Revised" types of Schedules indicates a submittal which is part of a Revised Day-Ahead Schedule as described in the SP. Each of the following data sections can be submitted up to seven (7) days in advance. Ramp rates submitted as detailed below will be only used by the ISO for procuring capacity associated with the specific Ancillary Services. The ISO will issue realtime Dispatch Instructions for the Energy associated with the awarded capacity based upon the applicable operational ramp rate submitted with the single Energy Bid curve in accordance with SBP Section 6.5. There is no provision for external exports with regard to Ancillary Services bids. The functionality necessary to accept such bids does not exist in the ISO scheduling software.

SCs with Ancillary Services awards must submit a single Energy Bid curve in the Real Time Market to correspond to any awarded capacity for the relevant resources as described in SBP Section 6.

SBP 5.1.1 Regulation

SBP 5.1.1.1 Regulation: Generating Units or System Units

Each SC desiring to self-provide Regulation or to participate in the ISO's Regulation auction will submit the following information for each relevant Generating Unit or System Unit for each Settlement Period of the relevant Trading Day:

- (a) type of schedule: Regulation Ancillary Service (ANC_SRVC) or Revised Regulation Ancillary Service (REVISED_ANC_SRVC);
- (b) SC's ID code;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

- (c) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (d) Generating Unit or System Unit ID code;
- (e) preferred bid flag, a "YES" indicates a bid and a "NO" indicates a self-provided schedule;
- (f) upward and downward range of Generating Unit or System Unit capacity over which the Generating Unit or System Unit is offering to provide Regulation;
- (g) Generating Unit or System Unit operating limits (high and low MW);
- (h) Generating Unit or System Unit ramp rate (MW/minute); and
- (i) bid price for Regulation capacity (\$/MW).

SBP 5.1.1.2 Regulation: External Imports

Each SC desiring to self-provide Regulation or to participate in the ISO's Regulation auction will submit the following information for each relevant external import for each Settlement Period of the relevant Trading Day:

- (a) type of schedule: (Regulation Ancillary Service);
- (b) SC's ID code;
- (c) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (d) Scheduling Point (the name)
- (e) interchange ID code (the name of the selling entity, buying entity and a numeric identifier):
- (f) external Control Area ID;
- (g) Schedule ID (NERC ID number);
- (h) complete WECC tag;
- (i) preferred bid flag, a "YES" indicates a bid and a "NO" indicates a self-provided schedule:
- in the case of Existing contracts, the applicable contract reference number;
- (k) upward and downward range of System Resource capacity over which the System Resource is offering to provide Regulation;
- (I) System Resource operating limits (high and low MW);

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: Upon Written Notice Provided By The ISO To FERC and Market Participants

- (m) ramp rate (MW/minute); and
- (n) bid price for Regulation capacity (\$/MW).

SBP 5.1.2 Spinning Reserve

SBP 5.1.2.1 Spinning Reserve: Generating Units or System Units

Each SC desiring to self-provide Spinning Reserve or to participate in the ISO's Spinning Reserve auction will submit the following information for each relevant Generating Unit or System Unit for each Settlement Period of the relevant Trading Day:

- type of schedule: Spinning Reserve Ancillary Service (ANC_SRVC) or Revised Spinning Reserve Ancillary Service (REVISED_ANC_SRVC);
- (b) SC's ID code;
- (c) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (d) Generating Unit or System Unit ID code;
- (e) preferred bid flag, a "YES" indicates a bid and a "NO" indicates a self-provided schedule;
- (f) Generating Unit or System Unit operating limits (high and low MW);
- (g) Spinning Reserve capacity (MW);
- (h) Generating Unit or System Unit ramp rate (MW/minute); and
- (i) bid price for Spinning Reserve capacity (\$/MW).

SBP 5.1.2.2 Spinning Reserve: External Imports/Exports

Each SC desiring to bid or self-provide Spinning Reserve will submit the following information for each relevant external import for each Settlement Period of the relevant Trading Day:

- (a) type of schedule: Spinning Reserve Ancillary Service (ANC_SRVC) or Revised Spinning Reserve Ancillary Service (REVISED_ANC_SRVC);
- (b) SC's ID code;
- (c) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (d) Scheduling Point (the name);
- (e) interchange ID code (the name of the selling entity, buying entity and a numeric identifier);
- (f) external Control Area ID;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 20, 2002

Effective: Upon Written Notice Provided By The ISO to FERC and Market Participants

- (g) Schedule ID (NERC ID number);
- (h) complete WECC tag;
- (i) preferred bid flag, which must be set to "NO", indicating a selfprovided schedule, until such time as the ISO's scheduling system is able to support Ancillary Services bids from external imports/exports;
- (j) export flag, a "YES" indicates an external export and a "NO" indicates an external import;
- (k) In the case of Existing Contracts, the applicable contract reference number;
- (I) Spinning Reserve capacity (MW);
- (m) ramp rate (MW/minute); and
- (n) bid price for Spinning Reserve capacity (\$/MW).

SBP 5.1.3 Non-Spinning Reserve

SBP 5.1.3.1 Non-Spinning Reserve: Generating Units or System Units

Each SC desiring to self-provide Non-Spinning Reserve or to participate in the ISO's Non-Spinning Reserve auction will submit the following information for each relevant Generating Unit or System Unit for each Settlement Period of the relevant Trading Day:

- (a) type of schedule: Non-Spinning Reserve Ancillary Service (ANC_SRVC) or Revised Non-Spinning Reserve Ancillary Service (REVISED_ANC_SRVC);
- (b) SC's ID code;
- (c) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (d) Generating Unit or System Unit ID code;
- (e) preferred bid flag, a "YES" indicates a bid and a "NO" indicates a self-provided schedule;
- (f) time to synchronize following notification (less than ten (10) minutes mandatory):
- (g) Non-Spinning Reserve capacity available within ten (10) minutes following notification (MW);
- (h) Generating Unit or System Unit operating limits (high and low MW);
- (i) Generating Unit or System Unit ramp rate (MW/minute); and
- (j) bid price for Non-Spinning Reserve capacity (\$/MW).

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

SBP 5.1.3.2 Non-Spinning Reserve: Curtailable Demands

Each SC desiring to self-provide Non-Spinning Reserve or to participate in the ISO's Non-Spinning Reserve auction will submit the following information for each relevant Curtailable Demand for each Settlement Period of the relevant Trading Day:

- type of schedule: Non-Spinning Reserve Ancillary Service (ANC_SRVC) or Revised Non-Spinning Reserve Ancillary Service (REVISED_ANC_SRVC);
- (b) SC's ID code;
- (c) type of market (Day-Ahead and Hour-Ahead) and Trading Day;
- (d) available Curtailable Demand ID code;
- (e) preferred bid flag, a "YES" indicates a bid and a "NO" indicates a self-provided schedule;
- (f) maximum allocation curtailment duration (hours) (CURT_HR);
- (g) time to interruption following notification (minutes);
- (h) amount of Curtailable Demand that can be interrupted within ten (10) minutes following notification (MW); and
- (i) bid price for Non-Spinning Reserve capacity (\$/MW).

SBP 5.1.3.3 Non-Spinning Reserve: External Imports/Exports

Each SC desiring to bid or self-provide Non-Spinning Reserve will submit the following information for each relevant external import for each Settlement Period of the relevant Trading Day:

- (a) type of schedule: Non-Spinning Reserve Ancillary Service (ANC_SRVC) or Revised Non-Spinning Reserve Ancillary Service (REVISED_ANC_SRVC);
- (b) SC's ID code;
- (c) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (d) Scheduling Point (the name);
- (e) interchange ID code (the name of the selling entity, buying entity and a numeric identifier);
- (f) external Control Area ID;
- (g) Schedule ID (NERC ID number);
- (h) complete WECC tag;
- (i) preferred bid flag, which must be set to "NO", indicating a selfprovided schedule;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: Upon Written Notice Provided By The ISO to FERC and Market Participants

Third Revised Sheet No. 560 Superseding Second Revised Sheet No. 560

- (j) export flag, a "YES" indicates an external export and a "NO" indicates an external import;
- (k) In the case of Existing Contracts, the applicable contract reference number;
- (I) time to synchronize following notification (less than ten (10) minutes mandatory);
- (m) Non-Spinning Reserve capacity (MW);
- (n) ramp rate (MW/minute); and
- (o) bid price for Non-Spinning Reserve capacity.

SBP 5.1.4 Replacement Reserve

FIRST REPLACEMENT VOLUME NO. II

SBP 5.1.4.1 Replacement Reserve: Generating Units or System Units

Each SC desiring to self-provide Replacement Reserve or to participate in the ISO's Replacement Reserve auction will submit the following information for each relevant Generating Unit or System Unit for each Settlement Period of the relevant Trading Day:

- (a) type of schedule: Replacement Reserve Ancillary Service (ANC_SRVC) or Revised Replacement Reserve Ancillary Service (REVISED_ANC_SRVC);
- (b) SC's ID code;
- (c) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (d) Generating Unit or System Unit ID code;
- (e) preferred bid flag, a "YES" indicates a bid and a "NO" indicates a self-provided schedule;
- (f) time to synchronize following notification (less than sixty (60) minutes mandatory);
- (g) Generating Unit or System Unit operating limits (high and low MW);
- (h) Replacement Reserve capacity available within sixty (60) minutes following notification (MW);
- (i) Generating Unit or System Unit ramp rates (MW/minute); and
- (j) bid price for Replacement Reserve capacity (\$/MW).

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

SBP 5.1.4.2 Replacement Reserve: Curtailable Demands

Each SC desiring to self-provide Replacement Reserve or to participate in the ISO's Replacement Reserve auction will submit the following information for each relevant Curtailable Demand for each Settlement Period of the relevant Trading Day:

- (a) type of schedule: Replacement Reserve Ancillary Service (ANC_SRVC) or Revised Replacement Reserve Ancillary Service (REVISED_ANC_SRVC);
- (b) SC's ID code;
- (c) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (d) Curtailable Demand ID code;
- (e) preferred bid flag, a "YES" indicates a bid and a "NO" indicates a self-provided schedule;
- (f) maximum allocation curtailment duration (hours) (CURT_HR);
- (g) time to reduction following notification (minutes);
- (h) amount of Curtailable Demand that can be interrupted within sixty (60) minutes following notification (MW);
- (i) Curtailable Demand reduction rate (MW/minute); and
- (j) bid price for Replacement Reserve capacity (\$/MW).

SBP 5.1.4.3 Replacement Reserve: External Imports

Each SC desiring to bid or self-provide Replacement Reserve will submit the following information for each relevant external import for each Settlement Period of the relevant Trading Day:

- (a) type of schedule: Replacement Reserve Ancillary Service (ANC_SRVC) or Revised Replacement Reserve Ancillary Service (REVISED_ANC_SRVC);
- (b) SC's ID code:
- (c) type of market (Day-Ahead or Hour-Ahead) and Trading Day;
- (d) Scheduling Point (the name);
- (e) interchange ID code (the name of the selling entity, buying entity and a numeric identifier);
- (f) external Control Area ID;
- (g) Schedule ID (NERC ID number);
- (h) complete WECC tag;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: Upon Written Notice Provided By The ISO to FERC and Market Participants

- (i) preferred bid flag, which must be set to "NO", indicating a selfprovided schedule, until such time as the ISO's scheduling system is able to support Ancillary Services bids from external imports;
- in the case of Existing Contracts, the applicable contract reference number;
- (k) time to synchronize following notification (less than sixty (60) minutes mandatory);
- (I) Replacement Reserve capacity (MW);
- (m) ramp rate (MW/minute); and
- (n) bid price for Replacement Reserve capacity (\$/MW).

SBP 5.2 Validation of Ancillary Services Bids

The ISO will verify that each Ancillary Services Schedule or bid conforms to the format specified for the relevant service. If the Ancillary Services Schedule or bid does not so conform, the ISO will send a notification to the SC notifying the SC of the errors in the Schedules and/or bids. SCs will comply with the ISO Data Templates and Validation Rules document, which contains the validation criteria for Ancillary Services Schedules and bids. Shown below are the two stages of validation carried out by the ISO:

SBP 5.2.1 Stage One Validation

During stage one validation, each incoming Ancillary Services schedule or bid will be validated to verify proper content, format and syntax. A technical validation will be performed to verify that a schedule or bid quantity of Regulation, Spinning Reserve, Non-Spinning Reserve or Replacement Reserve does not exceed the available capacity for Regulation, Operating Reserves and Replacement Reserve on the Generating Units, System Units, Curtailable Demands and external imports/exports scheduled or bid. The SC will be notified immediately through WEnet of any validation errors. For each error detected, an error message will be generated by the ISO in the SC's notification screen which will specify the nature of the error. The SC can then look at the notification messages to review the detailed list of errors, make changes, and resubmit if it is still within the timing requirements of the SP. The SC is also notified of successful validation via WEnet.

SBP 5.2.2 Stage Two Validation

Stage two validation will be conducted by the ISO in accordance with Appendix E of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

SBP 5.2.3 Validation Checks

The ISO's stage one validation checks are performed automatically whenever Ancillary Services Schedules and bids are submitted, as described in the SP. The ISO's stage two validation is performed automatically in accordance with the timing requirements described in the SP. A SC can also check whether its Ancillary Services Schedules and bids will pass the ISO's stage two validation by manually initiating validation of its Ancillary Services Schedules and bids, as described in the SP, at any time prior to the deadline for submission of Ancillary Services Schedules and bids. It is a SC's responsibility to perform such checks.

SBP 5.3 Buy Back of Ancillary Services

A Scheduling Coordinator who has sold or self-provided Regulation, Spinning Reserve, Non-Spinning Reserve or Replacement Reserve capacity to the ISO in the Day-Ahead Market shall be required to replace such capacity to the extent scheduled self-provision is decreased between the Day-Ahead and Hour-Ahead Markets, or to the extent the Ancillary Service associated with a Generating Unit, Curtailable Demand, or System Resource successfully bid in a Day-Ahead Ancillary Service Market is reduced in the Hour-Ahead Market, for any reason (other than the negligence or willful misconduct of the ISO, or a Scheduing Coordinator's involuntary decrease in such sold capacity or scheduled self-provision on the instruction of the ISO). The price for such replaced Ancillary Service shall be at the Market Clearing Price in the Hour-Ahead Market for the same Settlement Period for the Ancillary Service capacity concerned.

SBP 6 ENERGY BIDS

SCs must submit Energy Bids for resources providing Spinning, Non-Spinning, or Replacement Reserves. The upper portion of the Energy Bid that corresponds to the resource's available capacity up to the highest operating limit, shall be allocated to any awarded or self-provided Ancillary Services in the following order from higher to lower capacity: a) Regulation Up; b) Spinning Reserve; c) Non-Spinning Reserve; and d) Replacement Reserve. For resources providing Regulation Up, the upper regulating limit shall be used if it is lower than the highest operating limit. The remaining portion of the Energy Bid, if there is any, shall constitute Supplemental Energy. Supplemental Energy bids are available to the ISO for procurement and use for Imbalance Energy, additional Voltage Support and Congestion Management in the Real Time Market.

SBP 6.1 Content of Energy Bids

SBP 6.1.1 Generation Section of Energy Bid Data

Each SC offering Spinning, Non-Spinning, or Replacement Reserve, or Supplemental Energy to the ISO will submit the following information for each Generating Unit for each Settlement Period:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II

Third Revised Sheet No. 563A Superseding Second Revised Sheet No. 563A

- (a) SC's ID code;
- (b) name of Generating Unit;
- (c) Generating Unit operating limits (high and low MW);
- (d) Generating Unit operational ramp rate in MW/minute;
- (e) Generating Unit startup time function in minutes;
- (f) Generating Unit startup cost function in \$/start;
- (g) Generating Unit Minimum Load Cost in \$/hr; and

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

(h) the MW and \$/MWh values for each Generating Unit for which a Supplemental Energy bid is being submitted consistent with this SBP 6.

A Physical Scheduling Plant shall be treated as a single Generating Unit for Supplemental Energy bid purposes.

SBP 6.1.2 Demand Section of Energy Bid Data

Each SC offering Spinning, Non-Spinning, or Replacement Reserve, or Supplemental Energy to the ISO will submit the following information for each Demand for each Settlement Period:

- (a) SC's ID code:
- (b) name of Demand;
- (c) Demand shutdown time in minutes:
- (d) Demand shutdown cost in \$/start;
- (e) Demand minimum curtailed load cost in \$/hr; and
- (f) the MW and \$/MWh values for each Demand for which a Supplemental Energy bid is being submitted consistent with this SBP 6.

SBP 6.1.3 External Import Section of Energy Bid Data

Each SC offering Spinning, Non-Spinning, or Replacement Reserve, or Supplemental Energy to the ISO will submit the following information for each external import for each Settlement Period;

- (a) SC's ID code;
- (b) name of Scheduling Point;
- (c) interchange ID (the name of the selling entity, the buying entity, and a numeric identifier):
- (d) external Control Area ID;
- (e) Schedule ID (NERC ID number);
- (f) complete WECC tag;
- (g) operational ramp rate (MW/minute);
- (h) the MW and \$/MWh values for each external import for which a Supplemental Energy bid is being submitted consistent with this SBP 6:
- (i) minimum block of hours that bid must be dispatched;
- (j) Flag indicating the bid must is capable available for intra-hour Redispatch. If this flag is set to no then the bid is indicating that the bid must be pre-dispatched and not re-dispatched during the real-time operating hour;
- (k) interchange ID code;
- (I) external Control Area ID;
- (m) Schedule ID (NERC ID number) and complete WECC tag;
- (n) preferred bid flag, a "YES" indicates a bid and a "NO" indicates a self-provided schedule; and
- (o) the contract reference number, if applicable

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 30, 2004 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. II Superseding S

Third Revised Sheet No. 564A Superseding Second Revised Sheet No. 564A

SBP 6.2 Format of Energy Bids

The SC's Final Hour-Ahead Schedule for each resource must be within the range of the Energy Bids. The minimum MW output level specified for a resource, which may be zero MW (or negative for pumped storage resources), and the maximum MW output level specified for a resource must be physically achievable by the resource. All submitted Energy Bids must be in the form of a monotonically increasing staircase function for Demands. These staircase functions will be composed of up to eleven (11) ordered pairs (i.e., ten (10) steps or price bands) of quantity/price information, with an operational ramp rate associated with the

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 30, 2004 Effective: Upon Notice After September 6, 2003

Fourth Revised Sheet No. 565 Superseding Sub. Third Revised Sheet No. 565

entire MW range as provided for in SBP Section 6.5. SCs must comply with the ISO Data Templates and Validation Rules document, which contains the format for submission of Energy Bids.

SBP 6.3 Timing of Submission of Energy Bids

For specific timeline requirements for the submission of Energy Bids see the Dispatch Protocol.

SBP 6.4 Validation of Energy Bids

The ISO will check whether Energy Bids comply with the format requirements and will notify a SC if its bid does not so comply. A SC can check whether its Energy Bids will pass the ISO's validation by manually initiating validation of its Energy Bids at any time prior to the deadline for submission of Energy Bids. It is the SC's responsibility to perform such checks. SCs must comply with the ISO Data Templates and Validation Rules document, which contains the validation criteria for Energy Bids.

SBP 6.5 Format and Validation of Operational Ramp Rates

The submitted operational ramp rate expressed in megawatts per minute (MW/min) as a function of the operating level, expressed in megawatts (MW), must be a staircase function with up to nine segments defined by a set of 1 to 10 pairs, e.g., (50,1),(100,3),(200,2), (300,2). There is no monotonicity requirement for the operational ramp rate. The submitted operational ramp rate shall be validated as follows:

- The range of the submitted operational ramp rate must cover the entire capacity of the resource, from the minimum to the maximum operating capacity, as registered in the Master File for the relevant resource.
- The operating level entries must match exactly (in number, sequence, and value) the corresponding minimum and maximum operational ramp rate breakpoints, as registered in the Master File for the relevant resource.
- If a Scheduling Coordinator does not submit an operational ramp rate for a generating unit for a day, the ISO shall use the maximum ramp rate for each operating range set forth in the Master File as the ramp rate for that unit for that same operating range for that day.
- The last ramp rate entry shall be equal to the previous ramp rate entry and represent the maximum operating capacity of the resource as registered in the Master File. The resulting operational ramp rate segments must lie between the minimum and maximum operational ramp rates, as registered in the Master File.
- The submitted operational ramp rate must be the same for each hour of the Trading Day, i.e., the operational ramp rate submitted for a given hour must be the same with the one(s) submitted earlier for previous hours in the same Trading Day.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 3, 2004 Effective: Upon Notice

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 565.01

 Outages that affect the submitted operational ramp rate must be due to physical constraints, reported in SLIC and are subject to ISO approval. All approved changes to the submitted operational ramp rate will be used in determination of

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 21, 2003 Effective: Upon Notice After September 6, 2003

Dispatch Instructions for the shorter period of the balance of the Trading Day or duration of reported Outage.

 For all ISO Dispatch Instructions of Reliability Must Run resources the operational ramp rate will be the ramp rate declared in the Reliability Must Run Contract Schedule A.

SBP 6.6 Format and Validation of Startup and Shutdown Times

For a Generating Unit, the submitted startup time expressed in minutes (min) as a function of down time expressed in minutes (min) must be a staircase function with up to 10 segments defined by a set of 1 to 10 down time and startup time pairs. The startup time is the time required to start the resource if it is offline longer than the corresponding down time. The last segment will represent the time to start the unit from a cold start and will extend to infinity. The submitted startup time function shall be validated as follows:

- The first down time must be 0 min.
- The down time entries must match exactly (in number, sequence, and value) the corresponding down time breakpoints of the maximum startup time function, as registered in the Master File for the relevant resource.
- The startup time for each segment must not exceed the startup time of the corresponding segment of the maximum startup time function, as registered in the Master File for the relevant resource.
- The startup time function must be strictly monotonically increasing, i.e., the startup time must increase as down time increases.

For Curtailable Demand, a single shutdown time in minutes is the time required for the resource to shut down after receiving a Dispatch Instruction.

SBP 6.7 Format and Validation of Startup and Shutdown Costs

For a Generating Unit, the submitted startup cost expressed in dollars (\$) as a function of down time expressed in minutes (min) must be a staircase function with up to 10 segments defined by a set of 1 to 10 down time and startup cost pairs. The startup cost is the cost incurred to start the resource if it is offline longer than the corresponding down time. The last segment will represent the cost to start the resource from cold startup and will extend to infinity. The submitted startup cost function shall be validated as follows:

- The first down time must be 0 min.
- The down time entries must match exactly (in number, sequence, and value) the corresponding down time breakpoints of the costbased startup cost function, as registered in the Master File for the relevant resource.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

First Revised Sheet No. 565B Superseding Original Sheet No. 565B

 The startup cost for each segment must not be negative and must not exceed the startup cost of the corresponding segment of the cost-based startup cost function, as registered in the Master File for the relevant resource. For gas-fired resources, the cost-based startup cost function shall be derived from the startup fuel function, as registered in the Master File for the relevant resource, and the applicable gas price index as approved by FERC.

• The startup cost function must be strictly monotonically increasing, i.e., the startup cost must increase as down time increases.

For Curtailable Demand, a single shutdown cost in \$ is the cost incurred to shut down the resource after receiving a Dispatch Instruction. The submitted shutdown cost must not be negative.

SBP 6.8 Format and Validation of Minimum Load Costs

For a Generating Unit, the submitted Minimum Load Cost expressed in dollars per hour (\$/hr) is the cost incurred for operating the unit at minimum load. The submitted Minimum Load Cost must not be negative and must not exceed the cost-based Minimum Load Cost, as registered in the Master File for the relevant resource. For gas-fired resources, the cost-based Minimum Load Cost shall be derived pursuant to Section 5.11.6.1.2.

For Curtailable Demand, the submitted Minimum Load Cost (\$/hr) is the cost incurred while operating the resource at reduced consumption after receiving a Dispatch Instruction. The submitted Minimum Load Cost must not be negative.

SBP 7 INTERFACE REQUIREMENTS

SBP 7.1 WEnet

WEnet provides the backbone on which any of three communications mechanisms will be utilized. These are:

- (a) use of a web browser such as Netscape;
- (b) use of File Transfer Protocol (FTP); or
- (c) use of an Application Programming Interface (API).

Details of the technical aspects of each of these mechanisms, including information on how to change mechanisms and back-up procedures for individual SC failures, will be made available by the ISO to SCs on request. It is assumed that each SC has made application for and signed a Scheduling Coordinator Agreement. As such, each SC will already be familiar with and have arranged the mechanism, including security arrangements, by which it will initially communicate with the ISO.

SBP 7.2 Templates

The ISO Data Templates and Validation Rules document provides a description of the templates which will be utilized to enter data into the ISO's systems. For each of the three communications mechanisms, data entry is as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 565C

- (a) direct entry of data into the template screens through the use of a browser;
- (b) upload of ASCII delimited text through use of an upload button on the template screens which activates the FTP mechanism; or

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

(c) use of the SC's own API.

SBP 7.3 Public/Private Information

Through the use of the security provisions of WEnet, some data will be provided on a confidential basis (such as individual SC Schedules and bids) and other ISO data (such as ISO forecasts of Demand) will be published on the public section of WEnet and be available to anyone.

SBP 7.4 Individual SC Communication Failure

If there is a failure of communications with a SC, then, <u>at the ISO's</u> <u>discretion</u>, the SC may communicate by facsimile, but only if the ISO and the SC have communicated by telephone in advance.

SBP 7.5 Failure/Corruption of WEnet

Based on the designed reliability of the WEnet, there is no external back-up communications system. In the extremely unlikely event of WEnet failure, communications will be lost to <u>all</u> SCs and the ISO will use the latest valid information available to operate until restoration of WEnet.

SBP 8 AMENDMENTS TO THE PROTOCOL

If the ISO determines a need for an amendment to this Protocol, the ISO will follow the requirements as set forth in Section 16 of the ISO Tariff.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

Original Sheet No. 567

SBP APPENDIX TRANSMISSION RIGHTS/CURTAILMENT INSTRUCTIONS TEMPLATE

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 568 Superseding Original Sheet No. 568

Transmission Rights/Curtailment Instructions Template

| (a) Contract | (b) Ind I | mp (c) (| (c) Contact Person | | | Submitted By PTO: | | | | | | | | |
|--|-------------------------------------|---------------------------|---------------------------|-------------------------------------|-----------------------|-------------------|---|------------------------|------------------------|-------------------|-----------------------|------------------------|-------------------------------------|-------------------------------------|
| (a) Contract Ref # | (b) ind imp | | (o) Contact 1 croon | | Date Received By ISO: | | | | | | | | | |
| [a single number] | ., . | | none number] [name(s)] | | Date Accepted By ISO: | | | | | | | | | |
| | (e) Path Name(s) and Location(s) | | | | | | (i)(j) Types and Amounts of Transmission Service | | | (k) DA | (I) HA | (m) RT | (n) Se Per | rvice iod |
| (d) Contract Name(s)/Numb er(s) | Path Name(s) | POR Zone | POD Zone | (f) Party | (g) SC ID | ER/NC R | Firm /1/ | CF /1/ | N-F | (hour- ending) | (minute s) | (yes/n o) | Beginnin g | Ending |
| [name/number 1] | | [zone name] | [zone name] | [party 1] [party 2] [party n] | [sc id 2] | [ncr] | [MW] ["] ["] | [MW] ["] ["] | [MW] ["] ["] | [1400] | [30] [n/a] [20] | [yes] [no] [yes] | [hh/dd/m m/yy] ["] ["] | [hh/dd/ mm/yy] ["] ["] |
| [name/number 2] | | [zone name] | [zone name] | [party 1] [party 2] [party n] | [sc id 2] | [ncr] | [MW] ["] ["] | [MW] ["] ["] | [MW] ["] ["] | [1400] | [20] [n/a] [20] | [yes] [no] [yes] | ["] ["] ["] | ["] ["] ["] |
| [name/number n] | | [zone name] | [zone name] | [party 1] [party 2] [party n] | [sc id 2] | [ncr] | [MW] ["] ["] | [MW] ["] ["] | [MW] ["] ["] | [1500] | [20] [n/a] [20] | [yes] [no] [yes] | ["] ["] ["] | ["] ["] ["] |
| (o) Non-Emerge | • | | | | • | | | | | | | | | |
| [If other than pro Otherwise, indic | o rata, atta ate "pro ra | ch spreads ata" here.] | heet for I | SO to use | e in alloc | ating cur | tailmen | ts to rig | hts hold | ers betw | een the | indicat | ed Zones | • |
| (p) Emergency | Curtailme | nts | | | | | | | | | | | | |
| [Describ | e special | procedures | /requirem | ents here | e. Indica | ite "N/A" | if none | .] | | | | | | |

/1/ Priorities for firm and conditional firm transmission service are indicated in Schedules using Adjustment Bids as described in the SP.

Issued by: Charles F. Robinson, Vice President and General Counsel

Effective: October 13, 2000

SCHEDULING COORDINATOR APPLICATION PROTOCOL

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000

SCHEDULING COORDINATOR APPLICATION PROTOCOL

Table of Contents

| SCAP 1 | OBJECTIVE, DEFINITION AND SCOPE | 572 |
|-----------------|--|-----|
| SCAP 1.1 | Objective | 572 |
| SCAP 1.2 | Definitions | 572 |
| SCAP 1.2.1 | Master Definitions Supplement | 572 |
| SCAP 1.2.2 | Special Terms for this Protocol | 572 |
| SCAP 1.2.3 | Rules of Interpretation | 573 |
| SCAP 1.3 | Scope | 573 |
| SCAP 1.3.1 | Scope of Application to Parties | 573 |
| SCAP 1.3.2 | Liability of the ISO | 573 |
| SCAP 2 | PROCEDURE TO BECOME A SCHEDULING COORDINATOR | 573 |
| SCAP 2.1 | SC Applicant makes a Request | 573 |
| SCAP 2.2 | ISO Information | 574 |
| SCAP 2.3 | Duplicate Information | 574 |
| SCAP 2.4 | SC Applicant returns Application | 574 |
| SCAP 2.5 | Notice of Receipt | 574 |
| SCAP 2.6 | ISO Review of Application | 574 |
| SCAP 2.6.1 | Information Requirements | 575 |
| SCAP 2.6.2 | SC Applicant's Obligation for Contracts | 575 |
| SCAP 2.7 | Deficient Application | 575 |
| SCAP 2.7.1 | SC Applicant's Additional Information | 575 |
| SCAP 2.7.2 | No Response from SC Applicant | 575 |
| SCAP 3 | ISO APPROVAL OR REJECTION OF AN APPLICATION | 575 |
| SCAP 3.1 | Approval or Rejection Letter | 575 |
| SCAP 3.2 | Time for Processing Application | 576 |
| SCAP 4 | SC APPLICANT'S RESPONSE | 576 |
| SCAP 4.1 | SC Applicant's Acceptance | 576 |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

| SCAP 4.2 | SC Applicant's Rejection | 576 |
|-------------|--|-----|
| SCAP 4.2. | Resubmittal | 576 |
| SCAP 4.2.2 | 2 Appeal | 576 |
| SCAP 5 | POST APPLICATION PROCEDURES PRIOR TO FINAL CERTIFICATION | 576 |
| SCAP 5.1 | SC's Administrative, Financial and Technical Requirements | 576 |
| SCAP 6 | FINAL CERTIFICATION OF SC APPLICANT | 577 |
| SCAP 7 | SC'S ONGOING OBLIGATIONS AFTER CERTIFICATION | 577 |
| SCAP 7.1 | Scheduling Coordinator's Obligation to Report Changes | 570 |
| SCAP 7.1. | Obligation to Report a Change in Filed Information | 577 |
| SCAP 7.1.2 | Obligation to Report a Change in Credit Rating | 577 |
| SCAP 7.1.3 | Obligation to Maintain ISO Security Amount | 577 |
| SCAP 7.2 | ISO's Response for Failure to Inform | 578 |
| SCAP 7.2. | Failure to promptly Report a Material Change | 578 |
| SCAP 7.2.2 | Pailure to Report a Lost Approved Credit Rating | 578 |
| SCAP 7.2.3 | Failure to Maintain ISO Security Amount | 578 |
| SCAP 7.3 | SC's Obligation to Uphold all SC Commitments | 578 |
| SCAP 8 | AMENDMENTS TO THE PROTOCOL | 578 |
| SCAP APPENI | DIX A – SCHEDULING COORDINATOR APPLICATION FORM | 579 |
| SCAP APPENI | DIX B – PROCEDURES FOR CHANGES OR ADDITIONS TO SCHEDULING COORDINATOR'S (SC'S) | |
| | INFORMATION | 585 |
| SCAP APPENI | DIX C – ISO APPLICATION FILE TEMPLATE | 586 |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

SCHEDULING COORDINATOR APPLICATION PROTOCOL (SCAP)

SCAP 1 OBJECTIVE, DEFINITION AND SCOPE

SCAP 1.1 Objective

The objective of the SCAP is to inform an SC Applicant of the actions it must take and information it must provide to become an approved Scheduling Coordinator (SC). The SCAP also describes the actions the ISO will take to evaluate a submitted application.

SCAP 1.2 Definitions

SCAP 1.2.1 Master Definitions Supplement

Any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. A reference to a Section or an Appendix refers to a Section or an Appendix of the ISO Tariff unless otherwise indicated. References to SCAP are to this Protocol or to the stated paragraph of this Protocol.

SCAP 1.2.2 Special Terms for this Protocol

In this Protocol, the following words and expressions shall have the meaning set forth below:

"Electronic Data Interchange" (EDI) means the routine exchange of business documented on electronic media such as purchase orders, invoices and remittance. The format of the data is based on an industry-approved format such as those published by the ANSI ASC X12 committee.

"ISO Application File Template" means all information (administrative, financial and technical) pertaining to Scheduling Coordinators which must be maintained in a current form by the ISO and the Scheduling Coordinator.

"SC Customer" means a customer of the SC Applicant or a Scheduling Coordinator for whom the SC provides services relevant to the ISO Controlled Grid.

Issued by: Charles F. Robinson, Vice President and General Counsel

"Validation, Estimation and Editing" (VEE) applies to Meter Data directly acquired by the ISO. Validation is the process of checking the data to ensure that it is contiguous, within pre-defined limits and has not been flagged by the meter. Estimation and Editing is the process of replacing or making complete Meter Data by using data from redundant meters, schedules, PMS or, if necessary, statistical estimation.

"Value Added Network" (VAN) means a data communications service provider that provides, stores and forwards electronic data delivery services within its network and to subscribers on other VANs. The data is mostly EDI type messages.

SCAP 1.2.3 Rules of Interpretation

- (a) If the provisions of this Protocol and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency. The provisions of the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.
- (b) A reference to a given agreement, ISO Protocol or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made.
- (c) The captions and headings in this Protocol are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.
- (d) This Protocol shall be effective as of the ISO Operations Date.

SCAP 1.3 Scope

SCAP 1.3.1 Scope of Application to Parties

The SCAP will apply to:

- (a) Scheduling Coordinator Applicants:
- (b) Scheduling Coordinators; and
- (c) the ISO.

SCAP 1.3.2 Liability of the ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

SCAP 2 PROCEDURE TO BECOME A SCHEDULING COORDINATOR

SCAP 2.1 SC Applicant makes a Request

To become a Scheduling Coordinator, a SC Applicant must submit a written request for an application and other necessary information to the ISO by mail, fax, e-mail or in person. Alternatively, a SC Applicant may retrieve the application and necessary information from the ISO Home Page.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCAP 2.2 ISO Information

The ISO will provide the following information, in its most current form, on the ISO Home Page. Upon a request by a SC Applicant, the ISO will send the following information by mail:

- (a) the SC Application Form (including the ISO Application File Template which is Appendix C);
- (b) the ISO Tariff and ISO Protocols;
- (c) pro forma Meter Service Agreements and Interim Black Start Agreement;
- (d) historical ISO charges (Note: prior to January 2, 1998, estimated ISO charges) including, but not limited to, charges for purchased Ancillary Services, ISO Grid Management Charge, ISO Grid Operations Charge, Imbalance Energy market charges, and Usage Charges to assist the SC Applicant in determining the ISO Security Amount the SC Applicant must provide; and
- (e) a pro forma letter of understanding for payment for SC Applicants with Approved Credit Ratings, guarantee, letter of credit and escrow agreement for the ISO Security Amount, all of which will be in a form acceptable to the ISO.

SCAP 2.3 Duplicate Information

If two or more SCs apply simultaneously to register with the ISO for a single meter or Meter Point for an ISO Metered Entity or if an SC applies to register with the ISO for a meter or Meter Point for an ISO Metered Entity for which an SC has already registered, the ISO will return the application with an explanation that only one SC may register with the ISO for the meter or Meter Point in question and that an SC has already registered or that more than one SC is attempting to register for that meter or Meter Point. The ISO will send the SC Applicant the name and address of the applicable SC or SC Applicant.

SCAP 2.4 SC Applicant returns Application

At least 60 days before the proposed commencement of service, the SC Applicant must return a completed application form with the prescribed non-refundable application fee to cover the application processing costs, site visit and the costs of furnishing the ISO Tariffs.

SCAP 2.5 Notice of Receipt

Within 3 Business Days of receiving the application, the ISO will send a written notification to the SC Applicant that it has received the application and the non-refundable fee.

SCAP 2.6 ISO Review of Application

Within 14 days after receiving an application, the ISO will notify the SC Applicant whether the SC Applicant has submitted all necessary information as set forth in ISO Tariff Sections 2.2.3 and 2.2.4, and the ISO Application File Template requirements.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCAP 2.6.1 Information Requirements

The SC Applicant must submit with its application:

- (a) the proposed date for commencement of service which may not be less than 60 days after the date the application was filed, unless waived by the ISO;
- (b) financial and security information as set forth in ISO Tariff Section 2.2.3.2; and
- (c) the prescribed non-refundable application fee.

SCAP 2.6.2 SC Applicant's Obligation for Contracts

An SC Applicant must certify that it is duly authorized to represent the Generators and Loads, which are its SC Customers and must further certify that:

- represented Generators have entered into Participating Generator Agreements with the ISO;
- represented UDCs have entered into UDC agreements with the ISO;
- (c) represented ISO Metered Entities have entered into Meter Service Agreements with the ISO;
- (d) none of the Wholesale Customers it will represent are ineligible for wholesale transmission service pursuant to the provisions of the FPA Section 212(h); and
- (e) each End-Use Customer it will represent is eligible for Direct Access service pursuant to an established program approved by the California Public Utilities Commission or a Local Regulatory Authority.

SCAP 2.7 Deficient Application

In the event the application is deficient, the ISO will send a written notification of the deficiency to the SC Applicant within 14 days of receipt by the ISO of the application explaining the deficiency and requesting additional information.

SCAP 2.7.1 SC Applicant's Additional Information

Once the ISO requests additional information pursuant to Section 2.7, the SC Applicant has 7 days, or such longer period as the ISO may agree, to provide the additional material requested by the ISO.

SCAP 2.7.2 No Response from SC Applicant

If the SC Applicant does not submit additional information within 7 days or the longer period referred to in SCAP 2.7.1, the application may be rejected by the ISO in accordance with ISO Tariff Section 2.2.4.2(d).

SCAP 3 ISO APPROVAL OR REJECTION OF AN APPLICATION

SCAP 3.1 Approval or Rejection Letter

(a) If the ISO approves the application, it will send an approval letter with a signed SC Agreement for the SC Applicant's signature and any required software licensing agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

- (b) If the ISO rejects the application, the ISO will send a rejection letter stating one or more of the following grounds:
 - incomplete information;
 - ii. non-compliance with security requirements;
 - iii. non-compliance with third party contractual obligations;
 - iv. non-compliance with technical requirements; or
 - v. non-compliance with any other SCAP or ISO Tariff requirements.

Upon request, the ISO will provide guidance as to how the SC Applicant can cure the grounds for the rejection.

SCAP 3.2 Time for Processing Application

The ISO will make a decision whether to accept or reject the application within 14 days of receipt of the application. If more information is requested, the ISO will make a final decision within 14 days of the receipt of all outstanding or additional information requested.

SCAP 4 SC APPLICANT'S RESPONSE

SCAP 4.1 SC Applicant's Acceptance

If the ISO accepts the application, the SC Applicant must return an executed SC Agreement, Meter Service Agreements, Interim Black Start Agreements and letter of credit, guarantee or escrow agreement for the ISO Security Amount, as applicable.

SCAP 4.2 SC Applicant's Rejection

SCAP 4.2.1 Resubmittal

If an application is rejected, the SC Applicant may resubmit its application at any time. An additional application fee will not be required for the second application submitted within 6 months after a rejection.

SCAP 4.2.2 Appeal

The SC Applicant may also appeal against the rejection of an application by the ISO. An appeal must be submitted within 28 days following the rejection of its application, as set forth in ISO Tariff Section 2.2.4.3 and 2.2.4.4.

SCAP 5 POST APPLICATION PROCEDURES PRIOR TO FINAL CERTIFICATION

SCAP 5.1 SC's Administrative, Financial and Technical Requirements

The ISO will not certify that an SC Applicant has become a Scheduling Coordinator until the SC Applicant has:

- (a) provided the technical/operational information required to complete the ISO Application File Template, and to comply with ISO Tariff Section 10.6;
- executed software licensing agreement for the software used in conducting business with the ISO in a form approved by the ISO, if applicable;

Issued by: Charles F. Robinson, Vice President and General Counsel

- (c) bought and installed any required software for functional interface in order to Validate, Estimate and Edit meter values (VEE).
- (d) purchased the requisite Value Area Network (VAN) service in order to support Electronic Data Interchange (EDI) requirements;
- (e) provided its bank account information and arranged for Fed-Wire System transfers as defined in SABP 1.2.2;
- (f) submitted a timetable for completion of its operational facilities, in order to coordinate site visits by ISO staff to ensure compliance with the ISO Tariff Section 2.2.7.1; and
- (g) bought and installed a WEnet account in order to communicate with the ISO.

SCAP 6 FINAL CERTIFICATION OF SC APPLICANT

The SC Applicant will become a Scheduling Coordinator when:

- (a) its application has been accepted;
- (b) it has entered into an SC Agreement, Meter Service Agreements and Interim Black Start Agreements, if applicable, with the ISO;
- (c) the SC Applicant has met the financial requirements of ISO Tariff Section 2.2.3.2; and
- (d) the SC Applicant has fulfilled all technical/operational requirements of ISO Tariff Section 2.2.7.1, SCAP 5.1 and the ISO Application File Template.

The ISO will not certify an SC Applicant as a Scheduling Coordinator until the SC Applicant has completed all the above referenced requirements to the ISO's satisfaction, at least 14 days before the commencement of service.

SCAP 7 SC'S ONGOING OBLIGATIONS AFTER CERTIFICATION

SCAP 7.1 Scheduling Coordinator's Obligation to Report Changes

SCAP 7.1.1 Obligation to Report a Change in Filed Information

Each SC has an ongoing obligation to inform the ISO of any changes to any of the information submitted by it to the ISO as part of the application process, including any changes to the additional information requested by the ISO. SCAP Appendix B sets forth the procedures for changing the SC's information and timing of notifying the ISO of such changes.

SCAP 7.1.2 Obligation to Report a Change in Credit Rating

The SC has an ongoing obligation to inform the ISO within 3 Business Days if its Approved Credit Rating has been reduced below the ISO requirements.

SCAP 7.1.3 Obligation to Maintain ISO Security Amount

The SC has an ongoing obligation to maintain the ISO Security Amount as set forth in ISO Tariff Section 2.2.7.3. Alternatively, the SC has the

Issued by: Charles F. Robinson, Vice President and General Counsel

right to inform the ISO of an improvement in its credit status and have the ISO review a new Approved Credit Rating, in order to determine if the ISO Security Amount is still necessary.

SCAP 7.2 ISO's Response for Failure to Inform

SCAP 7.2.1 Failure to Promptly Report a Material Change

If a SC fails to inform the ISO of a material change in its information provided to the ISO, which may affect the reliability or safety of the ISO Controlled Grid, or the financial security of the ISO, the ISO may suspend or terminate the SC's rights under the ISO Tariff in accordance with the terms of ISO Tariff Sections 2.2.7.3 and 2.2.4 respectively. If the ISO intends to terminate the SC's rights it shall file a Notice of Termination with FERC. Such termination shall be effective upon acceptance by FERC of a Notice of Termination.

SCAP 7.2.2 Failure to Report a Lost Approved Credit Rating

If the SC's Approved Credit Rating is reduced below the ISO requirements, the ISO will suspend the SC's scheduling rights under the ISO Tariff, until the SC submits another form of security in accordance with ISO Tariff Sections 2.2.3.2 and 2.2.7.3.

SCAP 7.2.3 Failure to Maintain ISO Security Amount

If the SC's estimated aggregate liability is greater than its ISO Security Amount, the ISO will reject any schedule in accordance with ISO Tariff Section 2.2.7.3 until such time as the SC increases its ISO Security Amount or decreases its outstanding payment balance.

SCAP 7.3 SC's Obligation to Uphold all SC Commitments

Each SC has an ongoing obligation to uphold and be bound by all the terms and conditions of the ISO Tariff as long as it remains a SC.

SCAP 8 AMENDMENTS TO THE PROTOCOL

If the ISO determines a need for an amendment to this Protocol, the ISO will follow the requirements as set forth in Section 16 of the ISO Tariff.

Issued by: Roger Smith, Senior Regulatory Counsel

The information provided for this application will be treated as confidential information

SCAP APPENDIX A

SCHEDULING COORDINATOR APPLICATION FORM

This application is for approval as a Scheduling Coordinator ("SC") by the California Independent System Operator Corporation ("ISO") in accordance with the ISO Tariff.

| I. | Administrative Requirements | | | |
|----------|---|--|--|--|
| | SC Applicant's Legal Name: | | | |
| | Address of principal place of business: | | | |
| | | | | |
| | Authorized Representative: | | | |
| | Address: | | | |
| | | | | |
| | Phone: | | | |
| | Fax: | | | |
| | E-mail: | | | |
| Type of | entity: | | | |
| _ | | | | |
| | oal utility, power marketer, investor owned utility, federal or utity or other) | | | |
| State of | State of Incorporation or Partnership: | | | |
| Propose | ed commencement date for service: | | | |

Issued by: Roger Smith, Senior Regulatory Counsel

First Revised Sheet No. 580 Superseding Original Sheet No. 580

II. SC Customer Information

- 2.1 The information required under Appendix C, the ISO Application File Template, must be provided for represented SC Metered Entities, which are Generators. The SC Applicant must submit all requested information prior to final certification, which must occur fourteen (14) days before the commencement of service.
- 2.2 Information for SC Metered Entities, which are End Users or Eligible Customers, must be kept in a standard business format based on generally accepted accounting principals. The ISO shall have the right to inspect and audit a Scheduling Coordinator's accounts and files relating to its SC Metered Entities after giving two Business Days notice in writing.
- 2.3 The SC Applicant must submit a list of all ISO Metered Entities, which it will represent.

III. Security Requirement

| 3.1 | The SC Applicant has an Approved Credit Rating as set forth in the ISO Tariff: (yes/no). |
|-----|---|
| | The SC Applicant's credit rating is |
| | Please attach certified documentation of an Approved Credit Rating from Standard & Poor's, Moody's Investors Services or the equivalent. SC Applicant must also submit, before final certification, an executed letter of understanding for payment providing contact details in case of default. OR |
| 3.2 | The SC Applicant will provide an irrevocable and unconditional guarantee from a company which has an Approved Credit Rating: (yes / no). |
| | The SC Applicant must submit a signed irrevocable and unconditional guarantee in an ISO approved form and certified documentation of the other company's Approved Credit Rating before final certification. OR |
| 3.3 | The SC Applicant will provide an irrevocable and unconditional letter of credit: (yes / no). |
| | Amount: \$ |

Issued by: Charles F. Robinson, Vice President and General Counsel

The SC Applicant must submit a signed irrevocable and unconditional letter of credit in an ISO approved form before final certification. **OR**

3.4 The SC Applicant will provide a cash deposit: (yes / no).

Amount: \$_____. The SC Applicant must enter into an escrow agreement in an ISO approved form before final certification. **AND**

3.5 The SC Applicant must provide its bank account information before final certification. The SC Applicant's bank must be capable of performing Fed-Wire System transfers.

IV. Technical Requirements

- 4.1 Does the SC Applicant have the computer hardware, software and communication capabilities for interface compatibility with the ISO system for data transmission, for electronic data interchange (EDI) and for Fed-Wire System transfer accounts? (yes / no) If no, please submit a proposed completion date to be fully operational so that an ISO staff site visit can be arranged.
- 4.2 For Loads and Generating Units located within the ISO Controlled Grid, does the SC Applicant have any scheduling restrictions imposed by the parties they represent? (yes / no) If yes, provide full details on a separate sheet of paper.
- 4.3 Does the SC Applicant have adequate staffing to operate a SC's operational facility twenty-four (24) hours a day for 365 days a year? (yes / no). If no, please submit a proposed completion date to be fully operational so that an ISO staff site visit can be arranged.

V. <u>Third Party Contractual Requirements</u>

5.1 The SC Applicant confirms that all of its SC Customers which are located within the ISO Controlled Grid and which should execute agreements with the ISO have entered into or will enter into, prior to the certification of the SC Applicant, all required agreements with the ISO to enable them to meet the requirements of the ISO Tariff: (yes / no).

Issued by: Roger Smith, Senior Regulatory Counsel

- (a) Represented Generators have signed Participating Generator Agreements: (yes / no).
- (b) Represented UDCs have signed UDC Operating Agreements and Meter Service Agreements: (yes / no).
- (c) Represented ISO Metered Entities have signed Meter Service Agreements: (yes / no).
- (d) Wholesale Customers it will represent have warranted to the SC Applicant that they are eligible for wholesale transmission service pursuant to the provisions of the FPA Section 212(h): (yes / no).
- (e) Each End-Use Customer it will represent which requests Direct Access service has warranted to the SC Applicant that the End-Use Customer is eligible for such service: (yes / no).
- 5.2 The SC Applicant confirms that all of the parties which it represents as SC Customers have granted it all necessary agency authority, whether actual, implied or inherent, to enable the SC to perform all of its obligations under the ISO Tariff: (yes / no).
- 5.3 Notwithstanding 5.2, the SC confirms that it will have the primary responsibility, as the principal, for all SC payment obligations under the ISO Tariff: (yes / no).

VI. Additional Information and Obligations

- 6.1 The SC Applicant agrees to provide such further information to the ISO as the ISO may deem necessary to process the application and certify the SC Applicant as a SC now and on a continuing basis.
- 6.2 Subject to the ISO Tariff, the SC Applicant agrees to promptly report to the ISO within seven (7) Business Days or earlier any changes regarding the information provided by it referred to in the SCAP and in the application with the exception of the security requirement data referred to in Part III of SCAP Appendix A which must be updated within three (3) Business Days. The Scheduling Coordinator shall be responsible if a failure to submit revised technical data more promptly extends the period during which schedules are rejected by the ISO.

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Sheet No. 583 Superseding Original Sheet No. 583

6.3 The SC Applicant agrees to enclose herein the non-refundable application fee of \$500 to cover the application processing costs, site visit and costs of providing ISO Tariff.

Please make check payable to:

The California Independent System Operator Corporation

- 6.4 SC Applicant agrees to promptly execute and return the SC Agreement, Meter Service Agreements, Interim Black Start Agreements, software licensing agreement, letter of understanding, letter of credit, guarantee, escrow agreement, as applicable, and Fed-Wire System bank account number, after receiving its application approval letter from the ISO.
- 6.5 Final certification is contingent upon SC Applicant fulfilling all financial and technical requirements as referenced in the SCAP (including Appendix C, the ISO Application File Template).

Issued by: Charles F. Robinson, Vice President and General Counsel

(1)

SC Applicant certifies by its signature on this Application Form that:

all information it is submitting is correct and accurate; and that

| (2) | the SC Applicant has read and agrees to be bound by the ISO Tariff as may be in force or amended from time to time. |
|-------|---|
| Name | of Organization: |
| SC A | oplicant's Name (please print): |
| SC A | oplicant's Title: |
| SC A | oplicant's Signature: |
| _ | |
| State | of} |
| Coun | ty of}} |
| | [SEAL] |
| Sworr | n and subscribed |
| | e me this day of,19 |
| Notar | y's Signature: |

California Independent System Operator Corporation c/o Schedule Coordinator Application Processing Office

Please send application and required information to:

151 Blue Ravine Road,

Folsom, CA 95630

Issued by: Roger Smith, Senior Regulatory Counsel

First Revised Sheet No. 585 Superseding Original Sheet No. 585

SCAP APPENDIX B

Procedures for Changes or Additions to Scheduling Coordinator's (SC's) Information

The SC must update, amend and / or correct the information originally submitted to the ISO during the SC application process using the format set forth in this Appendix and / or a revised Appendix C, the ISO Application File Template. The SC must submit all changes or additional information by first class postage paid mail to:

California Independent System Operator Corporation c/o SC Application Processing Office 151 Blue Ravine Road Folsom, CA 95630

The SC must notify the ISO of any change to the information that it has previously submitted to the ISO, or any additional information, at least three Business Days before the change will take effect.

The ISO will send a written acknowledgment of receipt of the SC's changes within three Business Days of receipt. The receipt shall be sent to the address on file with the ISO or the address specified in the notice of change received by the ISO.

| Prior Information |
|-----------------------------------|
| |
| |
| New Information |
| |
| Explanation and Reason for Change |
| |
| |

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 586

SCAP APPENDIX C ISO APPLICATION FILE TEMPLATE

The ISO Application File Template is an Excel template used to load resources into the ISO's database. There is also a customer help file created to work with a Microsoft Access Database which are used together to gather application information.

Issued by: Roger Smith, Senior Regulatory Counsel

Effective: October 13, 2000

SCHEDULING PROTOCOL

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Second Revised Sheet No. 588 Superseding First Revised Sheet No. 588

SCHEDULING PROTOCOL

Table of Contents

| SP | 1 | OBJECTIVES, DEFINITIONS AND SCOPE | 592 |
|----|----------|------------------------------------|-----|
| SP | 1.1 | Objectives | 592 |
| SP | 1.2 | Definitions | 592 |
| | SP 1.2. | 1 Master Definitions Supplement | 592 |
| | SP 1.2.2 | 2 [Not used] | 592 |
| | SP 1.2.3 | Rules of Interpretation | 592 |
| SP | 1.3 | Scope | 593 |
| | SP 1.3. | 1 Scope of Application to Parties | 593 |
| | SP 1.3.2 | 2 Liability of ISO | 593 |
| SP | 2 | INTERFACE REQUIREMENTS | 593 |
| SP | 3 | TIME LINES | 593 |
| SP | 3.1 | Balanced Schedules | 594 |
| | SP 3.1. | 1 Types of Balanced Schedules | 594 |
| | SP 3.1.2 | 2 Preferred Schedules | 595 |
| | SP 3.1.3 | 3 Seven-Day Advance Schedules | 595 |
| | SP 3.1.4 | 4 Suggested Adjusted Schedules | 595 |
| | SP 3.1.5 | 5 Revised Schedules | 595 |
| | SP 3.1.6 | Final Schedules | 595 |
| SP | 3.2 | Day-Ahead Market | 596 |
| | SP 3.2. | 1 By 6:00 pm, Two Days Ahead | 596 |
| | SP 3.2.2 | 2 [Not Used] | 597 |
| | SP 3.2.3 | By 6:30 am, One Day Ahead | 597 |
| | SP 3.2.4 | By 8:00 am, One Day Ahead | 597 |
| | SP 3.2.5 | By 8:30 am, One Day Ahead | 598 |
| | SP 3.2.6 | By 10:00 am, One Day Ahead | 598 |
| | SP 3.2.7 | 7 By 11:00 am, One Day Ahead | 601 |
| | SP 3.2.8 | By 12:00 Noon, Day Ahead | 601 |
| | SP 3.2.9 | By 1:00 pm, Day Ahead | 604 |
| | SP 3.2. | 10 By 1:30 pm, Day Ahead | 605 |
| | SP 3.2. | 11 Between 1:00 p.m.and 10:00 p.m. | 605 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: December 21, 2005 Effective: September 23, 2005

| SP | 3.3 | Hour-Ahead Market | 606 |
|----|---------|--|-----|
| | SP 3.3. | 1 By Two Hours Ahead | 606 |
| | SP 3.3. | 2 By One Hour Ahead | 608 |
| SP | 4 | TRANSMISSION SYSTEM LOSS MANAGEMENT | 609 |
| SP | 4.1 | Overview | 609 |
| SP | 4.2 | Generator Meter Multipliers (GMMs) | 610 |
| | SP 4.2. | 1 Derivation of GMMs | 610 |
| | SP 4.2. | 2 Methodology for Calculating Transmission Losses | 611 |
| SP | 4.3 | Existing Contracts and Transmission Losses | 611 |
| SP | 5 | RELIABILITY MUST-RUN GENERATION | 611 |
| SP | 5.1 | Procurement of Reliability Must-Run Generation by the ISO | 611 |
| | SP 5.1. | 1 Annual Reliability Must-Run Forecast - Technical Evaluation | 611 |
| | SP 5.1. | 2 Annual Reliability Must-Run Forecast - Technical Studies | 612 |
| SP | 5.2 | Designation of Generating Unit as Reliability Must-Run | 612 |
| SP | 5.3 | Scheduling of Reliability Must-Run Generation | 612 |
| SP | 5.4 | [UNUSED] | 612 |
| SP | 6 | [UNUSED] | 612 |
| SP | 7 | MANAGEMENT OF EXISTING CONTRACTS FOR TRANSMISSION SERVICE | 612 |
| SP | 7.1 | Obligations of Participating Transmission Owners and Scheduling Coordinators | 612 |
| | SP 7.1. | 1 Participating Transmission Owners | 612 |
| | SP 7.1. | 2 Scheduling Coordinators | 612 |
| SP | 7.2 | Allocation of Forecasted Total Transfer Capabilities | 612 |
| | SP 7.2. | 1 Categories of Transmission Capacity | 612 |
| | SP 7.2. | 2 Prioritization of Transmission Uses | 613 |
| | SP 7.2. | 3 Allowable Linkages | 615 |
| SP | 7.3 | The Day-Ahead Process | 615 |
| | SP 7.3. | 1 Validation | 615 |
| | SP 7.3. | 2 Scheduling Deadlines | 615 |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 590 Superseding Original Sheet No. 590

| | SP 7.3. | 3 Reservation of Firm Transmission Capacity | 615 |
|----|---------|--|-----|
| | SP 7.3. | 4 Allocation of Inter-Zonal Interface Capacities | 616 |
| SP | 7.4 | The Hour-Ahead Process | 617 |
| | SP 7.4. | 1 Validation | 617 |
| | SP 7.4. | 2 Scheduling Deadlines | 617 |
| | SP 7.4. | 3 Acceptance of Firm Transmission Schedules | 617 |
| | SP 7.4. | 4 Reservation of Firm Transmission Capacity | 617 |
| | SP 7.4. | 5 Allocation of Inter-Zonal Interface Capacities | 617 |
| SP | 7.5 | The ISO's Real-Time Process | 618 |
| | SP 7.5. | 1 Inter-Control Area Changes to Schedules that Rely on Existing Rights | 618 |
| | SP 7.5. | 2 Intra-Control Area Changes to Schedules that Rely on Existing Rights | 619 |
| SP | 8 | OVERGENERATION MANAGEMENT | 619 |
| SP | 8.1 | Real-Time Overgeneration Management | 619 |
| SP | 9 | DAY/HOUR-AHEAD ANCILLARY SERVICES MANAGEMENT | 619 |
| SP | 9.1 | Bid Evaluation and Scheduling Principles | 619 |
| SP | 9.2 | Sequential Evaluation of Bids | 620 |
| SP | 9.3 | Scheduling Ancillary Services Resources | 621 |
| SP | 9.4 | Ancillary Service Bid Evaluation and Pricing Terminology | 622 |
| SP | 9.5 | Regulation Bid Evaluation and Pricing | 623 |
| | SP 9.5. | 1 Regulation Bid Evaluation | 623 |
| | SP 9.5. | 2 Regulation Price Determination | 623 |
| SP | 9.6 | Spinning Reserves Bid Evaluation and Pricing | 624 |
| | SP 9.6. | 1 Spinning Reserves Bid Evaluation | 624 |
| | SP 9.6. | 2 Spinning Reserves Price Determination | 625 |
| SP | 9.7 | Non-Spinning Reserves Bid Evaluation and Pricing | 625 |
| | SP 9.7. | 1 Non-Spinning Reserves Bid Evaluation | 625 |
| | SP 9.7. | 2 Non-Spinning Reserves Price Determination | 626 |
| SP | 9.8 | Replacement Reserves Bid Evaluation and Pricing | 626 |
| | SP 9.8. | 1 Replacement Reserves Bid Evaluation | 626 |
| | SP 9.8. | 2 Replacement Reserves Price Determination | 627 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004 Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 591 Superseding Original Sheet No. 591

| SP 9.9 | Existing Contracts – Ancillary Services Accountability | 627 |
|---------|--|-----|
| SP 10 | DAY/HOUR-AHEAD INTER-ZONAL CONGESTION MANAGEMENT | 628 |
| SP 10.1 | Congestion Management Assumptions | 628 |
| SP 10.2 | Congestion Management Process | 628 |
| SP 10.3 | Congestion Management Pricing | 628 |
| SP 11 | CREATION OF THE REAL-TIME MERIT ORDER STACK | 629 |
| SP 11.1 | Sources of Imbalance Energy | 629 |
| SP 11.2 | Stacking of the Energy Bids | 629 |
| SP 11.3 | Use of the Merit Order Stack | 630 |
| SP 12 | AMENDMENTS TO THE PROTOCOL | 630 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: March 11, 2004

Effective: October 13, 2000

First Revised Sheet No. 592 Superseding Original Sheet No. 592

SCHEDULING PROTOCOL (SP)

SP 1 OBJECTIVES, DEFINITIONS AND SCOPE

SP 1.1 Objectives

The objectives of this Protocol are:

- (a) to process the scheduling input data (submitted to the ISO under the Ancillary Service Requirements Protocol (ASRP), the Demand Forecasting Protocol (DFP), and the Schedules and Bids Protocol (SBP)) in order to develop Final Schedules for the Day-Ahead and Hour-Ahead Markets (real-time management of the ISO Controlled Grid is addressed in the Dispatch Protocol (DP));
- to provide for the scheduling of the use of Firm Transmission Rights and use of transmission service rights under Existing Contracts;
- (c) to assist the ISO in purchasing Ancillary Services; and
- (d) to manage Congestion.

SP 1.2 Definitions

SP 1.2.1 Master Definitions Supplement

Any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. A reference to a Section or an Appendix is to a Section or an Appendix of the ISO Tariff. References to SP are to this Protocol or to the stated paragraph of this Protocol.

SP 1.2.2 [Not used]

SP 1.2.3 Rules of Interpretation

- (a) Unless the context otherwise requires, if the provisions of this Protocol and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency. The provisions of the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.
- (b) A reference in this Protocol to a given agreement, ISO Protocol or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made.

Issued by: Charles F. Robinson, Vice President and General Counsel

- (c) The captions and headings in this Protocol are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.
- (d) This Protocol shall be effective as of the ISO Operations Date.
- (e) References to time are references to the prevailing Pacific time.

SP 1.3 Scope

SP 1.3.1 Scope of Application to Parties

The SP applies to the following entities:

- (a) Scheduling Coordinators (SCs);
- (b) Utility Distribution Companies (UDCs);
- (c) Participating Transmission Owners (PTOs);
- (c) interfacing Control Area operators in accordance with Inter-Control Area agreements entered into with the ISO, to the extent the agreement between the Connected Entity and the ISO so provides; and
- (d) the Independent System Operator (ISO).

SP 1.3.2 Liability of ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

SP 2 INTERFACE REQUIREMENTS

The WEnet interface requirements and associated information requirements are described in the SBP.

SP 3 Time Lines

- (a) Consistent with Sections 2.2.12.1 and 2.5.2.2 of the ISO Tariff, the ISO may implement any temporary variation or waiver of timing requirements contained in this SP (including the omission of any step) if any of the following criteria are met:
 - (i) the ISO receives Schedules that require delay in performing Day-Ahead Market or Hour-Ahead Market evaluations, such as in the case of the ISO receiving Inter-Scheduling Coordinator Energy Trades that do not balance:
 - (ii) the ISO requires additional time to fulfill its responsibilities pursuant to Section 2.2.2 of the ISO Tariff;

Issued by: Roger Smith, Senior Regulatory Counsel

- (iii) problems with data or the processing of data cause a delay in receiving or issuing Schedules or publishing information on the WEnet:
- (iv) problems with telecommunications or computing infrastructure cause a delay in receiving or issuing Schedules or publishing information on the WEnet; or
- (v) such waiver or variation of timing requirements is reasonably necessary to preserve System Reliability, prevent an imminent or threatened System Emergency or to retain Operational Control over the ISO Controlled Grid during an actual System Emergency.
- (b) If the ISO temporarily implements a waiver or variation of such timing requirements (including the omission of any step) consistent with Section 2.2.12.1 of the ISO Tariff and SP 3(a), the ISO will publish the following information on WEnet as soon as practicable:
 - (i) the exact timing requirements affected;
 - (ii) details of any substituted timing requirements;
 - (iii) an estimate of the period for which this waiver or variation will apply; and
 - (iv) reasons for the temporary waiver or variation.
- (c) If, despite the variation of any time requirement or the omission of any step, the ISO either fails to receive sufficient Schedules to operate the Day-Ahead Market or is unable to perform Congestion Management in the Day-Ahead Market, the ISO may abort the Day-Ahead Market and require all Schedules to be submitted, and Congestion Management to be performed, in the Hour-Ahead Market.
- (d) If, despite the variation of any time requirement or omission of any step, the ISO either fails to receive sufficient Schedules to operate the Hour-Ahead Market or is unable to perform Congestion Management in the Hour-Ahead Market, the ISO may abort the Hour-Ahead Market and function in real time.
- (e) The incorporation of the scheduling of the use of rights under Existing Contracts into the ISO's Day-Ahead, Hour-Ahead and real-time processes is additionally described in SP 7 and in the SBP.

SP 3.1 Balanced Schedules

SP 3.1.1 Types of Balanced Schedules

A Schedule shall be treated as a Balanced Schedule when the SC's aggregate Generation and external imports (adjusted for Transmission Losses) and Inter-Scheduling Coordinator Energy Trades (whether

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Sheet No. 595 Superseding Original Sheet No. 595

purchases or sales), equal the SC's aggregate Demand Forecast, including external exports, with respect to all entities for which the SC schedules. On an interim basis, the ISO may assist SCs in matching Inter-Scheduling Coordinator Energy Trades.

SP 3.1.2 Preferred Schedules

The Preferred Schedule is the initial Schedule submitted by a SC in the Day-Ahead Market or Hour-Ahead Market. A Preferred Schedule shall be a Balanced Schedule submitted to the ISO by each SC on a daily and/or hourly basis.

SP 3.1.3 Seven-Day Advance Schedules

SCs may submit Balanced Schedules for up to seven (7) Trading Days at a time, representing the SC's Preferred Schedule for each Day-Ahead Market and/or Hour-Ahead Market. These advance Schedules can be overwritten by new Preferred Schedules at any time prior to the deadline for submitting Day-Ahead Schedules and Hour-Ahead Schedules, as described in the SP. If not overwritten by the SC, a Schedule submitted in advance of this deadline for submission will become the SC's Preferred Schedule at the deadline for submitting Day-Ahead Schedules and/or Hour-Ahead Schedules. There is no validation of Schedules submitted in advance of the deadline for submitting Preferred Schedules. As part of the scheduling and validation process, the ISO will calculate and publish, via WEnet, the GMMs applicable to the Day-Ahead and Hour-Ahead Markets eight (8) days ahead of the Trading Day to which they relate, as described in SP 4.

SP 3.1.4 Suggested Adjusted Schedules

If the sum of SCs' Preferred Schedules would cause Congestion across any Inter-Zonal Interface, the ISO shall issue Suggested Adjusted Schedules to all SCs in the Day-Ahead Market only. These Suggested Adjusted Schedules will not apply to uses of transmission owned by Non-Participating TOs nor to uses of Existing Rights. A modification flag, set by the ISO, will indicate whether the scheduled output in a Settlement Period has been modified as a result of Congestion Management. The ISO will publish as public information, via the WEnet, estimated Usage Charges for Energy transfers between Zones.

SP 3.1.5 Revised Schedules

Following receipt of a Suggested Adjusted Schedule, a SC may submit to the ISO a Revised Schedule, which shall be a Balanced Schedule, and which shall seek to reduce or eliminate Congestion. There are no Revised Schedules in the Hour-Ahead Market.

SP 3.1.6 Final Schedules

If the ISO notifies a SC that there will be no Congestion on the ISO Controlled Grid based on the Preferred Schedules submitted by all

Issued by: Charles F. Robinson, Vice President and General Counsel

SCs, the Preferred Schedule shall become that SC's Final Schedule. If the ISO has adjusted the SC's Preferred Schedule to match Inter-Scheduling Coordinator Energy Trades then the adjusted Preferred Schedule shall become that SC's Final Schedule. If the ISO notifies a SC that there will be no Congestion on the ISO Controlled Grid based on the Revised Schedules submitted by all SCs, the Revised Schedule shall become that SC's Final Schedule. If the ISO has adjusted the SC's Revised Schedule to match Inter-Scheduling Coordinator Energy Trades then the adjusted Revised Schedule shall become that SC's Final Schedule. If there is Congestion based on the Revised Schedules or mismatches in Inter-Scheduling Coordinator Energy Trades, the ISO shall adjust the Revised Schedules and issue Final Schedules. The SCs will be notified, via WEnet, that their Schedules have become final. The ISO will also publish a final set of Usage Charges for Energy transfers between Zones, applicable to all SCs.

SP 3.2 Day-Ahead Market

The Day-Ahead Market is a forward market for Energy and Ancillary Services. The Day-Ahead Market operates individually for each Settlement Period of the Trading Day. The Day-Ahead Market starts at 6:00 pm two days ahead of the Trading Day and ends at 1:00 pm on the day ahead of the Trading Day, at which time the ISO issues the Final Day-Ahead Schedules.

SP 3.2.1 By 6:00 pm, Two Days Ahead

By 6:00 pm two days ahead of the Trading Day (for example, by 6:00 pm on Monday for the Wednesday Trading Day), the ISO will publish, via WEnet, the following information for each Settlement Period of the Trading Day:

- (a) a forecast of conditions on the ISO Controlled Grid, including transmission line and other transmission facility Outages;
- (b) a forecast of Generation Meter Multipliers (GMMs), as developed in accordance with SP 4, at each Generator location and Scheduling Point;
- (c) a forecast of system Demands by Zone;
- (d) an estimate of the Ancillary Services requirements for the ISO Control Area (see the ASRP for the details on these requirements);
- (e) a forecast of Loop Flows over interfaces with other Control Areas;
- (f) a forecast of the potential for Congestion conditions;
- (g) a forecast of total and Available Transfer Capacity over certain rated transmission paths and Inter-Zonal Interfaces;
- (h) a description of any temporary adjustments to Ancillary Service standards that the ISO has determined by that time to make, in accordance with Section 2.5.2.2.

Issued by: Roger Smith, Senior Regulatory Counsel

SP 3.2.1.1 By 5:00 am, One Day Ahead

By no later than 5:00 am on the day before the Trading Day, the ISO will notify SCs of the Energy Requirements from any Reliability Must-Run Units which the ISO requires to run in the Trading Day, except in those instances where a Reliability Must-Run Unit requires more than one day's notice, in which case the ISO may notify the applicable SC more than one day in advance of the Trading Day;

SP 3.2.1.2 By 6:00 am, One Day Ahead

By no later than 6:00 am on the day before the Trading Day, SCs that have been notified that a Reliability Must-Run Unit is required to run in the Trading Day will inform the ISO, with regard to each hour for which the ISO has provided such notice, whether the RMR Owner will take payment from the market or under the RMR Contract.

SP 3.2.2 [Not Used]

SP 3.2.3 By 6:30 am, One Day Ahead

By 6:30 am on the day ahead of the Trading Day (for example, by 6:30 am on Tuesday for the Wednesday Trading Day) and for each Settlement Period of the Trading Day: the ISO will provide to UDCs, via WEnet, the sum of the SCs' Direct Access Demand Forecasts by UDC Service Area; and

SP 3.2.4 By 8:00 am, One Day Ahead

By 8:00 am on the day ahead of the Trading Day (for example, by 8:00 am on Tuesday for the Wednesday Trading Day), and for each Settlement Period of that Trading Day, Firm Transmission Rights owners will notify the ISO, via the Secondary Registration System or other means established by the ISO, of any transaction of Firm Transmission Rights and of any changes in SCs' rights to schedule the use of Firm Transmission Rights at particular Inter-Zonal Interfaces.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: December 21, 2005 Effective: September 23, 2005

SP 3.2.5 By 8:30 am, One Day Ahead

By 8:30 am on the day ahead of the Trading Day (for example, by 8:30 am on Tuesday for the Wednesday Trading Day), and for each Settlement Period of that Trading Day, Participating Transmission Owners will notify the ISO, via e-mail of an electronic spreadsheet or other means established by the ISO, of the amounts of transmission capacity to reserve for its transmission service customers under Existing Contracts at particular Inter-Zonal Interfaces. Upon receiving this information, the ISO will, by 9:00 am, calculate the Firm Transmission Rights available on each Inter-Zonal Interface after taking into account transfer capabilities and Existing Contract transmission capacity reservations, and then publish adjusted scheduling rights for SCs scheduling the use of Firm Transmission Rights and Existing Contract rights. After publishing the adjusted scheduling rights for Existing Contract rights and Firm Transmission Rights, SCs may submit contract usage templates (in accordance with the SBP) for validation by the ISO prior to the ISO's deadline for receiving Preferred Day-Ahead Schedules.

SP 3.2.6 By 10:00 am, One Day Ahead

By 10:00 am on the day ahead of the Trading Day (for example, by 10:00 am on Tuesday for the Wednesday Trading Day), the following information flows for each Settlement Period of the Trading Day will be required to take place:

- (a) SCs will provide, via WEnet, the ISO with forecasts of their Direct Access Demand by UDC Service Area;
- (b) the ISO will publish, via WEnet, an updated forecast of system Demands and of the Ancillary Services requirements; and
- (c) the ISO will validate (in accordance with the SBP) the information submitted above by SCs and UDCs.

SP 3.2.6.1 Actions by SCs and the ISO

By 10:00 am on the day ahead of the Trading Day (for example, by 10:00 am on Tuesday for the Wednesday Trading Day) and for each Settlement Period of that Trading Day (see SP 3.2.6.2 for information on the pre-validation performed at ten (10) minutes prior to the 10:00 am deadline):

- (a) SCs will submit their Preferred Day-Ahead Schedules to the ISO in accordance with the SBP:
- (b) SCs will submit, as part of their Preferred Day-Ahead Schedules, their Adjustment Bids, if any, to the ISO in accordance with the SBP:
- (c) SCs will submit their Ancillary Services bids, if any, to the ISO in accordance with the SBP and SP 9;
- (d) SCs will submit their schedules for self-provided Ancillary Services, if any, to the ISO in accordance with the SBP and SP 9;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: December 21, 2005 Effective: September 23, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 598A

- (e) the ISO will validate (in accordance with the SBP) all SC submitted Preferred Day-Ahead Schedules for Energy and Adjustment Bids and may assist SCs to resolve mismatches in scheduled quantities or locations for Inter-Scheduling Coordinator Energy Trades in accordance with the procedure described in SP 3.2.6.4;
- (f) the ISO will validate (in accordance with the SBP) all SC submitted schedules for self-provided Ancillary Services, Inter-

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: December 21, 2005 Effective: September 23, 2005

Scheduling Coordinator Ancillary Service Trades, and Ancillary Services bids which were part of their Preferred Day-Ahead Schedules:

- (g) the ISO will validate (in accordance with the SBP) all contract usage templates received from SCs for scheduled uses of Existing Contract rights and Firm Transmission Rights;
- (h) the ISO will validate that all SC submitted Preferred Day-Ahead Schedules are compatible with the RMR requirements of which SCs were notified for that Trading Day and with the SCs' elected options for delivering the required Energy;
- (i) the ISO will start the first iteration of Inter-Zonal Congestion Management process as described in SP 10; and
- the ISO will start the Ancillary Services bid evaluation process as described in SP 9;

SP 3.2.6.2 Pre-validation

At 10 minutes prior to the deadline for submittal of the Preferred Day-Ahead Schedules, Adjustment Bids, schedules for self-provided Ancillary Services, Inter-Scheduling Coordinator Ancillary Service Trades, and Ancillary Services bids (the "submittal"), the ISO shall conduct a pre-validation of the stage two validation described in the SBP. The purpose of this is to allow the SCs, particularly those involved in the Inter-Scheduling Coordinator Energy Trades, to identify and resolve any validation problems. The ISO will immediately communicate the results of each SC's pre-validation to that SC via WEnet.

SP 3.2.6.3 Invalidation

Except with respect to invalidated contract usage associated with Existing Contract rights or Firm Transmission Rights, invalidation of the submittal for any Settlement Period results in rejection of the submittal for that Settlement Period. SCs will be notified of any invalid contract usage via an invalidated contract usage template issued, via the WEnet, by the ISO. Invalidation of contract usage will not cause the rejection of the SC's submittal; instead, invalid contract usage will be treated as new firm uses of ISO transmission service without the priorities and protections afforded the scheduled use of Existing Contract rights and Firm Transmission Rights. During the initial operations of the ISO, the ISO may assist SCs to resolve mismatches in the scheduled quantities or locations for Inter-Scheduling Coordinator Energy Trades contained in their Preferred Schedules in accordance with SP 3.2.6.4. Except with respect to contract usage templates (for which SCs can check whether or not their submittal will pass the ISO's validation checks between 9:00 am and 10:00 am), SCs may check at any time prior to 10:00 am whether or not their submittal will pass the ISO's validation checks at 10:00 am. It is the responsibility of the SCs to perform such checks since Preferred

Issued by: Charles F. Robinson, Vice President and General Counsel

Day-Ahead Schedules, Adjustment Bids, Schedules of self-provided Ancillary Services, Inter-Scheduling Coordinator Ancillary Service Trades, and Ancillary Services bids which are invalidated cannot be resubmitted after 10:00 am for the Day-Ahead Market, except that, during the initial period of ISO operations, the ISO will allow resubmission of Preferred Schedules which have mismatches in the scheduled quantities or locations for Inter-Scheduling Coordinator Energy Trades. The ISO will immediately communicate the results of each SC's 10:00 am validation to that SC via WEnet. If the usage or sum of the usages associated with an Existing Contract results in the contract being over-scheduled, the usages will be adjusted such that a usage in excess of the Existing Contract rights will be considered a new firm use (NFU) and will be exposed to Congestion charges.

SP 3.2.6.4 Inter-Scheduling Coordinator Energy Trades - Mismatches

During the initial period of ISO operations, if the ISO detects a mismatch in the scheduled quantities or locations for Inter-Scheduling Coordinator Energy Trades, the ISO will promptly notify both the receiving and sending SCs that a mismatch exists and will specify the time, which will allow them approximately one half-hour, by which they may submit modified Schedules which resolve the mismatch. If the SCs are unable to resolve the mismatch as to quantities in the allotted time and provided there is no dispute as to whether the trade occurred or over its location, then the ISO may adjust the SCs' Schedules in accordance with the following procedure:

- (a) The ISO will determine which Schedule contains the higher scheduled quantity of Energy for the Inter-Scheduling Coordinator Energy Trade and will reduce it so that it is equal to the lower scheduled quantity. However, if the Schedule specifying the higher scheduled quantity of Energy contains only Inter-Scheduling Coordinator Energy Trades, the ISO will increase the Schedule specifying the lower quantity of Energy so that it is equal to the higher scheduled quantity of Energy.
- (b) If there is a dispute between the SCs as to whether the trade occurred or over its location, the ISO will remove the disputed trade from the Schedules in which it appears.
- (c) As a consequence of the adjustments under (a) or (b) above, the SCs whose Schedules have been adjusted will no longer have a Balanced Schedule. The ISO will adjust their resources based on the following priority: Demands, exports, imports, Generation, and other Inter-Scheduling Coordinator Energy Trades.
- (d) The adjustments to each SC's portfolio will be based on the Adjustment Bids provided by the SC.
- (e) The ISO will notify each SC whose Schedule has been adjusted as to the adjustment in its Schedule.

Issued by: Charles F. Robinson, Vice President and General Counsel

SP 3.2.7 By 11:00 am, One Day Ahead

By 11:00 am on the day ahead of the Trading Day (for example, by 11:00 am on Tuesday for the Wednesday Trading Day) and for each Settlement Period of that Trading Day:

- (a) the ISO will complete the first iteration of the Inter-Zonal Congestion Management process described in SP 10 (if Inter-Zonal Congestion does not exist in any Settlement Period of the Trading Day, the scheduling process will continue with the steps at SP 3.2.9);
- (b) the ISO will provide, via WEnet, Suggested Adjusted Day-Ahead Schedules for Energy to <u>all</u> SCs which submitted Preferred Day-Ahead Schedules at 10:00 am, including the SCs which it is proposed should, as a result of Inter-Zonal Congestion Management, have their Preferred Day-Ahead Schedules modified;
- (c) the ISO will publish on WEnet the estimated Day-Ahead Usage Charge rate (in \$/MWh of scheduled flow) for Energy transfers between Zones; and
- (d) the ISO will provide, via WEnet, along with the Suggested Adjusted Day-Ahead Schedules, schedules for Ancillary Services to the SCs which either:
 - (i) submitted Ancillary Services bids and which, as a result, are proposed to supply Ancillary Services; or
 - (ii) submitted schedules to self-provide Ancillary Services and which schedules have been accepted by the ISO.
- (e) the ISO will provide, via WEnet, the available contract capacity template associated with the SC's scheduled use of any Existing Contract rights or Firm Transmission Rights. If any derate of an Inter-Zonal Interface has occurred, the ISO will provide, via WEnet, the invalidated usage information template.

SP 3.2.8 By 12:00 Noon, Day Ahead

By 12:00 noon on the day ahead of the Trading Day (for example, by 12:00 noon on Tuesday for the Wednesday Trading Day) and for each Settlement Period of that Trading Day (except where Inter-Zonal Congestion does not exist, in which case, the scheduling process will omit this step):

SP 3.2.8.1 Actions by SCs and the ISO

- (a) SCs will submit Revised Day-Ahead Schedules to the ISO, in response to the ISO's Suggested Adjusted Day-Ahead Schedules, in accordance with the SBP;
- (b) SCs will submit, as part of their Revised Day-Ahead Schedules, revised Adjustment Bids (allowing the range of

Issued by: Roger Smith, Senior Regulatory Counsel

- usage to change, but not the prices), if any, to the ISO in accordance with the SBP:
- (c) SCs will submit revised Ancillary Services bids, if any, to the ISO in accordance with the SBP and SP 9;
- (d) SCs will submit their schedules for self-provided Ancillary Services, if any, to the ISO in accordance with the SBP and SP 9:
- (e) the ISO will validate (in accordance with the SBP) all SC submitted Revised Day-Ahead Schedules for Energy and Adjustment Bids and may assist SCs to resolve mismatches in scheduled quantities or locations for Inter-Scheduling Coordinator Energy Trades in accordance with the same procedure described in SP 3.2.8.4;
- (f) the ISO will validate (in accordance with the SBP) all SC submitted schedules for self-provided Ancillary Services and Ancillary Services bids which were part of their Revised Day-Ahead Schedules:
- (g) the ISO will validate (in accordance with the SBP) all contract usage templates received from SCs for scheduled uses of Existing Contract rights and Firm Transmission Rights.
- (h) the ISO will start the second (and final) iteration of the Inter-Zonal Congestion Management process as described in SP 10;
- (i) the ISO will start the second (and final) iteration of the Ancillary Services bid evaluation process as described in SP 9; and
- (j) the ISO will use the SC's Preferred Day-Ahead Schedule in the event the SC does not submit a Revised Day-Ahead Schedule. If a SC desires to revise only part of its Preferred Day-Ahead Schedule, those portions of the Revised Day-Ahead Schedule must be submitted, including both the removal of any resources in the Preferred Day-Ahead Schedule which are not to be included in the Revised Day-Ahead Schedule and the addition of any resources that were not included in the Preferred Day-Ahead Schedule but that are to be included in the Revised Day-Ahead Schedule. A SC's failure to remove such resources will cause the Revised Schedule to be unbalanced, and rejected as such in the ISO's validation process.

SP 3.2.8.2 Pre-validation

At 10 minutes prior to the deadline for submittal of the Revised Day-Ahead Schedules, Adjustment Bids, schedules for self-provided Ancillary Services, Inter-Scheduling Coordinator Ancillary Service Trades, and Ancillary Services bids (the "submittal"), the ISO shall conduct a pre-validation of the stage two validation described in the SBP. The purpose of this is to allow the SCs, particularly those involved in Inter-Scheduling Coordinator Energy Trades, to identify and resolve any validation problems. The ISO will immediately

Issued by: Roger Smith, Senior Regulatory Counsel

communicate the results of the pre-validation of each SC's submittal to that SC via WEnet.

SP 3.2.8.3 Invalidation

Except with respect to invalidated contract usage associated with Existing Contract rights or Firm Transmission Rights, invalidation of the submittal for any Settlement Period results in rejection of the submittal for that Settlement Period. SCs will be notified of any invalid contract usage via an invalidated contract usage template issued, via the WEnet, by the ISO. Invalidation of contract usage will not cause the rejection of the SC's submittal; instead, invalid contract usage will be treated as new firm uses of ISO transmission service without the priorities and protections afforded the scheduled use of Existing Contract rights and Firm Transmission Rights. During the initial operations of the ISO, the ISO may assist SCs to resolve mismatches in the scheduled quantities or locations for Inter-Scheduling Coordinator Energy Trades in accordance with 3.2.8.4. Except with respect to contract usage templates, SCs may check at any time prior to 12:00 noon whether or not their submittal will pass the ISO's validation checks (which are undertaken at 12:00 noon). It is the responsibility of the SCs to perform such checks since Revised Day-Ahead Schedules, Adjustment Bids, schedules of self-provided Ancillary Services, Inter-Scheduling Coordinator Ancillary Service Trades, and Ancillary Services bids which are invalidated cannot be resubmitted after 12:00 noon for the Day-Ahead Market, except that during the initial period of operations, the ISO will allow resubmission of Schedules to resolve mismatches in the scheduled quantities and locations for Inter-Scheduling Coordinator Energy Trades. The ISO will immediately communicate the results of each SC's 12:00 noon validation to that SC via WEnet. If the usage or sum of the usages associated with an Existing Contract results in the contract being overscheduled, the usages will be adjusted such that a usage in excess of the Existing Contract rights will be considered a new firm use (NFU) and will be exposed to Congestion charges.

SP 3.2.8.4 Inter-Scheduling Coordinator Energy Trades - Mismatches

During the initial period of ISO operations, if the ISO detects a mismatch in the scheduled quantities or locations for Inter-Scheduling Coordinator Energy Trades, the ISO will promptly notify both the receiving and sending SCs that a mismatch exists and will specify the time, which will allow them approximately one half-hour, by which they may submit modified Schedules which resolve the mismatch. If the SCs are unable to resolve the mismatch as to quantities in the allotted time and provided there is no dispute as to whether the trade occurred or over its location, the ISO may adjust the SCs' Schedules in accordance with the following procedure:

(a) The ISO will determine which Schedule contains the higher scheduled quantity of Energy for the Inter-Scheduling

Issued by: Charles F. Robinson, Vice President and General Counsel

Coordinator Energy Trade and will reduce it so that it is equal to the lower scheduled quantity. However, if the Schedule specifying the higher scheduled quantity of Energy contains only Inter-Scheduling Coordinator Energy Trades, the ISO will increase the Schedule specifying the lower quantity of Energy so that it is equal to the higher scheduled quantity of Energy.

- (b) If there is a dispute between the SCs as to whether the trade occurred or over its location, the ISO will remove the disputed trade from the Schedules in which it appears.
- (c) As a consequence of the adjustments under (a) or (b) above, the SCs whose Schedules have been adjusted will no longer have a Balanced Schedule. The ISO will adjust their resources based on the following priority: Demands, exports, imports, Generation, and other Inter-Scheduling Coordinator Energy Trades.
- (d) The adjustments to each SC's portfolio will be based on the Adjustment Bids provided by the SC.
- (e) The ISO will notify each SC whose Schedule has been adjusted as to the adjustment in its Schedule.

SP 3.2.9 By 1:00 pm, Day Ahead

By 1:00 pm on the day ahead of the Trading Day (for example, by 1:00 pm on Tuesday for the Wednesday Trading Day) and for each Settlement Period of that Trading Day:

- (a) the ISO will complete the second iteration, if necessary, of the Inter-Zonal Congestion Management process described in SP 10:
- (b) the ISO will provide, via WEnet, Final Day-Ahead Schedules to all SCs which, depending on the existence of Inter-Zonal Congestion, could be:
 - the Preferred Day-Ahead Schedules (when no Congestion was found at 11:00 am and no mismatched Inter-Scheduling Coordinator Energy Trades);
 - (ii) the Revised Day-Ahead Schedules (when no Congestion was found at 1:00 pm and no mismatched Inter-Scheduling Coordinator Energy Trades);
 - (iii) modified Revised Day-Ahead Schedules for those SCs which had their Revised Day-Ahead Schedules for Energy modified for Inter-Zonal Congestion or mismatches in Inter-Scheduling Coordinator Energy Trades; or
 - (iv) modified Preferred Day-Ahead Schedules for those SCs which had their Preferred Schedule for Energy modified for Inter-Scheduling Coordinator Energy Trade mismatches:

Issued by: Roger Smith, Senior Regulatory Counsel

- (c) the ISO will publish on WEnet the Day-Ahead Usage Charge rate (in \$/MWh of scheduled flow) for Energy transfer between Zones, if any:
- (d) the ISO will provide, via WEnet, as part of the Final Day-Ahead Schedules, schedules for Ancillary Services to the SCs which either:
 - (i) submitted Ancillary Services bids and which, as a result, have been selected to supply Ancillary Services; or
 - (ii) submitted schedules to self-provide Ancillary Services and which schedules have been validated by the ISO; and
 - (iii) specified Inter-Scheduling Coordinator Ancillary Service Trades which have been validated by the ISO; and
- (e) the ISO will coordinate with adjacent Control Areas on the net schedules between the ISO Control Area and such other Control Areas. If the ISO and the operator of an adjacent Control Area have different records with respect to the net schedules, individual SC intertie schedules will be examined. If the other Control Area's records are determined to be correct, the ISO will notify the affected SC. If the other Control Area Operator's records are in error, no changes will be required by the ISO or affected SCs. The affected SC is required to correct its schedule in the Hour-Ahead Market.

SP 3.2.10 By 1:30 pm, Day Ahead

By 1:30 pm on the day ahead of the Trading Day (for example, by 1:30 pm on Tuesday for the Wednesday Trading Day) and for each Settlement Period of the Trading Day the ISO will publish, via WEnet, an updated forecast of system Demands.

SP 3.2.11 Between 1:00 p.m. and 10:00 p.m.

If, at any time after 1:00 p.m. and before 10:00 p.m. of the day prior to the Trading Day, the ISO determines that it requires Ancillary Services in addition to those provided through the Final Day-Ahead Schedules issued under SP 3.2.9, it may procure such additional Ancillary Services by providing to SCs, via WEnet, amended schedules for Ancillary Services that had been bid in the Day-Ahead Market but were not previously selected in the Final Day-Ahead Schedules, and have not been previously withdrawn. The ISO shall select such Ancillary Services in price merit order (and in the relevant Zone if the ISO is procuring Ancillary Services on a Zonal basis). Such amended schedules shall be provided to the SCs no later than 10:00 p.m. of the day prior to the Trading Day.

Issued by: Charles F. Robinson, Vice President and General Counsel

SP 3.3 Hour-Ahead Market

- (a) The Hour-Ahead Market is a "deviations" market in that it represents changes from the Day-Ahead Market commitments already made for each Settlement Period in the Trading Day. The SCs do not schedule these deviations. Instead, these deviations are calculated by the ISO as the difference between the Final Hour-Ahead Schedules (reflecting updated forecasts of Generation, Demand, external imports/exports and Inter-Scheduling Coordinator Energy Trades) and the Final Day-Ahead Schedules. If a SC does not submit a valid Preferred Hour-Ahead Schedule, its Final Day-Ahead Schedule will be deemed to be its Preferred Hour-Ahead Schedule.
- (b) The Hour-Ahead Markets for each Settlement Period of each Trading Day open when the Day-Ahead Market commitments are made for the same Trading Day. Hour-Ahead Market commitments are made one hour ahead of the start of the applicable Settlement Period, at which time the ISO issues the Final Hour-Ahead Schedules. There is an option in the bid submittal process for a SC to submit a Schedule or bid for one Settlement Period of the Trading Day or a set of Schedules and bids for all Settlement Periods of the Trading Day (but only between 1:00 pm and 12:00 midnight the day before).
- (c) For each Hour-Ahead Market of the Trading Day the ISO's validation of SCs' contract usage templates, associated with Existing Contract rights or Firm Transmission Rights, will be performed. If a derate of an Inter-Zonal Interface has occurred which affects an SC's Final Day-Ahead Schedule or Ancillary Service commitments, the ISO will notify the SC, via the WEnet, of its available contract capacity. Additionally, the ISO will validate SCs' scheduled usage against SCs' contract usage templates and notify SCs of any invalidated usage. Such validations and notifications associated with contract usage, available contract capacities and invalidated contract usage will occur during the two hours prior to the ISO's deadline for receiving Preferred Hour-Ahead Schedules.

SP 3.3.1 By Two Hours and Fifteen Minutes Ahead

By two hours and fifteen minutes ahead of the Settlement Period (for example, by 9:45 am for the Settlement Period starting at 12:00 noon [or hour ending 1300]) and with respect to that Settlement Period:

SP 3.3.1.1 Actions by SCs and the ISO

- (a) SCs will submit their Preferred Hour-Ahead Schedules to the ISO in accordance with the SBP:
- (b) SCs will submit, as part of their Preferred Hour-Ahead Schedules, their Adjustment Bids, if any, to the ISO in accordance with the SBP;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 25, 2002 Effective: December 11, 2002

- (c) SCs will submit their Ancillary Services bids, if any, to the ISO in accordance with the SBP and SP 9;
- (d) SCs will submit their Schedules for self-provided Ancillary Services and Inter-Scheduling Coordinator Ancillary Service Trades, if any, to the ISO in accordance with the SBP and SP 9:
- the ISO will validate (in accordance with the SBP) all SC submitted Preferred Hour-Ahead Schedules for Energy and Adjustment Bids;
- (f) SCs will submit contract usage templates for scheduled uses of Existing Contract rights and Firm Transmission Rights in accordance with the Hour-Ahead Market schedule, including usage template changes needed in response to line derations;
- (g) the ISO will validate (in accordance with the SBP) all contract usage templates received from SCs for scheduled uses of Existing Contract rights and Firm Transmission Rights;
- (h) the ISO will validate (in accordance with the SBP) all SC submitted Schedules for self-provided Ancillary Services, Inter-Scheduling Coordinator Ancillary Service Trades, and Ancillary Services bids which were part of their Preferred Hour-Ahead Schedules:
- (i) the ISO will start the Inter-Zonal Congestion Management process as described in SP 10;
- (j) the ISO will start the Ancillary Services bid evaluation process as described in SP 9; and
- (k) the ISO will validate that all SC submitted Preferred Hour-Ahead Schedules are compatible with the RMR requirements of which SCs were notified for that Trading Day and with the SCs' elected options for delivering the required Energy.

SP 3.3.1.2 Pre-validation

At 10 minutes prior to the deadline for submittal of the Preferred Hour-Ahead Schedules, Adjustment Bids, schedules for self-provided Ancillary Services, Inter-Scheduling Coordinator Ancillary Service Trades, and Ancillary Services bids (the "submittal"), the ISO shall conduct a pre-validation of the stage two validation described in the SBP. The purpose of this is to allow the SCs, particularly those involved in the Inter-Scheduling Coordinator Energy Trades, to identify and resolve any validation problems. The ISO will immediately communicate the results of the pre-validation of each SC's submittal to that SC via WEnet.

SP 3.3.1.3 Invalidation

Except with respect to invalidated contract usage associated with Existing Contract rights or Firm Transmission Rights, invalidation of the

Issued by: Charles F. Robinson, Vice President and General Counsel

submittal results in rejection of the submittal. SCs will be notified of any invalid contract usage via an invalidated contract usage template issued, via the WEnet, by the ISO. Invalidation of contract usage will not cause the rejection of the SC's submittal; instead, invalid contract usage will be treated as new firm uses of ISO transmission service without the priorities and protections afforded the scheduled use of Existing Contract rights and Firm Transmission Rights. SCs may check at any time prior to two hours and fifteen minutes ahead of the relevant Settlement Period whether or not their submittals will pass the ISO's validation checks (which are undertaken at two hours and fifteen minutes ahead of the Settlement Period). It is the responsibility of SCs to perform such checks since Preferred Hour-Ahead Schedules. Adjustment Bids, schedules of self-provided Ancillary Services, Inter-Scheduling Coordinator Ancillary Service Trades and Ancillary Services bids which are invalidated cannot be resubmitted for the Hour-Ahead Market after two hours and fifteen minutes ahead of the relevant Settlement Period. The ISO will immediately communicate the results of each SC's two hour and fifteen minute ahead validation to that SC via WEnet. If the usage or sum of the usages associated with an Existing Contract results in the contract being over-scheduled, the usages will be adjusted such that a usage in excess of the Existing Contract rights will be considered a new firm use (NFU) and will be exposed to Congestion charges.

SP 3.3.2 By One Hour Ahead

By one hour ahead of the Settlement Period (for example, by 11:00 am for the Settlement Period starting at 12:00 noon [or hour ending 1300]) and in respect of that Settlement Period:

- (a) The ISO will use the SC's Final Day-Ahead Schedule, without any Day-Ahead Adjustment Bids or Day-Ahead Ancillary Service bids, in the event the SC's Preferred Hour-Ahead Schedule fails validation. If a SC desires to submit an Hour-Ahead Schedule that is different than its Final Day-Ahead Schedule the SC must submit the Hour-Ahead Schedule including the addition or removal of any resources (i.e., for those resources to be removed, a zero value for the hourly MW quantity) in its Final Day-Ahead Schedule that are to be added, or that are not to be included, in the Hour-Ahead Schedule. A SC's failure to add or remove such resources will cause the Hour-Ahead Schedule to be unbalanced, and rejected as such in the ISO's validation process.
- (b) the ISO will complete, if necessary, the Inter-Zonal Congestion Management process described in SP 10;
- (c) the ISO will provide, via WEnet, Final Hour-Ahead Schedules for Energy to the ISO's real-time dispatchers for use under the DP and to all SCs which, depending on the existence of Inter-Zonal Congestion, could be:
 - (i) the Preferred Hour-Ahead Schedules (when no Congestion was found at one hour ahead); or

Issued by: Charles F. Robinson, Vice President and General Counsel

- (ii) modified Preferred Hour-Ahead Schedules for those SCs which had their Preferred Hour-Ahead Schedules for Energy modified for Inter-Zonal Congestion; and
- (d) the ISO will publish on WEnet the Hour-Ahead Usage Charge rate (in \$/MWh of scheduled flow) for Energy transfers between Zones, if any;
- (e) the ISO will provide, via WEnet, as part of the Final Hour-Ahead Schedules, schedules for Ancillary Services to the ISO's real-time dispatchers for use under the DP and to the SCs which either:
 - (i) submitted Ancillary Services bids and which, as a result, have been selected to supply Ancillary Services; or
 - (ii) specified Inter-Scheduling Coordinator Ancillary Service Trades, or submitted schedules to self-provide Ancillary Services and which schedules have been validated by the ISO; and
- (f) each SC will provide the ISO, via a form and by means of communication specified by the ISO, resource specific information for all Generating Units and Curtailable Demands constituting its System Unit, if any, scheduled or bid into the ISO's Day-Ahead Market and/or Hour-Ahead Market for Ancillary Services.
- (g) the ISO will coordinate with adjacent Control Areas on the net schedules between the ISO Control Area and such other Control Areas. If the ISO and the operator of an adjacent Control Area have different records with respect to the net schedules, individual SC intertie schedules will be examined. If the other Control Area operator's records were in error, no changes will be required by the ISO or SCs. If the other Control Area operator's records are determined to be correct, the ISO will notify the affected SC. The ISO will manually adjust the affected SC's schedule to conform with the other Control Area operator's net schedule, in real time, and the affected SC will be responsible for managing any resulting Energy imbalance.

SP 4 TRANSMISSION SYSTEM LOSS MANAGEMENT

SP 4.1 Overview

(a) A SC must ensure that each Schedule it submits to the ISO is a Balanced Schedule in which aggregate Generation and external imports (adjusted for Transmission Losses) and Inter-Scheduling Coordinator Energy Trades equals the aggregate Forecast Demand and external exports. The ISO will, for this purpose, specify GMMs for each Energy supply source

Issued by: Charles F. Robinson, Vice President and General Counsel

(Generating Units and external imports at Scheduling Points) to account for the Energy lost in transmitting power from Generating Units and/or Scheduling Points to Load. Inter-Scheduling Coordinator Energy Trades will not be subject to such adjustments, beyond the impact of GMMs on the respective SC's Generation and external imports. The ISO will, in accordance with this SP 4, derive a location specific GMM for each Generating Unit and external import on the ISO Controlled Grid.

(b) At all times, the ISO will make available GMMs for the seven Trading Days starting with the Trading Day after the next Trading Day. Each day, at 6:00 pm, the ISO will calculate and publish, via WEnet, the GMMs applicable to the Day-Ahead Markets and the Hour-Ahead Markets for the eighth (8th) Trading Day forward. In other words, if the current Trading Day is day 0, the ISO will publish at 6:00 pm today, via WEnet, the GMMs for Trading Days 2 through 8. On Trading Day 1, at 6:00 pm, the ISO will drop the GMMs for Trading Day 1 and add the newly calculated GMMs for Trading Day 9, with the GMMs for Trading Days 3 through 8 remaining the same.

SP 4.2 Generator Meter Multipliers (GMMs)

SP 4.2.1 Derivation of GMMs

- (a) The ISO will utilize the Power Flow Model to determine the GMMs which will be used to allocate, to each Generating Unit and external import, scheduled and Ex Post Transmission Losses.
- (b) For each Settlement Period, the GMMs will be first calculated before SCs submit Day-Ahead Preferred Schedules. Prior to the time when SCs are required to submit their Day-Ahead Preferred Schedules, the ISO will forecast the total Control Area Demand. This forecast, along with the ISO forecast of Generation and Demand patterns throughout the ISO Control Area, will be used to develop estimated GMMs for each Generating Unit and each external import. The ISO will calculate and publish (in accordance with SP 3.2.1) GMMs for each Settlement Period to reflect different expected Generation and Demand patterns and expected operations and maintenance requirements, such as line Outages, which could affect Transmission Loss determination and allocation.
- (c) The ISO will utilize the real-time Power Flow Model to calculate Ex Post GMMs to allocate Ex Post Transmission Losses to each Generating Unit and each external import. This run of the Power Flow Model will use metered Generation and Demand. Any difference between scheduled and Ex Post Transmission Losses will be considered as an Imbalance Energy deviation and will be purchased or sold in the Real Time Market at the Settlement Interval Ex Post Price.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After October 13, 2000

SP 4.2.2 Methodology for Calculating Transmission Losses

- (a) The ISO Power Flow Model will be utilized to calculate the effects on total Transmission Losses at each Generating Unit and Scheduling Point by calculating the sensitivity of injecting Energy at each Generating Unit bus or Scheduling Point to serve an increment of Demand distributed proportionately throughout the ISO Control Area. This will produce the Full Marginal Loss Rate at each Generating Unit and Scheduling Point.
- (b) The ISO will then determine the ratio of expected Transmission Losses to the total Transmission Losses that would be collected if Full Marginal Loss Rates were utilized to determine Transmission Losses. This ratio is referred to as the Loss Scale Factor.
- (c) The ISO will then multiply the Loss Scale Factor by the Full Marginal Loss Rate at each Generating Unit or Scheduling Point to determine each Generating Unit's or external import's Scaled Marginal Loss Rate. The GMM is calculated by subtracting the Scaled Marginal Loss Rate from unity.

SP 4.3 Existing Contracts and Transmission Losses

Certain Existing Contracts may have requirements for Transmission Loss accountability which differ from the provisions of this SP 4. Each PTO will be responsible for recovering any deficits or crediting any surpluses, associated with differences in assignment of Transmission Loss requirements, through its bilateral arrangements or its Transmission Owner's Tariff. The ISO will not undertake the settlement or billing of any such differences under any Existing Contract.

SP 5 RELIABILITY MUST-RUN GENERATION

SP 5.1 Procurement of Reliability Must-Run Generation by the ISO

SP 5.1.1 Annual Reliability Must-Run Forecast - Technical Evaluation

On an annual basis, the ISO will carry out technical evaluations based upon historic patterns of the operation of the ISO Controlled Grid and the ISO's forecast requirements for maintaining the reliability of the ISO Controlled Grid in the next year. The ISO will then determine which Generating Units it requires to continue to be Reliability Must-Run Units, which Generating Units it no longer requires to be Reliability Must-Run Units and which Generating Units it requires to become the subject of a Reliability Must-Run Contract which had not previously been so contracted to the ISO. None of the Generating Units owned by Local Publicly Owned Electric Utilities are planned to be designated as Reliability Must-Run Units by the ISO as of the ISO Operations Date but are expected to be operated in such a way as to maintain the safe and reliable operation of the interconnected transmission system comprising the ISO Control Area. However, in the future, Local Publicly Owned Electric Utilities may contract with the ISO to provide Reliability Must-Run Generation.

Issued by: Roger Smith, Senior Regulatory Counsel

First Revised Sheet No. 612 Superseding Original Sheet No. 612

SP 5.1.2 Annual Reliability Must-Run Forecast - Technical Studies

The ISO will perform off-line technical studies, adopt existing procedures developed by PTOs and/or develop new operating procedures to identify the Reliability Must-Run requirements for various levels of system Demand.

SP 5.2 Designation of Generating Unit as Reliability Must-Run

The ISO will have the right at any time based upon ISO Controlled Grid technical analyses and studies to designate or disqualify a Generating Unit as a Reliability Must-Run Unit.

SP 5.3 Scheduling of Reliability Must-Run Generation

The ISO will notify SCs of any Reliability Must-Run Units which the ISO requires to run during a Trading Day no later than 5:00 am on the day before that Trading Day, as described in SP 3.2.1.1.

- SP 5.4 [UNUSED]
- SP 6 [UNUSED]
- SP 7 MANAGEMENT OF EXISTING CONTRACTS FOR TRANSMISSION SERVICE
- SP 7.1 Obligations of Participating Transmission Owners and Scheduling Coordinators

SP 7.1.1 Participating Transmission Owners

Prior to the ISO accepting Schedules which include the use of Existing Rights, the Responsible PTO (as defined in the SBP) must have provided the ISO with the information required in the Transmission Control Agreement and the SBP, including transmission rights/curtailment instructions ("instructions") supplied in a form and by means of communication specified by the ISO.

SP 7.1.2 Scheduling Coordinators

The ISO will accept valid Schedules from a Responsible PTO that is the SC for the Existing Contract rights holders, or from Existing Contract rights holders that are SCs, or that are represented by a SC other than the Responsible PTO. Schedules submitted by SCs to the ISO which include the use of Existing Rights must be submitted in accordance with the SBP and this SP.

SP 7.2 Allocation of Forecasted Total Transfer Capabilities

SP 7.2.1 Categories of Transmission Capacity

As used in this SP, references to new firm uses shall mean any use of ISO transmission service, except for uses associated with Existing Rights. Prior to the start of the Day-Ahead scheduling process, for each Inter-Zonal Interface, the ISO will allocate the forecasted total transfer capability of the Interface to four categories. This allocation

Issued by: Charles F. Robinson, Vice President and General Counsel

will represent the ISO's best estimates at the time, and is not intended to affect any rights provided under Existing Contracts, except as provided in SP 7.4. The ISO's forecast of total transfer capability for each Inter-Zonal Interface will depend on prevailing conditions for the relevant Trading Day, including, but not limited to, the effects of parallel path (unscheduled) flows and/or other limiting operational conditions. This information will be posted on WEnet by the ISO in accordance with SP 3.2.1. In accordance with Section 2.4.4.5.1.4 of the ISO Tariff, the four categories are as follows:

- (a) transmission capacity that must be reserved for firm Existing Rights;
- (b) transmission capacity that may be allocated for use as ISO transmission service (i.e., "new firm uses");
- (c) transmission capacity that may be allocated by the ISO for conditional firm Existing Rights; and
- (d) transmission capacity that may remain for any other uses, such as non-firm Existing Rights for which the Responsible PTO has no discretion over whether or not to provide such non-firm service.

SP 7.2.2 Prioritization of Transmission Uses

The following rules are designed to enable the ISO to honor Existing Contracts in accordance with Sections 2.4.3 and 2.4.4 of the ISO Tariff. Regardless of the success of the application of such rules, it is intended that the rights under Existing Contracts will be honored as contemplated by the ISO Tariff. In each of the categories described in SP 7.2.1, the terms and conditions of service may differ among transmission contracts. These differences will be described by each Responsible PTO in the instructions submitted to the ISO in advance of the scheduling process in accordance with the SBP. In addition. Generation, Inter-Scheduling Coordinator Energy Trade imports or external imports in one Zone must be matched by an equal magnitude of Demand. Inter-Scheduling Coordinator Energy Trade exports or external exports in an adjacent Zone (see SP 7.2.3 for a summary of allowable linkages). Scheduling and curtailment priorities associated with each category will be defined by SCs through the use of contract usage templates submitted as part of their Schedules as described in the SBP.

(a) Transmission capacity for Schedules will be made available to holders of firm Existing Rights in accordance with this SP and the terms and conditions of their Existing Contracts. In the event that the firm uses of these rights must be curtailed, they will be curtailed on the basis of priority expressed in contract usage templates. So as not to be curtailed before any other scheduled use of Congested Inter-Zonal Interface capacity, the ISO's Congestion

Issued by: Roger Smith, Senior Regulatory Counsel

Management software will assign high priced Adjustment Bids to the scheduled uses (for example, a difference of \$130.000/MWh to \$140.000/MWh for Demand or external exports and a difference of -\$130,000/MWh to -\$140,000/MWh for Generation or external imports). This range will be reserved strictly for use in association with the prioritization of firm Existing Rights to use available Inter-Zonal Interface transmission capacity. These high priced Adjustment Bids are only for the ISO's use, in the context of Inter-Zonal Congestion Management, in recognizing the various levels of priority that may exist among the scheduled uses of firm transmission service. These high priced Adjustment Bids will not affect any other rights under Existing Contracts. To the extent that the MW amount exceeds the MW amount specified in the Existing Contract, the excess scheduled amount will be treated as a new firm use of ISO transmission services as described in (b) below. Note that, in some instances, for a particular Inter-Zonal Interface, there may be multiple SCs submitting Schedules under several different Existing Contracts on behalf of several Existing Contract rights holders. In these circumstances, and to the extent the rights holders desire to coordinate the prioritization of their firm uses of the Inter-Zonal Interface, their SCs will make the arrangements among themselves ahead of the ISO's scheduling process. In the absence of a valid contract usage template associated with Existing Contract rights, the ISO will treat the scheduled use of transmission service as a "price-taker" of ISO transmission service subject to Usage Charges.

- (b) ISO transmission service (i.e., "new firm uses") will be priced in accordance with the ISO Tariff. Usage Charges associated with the ISO's Congestion Management procedures, as described in SP 10, will be based on Adjustment Bids. In the absence of an Adjustment Bid, the ISO will treat the scheduled "new firm use" of ISO transmission service as a price taker paying the Usage Charge established by the highest valued use of transmission capacity between the relevant Zones.
- (c) Transmission capacity will be made available to holders of conditional firm Existing Rights in a manner similar to that done prior to the ISO Operations Date; that is, allocated, as available, based on the agreed priority. The levels of priority will be expressed in the contract usage templates associated with the Schedules. To the extent that the MW amount in a schedule exceeds the MW amount specified in the contract usage template, the excess scheduled amount will be treated as a new firm use of ISO transmission services as described in (b) above. Note that, in some instances, for a particular Inter-Zonal Interface, there may be multiple SCs submitting Schedules under several

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 31, 2003 Effective: May 30, 2003

different Existing Contracts on behalf of several Existing Contract rights holders. In these circumstances, and to the extent the rights holders desire to coordinate the prioritization of their conditional firm uses of the Inter-Zonal Interface, their SCs will make the arrangements among themselves ahead of the ISO's scheduling process. In the absence of a valid contract usage template associated with Existing Contract rights, the ISO will treat the scheduled use of transmission service as a "price-taker" of ISO transmission services subject to Usage Charges.

(d) Transmission capacity will be made available to holders of non-firm Existing Rights in a manner similar to that done prior to the ISO Operations Date; that is, treated as the lowest valued use of available transmission capacity. Non-firm uses of transmission capacity under Existing Contracts will be indicated in Schedules submitted by SCs as \$0.00/MWh Adjustment Bids. Therefore, there will be no contract reference number associated with non-firm Existing Contract rights.

SP 7.2.3 Allowable Linkages

As indicated in SP 7.2.2, Generation, Inter-Scheduling Coordinator Energy Trade imports or external imports in one Zone must be matched by an equal magnitude of Demand, Inter-Scheduling Coordinator Energy Trade exports or external exports in the same Zone or in an adjacent Zone.

SP 7.3 The Day-Ahead Process

SP 7.3.1 Validation

The ISO will coordinate the scheduling of the use of Existing Rights with new firm uses in the Day-Ahead process. The ISO will validate the Schedules submitted by SCs on behalf of the rights holders for conformity with the instructions previously provided by the Responsible PTO in accordance with the SBP. Invalid Schedules will be rejected and the ISO will immediately communicate the results of each SC's validation to that SC via WEnet.

SP 7.3.2 Scheduling Deadlines

Those Existing Contract rights holders who must schedule the use of their rights by the deadline for the submission of Schedules in the Day-Ahead Market must do so. After this time, the ISO will release these unused rights as available for new firm uses (not subject to recall).

SP 7.3.3 Reservation of Firm Transmission Capacity

As an initial step in performing its Day-Ahead Congestion Management analysis, the ISO will determine the amount of transmission capacity that is available and subject to its Protocols by subtracting, from the total transfer capability of the Inter-Zonal Interface, the unused portions

Issued by: Roger Smith, Senior Regulatory Counsel

of capacity applicable to firm Existing Rights. For purposes of Congestion Management, the total transfer capability of the Inter-Zonal Interface is therefore adjusted downward by an amount equal to the unused portions of firm Existing Rights. By reserving these blocks of unused transmission capacity, Existing Contracts rights holders are able to schedule the use of their transmission service on the timelines provided in their Existing Contracts after the deadline of the ISO's Day-Ahead scheduling process (in other words, after 1:00 pm on the day preceding the Trading Day), but prior to the deadline of the ISO's Hour-Ahead scheduling process (in other words, two hours ahead of the Settlement Period).

SP 7.3.4 Allocation of Inter-Zonal Interface Capacities

In the ISO's Congestion Management analysis of the Day-Ahead Market, for each Inter-Zonal Interface:

- if all scheduled uses of transmission service fit within the adjusted total transfer capability, all are accepted (in other words, there is no Congestion);
- (b) if all scheduled uses of transmission service do not fit within the adjusted total transfer capability, scheduled uses of non-firm Existing Rights will be curtailed, pro rata, to the extent necessary. If the remaining scheduled uses of transmission service still do not fit within the adjusted total transfer capability, uses of conditional firm Existing Rights will be curtailed (based upon the levels of priority expressed in the contract usage templates for Schedules as described in SP 7.2.2 (c)) to the extent necessary;
- (c) if Congestion still exists after curtailing all lower priority schedules (e.g. requesting non-firm and conditional firm uses of transmission service under Existing Contracts), the remaining transmission capacity (that is not already reserved as firm Existing Rights) is priced based upon Adjustment Bids. To the extent there are insufficient Adjustment Bids to fully mitigate the remaining Congestion, the default Usage Charge will apply and the ISO will curtail ISO transmission service (in other words, new firm uses other than Firm Transmission Rights uses evaluated in the Day-Ahead process), pro rata, to the extent necessary;
- (d) If Congestion still exists after curtailing all new firm uses (other than Firm Transmission Rights uses) in the Day-Ahead scheduling process, scheduled uses of Firm Transmission Rights are then curtailed, pro rata, to the extent necessary; and
- (e) if Congestion still exists after curtailing ISO new firm uses and uses of Firm Transmission Rights, scheduled uses of firm Existing Rights are then curtailed (based upon the priorities

Issued by: Roger Smith, Senior Regulatory Counsel

expressed in the contract usage templates associated with the Schedules as described in SP 7.2.2 (a)) to the extent necessary.

SP 7.4 The Hour-Ahead Process

SP 7.4.1 Validation

The ISO will coordinate the scheduling of the use of Existing Rights with new firm uses, in the Hour-Ahead process. The ISO will validate the submitted Schedules for conformity with the instructions provided by the Responsible PTOs, in accordance with the SBP. Invalid schedules will be rejected and the ISO will immediately communicate the results of each SC's validation to that SC via WEnet.

SP 7.4.2 Scheduling Deadlines

Those rights holders who must schedule the use of their rights by the deadline for the submission of Schedules in the Hour-Ahead Market must do so. After this time, the ISO will release these unused rights as available for new firm uses (not subject to recall).

SP 7.4.3 Acceptance of Firm Transmission Schedules

Before allocating any remaining transmission capacity under the following provisions of this SP 7, the ISO will accept Schedules associated with firm Existing Rights (subject to validation under SP 7.4.1), allocating transmission capacity for use by these rights holders.

SP 7.4.4 Reservation of Firm Transmission Capacity

The ISO will adjust the total transfer capabilities of Inter-Zonal Interfaces with respect to firm Existing Rights as it does in its Day-Ahead process described in this SP 7.3.3. Therefore, holders of Existing Rights are still able to exercise whatever scheduling flexibility they may have under their Existing Contracts after the Schedules and bids submittal deadline of the ISO's Hour-Ahead scheduling process, as described further in SP 7.5.

SP 7.4.5 Allocation of Inter-Zonal Interface Capacities

In the ISO's Congestion Management analysis of the Hour-Ahead Market, for each Inter-Zonal Interface:

- if all scheduled uses of transmission service fit within the total transfer capability, all are accepted (in other words, there is no Congestion);
- (b) if all scheduled uses of transmission service do not fit within the total transfer capability, scheduled uses of non-firm Existing Rights will be curtailed, pro rata, to the extent necessary. If the remaining scheduled uses of transmission service still do not fit within the total transfer capability, scheduled uses of conditional firm Existing Rights will be curtailed (based upon the levels of priority expressed in the contract usage templates for the Schedules as described in SP 7.2.2 (c)) to the extent necessary;

Issued by: Roger Smith, Senior Regulatory Counsel

- (c) if Congestion still exists after curtailing all lower priority schedules (e.g. representing non-firm and conditional firm uses of transmission service under Existing Contracts), the remaining transmission capacity (the subject of firm Existing Rights) is priced based upon Adjustment Bids. To the extent there are insufficient Adjustment Bids to fully mitigate the remaining Congestion, the default Usage Charge will apply and the ISO will curtail ISO transmission service (in other words, new firm uses including new firm uses of Firm Transmission Rights), pro rata, to the extent necessary; and
- (d) if Congestion still exists after curtailing ISO new firm uses, scheduled uses of firm Existing Rights will be curtailed (based upon the priorities expressed in the contract usage template associated with the Schedules as described in SP 7.2.2 (a)) to the extent necessary.

SP 7.5 The ISO's Real-Time Process

Consistent with SP 7.4.4, the ISO will honor those scheduling flexibilities that may be exercised by holders of Existing Rights through their respective SCs during the ISO's real-time processes to the extent that such flexibilities do not interfere with or jeopardize the safe and reliable operation of the ISO Controlled Grid or Control Area operations. The real-time processes described in SP 7.5.1 and SP 7.5.2 will occur during the three hours following the ISO's receipt of Preferred Hour-Ahead Schedules (that is, from two hours ahead of the start of the Settlement Period through the end of such Settlement Period).

SP 7.5.1 Inter-Control Area Changes to Schedules that Rely on Existing Rights

Changes to Schedules that occur during the ISO's real-time processes that involve changes to ISO Control Area imports or exports with other Control Areas (that is, inter-Control Area changes to Schedules) will be allowed and will be recorded by the ISO based upon notification received from the SC representing the holder of the Existing Rights. The ISO must be notified of any such changes to external import/export schedules. The ISO will receive notification of real-time changes to external import/export schedules, by telephone, from the SC representing the holder of the Existing Rights. The timing and content of any such notification must be consistent with the instructions previously submitted to the ISO by the Responsible PTO in accordance with the SBP. The ISO will manually adjust the SC's schedule to conform with the other Control Area's net schedule in real time, and the notifying SC will be responsible for and manage any resulting Energy imbalance. These Imbalance Energy deviations will be priced and accounted to the SC representing the holder of Existing Rights in accordance with the SABP.

Issued by: Charles F. Robinson, Vice President and General Counsel

SP 7.5.2 Intra-Control Area Changes to Schedules that Rely on Existing Rights

Changes to Schedules that occur during the ISO's real-time processes that do <u>not</u> involve changes to ISO Control Area imports or exports with other Control Areas (that is, intra-Control Area changes to Schedules) will be allowed and will give rise to Imbalance Energy deviations. These Imbalance Energy deviations will be priced and accounted to the SC representing the holder of Existing Rights in accordance with the SABP.

SP 8 OVERGENERATION MANAGEMENT

SP 8.1 Real-Time Overgeneration Management

Overgeneration management in real time will be conducted in accordance with the DP.

SP 9 DAY/HOUR-AHEAD ANCILLARY SERVICES MANAGEMENT

SP 9.1 Bid Evaluation and Scheduling Principles

The ISO will evaluate Ancillary Services bids based on the following principles:

- (a) the ISO will not differentiate between bidders other than through reserve (Regulation and Operating Reserves) price and capability to provide the reserve service, and the required locational mix of services:
- (b) to minimize the costs to users of the ISO Controlled Grid, the ISO will select the bidders with lowest bids for reserve which meet its technical requirements, including location and operating capability;
- (c) the ISO will (to the extent available) procure sufficient Ancillary Services to meet its technical requirements as defined in the ASRP;
- (d) the ISO will evaluate and price only those Ancillary Services bids received in accordance with the SBP;
- (e) the ISO will require SCs to honor their Day-Ahead Ancillary Services schedules and/or bids when submitting their Hour-Ahead Ancillary Services schedules and/or bids. A Scheduling Coordinator who has sold or self-provided Regulation, Spinning Reserve, Non-Spinning Reserve or Replacement Reserve capacity to the ISO in the Day-Ahead Market shall be required to replace such capacity to the extent scheduled self-provision is decreased between the Day-Ahead and Hour-Ahead Markets, or to the extent the Ancillary Service associated with a Generating Unit, Curtailable Demand, or System Resource successfully bid in a Day-Ahead Ancillary Service Market is reduced in the Hour-Ahead Market, for any reason (other than

Issued by: Charles F. Robinson, Vice President and General Counsel

the negligence or willful misconduct of the ISO, or a Scheduling Coordinator's involuntary decrease in such sold capacity or scheduled self-provision on the instruction of the ISO). The price for such replaced Ancillary Service shall be at the Market Clearing Price in the Hour-Ahead Market for the same Settlement Period for the Ancillary Service capacity concerned. Increases in each Scheduling Coordinator's self-provided Ancillary Services between the Day-Ahead and Hour-Ahead Markets shall be limited to the estimated incremental Ancillary Service requirement associated with the increase between the Day-Ahead and Hour-Ahead Markets in that Scheduling Coordinator's scheduled Zonal Load. Notwithstanding this limit on increases in Hour-Ahead self-provision, a Scheduling Coordinator may buy or sell Ancillary Services through Inter-Scheduling Coordinator Ancillary Service Trades in the Hour-Ahead Market:

- (f) due to the design of the ISO's scheduling software, the ISO will not take into account Usage Charges in the evaluation of Ancillary Services bids or in price determination and, in the event of Congestion in the Day-Ahead Market or Hour-Ahead Market, Ancillary Services will be procured and priced on a Zonal basis; and
- (g) due to the design of the ISO's scheduling system, any specific resource can bid to supply a specific Ancillary Service or can self-provide such Ancillary Service but cannot do both in the same Settlement Period.

SP 9.2 Sequential Evaluation of Bids

- (a) When SCs bid into the Regulation, Spinning Reserve, Non-Spinning Reserve and Replacement Reserve markets, the same resource capacity may be offered into more than one of these Ancillary Services markets at the same time. The ISO will evaluate bids in the reserve markets for Regulation, Spinning Reserve, Non-Spinning Reserve and Replacement Reserve sequentially and separately in the following order:
 - (i) Regulation
 - (ii) Spinning Reserve
 - (iii) Non-Spinning Reserve; and
 - (iv) Replacement Reserve.
- (b) SCs are allowed to specify different reserve prices and different Energy prices for each Ancillary Service they bid. SCs can bid the same resource capacity into any one or all of the Ancillary Service markets they desire. Any resource capacity accepted by the ISO in one of these reserve markets will be deducted from the resource capacity bid into the other reserve markets, except that resource

Issued by: Charles F. Robinson, Vice President and General Counsel

capacity accepted in the Regulation market that represents the downward range of movement accepted by the ISO will not be deducted from the resource capacity bid into other reserve markets.

SP 9.3 Scheduling Ancillary Services Resources

- (a) SCs are allowed to self-provide all or a portion of the following Ancillary Services to satisfy their obligations to the ISO:
 - (i) Regulation;
 - (ii) Spinning Reserve;
 - (iii) Non-Spinning Reserve; and
 - (iv) Replacement Reserve.
- (b) The ISO will reduce the quantity of Ancillary Services it competitively procures by the corresponding amount of the Ancillary Services that SCs self-provide.
- (c) The ISO shall prepare supplier schedules for Ancillary Services (both self-provided and purchased by the ISO) for the Day-Ahead Market and the Hour-Ahead Market.
- (d) The Ancillary Services schedules shall contain the information set out in the SBP for each Settlement Period of the following Trading Day in the case of the Day-Ahead Schedules or for a specific Settlement Period in the case of Hour-Ahead Schedules.
- Once the ISO has given SCs notice of the Day-Ahead and (e) Hour-Ahead Schedules, these schedules represent binding commitments made in the reserve markets between the ISO and the SCs concerned. A Scheduling Coordinator who has sold or self-provided Regulation, Spinning Reserve, Non-Spinning Reserve or Replacement Reserve capacity to the ISO in the Day-Ahead Market shall be required to replace such capacity to the extent scheduled self-provision is decreased between the Day-Ahead and Hour-Ahead Markets, or to the extent the Ancillary Service associated with a Generating Unit, Curtailable Demand, or System Resource successfully bid in a Day-Ahead Ancillary Service Market is reduced in the Hour-Ahead Market, for any reason (other than the negligence or willful misconduct of the ISO, or a Scheduling Coordinator's involuntary decrease in such sold capacity or scheduled selfprovision on the instruction of the ISO). The price for such replacement shall be at the Market Clearing Price in the Hour-Ahead Market for the Ancillary Service for the Settlement Period concerned for the Zone in which the Generating Unit or other resources on behalf of which the Scheduling Coordinator buys back the capacity, are located. The ISO will purchase the Ancillary Service concerned from another Scheduling

Issued by: Charles F. Robinson, Vice President and General Counsel

- Coordinator in the Hour-Ahead Market in accordance with the provisions of the ISO Tariff.
- (f) Any minimum Energy output associated with Regulation and Spinning Reserve services shall be the responsibility of the SC, as the ISO's auction does not compensate the SC for the minimum Energy output of its Generating Units or System Unit, if any, bidding to provide these services. Accordingly, the SCs shall adjust their Balanced Schedules to accommodate the minimum Energy outputs required by the Generating Units or System Units, if any, included in the Ancillary Services schedules.
- (g) SCs providing one or more of the Ancillary Services cannot change the identification of the Generating Units System Units or external imports of System Resources, if any, or Curtailable Demands offered in the Day-Ahead Market, in the Hour-Ahead Market, or in the Real Time Market (except with respect to System Units, if any, in which case SCs are required to identify and disclose the resource specific information for all Generating Units and Curtailable Demands constituting the System Unit scheduled or bid into the ISO's Day-Ahead Market and Hour-Ahead Market as required in SP 3.3.2(e)).

SP 9.4 Ancillary Service Bid Evaluation and Pricing Terminology

Unless otherwise specifically described herein, the following terminology will apply:

 $CapRes_{ijt}$ = the Ancillary Service reserve reservation bid price (in \$/MW).

 $Cap_{iit}max$ = the maximum amount of reserve that can be

scheduled by the ISO with respect to a SC's bid of that resource to supply Ancillary

Services (in MW).

Cap_{ij} = that portion of an Ancillary Services bid (in

MW), identified in the ISO's evaluation process, that may be used to meet the ISO's *Requirement* for a particular Ancillary Service

 $(Cap_{iit} \leq Cap_{iit}max)$

Requirement = the total amount of reserve that must be

scheduled for a particular Ancillary Service required by the ISO in a Settlement Period (in

MW).

i, j, t = Generating Unit i, Scheduling Coordinator j,

Settlement Period t.

Issued by: Roger Smith, Senior Regulatory Counsel

FIRST REPLACEMENT VOLUME NO. II Superseding Original Sheet No. 623

SP 9.5 Regulation Bid Evaluation and Pricing

SP 9.5.1 Regulation Bid Evaluation

- (a) Based on the quantity and location of the system requirements, the ISO will select Generating Units, System Units, and System Resources with the Regulation bids which minimize the sum of the total Regulation bids of the Generating Units, System Units, and System Resources selected subject to two constraints:
 - (i) the sum of the selected amounts of Regulation bid must be greater than or equal to the required amount of Regulation; and

First Revised Sheet No. 623

- (ii) the amount of Regulation bid for each Generating Unit, System Unit, or System Resource must be less than or equal to that Generating Unit's, System Unit's, or System Resource's ramp rate times *Period* minutes where *Period* minute is established by the ISO, by giving Scheduling Coordinators twenty-four (24) hours advance notice, within a range from a minimum of 10 minutes to a maximum of 30 minutes.
- (b) The total Regulation bid for each Generating Unit, System Unit, or System Resource is calculated by multiplying the reserve reservation bid price by the amount of Regulation bid. Subject to any locational requirements, the ISO will accept winning Regulation bids in accordance with the following criteria:

$$Min \sum_{i,j} TotalBid_{ijt}$$

subject to

$$\sum_{i,j} Cap_{ijt} \ge Requirement_t$$

and

$$Cap_{iit} \leq Cap_{iit} \max$$

where:

 $TotalBid_{ijt} = Cap_{ijt} * CapRes_{ijt}$

Requirement = Amount of upward and downward movement

(Regulation) required by the ISO.

SP 9.5.2 Regulation Price Determination

The price payable to SCs for Regulation made available for upward and downward movement in accordance with the ISO's Ancillary Services schedules will, for each Generating Unit, System Unit, and System Resource concerned, be the Zonal Market Clearing Price for Regulation calculated as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 624 Superseding Original Sheet No. 624

 $Pagc_{ijt} = MCP_{xt}$

where:

the Zonal Market Clearing Price (MCP_{xt}) for Regulation is the highest priced winning reservation bid of a Generating Unit, System Unit, or System Resource serving Demand in Zone X based on the reservation bid price (i.e., $MCP_{xt} = Max$ ($CapRes_{ijt}$) in Zone X for Settlement Period t). In the absence of Inter-Zonal Congestion, the Zonal Market Clearing Prices will be equal.

SP 9.6 Spinning Reserves Bid Evaluation and Pricing

SP 9.6.1 Spinning Reserves Bid Evaluation

- (a) Based on the quantity and location of the system requirements, the ISO will select the Generating Units, System Units and external imports of System Resources with the Spinning Reserve bids which minimize the sum of the total Spinning Reserve bids of the Generating Units, System Units and external imports of System Resources selected subject to two constraints:
 - the sum of the selected amounts of Spinning Reserve bid must be greater than or equal to the required amount of Spinning Reserve; and
 - (ii) the amount of Spinning Reserve bid for each Generating Unit, System Unit or external import of a System Resource must be less than or equal to that Generating Unit's, System Unit's ramp rate times 10 minutes.
- (b) The total Spinning Reserve bid for each Generating Unit, System Unit or external import of a System Resource is calculated by multiplying the reserve reservation bid price by the amount of Spinning Reserve bid. Subject to any locational requirements, the ISO will select the winning Spinning Reserve bids in accordance with the following criteria:

$$Min \sum_{i,j} Totalbid_{ijt}$$

subject to

$$\sum_{i,i} Cap_{ijt} \geq Requirement_t$$

and

 $Cap_{ijt} \leq Cap_{ijt}max$

where:

 $TotalBid_{ijt} = Cap_{ijt} * CapRes_{ijt}$

Requirement = Amount of Spinning Reserve required by the ISO.

Issued by: Charles F. Robinson, Vice President and General Counsel

SP 9.6.2 Spinning Reserves Price Determination

The price payable to SCs for Spinning Reserve made available in accordance with the ISO's Ancillary Services schedules shall, for each Generating Unit, System Unit or external import of a System Resource concerned, be the Zonal Market Clearing Price for Spinning Reserve calculated as follows:

 $Psp_{iit} = MCP_{xt}$

where:

the Zonal Market Clearing Price (MCP_{xt}) for Spinning Reserve is the highest priced winning reservation bid of a Generating Unit, System Unit or external import of a System Resource serving Demand in Zone X based on the reservation bid price (i.e., $MCP_{xt} = Max(CapRes_{ijt})$ in Zone X for Settlement Period t). In the absence of Inter-Zonal Congestion, the Zonal Market Clearing Prices will be equal.

SP 9.7 Non-Spinning Reserves Bid Evaluation and Pricing

SP 9.7.1 Non-Spinning Reserves Bid Evaluation

- (a) Based on the quantity and location of the system requirements, the ISO shall select the Generating Units, System Units, Curtailable Demands and external imports of System Resources with the Non-Spinning Reserve bids which minimize the sum of the total Non-Spinning Reserve bids of the Generating Units, System Units, Curtailable Demands and external imports of System Resources selected subject to two constraints:
 - (i) the sum of the selected amounts of Non-Spinning Reserve bid must be greater than or equal to the required amount of Non-Spinning Reserve; and
 - (ii) the amount of Non-Spinning Reserve bid for each Generating Unit, System Unit, or Curtailable Demand must be less than or equal to that Generating Unit's, System Unit's, Curtailable Demand's, or external import's ramp rate (or time to interruption in the case of a Load offering Demand reduction) times the difference between 10 minutes and the time to synchronize in the case of a Generating Unit, or to interruption in the case of a Load.
- (b) The total Non-Spinning Reserve bid for each Generating Unit, System Unit, Curtailable Demand or external import of a System Resource is calculated by multiplying the reserve reservation bid price by the amount of Non-Spinning Reserve bid. Subject to any locational requirements, the ISO will accept the winning Non-Spinning Reserve bids in accordance with the following criteria:

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II Su

First Revised Sheet No. 626 Superseding Original Sheet No. 626

$$Min \sum_{i,j} Totalbid_{ijt}$$

subject to

$$\sum_{i,j} Cap_{ijt} \geq Requirement_t$$

and

$$Cap_{ijt} \leq Cap_{ijt} max$$

where:

 $TotalBid_{ijt} = Cap_{ijt} * CapRes_{ijt}$

Requirement = Amount of Non-Spinning Reserve required by the ISO.

SP 9.7.2 Non-Spinning Reserves Price Determination

The price payable to SCs for Non-Spinning Reserve made available in accordance with the ISO's Ancillary Services schedules shall, for each Generating Unit, System Unit, Curtailable Demand or external import of a System Resource concerned, be the Zonal Market Clearing Price for Non-Spinning Reserve calculated as follows:

 $Pnonsp_{ijt} = MCP_x$

where:

the Zonal Market Clearing Price (MCP_{xt}) for Non-Spinning Reserve is the highest priced winning reservation bid of a Generating Unit, System Unit, Curtailable Demand or external import of a System Resource serving Demand in Zone X based on the reservation bid (i.e., $MCP_{xt} = Max(CapRes_{ijt})$) in Zone X for Settlement Period t). In the absence of Inter-Zonal Congestion, the Zonal Market Clearing Prices will be equal.

SP 9.8 Replacement Reserves Bid Evaluation and Pricing

SP 9.8.1 Replacement Reserves Bid Evaluation

- (a) Based on the quantity and location of the system requirements, the ISO shall select the Generating Units, System Units, Curtailable Demands and external imports of System Resources with the Replacement Reserve bids which minimize the sum of the total Replacement Reserve bids of the Generating Units, System Units, Curtailable Demands and external imports of System Resources selected subject to two constraints:
 - (i) the sum of the selected amounts of Replacement Reserve bid must be greater than or equal to the required amount of Replacement Reserve; and
 - (ii) the amount of Replacement Reserve bid for each Generating Unit, System Unit, Curtailable Demand or external import of a System Resource must be less than or equal to that Generating Unit's, System Unit's, Curtailable Demand's or external import's ramp

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 627 Superseding Original Sheet No. 627

rate (or time to interruption in the case of a Load offering Demand reduction) times the difference between 60 minutes and the time to synchronize in the case of Generating Unit, or to interruption in the case of Load.

(b) The total Replacement Reserve bid for each Generating Unit, System Unit, Curtailable Demand or external import of a System Resource is calculated by multiplying the reserve reservation bid price by the amount of Replacement Reserve bid. Subject to any locational requirements, the ISO will select the winning Replacement Reserve bids in accordance with the following criteria:

$$Min\sum_{i,j} Totalbid_{ijt}$$

subject to

$$\sum_{i,j} Cap_{ijt} \ge Requirement_t$$

and

 $Cap_{ijt} \leq Cap_{ijt} max$

where:

 $TotalBid_{ijt} = Cap_{ijt} * CapRes_{ijt}$

Requirement = Amount of Replacement Reserve required by the

SP 9.8.2 Replacement Reserves Price Determination

The price payable to SCs for Replacement Reserve made available in accordance with the ISO's Ancillary Services schedules shall, for each Generating Unit, System Unit, Curtailable Demand or external import of a System Resource concerned, be the Zonal Market Clearing Price for Replacement Reserve calculated as follows:

 $Prepres_{ijt} = MCP_{xi}$

where:

the Zonal Market Clearing Price (MCP_{xt}) for Replacement Reserve is the highest priced winning reservation bid of a Generating Unit, System Unit, Curtailable Demand or external import of a System Resource serving Demand in Zone X based on the reservation bid price (i.e., $MCP_{xt} = Max(CapRes_{ijt})$) in Zone X for Settlement Period t). In the absence of Inter-Zonal Congestion, the Zonal Market Clearing Prices will be equal.

SP 9.9 Existing Contracts – Ancillary Services Accountability

Certain Existing Contracts may have requirements for Ancillary Services which differ from the requirements of this SP 9. Each PTO will be responsible for recovering any deficits or crediting any surpluses associated with differences in assignment of Ancillary Services requirements, through its bilateral

Issued by: Charles F. Robinson, Vice President and General Counsel

Second Revised Sheet No. 628

FIRST REPLACEMENT VOLUME NO. II Superseding Sub. First Revised Sheet No. 628

arrangements or its Transmission Owner's Tariff. The ISO will not undertake the settlement or billing of any such differences under any Existing Contract.

SP 10 DAY/HOUR-AHEAD INTER-ZONAL CONGESTION MANAGEMENT

SP 10.1 Congestion Management Assumptions

The Inter-Zonal Congestion Management process is based upon the following assumptions:

- (a) Inter-Zonal Congestion Management will ignore Intra-Zonal Congestion. Intra-Zonal Congestion will be managed in accordance with Tariff Section 7.2.6;
- (b) Inter-Zonal Congestion Management will use a DC optimal power flow (OPF) program that uses linear optimization techniques with active power (MW) controls only; and
- (c) transmission capacity reserved under Existing Contracts will not be subject to the ISO's Congestion Management procedures.

SP 10.2 Congestion Management Process

- (a) Inter-Zonal Congestion Management will involve adjusting Schedules to remove potential violations of Inter-Zonal Interface Constraints, minimizing the Redispatch cost, as determined by the submitted Adjustment Bids that accompany the submitted Schedules. See the SBP for a general description of the use of Adjustment Bids to establish priorities.
- (b) Inter-Zonal Congestion Management will not involve arranging or modifying trades between SCs. Each SC's portfolio will be kept in balance (i.e., its Generation plus external imports, as adjusted for Transmission Losses, and Inter-Scheduling Coordinator Energy Trades (whether purchases or sales) will still match its Demand plus external exports) after the adjustments. Market Participants will have the opportunity to trade with one another and to revise their Schedules during the first Congestion Management iteration in the Day-Ahead Market, and between the Day-Ahead Market and Hour-Ahead Market.
- (c) Inter-Zonal Congestion Management will also not involve the optimization of SC portfolios within Zones (where such apparently non-optimal Schedules are submitted by SCs). Adjustments to individual SC portfolios within a Zone will be either incremental (i.e., an increase in Generation and external imports and a decrease in Demand and external exports) or decremental (i.e., a decrease in Generation and external imports and an increase in Demand and external exports), but not both.
- (d) If Adjustment Bids are exhausted before Congestion is eliminated, the remaining Schedules will be adjusted *pro rata* except for those uses of transmission service under Existing Contracts, which are curtailed in accordance with SP 7.3 and SP 7.4.

SP 10.3 Congestion Management Pricing

(a) The Adjustment Bids that the SCs submit constitute implicit bids for transmission between Zones on either side of a Congested Inter-Zonal Interface. The ISO's Inter-Zonal

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: May 30, 2003

Congestion Management process will allocate Congested transmission to those users who value it the most and will charge all SCs for their allocated usage of Congested Inter-Zonal Interfaces on a comparable basis. All SCs within a Zone will see the same price for transmitting Energy across a Congested Inter-Zonal Interface, irrespective of the particular locations of their Generators, Demands and external imports/exports.

- (b) The ISO will determine the prices for the use of Congested Inter-Zonal Interfaces using the Adjustment Bids. The ISO will collect Usage Charges from SCs for their Scheduled use of Congested Inter-Zonal Interfaces. If Adjustment Bids are exhausted and Schedules are adjusted *pro rata*, the ISO will apply a default Usage Charge calculated in accordance with Section 7.3.1.3 of the ISO Tariff.
- (c) The ISO will rebate the Congestion revenues collected through the Usage Charges to the PTOs which own the Congested Inter-Zonal Interface in proportion to their respective ownership rights.

SP 11 CREATION OF THE REAL-TIME MERIT ORDER STACK

SP 11.1 Sources of Imbalance Energy

The following Energy Bids will be considered in the creation of the real-time merit order stack for Imbalance Energy:

- (a) Supplemental Energy Bids submitted in accordance with the SBP;
- (b) Ancillary Services Energy Bids (except for Regulation) submitted for specific Ancillary Services in accordance with the SBP for those resources which have been selected in the ISO's Ancillary Services auction to supply such specific Ancillary Services; and
- (c) Ancillary Services Energy Bids (except for Regulation) submitted for specific Ancillary Services in accordance with the SBP for those resources which SCs have elected to use to self-provide such specific Ancillary Services and for which the ISO has accepted such self-provision.

SP 11.2 Stacking of the Energy Bids

The sources of Imbalance Energy described in SP 11.1 will be arranged in order of increasing Energy Bid prices to create a merit order stack for use in accordance with the DP. This merit order stack will be arranged without regard to the source of the Energy Bid except that Energy Bids associated with Spinning and Non-Spinning Reserve shall not be included in the merit order stack during normal operating conditions if the capacity associated with such bids has been designated as available to supply Imbalance Energy only in the event of the occurrence of an unplanned Outage, a Contingency or an imminent or

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: Upon Written Notice Provided By The ISO To FERC and Market Participants

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II Superseding Second Revised Sheet No. 629A

actual System Emergency. In the event of an unplanned Outage, a Contingency or threatened or actual System Emergency, all Energy Bids associated with Spinning and Non-Spinning Reserve may be included in the merit order stack. In the event of Inter-Zonal Congestion, separate merit order stacks will be created for each Zone. The information in the merit order stack shall be provided to the real-time dispatcher through the RTD Software.

Third Revised Sheet No. 629A

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: Upon Written Notice Provided By The ISO To FERC and Market Participants

FIRST REPLACEMENT VOLUME NO. II

Superseding Sub. Fourth Revised Sheet No. 630

Where, in any Settlement Interval, the highest decremental Energy Bid in the merit order stack is higher than the lowest incremental Energy Bid, the RTD Software will eliminate the Price Overlap by actually dispatching for all those incremental and decremental bids which fall within the overlap.

References to incremental Energy Bids include references to Demand reduction bids, and for the purpose of applying this algorithm a reduction in Demand shall be treated as an equivalent increase in Generation.

SP 11.3 Use of the Merit Order Stack

The merit order stack, as described in SP 11.2, can be used to supply Energy for:

- (a) satisfying needs for Imbalance Energy (differences between actual and scheduled Generation, Demand and external imports/exports) in real time;
- (b) managing Inter-Zonal Congestion in real time;
- (c) supplying Energy necessary to allow resources providing Regulation service to return to the base point of their regulating ranges in real time;
- (d) recovering Operating Reserves utilized in real time;
- (e) procuring additional Voltage Support required from resources beyond their power factor ranges in real time; and
- (f) Dispatching System Resources and Dispatchable Loads and increasing Generating Units' output to manage Intra-Zonal Congestion in real time.

SP 12 AMENDMENTS TO THE PROTOCOL

If the ISO determines a need for an amendment to this Protocol, the ISO will follow the requirements as set forth in Section 16 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004

Effective: Upon Written Notice By The ISO To FERC and Market Participants

SETTLEMENT AND BILLING PROTOCOL

Issued by: Roger Smith, Senior Regulatory Counsel

SETTLEMENT AND BILLING PROTOCOL

Table of Contents

| SABP 1. | OBJECTIVES, DEFINITIONS AND SCOPE | 636 |
|------------|--|-----|
| SABP 1.1 | Objectives | 636 |
| SABP 1.2 | Definitions | 636 |
| SABP 1.2.1 | Master Definitions Supplement | 636 |
| SABP 1.2.2 | Special Definitions for this Protocol | 636 |
| SABP 1.2.3 | Rules of Interpretation | 637 |
| SABP 1.2.4 | Time | 637 |
| SABP 1.2.5 | Financial Transaction Conventions | 637 |
| SABP 1.2.6 | Currency | 637 |
| SABP 1.3 | Scope | 637 |
| SABP 1.3.1 | Scope of Application to Parties | 637 |
| SABP 1.3.2 | Liability of the ISO | 638 |
| SABP 2. | OVERVIEW OF SETTLEMENT AND BILLING PROCESS | 638 |
| SABP 2.1 | Settlement Software | 638 |
| SABP 2.2 | ISO Accounts | 638 |
| SABP 2.2.1 | Costs Associated with the ISO Trust Accounts | 638 |
| SABP 2.2.2 | Location of the ISO Accounts | 639 |
| SABP 2.2.3 | ISO Trust Accounts | 639 |
| SABP 2.2.4 | The ISO Clearing Account | 639 |
| SABP 2.2.5 | The ISO Reserve Account | 639 |
| SABP 2.2.6 | Accounts of the SCs and Participating TOs | 639 |
| SABP 2.3 | ISO Payments Calendar | 640 |
| SABP 2.3.1 | Contents of ISO Payments Calendar | 640 |
| SABP 2.3.2 | Calendar Content and Format | 640 |
| SABP 2.3.3 | Draft Payments Calendar | 640 |
| SABP 2.3.4 | Final Payments Calendar | 641 |
| SABP 2.3.5 | Update the Final Payments Calendar | 641 |
| SABP 2.3.6 | Final Calendar Binding | 641 |
| SABP 3. | COMPUTATION OF CHARGES | 641 |
| SABP 3.1 | Description of Charges to be Settled | 641 |

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 633

| SABP 3.1.1 | Additional Charges and Payments | 642 |
|------------|--|----------|
| SABP 3.2 | Method of Settlement of Charges | 643 |
| SABP 3.2.1 | Settlement of Payments to/from Scheduling Coordinators and Participating TOs | l 643 |
| SABP 4. | SETTLEMENT STATEMENTS | 643 |
| SABP 4.1 | Preliminary Settlement Statements | 643 |
| SABP 4.1.1 | Timing of Preliminary Settlement Statements | 643 |
| SABP 4.1.2 | Contents of Preliminary Settlement Statements | 643 |
| SABP 4.1.3 | Imbalance Energy Report | 644 |
| SABP 4.2 | Final Settlement Statements | 644 |
| SABP 4.3 | Review, Validation, Confirmation of Preliminary Settlement Statements | 644 |
| SABP 4.4 | Resolving Disputes Relating to Preliminary and Final Settlement Statements | 644 |
| SABP 4.4.1 | Notice | 644 |
| SABP 4.4.2 | Contents of Notice | 645 |
| SABP 4.4.3 | ISO Determination of a Recurring Dispute | 645 |
| SABP 4.4.4 | Amendment | 645 |
| SABP 4.4.5 | ISO Contact | 646 |
| SABP 4.4.6 | Payment Pending Dispute | 646 |
| SABP 4.5 | Settlement Statement Re-runs | 646 |
| SABP 4.5.1 | Notice | 646 |
| SABP 4.5.2 | lso Tariff | 646 |
| SABP 5. | INVOICES | 646 |
| SABP 6. | PAYMENT PROCEDURES | 647 |
| SABP 6.1 | Time of Payment | 647 |
| SABP 6.1.1 | Payment Date | 647 |
| SABP 6.1.2 | Prepayments | 647 |
| SABP 6.2 | Payments to be made by Fed-Wire | 647 |
| SABP 6.3 | Payment Process | 648 |
| SABP 6.3.1 | Use of the ISO Clearing Account | 648 |
| SABP 6.4 | Use of the ISO Reserve Account | 648 |

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 634

| SABP 6.5 | Use of the ISO Surplus Account | 648 |
|------------|---|-----|
| SABP 6.5.1 | I Establishment | 648 |
| SABP 6.5.2 | Other Funds in the ISO Surplus Account. | 648 |
| SABP 6.5.3 | B Distribution of Funds | 649 |
| SABP 6.5.4 | 1 Trust | 649 |
| SABP 6.6 | System Failure | 649 |
| SABP 6.6.1 | At ISO Debtor's Bank | 649 |
| SABP 6.6.2 | 2 At the ISO's Bank | 649 |
| SABP 6.7 | Payment Default | 649 |
| SABP 6.7.1 | Enforcing the Security of a Defaulting Scheduling Coordinator | 650 |
| SABP 6.7.2 | 2 Use of ISO Reserve Account | 650 |
| SABP 6.7.3 | Action against a Defaulting Scheduling Coordinator | 650 |
| SABP 6.7.4 | Reduction of Payments to ISO Creditors | 650 |
| SABP 6.8 | Default to be Remedied Promptly | 650 |
| SABP 6.9 | Replenishing the ISO Reserve Account Following Payment Default | 650 |
| SABP 6.10 | Application of Funds Received | 651 |
| SABP 6.10 | .1 Termination of SC Agreement and Limitation on Trading | 651 |
| SABP 6.10 | .2 Set-Off | 651 |
| SABP 6.10 | .3 Defaulting SCs and Eligible Customers | 651 |
| SABP 6.10 | .4 Order of Payments | 652 |
| SABP 6.10 | .5 Default Interest | 652 |
| SABP 6.10 | .6 Interest Accruing while Enforcing the Security | 652 |
| SABP 7. | PAYMENT ERRORS | 652 |
| SABP 7.1 | Overpayments | 652 |
| SABP 7.1.1 | Notification | 652 |
| SABP 7.1.2 | 2 Overpayment held on Trust | 652 |
| SABP 7.1.3 | Interest on Overpayment | 652 |
| SABP 7.1.4 | Treatment of Amounts Outstanding as a Result of an Overpayment | 653 |
| SABP 8. | COMMUNICATIONS | 653 |
| SABP 8.1 | Method of Communication | 653 |
| SABP 8.2 | Failure of Communications | 653 |

Issued by: Roger Smith, Senior Regulatory Counsel

| SABP 9. | EMERGENCY PROCEDURES | 653 |
|-------------|--|-----|
| SABP 9.1 | Use of Estimated Data | 653 |
| SABP 9.2 | Payment of Estimated Statements and Invoices | 653 |
| SABP 9.3 | Validation and Correction of Estimated Statements and Invoices | 654 |
| SABP 9.4 | Estimated Statements to be Final | 654 |
| SABP 10. | CONFIDENTIAL DATA | 654 |
| SABP 11. | AMENDMENTS TO THE PROTOCOL | 654 |
| SABP APPEND | DIX A - GRID MANAGEMENT CHARGE | 656 |
| SABP APPEND | DIX B - GRID OPERATIONS CHARGES/PAYMENTS | 657 |
| SABP APPEND | DIX C - ANCILLARY SERVICES CHARGES/PAYMENTS | 661 |
| SABP APPEND | DIX D - IMBALANCE ENERGY CHARGES/PAYMENTS | 689 |
| SABP APPEND | DIX E - USAGE CHARGES/PAYMENTS | 701 |
| SABP APPEND | DIX F - WHEELING ACCESS CHARGES COMPUTATION | 705 |
| SABP APPEND | DIX G - VOLTAGE SUPPORT AND BLACK START CHARGES | 707 |
| SABP APPEND | DIX H- [NOT USED] | 712 |
| SABP APPEND | DIX I - DRAFT SAMPLE OF INVOICE | 713 |
| | TLEMENT AND BILLING OF RELIABILITY MUST-RUN CHARGES AND PAYMENTS | 715 |

Issued by: Roger Smith, Senior Regulatory Counsel

SETTLEMENT AND BILLING PROTOCOL (SABP)

SABP 1 OBJECTIVES, DEFINITIONS AND SCOPE

SABP 1.1 Objectives

The objective of this Protocol (and of Annex 1) is to inform Scheduling Coordinators, Participating TOs, Utility Distribution Companies, Metered Subsystems, and Operators of Reliability Must-Run Units of the manner in which the charges referred to in Section 11.1.6 of the ISO Tariff shall be calculated and settled and of the procedures regarding the billing, invoicing and payment of these charges.

SABP 1.2 Definitions

SABP 1.2.1 Master Definitions Supplement

Any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. A reference to a Section is to a Section of the ISO Tariff. References to SABP are to this Protocol or to the stated paragraph of this Protocol. References to Annex 1 are to Annex 1 of this Protocol.

SABP 1.2.2 Special Definitions for this Protocol

In this Protocol, the following words and expressions shall have the meanings set opposite them:

"Day 0" means the Trading Day to which the Settlement Statement or Settlement calculation refers. For example "Day 41" shall mean the 41st day after that Trading Day and similar expressions shall be construed accordingly.

"**Fed-Wire**" means the Federal Reserve Transfer System for electronic funds transfer.

"Interim Black Start Agreement" means an agreement entered into between the ISO and a Participating Generator (other than a Reliability Must-Run Agreement) for the provision by the Participating Generator of Black Start capability and Black Start Energy on an interim basis until the introduction by the ISO of its Black Start auction (or until terminated earlier by either party in accordance with its terms).

"ISO Surplus Account" means the account established by the ISO pursuant to SABP 6.5.

Issued by: Charles F. Robinson, Vice President and General Counsel

"Security" means the form of security provided by a Scheduling Coordinator pursuant to Section 2.2.3.2 of the ISO Tariff (i.e. letter of credit, guarantee or cash deposit) to secure its trading obligations.

"Trading Interval" means a Settlement Period as defined in the Master Definitions Supplement of the ISO Tariff.

SABP 1.2.3 Rules of Interpretation

- (a) Unless the context otherwise requires, if the provisions of this Protocol and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency. The provisions of the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.
- (b) A reference in this Protocol to a given agreement, ISO Protocol or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made.
- (c) The captions and headings in this Protocol are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.
- (d) This Protocol shall be effective as of the ISO Operations Date.
- (e) A reference to a day or Trading Day is to a calendar day unless otherwise specified.

SABP 1.2.4 Time

All references to time are references to prevailing Pacific Time.

SABP 1.2.5 Financial Transaction Conventions

In this Protocol and its Appendices and Annex 1, the following conventions have been adopted in defining sums of money to be remitted to or received by the ISO:

- (a) where the ISO is to receive a sum of money under this Protocol, this is defined as a "Charge";
- (b) where the ISO is to required to pay a sum of money under this Protocol, this is defined as a "Payment".

SABP 1.2.6 Currency

All financial transactions are denominated in US dollars and cents.

SABP 1.3 Scope

SABP 1.3.1 Scope of Application to Parties

This Protocol (excluding Annex 1) applies to the ISO and to the following entities:

(a) Scheduling Coordinators;

Issued by: Roger Smith, Senior Regulatory Counsel

- (b) Participating TOs;
- (c) Black Start Generators;
- (d) Utility Distribution Companies, and
- (e) Metered Subsystems.

The Settlement, billing and payment process between the ISO, Scheduling Coordinators, Participating TOs, Black Start Generators, Utility Distribution Companies, and Metered Subsystems shall be in accordance with Sections 11.3 to 11.24 inclusive of the ISO Tariff. References in those Sections to Scheduling Coordinators shall also apply to Participating TOs which receive Settlement Statements from the ISO in relation to the transactions referred to in those Settlement Statements but excluding the transactions referred to in Annex 1. Notwithstanding SABP 1.2.3(a), references in Sections 11.3 to 11.24 inclusive of the ISO Tariff to Scheduling Coordinators, ISO Debtors and ISO Creditors shall also apply to Black Start Generators which receive Settlement Statements from the ISO in relation to transactions under their Interim Black Start Agreements.

Annex 1 of this Protocol applies to the ISO, Owners of Reliability Must-Run Units and Participating TOs in relation to the billing and payment of amounts due under Reliability Must-Run Contracts and recovery of such amounts by the ISO from Participating Utilities. The provisions of this Protocol shall not apply to Annex 1 unless otherwise specified.

SABP 1.3.2 Liability of the ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

SABP 2 OVERVIEW OF SETTLEMENT AND BILLING PROCESS

SABP 2.1 Settlement Software

The ISO Settlement software shall be audited by an independent firm of auditors competent to carry out audits of such software to determine its consistency with this Protocol and the ISO Tariff. In any dispute regarding Settlement calculations, a certificate of such firm of auditors that the ISO software is consistent with the ISO Tariff shall be prima facie proof that the charges shown in a Settlement Statement have been calculated in a method consistent with the ISO Tariff and this Protocol. Nothing in this section will be deemed to establish the burden of proof with respect to Settlement calculations in any proceeding.

SABP 2.2 ISO Accounts

SABP 2.2.1 Costs Associated with the ISO Trust Accounts

The ISO is authorized to establish and maintain bank accounts held in trust for Market Participants and obtain lines of credit and other banking facilities (not exceeding an aggregate amount set by

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: January 1, 2001

First Revised Sheet No. 639 Superseding Original Sheet No. 639

the ISO Governing Board) necessary for the operation of its Settlement and billing procedures. Unless otherwise specified in this Protocol the ISO will recover all costs incurred in connection with these ISO banking facilities through the appropriate component of the Grid Management Charge.

SABP 2.2.2 Location of the ISO Accounts

The ISO will maintain its bank accounts held on trust at a bank in California approved by the ISO Governing Board.

SABP 2.2.3 ISO Trust Accounts

The ISO will open and operate the following accounts which it will hold on trust for Market Participants:

- (a) the ISO Clearing Account to and from which payments are made pursuant to Section 11.8.2.1 of the ISO Tariff and SABP 6.3.1;
- (b) the ISO Reserve Account from which any debit balances on the ISO Clearing Account at the close of banking business are settled pursuant to Section 11.8.2.2 of the ISO Tariff and SABP 6.4; and
- (c) the ISO Surplus Account consistent with Section 11.8.2.3 of the ISO Tariff and SABP 6.5.

The ISO may establish additional trust accounts as necessary to implement the Settlement and billing procedures outlined in this Protocol. It shall notify the Market Participants of the establishment of such accounts through the WEnet.

SABP 2.2.4 The ISO Clearing Account

Subject to SABP 6.1.2, ISO Debtors shall make all payments of ISO invoices by Fed-Wire to the ISO Clearing Account by 10:00 am on the due date according to the ISO Payments Calendar.

SABP 2.2.5 The ISO Reserve Account

The ISO shall operate the ISO Reserve Account as a trust account as follows:

- the proceeds of drawings under any line of credit or other credit facility of the ISO Reserve Account shall be held on trust for ISO Creditors;
- (b) if the Reserve Account is replenished as provided for in SABP 6.9, any credits shall be held on trust for all ISO Creditors.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: November 1, 2000 Effective: January 1, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 639A

SABP 2.2.6 Accounts of the SCs and Participating TOs

Each Scheduling Coordinator and each Participating TO shall establish and maintain a Settlement Account at a commercial bank located in the United States and reasonably acceptable to the ISO which can effect money transfers via Fed-Wire where payments to and from the ISO Clearing Account shall be made in accordance with this Protocol. Scheduling Coordinators may, but will not be required

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: November 1, 2000 Effective: January 1, 2001

to, maintain separate accounts for receipts and payments. Each Scheduling Coordinator shall notify the ISO of its account details and of any changes to those details in accordance with the provisions of its SC Agreement. Participating TOs will notify the ISO of their Settlement Account details in accordance with Section 2.2.1 of their Transmission Control Agreement and may notify the ISO from time to time of any changes by giving at least 7 days written notice before the new account becomes operational.

SABP 2.3 ISO Payments Calendar

SABP 2.3.1 Contents of ISO Payments Calendar

In September of each year, the ISO will prepare a draft ISO Payments Calendar for the following calendar year showing for each Trading Day:

- (a) The date by which Scheduling Coordinators are required to provide Settlement Quality Meter Data for all their Scheduling Coordinator Metered Entities for each Settlement Period in the Trading Day;
- (b) The date on which the ISO will issue Preliminary Settlement Statements and invoices to Scheduling Coordinators, Black Start Generators and Participating TOs for that Trading Day;
- (c) The date by which Scheduling Coordinators, Black Start Generators and Participating TOs are required to notify the ISO of any disputes in relation to their Preliminary Settlement Statements pursuant to SABP 4.4.1 and the ISO Tariff:
- (d) The date on which the ISO will issue Final Settlement
 Statements and invoices to Scheduling Coordinators, Black
 Start Generators and Participating TOs for that Trading Day;
- (e) The date and time by which ISO Debtors are required to have made payments into the ISO Clearing Account in payment of invoices for that Trading Day; and
- (f) The dates and times on which ISO Creditors will receive payments from the ISO Clearing Account of amounts owing to them for that Trading Day.
- (g) In relation to Reliability Must-Run Charges and Payments, the details set out in paragraph 3 of Annex 1.

SABP 2.3.2 Calendar Content and Format

In accordance with SABP 2.3.3, 2.3.4 and 2.3.5 the ISO may change the content or format of the ISO Payments Calendar. The ISO may also produce a summary outline of the Settlement and billing cycles.

SABP 2.3.3 Draft Payments Calendar

In September of each year, the ISO will make a draft of the ISO Payments Calendar available on the ISO Home Page to Scheduling Coordinators, Black Start Generators, Participating TOs and Owners

Issued by: Roger Smith, Senior Regulatory Counsel

Fifth Revised Sheet No. 641

Superseding Fourth Revised Sheet No. 641

any of which may submit comments and objections to the ISO within two weeks of the date of posting of the draft on the ISO Home Page.

SABP 2.3.4 Final Payments Calendar

No later than October 31st in each year, the ISO will publish pursuant to Section 11.24.1 of the ISO Tariff the final ISO Payments Calendar for the following calendar year, after considering the comments and objections received from Scheduling Coordinators, Black Start Generators, Participating TOs and Owners. The final ISO Payments Calendar will be posted on the ISO Home Page.

SABP 2.3.5 Update the Final Payments Calendar

If as a result of a tariff amendment approved by FERC the final ISO Payments Calendar developed in accordance with SABP 2.3.3 and 2.3.4 above is rendered inconsistent with the timing set forth in the tariff, the ISO shall update the final ISO Payments Calendar to make it consistent with the tariff as approved by FERC on the date on which the tariff amendment goes into effect. The ISO shall simultaneously send out a notice to Market Participants that the final ISO Payments Calendar has been revised.

SABP 2.3.6 Final Calendar Binding

The final ISO Payments Calendar shall be binding on the ISO and on Scheduling Coordinators, Black Start Generators, Participating TOs and Owners.

SABP 3 COMPUTATION OF CHARGES

SABP 3.1 Description of Charges to be Settled

The ISO shall, based on the Settlement Quality Meter Data it has received, or, if Settlement Quality Meter Data is not available, based on the best available information or estimate it has received, calculate the following:

- (a) the amount due from each Scheduling Coordinator for its share for the relevant month of the eight components of the Grid Management Charge in accordance with the formula located in Appendix F, Schedule 1, Part A of this Tariff. These Charges shall accrue on a monthly basis.
- (b) the amount due from each Scheduling Coordinator for the Grid Operations Charge in accordance with Appendix F, Schedule 2 of this Tariff. This charge shall accrue on a monthly basis.
- (c) the amount due from and/or owed to each Scheduling Coordinator for the Charge for each Ancillary Service in accordance with Appendix C, for each of the Settlement Periods of Day 0.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2004 Effective: January 1, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 641A

- (d) the amount due from and/or owed to each Scheduling Coordinator for Imbalance Energy in accordance with Appendix D, for each of the Settlement Periods of Day 0.
- (e) the amount due from and/or owed to each Scheduling Coordinator for Usage Charges in accordance with Appendix E, for each of the Settlement Periods of Day 0.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: November 1, 2000 Effective: January 1, 2001

- (f) the amount due from each Scheduling Coordinator for Wheeling Out and Wheeling Through Charges and the amount owed to each Participating TO for these charges in accordance with Appendix F, for each of the Settlement Periods of Day 0.
- (g) the amounts due from/to Scheduling Coordinators for Voltage Support (supplemental reactive power charges) for each of the Settlement Periods of Day 0 in accordance with Appendix G.
- (h) the monthly charges due from/to Scheduling Coordinators for long-term Voltage Support provided by Owners of Reliability Must-Run Units in accordance with Appendix G.
- (i) the amounts due from/to Scheduling Coordinators for the provision of Black Start Energy from Reliability Must-Run Units for each of the Settlement Periods of Day 0 in accordance with Appendix G.
- (j) the amounts due from/to Black Start Generators for the provision of Black Start Energy for each of the Settlement Periods of Day 0 in accordance with Appendix G.
- (k) the amount due from each UDC or MSS, or from a Scheduling Coordinator delivering Energy for the supply of Gross Load not directly connected to the facilities of a UDC or MSS, for the High Voltage Access Charge and Transition Charge in accordance with operating procedures posted on the ISO Home Page. These charges shall accrue on a monthly basis.
- (I) the amounts due from Scheduling Coordinators for FERC Annual Charges.

All of the data, information, and estimates the ISO uses to calculate these amounts shall be subject to the auditing requirements of Section 10.5 of the ISO Tariff.

The ISO shall calculate these amounts using the software referred to in SABP 2.1 except in cases of system breakdown when it shall apply the procedures set out in SABP 9 (Emergency Procedures).

SABP 3.1.1 Additional Charges and Payments

The ISO shall be authorized to levy additional charges or payments as special adjustments in regard to:

(a) amounts required to round up any invoice amount expressed in dollars and cents to the nearest whole dollar amount in order to clear the ISO Clearing Account. These charges will be allocated amongst Scheduling Coordinators over an interval determined by the ISO and pro rata based on metered Demand (including exports) during that interval;

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: January 1, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

Superseding Second Revised Sheet No. 642A

Third Revised Sheet No. 642A

FIRST REPLACEMENT VOLUME NO. II

- (b) amounts in respect of penalties or sanctions which may be levied by the ISO in accordance with the ISO Tariff or ISO Protocols. These charges will be levied on the Market Participants liable for payment of the penalty or sanction.
- (c) amounts required to reach an accounting trial balance of zero in the course of the Settlement process in the event that the charges calculated as due from ISO Debtors are lower

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: Upon Commission Approval

FIRST REPLACEMENT VOLUME NO. II

than payments calculated as due to the ISO Creditors for the same Trading Day. These charges will be allocated amongst the Scheduling Coordinators who traded on that Trading Day pro rata to their metered Demand (including exports) in MWh of Energy for that Trading Day. In the event that the charges due from ISO Debtors are higher than the payments due to ISO Creditors, the ISO shall allocate a payment to the Scheduling Coordinators who traded on that Trading Day pro rata to their metered Demand (including exports) in MWh of Energy for that Trading Day.

(d) amounts required with respect to payment adjustments for regulating Energy as calculated in accordance with Section 2.5.27.1 of the ISO Tariff. These charges will be allocated amongst the Scheduling Coordinators who traded on that Trading Day pro rata to their metered Demand (including exports) in MWh for that Trading Day.

SABP 3.2 Method of Settlement of Charges

SABP 3.2.1 Settlement of Payments to/from Scheduling Coordinators and Participating TOs

The ISO will calculate for each charge the amounts payable by the relevant Scheduling Coordinator, Black Start Generator or Participating TO for each Settlement Period of the Trading Day, and the amounts payable to that Scheduling Coordinator, Black Start Generator or Participating TO for each charge for each Settlement Period of that Trading Day and shall arrive at a net amount payable for each charge by or to that Scheduling Coordinator, Black Start Generator or Participating TO for each charge for that Trading Day. Each of these amounts will appear in the Preliminary and Final Settlement Statements that the ISO will provide to the relevant Scheduling Coordinator, Black Start Generator or Participating TO as provided in SABP 4.

The eight components of the Grid Management Charge will be included in the Preliminary Settlement Statement and Final Settlement Statement with the other types of charges referred to in SABP 3.1, but a separate invoice for the Grid Management Charge, stating the rate, billing determinant volume, and total charge for each of its eight components, will be issued by the ISO to the Scheduling Coordinator.

SABP 4 SETTLEMENT STATEMENTS

SABP 4.1 Preliminary Settlement Statements

SABP 4.1.1 Timing of Preliminary Settlement Statements

The ISO shall provide to each Scheduling Coordinator, Black Start Generator or Participating TO for validation a Preliminary Settlement Statement for each Trading Day in accordance with the ISO Payments Calendar.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2004 Effective: January 1, 2004

Original Sheet No. 643A

SABP 4.1.2 Contents of Preliminary Settlement Statements

Each Preliminary Settlement Statement will include a statement of:

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: November 1, 2000 Effective: January 1, 2001

- (a) the amount payable or receivable by the Scheduling Coordinator, Black Start Generator or Participating TO for each charge referred to in SABP 3 for each Settlement Period in the relevant Trading Day;
- (b) the total amount payable or receivable by that Scheduling Coordinator, Black Start Generator or Participating TO for each charge for all Settlement Periods in that Trading Day after the amounts payable and the amounts receivable under (a) have been netted off pursuant to SABP 3.2.1; and
- (c) the components of each charge in each Settlement Period except for information contained in the Imbalance Energy Report referred to in SABP 4.1.3.

SABP 4.1.3 Imbalance Energy Report

Each Preliminary Settlement Statement shall be accompanied by a breakdown of the components of the Imbalance Energy Charge (the "Imbalance Energy Report").

SABP 4.2 Final Settlement Statements

The ISO shall provide to each Scheduling Coordinator, Black Start Generator or Participating TO a Final Settlement Statement in accordance with the ISO Tariff and the ISO Payments Calendar. The Final Settlement Statement shall be in a format similar to that of the Preliminary Settlement Statement and shall include all the information provided in the Preliminary Settlement Statement as amended following the validation procedure set forth in SABP 4.3 and 4.4.

SABP 4.3 Review, Validation, Confirmation of Preliminary Settlement Statements

The provisions for confirmation, review and validation of Preliminary Settlement Statements set forth in Sections 11.6.1.2, 11.7.1, 11.7.2, 11.7.3 and 11.7.4 of the ISO Tariff shall apply to all Scheduling Coordinators, Black Start Generators or Participating TOs (save, in the case of Participating TOs, for charges or rebates referred to in Annex 1) who receive a Preliminary Settlement Statement from the ISO

SABP 4.4 Resolving Disputes Relating to Preliminary and Final Settlement Statements

SABP 4.4.1 Notice

SABP 4.4.1.1 Notice of an ordinary dispute

If a Scheduling Coordinator, Black Start Generator or Participating TO disputes any item or calculation set forth in its Preliminary or Final Settlement, it shall provide the ISO by electronic means with a notice of dispute within eight (8) Business Days from the date of issue of the Preliminary Settlement Statement or within ten (10) Business Days from the date of issue of the Final Settlement Statement.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

SABP 4.4.1.2 Notice of recurring dispute

If a Scheduling Coordinator, Black Start Generator or Participating TO believes a dispute will apply to subsequent Preliminary or Final Settlement Statements, it may request, in a notice provided in accordance with Section SABP 4.4.1.1 above, that the ISO treat the dispute as recurring. A request for recurring treatment may be made for any valid reason provided that subsequent Preliminary and Final Settlement Statements would be affected, including but not limited to, that the disputed calculation will recur, or that a disagreement as to policy will affect calculations in subsequent Preliminary and Final Settlement Statements.

SABP 4.4.2 Contents of Notice

SABP 4.4.2.1 Contents of a notice of dispute

The notice of dispute shall state clearly the Trading Day, the issue date of the Preliminary of Final Settlement Statement, the item disputed, the reasons for the dispute, the amount claimed (if appropriate) and shall be accompanied with all available evidence reasonably required to support the claim.

SABP 4.4.2.2 Contents of a request for treatment as a recurring dispute

If a Scheduling Coordinator, Black Start Generator or Participating TO wishes to request that the ISO treat a dispute as recurring, it shall, in the notice provided in accordance with Section SABP 4.4.2.1 above, clearly indicate that it requests such treatment and set forth in detail the reasons that support such treatment. To the extent possible, the Scheduling Coordinator, Black Start Generator or Participating TO shall state the types of charges and dates to which the dispute will apply, and provide estimates of the amounts that will likely be claimed on each date.

SABP 4.4.3 ISO determination of a recurring dispute

The ISO may deny a request that the ISO treat a dispute as recurring for any valid reason, including because the request is not adequately specific as to the basis for recurring treatment or the subsequent calculations that will be affected.

SABP 4.4.4 Amendment

Regarding a dispute related to a Preliminary Settlement Statement, if the ISO agrees with the amount claimed, it shall incorporate the relevant data into the Final Settlement Statement. Regarding a dispute related to an Incremental Change in a Final Settlement Statement, the ISO shall make a determination on the dispute no later than twenty-five (25) Business Days from the issuance of the Final Settlement Statement, and, if the ISO agrees with the amount claimed, shall incorporate the relevant data into the next available Preliminary Settlement Statement.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

SABP 4.4.5 ISO Contact

If the ISO does not agree with the amount claimed or if it requires additional information, it shall make reasonable efforts (taking into account the time it received the notice of dispute and the complexity of the issue involved) to contact the relevant Scheduling Coordinator, Black Start Generator or Participating TO to resolve the issue before issuing the Final Settlement Statement. If it is not possible to contact the relevant party, the ISO shall issue the Final Settlement Statement without taking into account the dispute notice.

SABP 4.4.6 Payment Pending Dispute

Each Scheduling Coordinator, Black Start Generator or Participating TO which receives an invoice shall pay any net debit and shall be entitled to receive any net credit shown in the invoice on the Payment Date, whether or not there is any dispute regarding the amount of the debit or credit. The provisions of Section 13 (Dispute Resolution) of the ISO Tariff shall apply to the disputed amount.

SABP 4.5 Settlement Statement Re-runs

SABP 4.5.1 Notice

If a Scheduling Coordinator, Black Start Generator or Participating TO, (having made reasonable efforts to resolve with the ISO any dispute relating to a Preliminary Settlement Statement pursuant to SABP 4.4) requires a Settlement Statement Re-run, it shall send at any time to the ISO Governing Board a notice in writing.

SABP 4.5.2 ISO Tariff

The provisions of Sections 11.6.3, 11.6.3.1, 11.6.3.2 and 11.6.3.3 of the ISO Tariff relating to Settlement Statement Re-runs shall apply to all Scheduling Coordinators, Black Start Generators or Participating TOs who require a Settlement Re-run in accordance with this SABP 4.5.

SABP 5 INVOICES

The ISO shall provide on the day specified in the ISO Payments Calendar an invoice in the format set out in SABP Appendix I showing:

- (a) amounts which according to each of the Preliminary and Final Settlement Statements of that Billing Period are to be paid from or to each Scheduling Coordinator, Black Start Generator or Participating TO;
- (b) the Payment Date, being the date on which such amounts are to be paid or received and the time for such payment; and
- (c) details (including the account number, bank name and Fed-Wire transfer instructions) of the ISO Clearing Account to which any amounts owed by the Scheduling Coordinator, Black Start Generator or Participating TO are to be paid.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: January 1, 2004

Fourth Revised Sheet No. 647 Superseding Third Revised Sheet No. 647

A separate invoice for the Grid Management Charge, stating the rate, billing determinant volume and total charge for each of its eight components, will be issued by the ISO to the Scheduling Coordinator.

A separate invoice for Interest, issued on the preliminary invoice date, stating the total charges for each Trade Month in which interest is charged, will be issued by the ISO.

SABP 6 PAYMENT PROCEDURES

SABP 6.1 Time of Payment

SABP 6.1.1 Payment Date

Subject to SABP 6.1.2, payment will be made by the ISO and by each Scheduling Coordinator, Black Start Generator and Participating TO on the Payment Date as set forth in Section 11.3.2. Payment will be made by the ISO in accordance with Section 11.13.

SABP 6.1.2 Prepayments

- (a) A Scheduling Coordinator may choose to pay at an earlier date than the Payment Date specified in the ISO Payments Calendar by way of prepayment provided it notifies the ISO by electronic means before submitting its prepayment.
- (b) Prepayment notifications must specify the dollar amount prepaid.
- (c) Prepayments must be made by Scheduling Coordinators via Fed-Wire into their ISO prepayment account designated by the ISO. The relevant Scheduling Coordinator shall grant the ISO a security interest on all funds in its ISO prepayment account.
- (d) On any Payment Date the ISO shall be entitled to cause funds from the relevant Scheduling Coordinator's ISO prepayment account to be transferred to the ISO Clearing Account in such amounts as may be necessary to discharge in full that Scheduling Coordinator's payment obligation arising in relation to that Payment Date.
- (e) Any funds held in the relevant Scheduling Coordinator's ISO prepayment account shall be treated as part of that Scheduling Coordinator's Security.
- (f) Interest (or other income) accruing on the relevant Scheduling Coordinator's ISO prepayment account shall inure to the benefit of that Scheduling Coordinator and shall be added to the balance of its ISO prepayment account on a monthly basis.
- (g) Funds held in an ISO prepayment account by a Scheduling Coordinator may be recouped, offset or applied by the ISO to any outstanding financial obligations of that Scheduling Coordinator to the ISO or to other Scheduling Coordinators under this Protocol.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 29, 2004 Effective: January 1, 2004

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 647A

SABP 6.2 Payments to be made by Fed-Wire

All payments by the ISO to Scheduling Coordinators, Black Start Generators and Participating TOs shall be made by Fed-Wire.

All payments to the ISO by Scheduling Coordinators, Black Start Generators and Participating TOs shall be made by Fed-Wire.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: November 1, 2000 Effective: January 1, 2001

Superseding Fourth Revised Sheet No. 648

SABP 6.3 Payment Process

SABP 6.3.1 Use of the ISO Clearing Account

- (a) Subject to SABP 6.1.2 each ISO Debtor shall remit to the ISO Clearing Account the amount shown on the invoice as payable by that ISO Debtor for value not later than 10:00 am on the Payment Date.
- (b) On the Payment Date the ISO shall be entitled to cause the transfer of such amounts held in a Scheduling Coordinator's ISO prepayment account to the ISO Clearing Account as provided in SABP 6.1.2(c).

SABP 6.3.1.2 Distribution to ISO Creditors

The ISO shall calculate the amounts available for distribution to ISO Creditors on the Payment Date and shall give irrevocable instructions to the ISO Bank to remit from the ISO Clearing Account to the relevant Settlement Account maintained by each ISO Creditor for same day value the amounts determined by the ISO to be available for payment to each ISO Creditor. If required, the ISO shall instruct the ISO Bank to transfer amounts from the ISO Reserve Account to enable the ISO Clearing Account to clear by the close of banking business on the Payment Date.

SABP 6.3.1.3 Grid Management Charge

The ISO is authorized to instruct the ISO Bank to debit the ISO Clearing Account and transfer to the relevant ISO account sufficient funds to pay in full the Grid Management Charge falling due on any Payment Day with priority over any other payments to be made on that or on subsequent days out of the ISO Clearing Account.

SABP 6.4 Use of the ISO Reserve Account

If there are insufficient funds in the ISO Clearing Account to pay ISO Creditors and clear the account on any Payment Date, due to payment default by one or more ISO Debtors, the ISO shall transfer funds from the ISO Reserve Account to the ISO Clearing Account to clear it by close of banking business on that Payment Date pursuant to SABP 6.7.2.

SABP 6.5 Use of the ISO Surplus Account

SABP 6.5.1 Establishment

The ISO shall establish and maintain a bank account in accordance with this Protocol denominated the "ISO Surplus Account".

SABP 6.5.2 Other Funds Used in the ISO Surplus Account.

(a) Any amounts paid to the ISO in respect of penalties or sanctions referred to in SABP 3.1.1 shall be credited to the Surplus Account, subject, however, to SABP 6.5.2(b).

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: Upon Commission Approval

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II Su

First Revised Sheet No. 648A Superseding Original Sheet No. 648A

(b) The funds referred to in SABP 6.5.2(a) pertaining to penalties or sanctions as provided in SABP 3.1.1 shall first be applied towards any expenses, loss or costs incurred by the ISO except for that portion of those amounts collected pursuant to EP 9.4. Any

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: Upon Commission Approval

excess after such application will be credited to the Surplus Account pursuant to SABP 6.5.2(a).

(c) The funds referred to in SABP 6.5.2(a) pertaining to default interest referred to in SABP 6.10.5 shall first be applied towards any unpaid creditor balances for the trade month in which the default interest was assessed and second to any other unpaid creditor balances Only after all unpaid creditor balances are satisfied in full will any excess funds pertaining to default interest be credited to the Surplus Account pursuant to SABP 6.5.2(a).

SABP 6.5.3 Distribution of Funds

In the event that there are funds in the ISO Surplus Account in excess of an amount to be determined by the ISO Governing Board and noticed by the ISO to Market Participants, the amount of such excess will be distributed to Scheduling Coordinators using the same method of apportioning the refund as the method employed in apportioning the liability for the Grid Management Charge.

SABP 6.5.4 Trust

All amounts standing to the credit of the ISO Surplus Account will be held at all times on trust for Market Participants in accordance with this Protocol.

SABP 6.6 System Failure

SABP 6.6.1 At ISO Debtor's Bank

If any ISO Debtor becomes aware that a payment will not, or is unlikely to be, remitted to the ISO Bank by 10:00 am on the relevant Payment Date for any reason (including failure of the Fed-Wire or any computer system), it shall immediately notify the ISO, giving full details of the payment delay (including the reasons for the payment delay). The ISO Debtor shall make all reasonable efforts to remit payment as soon as possible, by an alternative method if necessary, to ensure that funds are received for value no later than 10:00 am on the Payment Date, or as soon as possible thereafter.

SABP 6.6.2 At the ISO's Bank

In the event of failure of any electronic transfer system affecting the ISO Bank, the ISO shall use reasonable efforts to establish alternative methods of remitting funds to the ISO Creditors' Settlement Accounts by close of banking business on that Payment Date, or as soon as possible thereafter. The ISO shall notify the ISO Debtors and the ISO Creditors of occurrence of the system failure and the alternative methods and anticipated time of payment.

SABP 6.7 Payment Default

Subject to SABP 6.8, if by 10:00 am on a Payment Date the ISO, in its reasonable opinion, believes that all or any part of any amount due to be remitted to the ISO Clearing Account by any Scheduling

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: Upon Commission Approval

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 649A

Coordinator will not or has not been remitted and there are insufficient funds in the relevant Scheduling Coordinator's ISO prepayment account (the amount of insufficiency being referred to as the "Default Amount"), the ISO shall take the following actions to enable the ISO Clearing Account to clear not later than the close of banking business on the relevant Payment Date:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: December 28, 2001 Effective: November 1, 2001

SABP 6.7.1 Enforcing the Security of a Defaulting Scheduling Coordinator

Subject to SABP 6.8 the ISO shall make reasonable endeavors to enforce the defaulting Scheduling Coordinator's Security (if any) to the extent necessary to pay the Default Amount. If it is not practicable to obtain clear funds in time to effect payment to ISO Creditors on the same day the ISO shall proceed in accordance with SABP 6.7.2 or 6.7.4 as applicable.

SABP 6.7.2 Use of ISO Reserve Account

If there are funds standing to the credit of the ISO Reserve Account (including the proceeds of drawings under banking facilities described in SABP 2.2.5) the ISO shall debit the ISO Reserve Account with the Default Amount in order to clear the ISO Clearing Account and effect payment to the ISO Creditors.

SABP 6.7.3 Action against a Defaulting Scheduling Coordinator

The ISO shall as soon as possible after taking action under SABP 6.7.2 take any steps it deems appropriate against the defaulting Scheduling Coordinator to recover the Default Amount (and any Interest as set out in SABP 6.10.5) including enforcing any Security pursuant to Section 11.14 of the ISO Tariff, exercising its rights of recoupment or set-off pursuant to SABP 6.10.2 and/or bringing proceedings against the defaulting Scheduling Coordinator pursuant to Section 11.20.1 of the ISO Tariff.

SABP 6.7.4 Reduction of Payments to ISO Creditors

If there are insufficient funds standing to the credit of the ISO Reserve Account, the ISO shall reduce payments to ISO Creditors on that Payment Date pursuant to Section 11.16.1 of the ISO Tariff to the extent necessary to clear the ISO Clearing Account by the close of banking business on the Payment Date.

SABP 6.8 Default to be Remedied Promptly

In the event that the ISO reasonably believes that an outstanding amount which has not been paid by 10:00 am on the relevant Payment Date, is likely to be paid no later than close of banking business on the next Business Day then the ISO may, but shall not be obliged to, delay enforcing that ISO Debtor's Security or taking other measures to recover payment until after the close of banking business on the next Banking Day but Interest shall nonetheless accrue pursuant to SABP 6.10.5.

SABP 6.9 Replenishing the ISO Reserve Account Following Payment Default

If the ISO has debited the ISO Reserve Account as provided in SABP 6.7.2 then:

(a) If, after the ISO has debited the ISO Reserve Account on a Payment Date, the ISO Bank receives a remittance from an ISO Debtor which has not been (but should have been, if it

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: January 15, 2004 Effective: August 9, 2003

had been received on a timely basis) credited to the ISO Clearing Account by 10:00 am on the Payment Date and which required the debiting of the ISO Reserve Account, such remittance shall be credited to the ISO Reserve Account.

- (b) The proceeds of any enforcement of Security referred to in SABP 6.8.2 and/or amounts recovered under proceedings shall be credited to the ISO Reserve Account.
- (c) If after taking reasonable action the ISO determines that the Default Amount (or any part) and/or Interest referred to in SABP 6.10.5 cannot be recovered, such amounts shall be deemed to be owing by those Market Participants who were ISO Creditors on the relevant Payment Date pro rata to the net payments they received on that Payment Date and shall be accounted for by way of a charge in the next Settlement Statements of those ISO Creditors. Such charge shall be credited to the Reserve Account.

SABP 6.10 Application of Funds Received

Amounts credited to the ISO Clearing Account in payment of a Default Amount (as set out in SABP 6.9(a)) or as a result of enforcing the defaulting ISO Debtor's Security shall be applied to the ISO Reserve Account pursuant to SABP 6.9 to reduce amounts outstanding under any ISO banking facilities used to fund the ISO Reserve Account on the relevant Payment Date and the balance (if any) shall be applied to reimburse pro rata any ISO Creditors whose payments were reduced pursuant to SABP 6.7.4.

SABP 6.10.1 Termination of SC Agreement and Limitation on Trading

The provisions of Section 2.2.4.5 and 2.2.7.3 of the ISO Tariff shall apply.

SABP 6.10.2 Set-Off

The ISO is authorized to recoup, set off and apply any amount to which any defaulting ISO Debtor is or will be entitled, in or towards the satisfaction of any of that ISO Debtor's debts arising under the ISO Settlement and billing process. Each ISO Creditor and each ISO Debtor expressly acknowledges the following application of funds: first to the current month's Grid Management Charge, and then as described in SABP 6.10.4 unless otherwise specified in accordance with Section 11.16.

SABP 6.10.3 Defaulting SCs and Eligible Customers

If the ISO intends to terminate the SC Agreement of a Scheduling Coordinator (the "Defaulting SC") pursuant to Section 2.2.4.5 of the ISO Tariff, the ISO shall give written notice to the UDC or UDCs on whose service territory the customers of that Defaulting SC are located and shall post such notification on the ISO Home Page pursuant to Section 2.2.4.6 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: January 15, 2004 Effective: August 9, 2003

SABP 6.10.4 Order of Payments

Unless otherwise specified in accordance with Section 11.16, the ISO shall apply payments received in respect of amounts owing to ISO Creditors to repay the relevant debts in the order of the creation of such debts.

SABP 6.10.5 Interest on Defaulted Payments

Unless the ISO is able to enforce the Security (if any) provided by the defaulting ISO Debtor, such ISO Debtor shall pay Interest on the Default Amount for the period from the relevant Payment Date to the date on which the payment is received by the ISO together with any related transaction costs incurred by the ISO pursuant to SABP 6.7.2.

The ISO shall apply all such Interest payments on the Default Amount on a pro rata basis to ISO Creditors in relation to amounts past due in the order of the creation of such debts.

SABP 6.10.6 Interest Accruing while Enforcing the Security

If the ISO has debited the Reserve Account as provided in SABP 6.7.1, 6.7.2 or 6.8 and it subsequently succeeds in enforcing the Security provided by the defaulting Scheduling Coordinator, the ISO shall be entitled to withdraw from such Security in addition to the Default Amount, all costs incurred and interest accrued to the ISO as a result of debiting the Reserve Account from the date of such debit to the date of enforcement of the said Security.

SABP 7 PAYMENT ERRORS

SABP 7.1 Overpayments

SABP 7.1.1 Notification

If an ISO Creditor receives an overpayment on any Payment Date, it shall notify the ISO of such overpayment in accordance with the provisions of Section 11.18.1 of the ISO Tariff.

SABP 7.1.2 Overpayment held on Trust

Until an ISO Creditor refunds the overpayment to the ISO, the ISO Creditor shall be deemed to hold the amount of such overpayment on trust for any ISO Creditor which may have been underpaid in consequence of such overpayment, pro rata to the amount of the underpayment.

SABP 7.1.3 Interest on Overpayment

(a) If an overpayment is repaid by an ISO Creditor in accordance with Section 11.18.1 of the ISO Tariff, the ISO shall be entitled to Interest on the amount of the overpayment at the prime rate of the bank where the

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: January 15, 2004 Effective: August 9, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II Superse

Second Revised Sheet No. 652A Superseding First Revised Sheet No. 652A

Settlement Account of the overpaid ISO Creditor is located from the date the overpayment was received to the time that the repayment is credited to the relevant ISO Account.

(b) If the overpayment (or any part of it) is not repaid by an ISO Creditor in accordance with Section 11.18.1 of the ISO Tariff, the ISO shall be entitled to Interest on the amount of the overpayment from the expiry of the two day period referred to in that Section until the

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: June 10, 2003 Effective: August 9, 2003

First Revised Sheet No. 653 Superseding Original Sheet No. 653

repayment is credited to the relevant ISO Account and the ISO will be entitled to treat the overpayment (and any Interest accruing thereon) as a Default Amount to which SABP 6.7 will apply.

SABP 7.1.4 Treatment of Amounts Outstanding as a Result of an Overpayment

The ISO shall apply the amount of any overpayment repaid (including interest received) to it under SABP 7.1.3 to credit any underpaid ISO Creditors pro rata to the amounts of their underpayments on the same day of receipt, or if not practicable, on the following Business Day.

SABP 8 COMMUNICATIONS

SABP 8.1 Method of Communication

Preliminary Settlement Statements and Final Settlement Statements will be published by the ISO on the WEnet. Invoices will be issued via EDI. Communications on a Payment Date relating to payment shall be made by the fastest practical means including by telephone. Methods of communication between the ISO and Market Participants may be varied by the ISO giving not less than 10 days notice to Market Participants on the WEnet.

SABP 8.2 Failure of Communications

The provisions of Section 11.23 of the ISO Tariff shall apply.

SABP 9 EMERGENCY PROCEDURES

SABP 9.1 Use of Estimated Data

In the event of an emergency or a failure of any of the ISO software or business systems, the ISO may use estimated Settlement Statements and invoices and may implement any temporary variation of the timing requirements relating to the Settlement and billing process contained in the ISO Tariff or this Protocol. Details of the variation and the method chosen to produce estimated data, Settlement Statements and invoices will be published on the ISO Home Page.

SABP 9.2 Payment of Estimated Statements and Invoices

When estimated Settlement Statements and invoices are issued by the ISO, payments between the ISO and Market Participants shall be made on an estimated basis and the necessary corrections shall be made by the ISO as soon as practicable. The corrections will be reflected as soon as practicable in later Settlement Statements and invoices issued by the ISO in the manner set forth in Section 11.5 of the ISO Tariff. Failure to make such estimated payments shall result in the same consequences as a failure to make actual payments under SABP.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: June 10, 2003 Effective: August 9, 2003

SABP 9.3 Validation and Correction of Estimated Statements and Invoices

The ISO shall use its best efforts to verify the estimated data used under SABP 9.1 and to make the necessary corrections as soon as practicable. The corrections will be reflected as soon as practicable in later Settlement Statements and invoices issued by the ISO in the manner set forth in Section 11.5 of the ISO Tariff.

SABP 9.4 Estimated Statements to be Final

In the event that the ISO is of the opinion that, despite its best efforts, it is not possible for it to verify the estimated data because actual data is not reasonably expected to become available to the ISO in the foreseeable future, the ISO shall consult with the Market Participants in order to develop the most appropriate substitute data including using data provided by Market Participants. Following such determination of substitute data, the ISO shall send to the relevant Market Participants revised Settlement Statements and Invoices. The provisions of SABP 4.4.5 shall apply to payment of revised invoices issued in accordance with this SABP 9.4. Failure to make payments of such revised invoices shall result in the same consequences as a failure to make actual payments under SABP.

SABP 10 CONFIDENTIAL DATA

- (a) The ISO shall implement and maintain a system of communication with Scheduling Coordinators to ensure compliance with Sections 11.22 and 20.3 of the ISO Tariff regarding access to confidential data and with Participating TOs pursuant to Section 26.3 of the Transmission Control Agreement.
- (b) Access within the ISO to such data on ISO's communications systems, including databases and backup files, shall be strictly limited to authorized ISO personnel through the use of passwords and other appropriate means.

SABP 11 AMENDMENTS TO THE PROTOCOL

If the ISO determines a need for an amendment to this Protocol, the ISO will follow the requirements as set forth in Section 16 of the ISO Tariff.

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

SETTLEMENT AND BILLING PROTOCOL **APPENDICES A-I**

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Third Revised Sheet No. 656
FIRST REPLACEMENT VOLUME NO. II
Superseding Sub. Second Revised Sheet No. 656

APPENDIX A

[Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: October 31, 2003 Effective: January 1, 2004

Third Revised Sheet No. 657 Superseding Second Revised Sheet No. 657

APPENDIX B

GRID OPERATIONS CHARGE COMPUTATION

B 1 Purpose of charge

The Grid Operations Charge is a charge which recovers Redispatch costs incurred due to Intra-Zonal Congestion pursuant to Section 7.3.2 of the ISO Tariff. The Grid Operations Charge is paid by or charged to Scheduling Coordinators in order for the ISO to recover and properly redistribute the costs of adjusting the Balanced Schedules submitted by Scheduling Coordinators.

B 2 Fundamental formulae

B 2.1 Payments to SCs with incremented schedules

When it becomes necessary for the ISO to increase the output of a Scheduling Coordinator's Generating Unit; or System Resource, or reduce a Curtailable Demand; in order to relieve Congestion within a Zone, the ISO will pay the Scheduling Coordinator. The amount that ISO pays the Scheduling Coordinator; is the price specified in the Scheduling Coordinator's Imbalance Energy bid for the Generating Unit; or System Resource, or Curtailable Demand; multiplied by the quantity of Energy Dispatched. The formula for calculating the payment to Scheduling Coordinator; for each blockb of Energy of its bid curve in Trading Intervalt is:

$$INC_{bijt} = adjinc_{bijt} * \Delta_{inc_{bijt}}$$

B 2.1.1 Total Payment for Trading Interval

The formula for calculating payment to Scheduling Coordinator_j whose Generating Unit_i or System Resource_i has been increased or Curtailable Demand_i reduced for all the relevant blocks_b of Energy in the Imbalance Energy bid curve of that Generating Unit or System Resource or Curtailable Demand in the same Trading Interval_t is:

$$PayTI_{ijt} = \sum_{b} INC_{bijt}$$

B 2.2 Charges to Scheduling Coordinators with decremented schedules

When it becomes necessary for the ISO to decrease the output of a Scheduling Coordinator's Generating Uniti or System Resource, in order to relieve Congestion within a Zone, the ISO will make a charge to the Scheduling Coordinator. The amount that the ISO will charge Scheduling Coordinator for decreasing the output of Generating Uniti is

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Se FIRST REPLACEMENT VOLUME NO. II Superseding

Second Revised Sheet No. 657A Superseding First Revised Sheet No. 657A

the decremental reference price specified for the Scheduling Coordinator as determined in accordance with Section 7.2.6.1 multiplied by the quantity of Energy Dispatched. The amount that the ISO will charge Scheduling Coordinatorj for decreasing the output of System Resourcei is the price specified in the Scheduling Coordinator's Imbalance Energy bid for System Resourcei multiplied by the quantity of Energy Dispatched. The formula for calculating the

Issued by: Charles F. Robinson, Vice President and General Counsel

charge to Scheduling Coordinatorj for each block_b of Energy in its decremental reference price or Imbalance Energy Bid in Trading Interval_t is:

$$DEC_{biit} = adjdec_{biit} * \Delta dec_{biit}$$

B 2.2.1 Total Charge for Trading Interval

The formula for calculating the charge to Scheduling Coordinatorj whose Generating Uniti or System Resource, has been decreased for all the relevant blocks $_b$ of Energy at the decremental reference price for Generating Uniti, or Imbalance Energy bid for System Resource, in the same Trading Interval $_t$ is:

$$ChargeTI_{ijt} = \sum_{b} DEC_{bijt}$$

B 2.3 Not Used

B 2.4 Net ISO Redispatch costs

The Trading Interval net Redispatch cost encountered by ISO to relieve Intra-Zonal Congestion is the sum of the amounts paid by the ISO to those Scheduling Coordinators whose Generation or System Resource was increased or Curtailable Demand was decreased during the Trading Interval less the sum of the amounts received by the ISO from those Scheduling Coordinators whose Generating Units or System Resource were decreased during the Trading Interval. The fundamental formula for calculating the net Redispatch cost is:

$$REDISP_{CONGt} = \sum_{j} PayTI_{ijt} - \sum_{j} ChargeTI_{ijt}$$

Note that *REDISPCONGt* can be either positive or negative. This means that it is possible for the ISO to generate either a net cost or a net income, for any given Trading Interval. In the event the ISO does not make use of equal amounts of incremental and decremental dispatched MWHs, then the net Redispatch cost becomes the sum of the amounts paid (or charged) by the ISO to those Scheduling Coordinators whose Generation or System Resource was increased (or decreased) or Curtailable Demand was decreased (or increased) during the Trading Interval less the sum of the amounts received by the ISO from Scheduling Coordinators through the Imbalance Energy Market.

B 2.5 Grid Operations Price

The grid operations price is the Trading Interval rate used by the ISO to apportion net Trading Interval Redispatch costs to Scheduling Coordinators within the Zone with Intra-Zonal Congestion. The grid operations price is calculated using the following formula:

Issued by: Charles F. Robinson, Vice President and General Counsel

$$GOP_{t} = \frac{REDISP_{CONG_{t}}}{\sum_{j} QCharge_{jt} + \sum_{j} Export_{jt}}$$

B 2.6 Grid Operations Charge

The Grid Operations Charge is the vehicle by which the ISO recovers the net Redispatch costs. It is allocated to each Scheduling Coordinator in proportion to the Scheduling Coordinator's Demand in the Zone with Intra-Zonal Congestion and exports from the Zone with Intra-Zonal Congestion. The formula for calculating the Grid Operations Charge for Scheduling Coordinator; in Trading Intervalt is:

$$GOC_{jt} = GOP_t * (QCharge_{jt} + EXPORT_{jt})$$

B 3 Meaning of terms of formulae

B 3.1 INC_{biit} - \$

The payment from the ISO due to Scheduling Coordinator, whose Generating Unit; or System Resource, is increased or Curtailable Load; is reduced within a blockb of Energy in its Imbalance Energy bid in Trading Intervalt in order to relieve Intra-Zonal Congestion.

B 3.2 adjincbiit - \$/MWh

The incremental cost for the rescheduled Generating Unit; or System Resource; or Curtailable Load; taken from the relevant blockb of Energy in the Imbalance Energy bid submitted by the Scheduling Coordinator; or generated by the ISO for the Trading Intervalt.

B 3.3 Δincbijt - MW

The amount by which the Generating Unit_i or System Resource_i or Curtailable Load; of Scheduling Coordinator_j for Trading Interval_t is increased by the ISO within the relevant block_b of Energy in its Imbalance Energy bid.

B 3.4 PayTl_{iit} - \$

The Trading Interval payment to Scheduling Coordinator; whose Generating Unit; has been increased or System Resource; or Curtailable Load; reduced in Trading Interval; of the Trading Day.

B 3.5 DEC_{biit} - \$

The charge to Scheduling Coordinator_j whose Generating Unit_i or System Resource_i is decreased for Trading Interval_t within a block_b of Energy at the decremental reference price for Generating Unit_i or in the Imbalance Energy bid for System Resource_i.

Issued by: Charles F. Robinson, Vice President and General Counsel

B 3.6 adjdecbiit - \$/MWh

The decremental cost for the rescheduled Generating Unit; or System Resource; taken from the relevant blockb of Energy at the decremental reference price for Generating Unit; or Imbalance Energy bid for System Resource; submitted by Scheduling Coordinator; or generated by the ISO for the Trading Intervalt.

B 3.7 Δdecbiit - MW

The amount by which the Generating Unit_i or System Resource_i of Scheduling Coordinator_j for Trading Interval_t is decreased by ISO within the relevant block_b of Energy at the decremental reference price for Generating Unit_i or Imbalance Energy bid for System Resource_i.

B 3.8 ChargeTl_{ijt} - \$

The Trading Interval charge to Scheduling Coordinator_j whose Generating Unit_i or System Resource_i has been decreased in Trading Interval_t of the Trading Day.

B 3.9 Not Used

B 3.10 Not Used

B 3.10.1 Not Used

B 3.10.2 Not Used

B 3.11 REDISPCONGt - \$

The Trading Interval net cost to ISO to redispatch in order to relieve Intra-Zonal Congestion during Trading Interval_t.

B 3.12 GOP_t - \$/MWh

The Trading Interval grid operations price for Trading Interval_t used by the ISO to recover the costs of Redispatch for Intra-Zonal Congestion Management.

B 3.13 GOC_{it} - \$

The Trading Interval Grid Operations Charge by the ISO for Trading Intervalt for Scheduling Coordinator; in the relevant Zone with Intra-Zonal Congestion.

B 3.14 QCHARGE_{it} – MWh

The Trading Interval metered Demand within a Zone for Trading Intervalt for Scheduling Coordinator; whose Grid Operations Charge is being calculated.

B 3.15 EXPORT_{it} – MWh

The total Energy for Trading Intervalt exported from the Zone to a neighboring Control Area by Scheduling Coordinatori.

Issued by: Charles F. Robinson, Vice President and General Counsel

APPENDIX C

ANCILLARY SERVICES CHARGES COMPUTATION

C 1 Purpose of charges

The Ancillary Services charges reimburse the ISO for the costs of purchasing Ancillary Services in the Day-Ahead and Hour-Ahead Markets. Each Scheduling Coordinator that does not self-provide Ancillary Services must purchase these services from the ISO. The ISO will in turn purchase these Ancillary Services from Scheduling Coordinators in the markets. Ancillary Services purchased and resold by the ISO includes Regulation, Spinning Reserve, Non-Spinning Reserve, and Replacement Reserve. Any references in this Appendix C to the Ancillary Service "Regulation" shall be read as referring to "Regulation Up" or "Regulation Down".

This Appendix C also addresses the payments by ISO to Scheduling Coordinators for the Dispatch of energy from Dispatched Ancillary Services Units and for the Dispatch of Supplemental Energy in the Real Time Market. The ISO recovers the costs of real-time Dispatch of such energy through the Imbalance Energy charges described in Appendix D of this Protocol.

The reference to a Scheduling Coordinator by Zone refers to the Demand of that Scheduling Coordinator which is located in the Zone. A Generation Unit, Load, or System Resource located in another Control Area is considered to be located in the Zone in which its contract path enters the ISO Controlled Grid.

The ISO will purchase Ancillary Services for each Trading Interval in both the Day-Ahead and Hour-Ahead Markets. Separate payments will be calculated for each service for each Trading Interval and in each market for each Generating Unit, Load and System Resource. The ISO will then calculate a total payment for each Scheduling Coordinator for each Trading Interval for each service for each Zone in each market for all the Generating Units, Loads and System Resources that the Scheduling Coordinator represents. The ISO will charge Scheduling Coordinators for Ancillary Services, other than for energy, which they purchase from the ISO by calculating and applying charges to each Scheduling Coordinator for each Trading Interval for each service in each Zone in each market.

The ISO will allocate the Ancillary Services capacity charges, for both the Day-Ahead Market and the Hour-Ahead Market, on a Zonal basis if the Day-Ahead Ancillary Services Market is procured on a Zonal basis. The ISO will allocate the Ancillary Services capacity charges, for both the Day-Ahead Market and the Hour-Ahead Market, on an ISO Control Area wide basis if the Day-Ahead Ancillary Services Market is defined on an ISO Control Area wide basis.

Issued by: Charles F. Robinson, Vice President and General Counsel

C 2 Fundamental formulas

C 2.1 ISO payments to Scheduling Coordinators

C 2.1.1 Day-Ahead Market

(a) Regulation. When the ISO purchases Regulation capacity in the Day-Ahead Market, Scheduling Coordinators for Generating Units that provide this capacity will receive payments for each Trading Interval of the Day-Ahead Market. The payment for a given Generating Unit which provides Regulation capacity over a given Trading Interval will be the total quantity of Regulation capacity provided times the Zonal Market Clearing Price for that Trading Interval in that Zone. The required Regulation capacity is defined in the Ancillary Services Requirements Protocol. Regulation Up and Regulation Down payments shall be calculated separately. This payment for Scheduling Coordinator j for providing Regulation Up capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

$$AGCUpPayDA_{ijxt} = AGCUpQDA_{ijxt} * PAGCUpDA_{xt}$$

This payment for Scheduling Coordinator j for providing Regulation Down capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

$$AGCDownPayDA_{ijxt} = AGCDownQDA_{ijxt} * PAGCDownDA_{xt}$$

The total Regulation Up payment to each Scheduling Coordinator for a given Trading Interval in the Day-Ahead Market for all the resources that it represents in a given Zone is calculated by summing all the payments for the resources of the Scheduling Coordinator in the Zone for the Trading Interval. This payment for Scheduling Coordinator j in Zone x for Trading Interval t is calculated as follows:

$$AGCUpPayTotalDA_{jxt} = \sum_{i} AGCUpPayDA_{ijxt}$$

The total Regulation Down payment to each Scheduling Coordinator for a given Trading Interval in the Day-Ahead Market for all the resources that it represents in a given Zone is calculated by summing all the payments for the resources of the Scheduling Coordinator in the Zone for the Trading Interval. This payment for Scheduling Coordinator j in Zone x for Trading Interval t is calculated as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

$AGCDownPayTotalDA_{jxt} = \sum_{i} AGCDownPayDA_{ijxt}$

(b) Spinning Reserve. When ISO purchases Spinning Reserve capacity in the Day-Ahead Market. Scheduling Coordinators for Generating Units and System Resources that provide this capacity will receive payments for each Trading Interval of the Day-Ahead Market. The payment for a given Generating Unit or System Resource which provides Spinning Reserve capacity over a given Trading Interval will be the total quantity of Spinning Reserve capacity provided times the Zonal Market Clearing Price for that Trading Interval in that Zone. The required Spinning Reserve capacity is defined in the Ancillary Services Requirements Protocol. This payment for Scheduling Coordinator j for providing Spinning Reserve capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

$$SpinPayDA_{iixt} = SpinQDA_{iixt} * PSpinDA_{xt}$$

The total Spinning Reserve payment to each Scheduling Coordinator for a given Trading Interval in the Day-Ahead Market for all the resources that it represents in a given Zone is calculated by summing all the payments for the resources of the Scheduling Coordinator in the Zone for the Trading Interval. This payment for Scheduling Coordinator j in Zone x for Trading Interval t is calculated as follows:

$$SpinPayTotalDA_{jxt} = \sum_{i} SpinPayDA_{ixt}$$

(c) Non-Spinning Reserve. When the ISO purchases Non-Spinning Reserve capacity in the Day-Ahead Market, Scheduling Coordinators for Generating Units, Loads and System Resources that provide this capacity will receive payments for each Trading Interval of the Day-Ahead Market. The payment for a given Generating Unit, Load or System Resource which provides Non-Spinning Reserve capacity over a given Trading Interval will be the total quantity of Non-Spinning Reserve capacity provided times the Zonal Market Clearing Price for that Trading Interval in that Zone. The required Non-Spinning Reserve capacity is defined in the Ancillary Services Requirements Protocol. This payment for Scheduling Coordinator i for providing Non-Spinning Reserve capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

$$NonSpinPayDA_{ijxt} = NonSpinQDA_{ijxt} * PNonSpinDA_{xt}$$

The total Non-Spinning Reserve payment to each Scheduling Coordinator for a given Trading Interval in the Day-Ahead Market for all the resources that it represents in a given Zone is calculated by summing all the payments for the resources of the Scheduling Coordinator in the Zone for the Trading Interval. This payment for Scheduling Coordinator j in Zone x for Trading Interval t is calculated as follows:

$$NonSpinPayTotalDA_{jxt} = \sum_{i} NonSpinPayDA_{ijxt}$$

(d) Replacement Reserve. When the ISO purchases Replacement Reserve capacity in the Day-Ahead Market, Scheduling Coordinators for Generating Units, Loads and System Resources that provide this capacity will receive payments for each Trading Interval of the Day-Ahead Market. The payment for a given Generating Unit, Load or System Resource which provides Replacement Reserve capacity over a given Trading Interval will be the total quantity of Replacement Reserve capacity provided times the Zonal Market Clearing Price for that Trading Interval in that Zone. The required Replacement Reserve capacity is defined in the Ancillary Services Requirements Protocol. This payment for Scheduling Coordinator j for providing Replacement Reserve capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

$$ReplPayDA_{iixt} = ReplQDA_{iixt} * PReplDA_{xt}$$

The total Replacement Reserve payment to each Scheduling Coordinator for a given Trading Interval in the Day-Ahead Market for all the resources that it represents in a given Zone is calculated by summing all the payments for the resources of the Scheduling Coordinator in the Zone for the Trading Interval. This payment for Scheduling Coordinator j in Zone x for Trading Interval t is calculated as follows:

$$ReplPayTotalDA_{jxt} = \sum_{i} ReplPayDA_{ijxt}$$

C 2.1.2 Hour-Ahead Market

(a) Regulation. When the ISO purchases Regulation capacity in the Hour-Ahead Market, Scheduling Coordinators for Generating Units that provide this capacity will receive payment for the Trading Interval of the Hour-Ahead Market. The payment for a given Generating Unit which provides Regulation capacity over the Trading Interval will be the total quantity of Regulation capacity provided times the Zonal Market Clearing

Issued by: Charles F. Robinson, Vice President and General Counsel

Price for that Trading Interval in that Zone. The required Regulation capacity is defined in the Ancillary Services Requirements Protocol. Regulation Up and Regulation Down payments shall be calculated separately. This payment for Scheduling Coordinator j for providing Regulation Up capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

$$AGCUpPayHA_{ijxt} = AGCUpQIHA_{ijxt} * PAGCUpHA_{xt}$$

This payment for Scheduling Coordinator j for providing Regulation Down capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

$$AGCDownPayHA_{ijxt} = AGCDownQIHA_{ijxt} * PAGCDownHA_{xt}$$

When a Scheduling Coordinator buys back, in the Hour-Ahead Market, Regulation capacity which it sold to the ISO in the Day-Ahead Market, the payment which the ISO receives will be the total quantity of Regulation capacity bought back times the Zonal Hour-Ahead Market Clearing Price for that Trading Interval in that Zone.

This payment to the ISO from Scheduling Coordinator j to buy back Regulation Up capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

$$AGCUpReceiveHA_{ijxt} = AGCUpQDHA_{ijxt} * PAGCUpHA_{xt}$$

This payment to the ISO from Scheduling Coordinator j to buy back Regulation Down capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

$$AGCDownReceiveHA_{ijxt} = AGCDownQDHA_{ijxt} * PAGCDownHA_{xt}$$

The total Regulation payment for the Trading Interval of the Hour-Ahead Market to each Scheduling Coordinator for all the resources that it represents in a given Zone is calculated by summing all the payments for the resources of the Scheduling Coordinator in the Zone for the Trading Interval and then deducting therefrom any amount payable by the Scheduling Coordinator to the ISO for Regulation bought back by the Scheduling Coordinator from the ISO in the Hour-Ahead Market for the Trading Interval on behalf of resources located in the Zone. This payment for Scheduling Coordinator j in Zone x for Trading Interval t is calculated as follows:

$$AGCUpPayTotalHA_{jxt} = \sum_{i} AGCUpPayHA_{ijxt} - \sum_{i} AGCUpReceiveHA_{ijxt}$$

$$AGCDownPayTotalHA_{jxt} = \sum_{i} AGCDownPayHA_{ijxt} - \sum_{i} AGCDownReceiveHA_{ijxt}$$

$$i$$

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. II

(b) Spinning Reserve. When the ISO purchases Spinning Reserve capacity in the Hour-Ahead Market, Scheduling Coordinators for Generating Units and System Resources that provide this capacity will receive payments for the Trading Interval of the Hour-Ahead Market. The payment for a given Generating Unit or System Resource which provides Spinning Reserve capacity over the Trading Interval will be the total quantity of Spinning Reserve capacity provided times the Zonal Market Clearing Price for that Trading Interval in that Zone. This payment for Scheduling Coordinator j for providing Spinning Reserve capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

$$SpinPayHA_{ijxt} = SpinQIHA_{ijxt} * PSpinHA_{xt}$$

When a Scheduling Coordinator buys back in the Hour-Ahead Market Spinning Reserve capacity which it sold to the ISO in the Day-Ahead Market, the payment which the ISO receives will be the total quantity of Spinning Reserve capacity bought back times the Zonal Hour-Ahead Market Clearing Price for that Trading Interval in that Zone.

This payment to the ISO from Scheduling Coordinator j to buy back Spinning Reserve capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

$$SpinReceiveHA_{ijxt} = SpinQDHA_{ijxt} * PSpinHA_{xt}$$

The total Spinning Reserve payment to each Scheduling Coordinator for the Trading Interval of the Hour-Ahead Market for all the resources that it represents in a given Zone is calculated by summing all the payments for the resources of the Scheduling Coordinator in the Zone for the Trading Interval and then deducting therefrom any amount payable by the Scheduling Coordinator to the ISO for Spinning Reserve bought back by the Scheduling Coordinator from the ISO in the Hour-Ahead Market for the Trading Interval on behalf of resources located in the Zone. This payment for Scheduling Coordinator j in Zone x for Trading Interval t is calculated as follows:

$$SpinPayTotalHA_{jxt} = \sum_{i} SpinPayHA_{ijxt} - \sum_{i} SpinReceiveHA_{ijxt}$$

(c) Non-Spinning Reserve. When the ISO purchases Non-Spinning Reserve capacity in the Hour-Ahead Market, Scheduling Coordinators for Generating Units, Loads and System Resources that provide this capacity will receive payment for the Trading Interval of the Hour-Ahead Market. The payment for a given Generating Unit, Load or System Resource which provides Non-Spinning Reserve capacity over the Trading Interval will be the total quantity of Non-Spinning

Issued by: Charles F. Robinson, Vice President and General Counsel

Reserve capacity provided times the Zonal Market Clearing Price for that Trading Interval in that Zone. This payment for Scheduling Coordinator j for providing Non-Spinning Reserve capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

 $NonSpinPayHA_{ijxt} = NonSpinQIHA_{ijxt} * PNonSpinHA_{xt}$

When a Scheduling Coordinator buys back in the Hour-Ahead Market Non-Spinning Reserve capacity which it sold to the ISO in the Day-Ahead Market, the payment which the ISO receives will be the total quantity of Non-Spinning Reserve capacity bought back times the Zonal Hour-Ahead Market Clearing Price for that Trading Interval in that Zone.

This payment to the ISO from Scheduling Coordinator j to buy back Non-Spinning Reserve capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

 $NonSpinReceiveHA_{ijxt} = SpinQDHA_{ijxt} * PNonSpinHA_{xt}$

The total Non-Spinning Reserve payment to each Scheduling Coordinator for the Trading Interval of the Hour-Ahead Market for all the resources that it represents in a given Zone is calculated by summing all the payments for the resources of the Scheduling Coordinator in the Zone for the Trading Interval and then deducting therefrom any amount payable by the Scheduling Coordinator to the ISO for Non-Spinning Reserve bought back by the Scheduling Coordinator from the ISO in the Hour-Ahead Market for the Trading Interval on behalf of resources located in the Zone. This payment for Scheduling Coordinator j in Zone x for Trading Interval t is calculated as follows:

$$NonSpinPayTotalHA_{jxt} = \sum_{i} NonSpinPayHA_{ijxt} - \sum_{i} NonSpinReceiveHA_{ijxt}$$

(d) Replacement Reserve. When the ISO purchases
Replacement Reserve capacity in the Hour-Ahead Market,
Scheduling Coordinators for Generating Units, Loads and
System Resources that provide this capacity will receive
payments for the Trading Interval of the Hour-Ahead Market.
The payment for a given Generating Unit, Load or System
Resource which provides Replacement Reserve capacity over
the Trading Interval will be the total quantity of Replacement
Reserve capacity provided times the Zonal Market Clearing
Price for that Trading Interval in that Zone. This payment for
Scheduling Coordinator j for providing Replacement Reserve
capacity from a resource i in Zone x for Trading Interval t is
calculated as follows:

 $ReplPayHA_{ijxt} = ReplQIHA_{ijxt} * PReplHA_{xt}$

Issued by: Charles F. Robinson, Vice President and General Counsel

When a Scheduling Coordinator buys back in the Hour-Ahead Market Replacement Reserve capacity which it sold to the ISO in the Day-Ahead Market, the payment which the ISO receives will be the total quantity of Replacement Reserve capacity bought back times the Zonal Hour-Ahead Market Clearing Price for that Trading Interval in that Zone.

This payment to the ISO from Scheduling Coordinator j to buy back Replacement Reserve capacity from a resource i in Zone x for Trading Interval t is calculated as follows:

$$ReplReceiveHA_{ijxt} = ReplQDHA_{ijxt} * PReplHA_{xt}$$

The total Replacement Reserve payment to each Scheduling Coordinator for the Trading Interval of the Hour-Ahead Market for all the resources that it represents in a given Zone is calculated by summing all the payments for the resources of the Scheduling Coordinator in the Zone for the Trading Interval and then deducting therefrom any amount payable by the Scheduling Coordinator to the ISO for Replacement Reserve bought back by the Scheduling Coordinator from the ISO in the Hour-Ahead Market for the Trading Interval on behalf of resources located in the Zone. This payment for Scheduling Coordinator j in Zone x for Trading Interval t is calculated as follows:

$$ReplPayTotalHA_{jxt} = \sum_{i} ReplPayHA_{ijxt} - \sum_{i} ReplReceiveHA_{ijxt}$$

Issued by: Charles F. Robinson, Vice President and General Counsel

C 2.2 ISO allocation of charges to Scheduling Coordinators

C 2.2.1 Day-Ahead Market

(a) Regulation. The ISO will charge the Zonal cost of providing Regulation capacity that is not self-provided by Scheduling Coordinators, in the Day-Ahead Market, through the application of a charge to each Scheduling Coordinator for each Trading Interval. This charge will be computed by multiplying the Regulation user rate for the Trading Interval by the Scheduling Coordinator's Regulation obligation, for which it has not self-provided, for the same period.

The Zonal Regulation user rate for the Day-Ahead Market is calculated by dividing the total cost to ISO of purchasing Regulation Capacity within the Zone, for the Trading Interval, by the total ISO Regulation MW purchases for the Trading Interval within the Zone. Regulation Up and Regulation Down payments shall be calculated separately.

The Day-Ahead Regulation Up user rate in Zone x for Trading Interval t is calculated as follows:

$$AGCUpRateDA_{xt} = \frac{\sum_{j} AGCUpPayTotalDA_{jxt}}{AGCUpPurchDA_{xt}}$$

where,

 $AGCUpPayTotalDA_{ixt}$ = Total Regulation Up payments for the Settlement Period t in the Day-Ahead Market for the Zone x.

The Day-Ahead Regulation Down user rate in Zone x for Trading Interval t is calculated as follows:

$$AGCDownRateDAxt = \frac{\displaystyle\sum_{j} AGCDownPayTotalDAjxt}{AGCDownPurchDAxt}$$

where,

 $AGCDownPayTotalDA_{jxt}$ = Total Regulation Down payments for the Settlement Period t in the Day-Ahead Market for the Zone x.

Issued by: Charles F. Robinson, Vice President and General Counsel

The Regulation capacity charge for Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t is calculated as follows:

$$AGCUpChgDA_{jxt} = AGCUpOblig_{jxt} * AGCUpRateDA_{xt}$$

$$AGCDownChgDA_{ixt} = AGCDownOblig_{ixt} * AGCDownRateDA_{xt}$$

Spinning Reserve. The ISO will charge the Zonal cost of (b) providing Spinning Reserve capacity that is not self-provided by Scheduling Coordinators, in the Day-Ahead Market, through the application of a charge to each Scheduling Coordinator for each Trading Interval. This charge will be computed by multiplying the Spinning Reserve capacity user rate for the Trading Interval by the Scheduling Coordinator's Spinning Reserve obligation, for which it has not self-provided, for the same period. The Zonal Spinning Reserve capacity user rate for the Day-Ahead Market is calculated by dividing the total cost to ISO of purchasing Spinning Reserve capacity within the Zone, for the Trading Interval, by the total ISO Spinning Reserve MW purchases for the Trading Interval within the Zone. The Day-Ahead Spinning Reserve capacity user rate in Zone x for Trading Interval t is calculated as follows:

$$SpinRateDA_{xt} = \frac{\displaystyle\sum_{j} SpinPayTotalDA_{jxt}}{SpinPurchDA_{xt}}$$

The Spinning Reserve capacity charge for Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t is calculated as follows:

$$SpinChgDA_{ixt} = SpinOblig_{ixt} * SpinRateDA_{xt}$$

(c) Non-Spinning Reserve. The ISO will charge the Zonal cost of providing Non-Spinning Reserve capacity that is not self-provided by Scheduling Coordinators, in the Day-Ahead Market, through the application of a charge to each Scheduling Coordinator for each Trading Interval. This charge will be computed by multiplying the Non-Spinning Reserve capacity user rate for the Trading Interval by the Scheduling Coordinator's Non-Spinning Reserve obligation, for which it has not self-provided, for the same period.

The Zonal Non-Spinning Reserve capacity user rate for the Day-Ahead Market is calculated by dividing the total cost to ISO of purchasing Non-Spinning Reserve capacity within the Zone, for the Trading Interval, by the total ISO Non-Spinning Reserve MW purchases for the Trading Interval within the Zone. The Day-Ahead Non-Spinning Reserve capacity user rate in Zone x for Trading Interval t is calculated as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

$$NonSpinRateDA_{xt} = \frac{\displaystyle\sum_{j} NonSpinPayTotalDA_{jxt}}{NonSpinPurchDA_{xt}}$$

The Non-Spinning Reserve capacity charge for Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t is calculated as follows:

$$NonSpinChgDA_{ixt} = NonSpinOblig_{ixt} * NonSpinRateDA_{xt}$$

C 2.2.2 Hour-Ahead Market

(a) Regulation. The ISO will charge the Zonal net cost of providing Regulation capacity that is not self-provided by Scheduling Coordinators, in the Hour-Ahead Market through the application of a charge to each Scheduling Coordinator for the Trading Interval concerned. This charge will be computed by multiplying the Regulation user rate for the Trading Interval by the Scheduling Coordinator's Regulation obligation, for which it has not self-provided, for the same period.

The Zonal Regulation capacity user rate for the Hour-Ahead Market is calculated by dividing the total cost to the ISO of purchasing Regulation capacity within the Zone less any amounts payable to the ISO by Scheduling Coordinators for Regulation bought back from the ISO in the Hour-Ahead Market on behalf of resources located in the Zone, for the Trading Interval, by the total ISO Regulation capacity MW purchases for the Trading Interval within the Zone. Regulation Up and Down payments shall be calculated separately. The Hour-Ahead Regulation Up capacity user rate in Zone x for Trading Interval t is calculated as follows:

$$AGCUpRateHA_{xt} = \frac{\displaystyle\sum_{j} AGCUpPayTotalHA_{jxt}}{AGCUpPurchHA_{xt}}$$

where,

 $AGCUpPayTotalHa_{jxt}$ = Totlal Regulation Up payments for the Settlement Period t in the Hour-Ahead Market for Zone x.

The Hour-Ahead Regulation Down capacity user rate in Zone x for Trading Interval t is calculated as follows:

$$\frac{\displaystyle\sum_{j} AGCDownPayTotalHA_{jxt}}{AGCDownPurchHA_{xt}}$$

where,

Issued by: Charles F. Robinson, Vice President and General Counsel

 $AGCDownPayTotalHA_{xt}$ = Total Regulation Down payments for the Settlement Period t in the Hour-Ahead Market for Zone x.

The Regulation capacity charge for Scheduling Coordinator j in the Hour-Ahead Market in Zone x for Trading Interval t is calculated as follows:

 $AGCUpChgHA_{jxt} = (AGCUpOblig_{jxt} * AGCUpRateHA_{xt})$ $AGCDownChgHA_{ixt} = (AGCDownOblig_{ixt} * AGCDownRateHA_{xt})$

(b) Spinning Reserve. The ISO will charge the Zonal net cost of providing Spinning Reserve capacity that is not self-provided by Scheduling Coordinators, in the Hour-Ahead Market, through the application of a charge to each Scheduling Coordinator for the Trading Interval. This charge will be computed by multiplying the Spinning Reserve capacity user rate for the Trading Interval by the Scheduling Coordinator's Spinning Reserve obligation, for which it has not self-provided, for the same period. The Zonal Spinning Reserve capacity user rate for the Hour-Ahead Market is calculated by dividing the total cost to ISO of purchasing Spinning Reserve capacity within the Zone less any amounts payable to the ISO by Scheduling Coordinators for Spinning Reserve bought back from the ISO in the Hour-Ahead Market on behalf of resources located in the Zone, for the Trading Interval, by the total ISO Spinning Reserve MW purchases for the Trading Interval within the Zone. The Hour-Ahead Spinning Reserve capacity user rate in Zone x for Trading Interval t is calculated as follows:

$$SpinRateHA_{xt} = \frac{\displaystyle\sum_{j} SpinPayTotalHA_{jxt}}{SpinPurchHA_{xt}}$$

The Spinning Reserve capacity charge for Scheduling Coordinator j in the Hour-Ahead Market in Zone x for Trading Interval t is calculated as follows:

 $SpinChgHA_{ixt} = (SpinOblig_{ixt} * SpinRateHA_{xt})$

(c) Non-Spinning Reserve. The ISO will charge the Zonal net cost of providing Non-Spinning Reserve capacity that is not self-provided by Scheduling Coordinators, in the Hour-Ahead Market, through the application of a charge to each Scheduling Coordinator for the Trading Interval. This charge will be computed by multiplying the Non-Spinning Reserve capacity user rate for the concerned Trading Interval by the Scheduling Coordinator's Non-Spinning Reserve obligation, for which it has not self-provided, for the same period. The Zonal Non-Spinning Reserve capacity user rate for the Hour-Ahead Market is calculated by dividing the total cost to ISO of purchasing Non-Spinning Reserve capacity within the Zone less any amounts

Issued by: Charles F. Robinson, Vice President and General Counsel

payable to the ISO by Scheduling Coordinators for Non-Spinning Reserve bought back from the ISO in the Hour-Ahead Market on behalf of resources in the Zone, for the Trading Interval, by the total ISO Non-Spinning Reserve MW purchases for the Trading Interval within the Zone. The Hour-Ahead Non-Spinning Reserve capacity user rate in Zone x for Trading Interval t is calculated as follows:

$$NonSpinRateHA_{xt} = \frac{\sum\limits_{j} NonSpinPayTotalHA_{jxt}}{NonSpinObligTotal_{xt}}$$

The Non-Spinning Reserve capacity charge for Scheduling Coordinator j in the Hour-Ahead Market in Zone x for Trading Interval t is calculated as follows:

 $NonSpinChgHA_{jxt} = (NonSpinOblig_{jxt} * NonSpinRateHA_{xt})$

C 2.2.3 Replacement Reserve

The user rate per unit of Replacement Reserve obligation for each Settlement Period t for each Zone x shall be as follows:

$$ReplRate_{xt} = \frac{\left(PRepResDA_{xt} * OrigReplReqDA_{xt}\right) + \left(PRepResHA_{xt} * OrigReplReqHA_{xt}\right)}{OrigReplReqDA_{xt} + OrigReplReqHA_{xt}}$$

where:

 $OrigReplReqDA_{xt}$ = Replacement Reserve requirement net of self-provision in the Day-Ahead Market before consideration of any substitutions pursuant to Section 2.5.3.6.

 $OrigReplReqHA_{xt}$ = Incremental change in the Replacement Reserve requirement net of self-provision between the Day-Ahead Market and the Hour-Ahead Market before consideration of any substitutions pursuant to Section 2.5.3.

 $PRepResDA_{xt}$ is the Market Clearing Price for Replacement Reserve in the Day-Ahead Market for Zone x in Settlement Period t.

 $PRepResHA_{xt}$ is the Market Clearing Price for Replacement Reserve in the Hour-Ahead Market for Zone x in Settlement Period t.

For each Settlement Period t, each Scheduling Coordinator shall pay to the ISO a sum calculated as follows for each Zone x:

 $ReplRate_{xt} * ReplOblig_{jxt}$

where

 $ReplOblig_{jxt} = DevReplOblig_{jxt} + RemRepl_{jxt} - SelfProv_{jxt} + NetInterSCTrades_{jxt}$

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: October 13, 2000 Effective: October 13, 2000

 $DevReplOblig_{jxt}$ is the Scheduling Coordinator's obligation for deviation Replacement Reserve in Zone x in the Settlement Period t and $RemRepl_{jxt}$ is the Scheduling Coordinator's obligation for remaining Replacement Reserve in Zone x for Settlement Period t.

 $SelfProv_{jxt}$ is Scheduling Coordinator's Replacement Reserve self-provision in Zone x for Settlement Period t.

 $NetInterSCTrades_{jxt}$ is the sale of Replacement Reserve less the purchase of Replacement Reserve through Inter-Scheduling Coordinator Trades by Scheduling Coordinator j in Zone x for Settlement Period t.

Deviation Replacement Reserve for Scheduling Coordinator i in Zone x for Settlement Period t is calculated as follows:

If $ReplObligTotal_{xt} > TotalDeviations_{xt}$ then:

$$DevReplOblig_{xjt} = \left[Max \left(0, \sum_{i} GenDev_{ijxt} \right) - Min \left(0, \sum_{i} LoadDev_{ijxt} \right) \right]$$

If $ReplObligTotal_{xt} < TotalDeviations_{xt}$ then:

$$DevReplOblig_{xjt} = \frac{ReplObligTotal_{xt}}{TotalDeviations_{xt}} * \left[Max \left(0, \sum_{i} GenDev_{ijxt} \right) - Min \left(0, \sum_{i} LoadDev_{ijxt} \right) \right]$$

where,

$$Total Deviations_{xt} = \sum_{j} \left[Max \left(0, \sum_{i} Gen Dev_{ijxt} \right) - Min \left(0, \sum_{i} Load Dev_{ijxt} \right) \right]$$

 $GenDev_{ijxt}$ = The deviation between scheduled and actual Energy generation for Generator i represented by Scheduling Coordinator I in Zone x during Settlement Period t as referenced in SABP Appendix D.

 $LoadDev_{ijxt}$ = The deviation between scheduled and actual Load consumption for resource I represented by Scheduling Coordinator iin Zone x during Settlement Period t as referenced in SABP Appendix D.

 $DevReplOblig_{xt}$ is total deviation Replacement Reserve in Zone x for Settlement Period t.

 $ReplObligTotal_{xt}$ is total Replacement Reserve Obligation in Zone x for Settlement Period t.

Remaining Replacement Reserve for Scheduling Coordinator j in Zone x for Settlement Period t is calculated as follows:

$$RemRepl_{xjt} = \frac{MeteredDemand_{jxt}}{TotalMeteredDemand_{xt}} * TotalRemRepl_{xt}$$

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: April 1, 2002

where:

 $MeteredDemand_{jxt}$ is the Scheduling Coordinator's total metered Demand excluding exports in Zone x for Settlement Period t.

 $TotalMeteredDemand_{xt}$ is total metered Demand excluding exports in Zone x for Settlement Period t.

 $TotalRemRepl_{xt} = Max[0,ReplObligTotal_{xt} - DevReplOblig_{xt}]$

C 2.2.4 Rational Buyer Adjustments

- (a) If, in any Settlement Period, no quantity of Regulation, Spinning Reserve, Non-Spinning Reserve or Replacement Reserve is purchased in the Day-Ahead Market or the Hour-Ahead Market due to the operation of Section 2.5.3.6 of the ISO Tariff, then in lieu of the user rate determined in accordance with Section C 2.2.1, C 2.2.2, or C 2.2.3, as applicable, the user rate for the affected Ancillary Service for that Settlement Period shall be determined as follows:
 - (i) If the affected market is a Day-Ahead Market, the user rate for the affected Ancillary Service shall be set at the lowest capacity reservation price for an unaccepted qualified capacity bid in a Day-Ahead Market for that Ancillary Service or for another Ancillary Service that meets the requirements for the affected Ancillary Service. If there are no such unaccepted bids, the user rate for the affected Ancillary Service shall be the lowest Market Clearing Price for the same Settlement Period established in the Day-Ahead Market for another Ancillary Service that meets the requirements for the affected Ancillary Service.
 - (ii) If the affected market is an Hour-Ahead Market, the user rate for the affected Ancillary Service shall be set at the lowest capacity reservation price for an unaccepted qualified capacity bid in the Hour-Ahead Market for the same Settlement Period for that Ancillary Service or for another Ancillary Service that meets the requirements for the affected Ancillary Service. If there are no such unaccepted bids, the user rate for the affected Ancillary Service shall be the user rate for the same Ancillary Service in the Day-Ahead Market in the same Settlement Period.
- (b) With respect to each Settlement Period, in addition to the user rates determined in accordance with Sections C 2.2.1 through C 2.2.3, or Section C 2.2.4(a), as applicable, each Scheduling Coordinator shall be charged an additional amount equal to its proportionate share, based on total purchases by Scheduling Coordinators of Regulation, Spinning Reserve, Non-Spinning Reserve and Replacement Reserve of the amount, if any, by which (i) the total payments to Scheduling Coordinators

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

pursuant to Section C 2.1 for the Day-Ahead Market and Hour-Ahead Market and all Zones, exceed (ii) the total amounts charged to Scheduling Coordinators pursuant to Sections C 2.2.1 through C 2.2.3, for the Day-Ahead Market and Hour-Ahead Market and all Zones. If total amounts charged to Scheduling Coordinators exceed the total payments to Scheduling Coordinators, each Scheduling Coordinator will be refunded its proportionate share, based on total purchases by Scheduling Coordinators of Regulation, Spinning Reserve, Non-Spinning Reserve and Replacement Reserve.

C 2.2.5 Real-Time Market

- (a) The ISO will charge the costs of purchasing Instructed Imbalance Energy output from Dispatched Spinning Reserve, Non-Spinning Reserve, Replacement Reserve and Supplemental Energy resources through the Instructed Imbalance Energy settlement process.
- (b) The ISO will charge the costs of purchasing Uninstructed Imbalance Energy (including incremental and decrmental Energy from Generating Units providing Regulation) through the Uninstructed Imbalance Energy settlement process.
- (c) The ISO will charge the costs of Regulation Energy Payment Adjustments as calculated in accordnace with Section 2.5.27.1 of the ISO Tariff, in accordance with SABP 3.1.1(d)

C 3 Meaning of terms of formulae

C 3.1 AGCUpPayDAiixt - \$

The payment for Scheduling Coordinator j for providing Regulation Up capacity in the Day-Ahead Market from a resource i in Zone x for Trading Interval t.

AGCDownPayDAiixt - \$

The payment for Scheduling Coordinator j for providing Regulation Down capacity in the Day-Ahead Market from a resource i in Zone x for Trading Interval t.

C 3.2 AGCUpQDA_{iixt} – MW

The total quantity of Regulation Up capacity provided in the ISO Day-Ahead Market from resource i by Scheduling Coordinator j in Zone x for Trading Interval t.

AGCDownQDAijxt - MW

The total quantity of Regulation Down capacity provided in the ISO Day-Ahead Market from resource i by Scheduling Coordinator j in Zone x for Trading Interval t.

Issued by: Roger Smith, Senior Regulatory Counsel

C 3.3 PAGCUpDA_{xt} - \$/MW

In the case of Capacity made available in accordance with the ISO's Final Day-Ahead Schedules, the Market Clearing Price for units exempt from FERC Ancillary Service rate caps or the bid price for those Units subject to the cap for Regulation Up Capacity in the Day-Ahead Market for Trading Interval t in Zone x. In the case of Capacity not included in the ISO's Final Day-Ahead Schedules but made available in accordance with amended Ancillary Services supplier schedules issued in accordance with Section 2.5.21, the bid price for the unit for Regulation Up Capacity in Zone x for Trading Interval t.

PAGCDownDA_{xt} - \$/MW

In the case of Capacity made available in accordance with the ISO's Final Day-Ahead Schedules, the Market Clearing Price for units exempt from FERC Ancillary Service rate caps or the bid price for those Units subject to the cap for Regulation Down Capacity in the Day-Ahead Market for Trading Interval t in Zone x. In the case of Capacity not included in the ISO's Final Day-Ahead Schedules but made available in accordance with amended Ancillary Services supplier schedules issued in accordance with Section 2.5.21, the bid price for the unit for Regulation Down Capacity in Zone x for Trading Interval t.

C 3.4 AGCUpPayTotalDA_{ixt} - \$

The total payment for Regulation Up capacity to Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t.

AGCDownPayTotalDAixt - \$

The total payment for Regulation Down capacity to Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t.

C 3.5 AGCUpPayHA_{ijxt} - \$

The payment for Scheduling Coordinator j for providing incremental (additional to Day-Ahead) Regulation Up capacity in the Hour-Ahead Market from a resource i in Zone x for Trading Interval t.

AGCDownPayHAiixt - \$

The payment for Scheduling Coordinator j for providing incremental (additional to Day-Ahead) Regulation Down capacity in the Hour-Ahead Market from a resource i in Zone x for Trading Interval t.

C 3.5.1 AGCUpReceiveHA_{iixt} - \$

The payment from Scheduling Coordinator j for buying back from the ISO in the Hour-Ahead Regulation Up capacity which the ISO had purchased from Scheduling Coordinator j in the Day-Ahead Market from a resource i in Zone x for Trading Interval t.

AGCDownReceiveHAijxt - \$

The payment from Scheduling Coordinator j for buying back from the ISO in the Hour-Ahead Regulation Down capacity which the ISO had

Issued by: Roger Smith, Senior Regulatory Counsel

purchased from Scheduling Coordinator j in the Day-Ahead Market from a resource i in Zone x for Trading Interval t.

C 3.6 AGCUpQIHA_{iixt} – MW

The total quantity of incremental (additional to Day-Ahead) Regulation Up capacity provided in the ISO Hour-Ahead Market from resource i by Scheduling Coordinator j in Zone x for Trading Interval t.

AGCDownQIHAiixt - MW

The total quantity of incremental (additional to Day-Ahead) Regulation Down capacity provided in the ISO Hour-Ahead Market from resource i by Scheduling Coordinator j in Zone x for Trading Interval t.

C 3.7 AGCUpQDHA_{iixt} – MW

The total quantity of decremental (less than Day-Ahead) Regulation Up capacity provided in the ISO Hour-Ahead Market from resource i by Scheduling Coordinator j in Zone x for Trading Interval t.

AGCDownQDHAijxt - MW

The total quantity of decremental (less than Day-Ahead) Regulation Down capacity provided in the ISO Hour-Ahead Market from resource i by Scheduling Coordinator j in Zone x for Trading Interval t.

C 3.7.1 PAGCUpHA_{xt} - \$/MW

The Market Clearing Price for units exempt from FERC Ancillary Service rate caps or the bid price for those units subject to the cap for incremental (additional to Day-Ahead) Regulation Up capacity in the Hour-Ahead Market for Trading Interval t in Zone x. On buyback condition, MCP applies.

PAGCDownHA_{xt} - \$/MW

The Market Clearing Price for units exempt from FERC Ancillary Service rate caps or the bid price for those units subject to the cap for incremental (additional to Day-Ahead) Regulation Down capacity in the Hour-Ahead Market for Trading Interval t in Zone x. On buyback condition, MCP applies.

C 3.8 AGCUpPayTotalHA_{ixt} - \$

The total payment for incremental (additional to Day-Ahead) Regulation Up capacity to Scheduling Coordinator j in the Hour-Ahead Market in Zone x for Trading Interval t, after deduction of payments from Scheduling Coordinator j for buying back from theISO in the Hour-Ahead, Regulation Up capacity which the ISO had purchased from Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t.

AGCDownPayTotalHAixt - \$

The total payment for incremental (additional to Day-Ahead) Regulation Down capacity to Scheduling Coordinator j in the Hour-Ahead Market in

Issued by: Roger Smith, Senior Regulatory Counsel

Zone x for Trading Interval t, after deduction of payments from Scheduling Coordinator j for buying back from the ISO in the Hour-Ahead, Regulation Down capacity which the ISO had purchased from Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t.

C 3.9 AGCUpRateDA_{xt} - \$/MW

The Day-Ahead Regulation Up capacity user rate charged to Scheduling Coordinators by the ISO in Zone x for Trading Interval t.

AGCDownRateDAxt - \$/MW

The Day-Ahead Regulation Down capacity user rate charged to Scheduling Coordinators by the ISO in Zone x for Trading Interval t.

C 3.10 AGCUpObligTotal_{xt} – MW

The net total Regulation Up obligation in Zone x for Trading Interval t as defined in the Ancillary Services Requirements Protocol. This net total equals the total obligation minus that self-provided.

AGCDownObligTotalxt - MW

The net total Regulation Down obligation in Zone x for Trading Interval t as defined in the Ancillary Services Requirements Protocol. This net total equals the total obligation minus that self-provided.

C 3.11 AGCUpChgDA_{jxt} - \$

The Regulation Up charge for Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t.

AGCDownChgDA_{jxt} - \$

The Regulation Down charge for Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t.

C 3.12 AGCUpOblig_{ixt} – MW

The net Regulation Up obligation for Scheduling Coordinator j in Zone x for Trading Interval t as defined in the Ancillary Services Requirements Protocol. This net obligation equals the obligation minus that self-provided.

AGCDownObligixt - MW

The net Regulation Down obligation for Scheduling Coordinator j in Zone x for Trading Interval t as defined in the Ancillary Services Requirements Protocol. This net obligation equals the obligation minus that self-provided.

C 3.13 AGCUpRateHA_{xt} - \$/MW

The Hour-Ahead incremental (additional to Day-Ahead) Regulation Up capacity user rate charged to Scheduling Coordinators by the ISO in Zone x for Trading Interval t.

Issued by: Roger Smith, Senior Regulatory Counsel

AGCDownRateHA_{xt} - \$/MW

The Hour-Ahead incremental (additional to Day-Ahead) Regulation Down capacity user rate charged to Scheduling Coordinators by the ISO in Zone x for Trading Interval t.

C 3.14 AGCUpChgHA_{ixt} - \$

The incremental (additional to Day-Ahead) Regulation Up charge for Scheduling Coordinator j in the Hour-Ahead Market in Zone x for Trading Interval t.

AGCDownChgHAixt - \$

The incremental (additional to Day-Ahead) Regulation Down charge for Scheduling Coordinator j in the Hour-Ahead Market in Zone x for Trading Interval t.

C 3.15 EnQPayijxt - \$

The payment for Scheduling Coordinator j for Instructed Imbalance Energy output from a resource i in the Real Time Market in Zone x for Trading Interval t.

- C 3.16 [NOT USED]
- C 3.17 [NOT USED]
- C 3.18 [NOT USED]

C 3.19 SpinPayDA_{iixt} - \$

The payment for Scheduling Coordinator j for providing Spinning Reserve capacity in the Day-Ahead Market from a resource i in Zone x for Trading Interval t.

C 3.20 SpinQDA_{ijxt} – MW

The total quantity of Spinning Reserve capacity provided in the Day-Ahead Market by resource i represented by Scheduling Coordinator j in Zone x for Trading Interval t.

C 3.20A REPA_{iixt} - \$

The Regulation Energy Payment Adjustment payable for real-time incremental or decremental Energy provided from Regulation resource i of Scheduling Coordinator j in Zone x in Trading Interval t.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

C 3.20B RUP_{iixt} – MW

The upward Regulation capacity of Regulation resource i in Zone x included in the Final Schedule for Ancillary Services of Scheduling Coordinator j for Trading Interval t, weighted in proportion to the ISO's need for upward Regulation.

C3.20C RDN_{ijxt} – MW

The downward Regulation capacity of Regulation resource i in Zone x included in the Final Schedule for Ancillary Services of Scheduling Coordinator j for Trading Interval t, weighted in proportion to the ISO's need for downward Regulation.

C 3.20D CUP – number

The constant established by the ISO and subject to change by resolution of the ISO Governing Board. Initially this shall be set at 1. The ISO may modify the value of CUP within a range of 0-1 either generally in regard to all hours or specifically in regard to particular times of the day, after the ISO Governing Board approves such modifications, by a notice issued by the Chief Executive Officer of the ISO and posted on the ISO Internet "Home Page," at http://www.caiso.com, or such other Internet address as the ISO may publish from time to time, specifying the date and time from which the modification shall take effect, which shall be not less than seven (7) days after the Notice is issued.

C 3.20E CDN – number

The constant established by the ISO and subject to change by resolution of the ISO Governing Board. Initially this shall be set at 1. The ISO may modify the value of CDN within a range of 0-1 either generally in regard to all hours or specifically in regard to particular times of the day, after the ISO Governing Board approves such modifications, by a notice issued by the Chief Executive Officer of the ISO and posted on the ISO Internet "Home Page," at http://www.caiso.com, or such other Internet address as the ISO may publish from time to time, specifying the date and time from which the modification shall take effect, which shall be not less than seven (7) days after the Notice is issued.

C 3.21 PSpinDA_{xt} -\$/MW

In the case of Capacity made available in accordance with the ISO's Final Day-Ahead Schedules, the Day-Ahead Market Clearing Price for units exempt from FERC Ancillary Service rate caps or the bid price for those units subject to the cap for Spinning Reserve Capacity in Zone x for Trading Interval t. In the case of Capacity not included in the ISO's Final Day-Ahead Schedules but made available in accordance with amended Ancillary Services supplier schedules issued in accordance with Section 2.5.21, the bid price for the unit for Spinning Reserve Capacity in Zone x for Trading Interval t.

Issued by: Roger Smith, Senior Regulatory Counsel

C 3.22 SpinPayTotalDA_{jxt} - \$

The total payment to Scheduling Coordinator j for Spinning Reserve capacity in the Day-Ahead Market in Zone x for Trading Interval t.

C 3.23 SpinPayHA_{iixt} - \$

The payment for Scheduling Coordinator j for providing incremental (additional to Day-Ahead) Spinning Reserve capacity in the Hour-Ahead Market from a resource i in Zone x for Trading Interval t.

C 3.23.1 SpinReceiveHA_{lixt} - \$

The payment from Scheduling Coordinator j for buying back from the ISO in the Hour-Ahead, Spinning Reserve capacity which the ISO had purchased from Scheduling Coordinator j in the Day-Ahead Market from a resource i in Zone x for Trading Interval t.

C 3.24 SpinQIHAiixt – MW

The total quantity of incremental (additional to Day-Ahead) Spinning Reserve capacity provided in the Hour-Ahead Market by resource i represented by Scheduling Coordinator j in Zone x for Trading Interval t.

C 3.25 SpinQDHA_{iixt} – MW

The total quantity of decremental (less than Day-Ahead) Spinning Reserve capacity provided in the ISO Hour-Ahead Market from resource i by Scheduling Coordinator j in Zone x for Trading Interval t.

C 3.25.1 PSpinHA_{xt} -\$/MW

The Hour-Ahead Market Clearing Price for units exempt from FERC Ancillary Service rate caps or the bid price for those units subject to the cap for incremental (additional to Day-Ahead) Spinning Reserve capacity in Zone x for Trading Interval t. On Buyback condition, MCP applies charge for HA.

C 3.26 SpinPayTotalHA_{ixt} - \$

The total payment to Scheduling Coordinator j for incremental (additional to Day-Ahead) Spinning Reserve capacity in the Hour-Ahead Market in Zone x for Trading Interval t, after deduction of payments from Scheduling Coordinator j for buying back from the ISO in the Hour-Ahead, Spinning Reserve capacity which the ISO had purchased from Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t.

C 3.27 SpinRateDA_{Xt} - \$/MW

The Day-Ahead Spinning Reserve capacity user rate charged to Scheduling Coordinators by the ISO in Zone x for Trading Interval t.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

C 3.28 SpinObligTotal_{xt} – MW

The net total Spinning Reserve capacity obligation in Zone x for Trading Interval t as defined in the Ancillary Services Requirements Protocol. This net total equals the total obligation minus that self-provided.

C 3.29 SpinChgDA_{jxt} - \$

The Spinning Reserve capacity charge for Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t.

C 3.30 SpinObligixt – MW

The net Spinning Reserve capacity obligation for Scheduling Coordinator j in Zone x for Trading Interval t as defined in the Ancillary Services Requirements Protocol. This net obligation equals the obligation minus that self-provided.

C 3.31 SpinRateHA_{xt} - \$/MW

The Hour-Ahead incremental (additional to Day-Ahead) Spinning Reserve capacity user rate charged to Scheduling Coordinators by the ISO in Zone x for Trading Interval t.

C 3.32 SpinChgHA_{jxt} - \$

The incremental (additional to Day-Ahead) Spinning Reserve capacity charge for Scheduling Coordinator j in the Hour-Ahead Market in Zone x for Trading Interval t.

C 3.33 NonSpinPayDA_{ijxt} - \$

The payment for Scheduling Coordinator j for providing Non-Spinning Reserve capacity in the Day-Ahead Market from a resource i in Zone x for Trading Interval t.

C 3.34 NonSpinQDA_{iixt} – MW

The total quantity of Non-Spinning Reserve capacity provided from resource i in the Day-Ahead Market by Scheduling Coordinator j in Zone x for Trading Interval t.

C 3.35 PNonSpinDA_{xt} - \$/MW

In the case of Capacity made available in accordance with the ISO's Final Day-Ahead Schedules, the Day-Ahead Market Clearing Price for units exempt from FERC Ancillary Service rate caps or the bid price for those units subject to the cap for Non-Spinning Reserve Capacity for Trading Interval t in Zone x. In the case of Capacity not included in the ISO's Final Day-Ahead Schedules but made available in accordance with amended Ancillary Services supplier schedules issued in accordance with Section 2.5.21, the bid price for the unit for Non-Spinning Reserve Capacity in Zone x for Trading Interval t.

Issued by: Roger Smith, Senior Regulatory Counsel

C 3.36 NonSpinPayTotalDA_{ixt} - \$

The total payment to Scheduling Coordinator j for providing Non-Spinning Reserve capacity in the Day-Ahead Market in Zone x for Trading Interval t.

C 3.37 NonSpinPayHA_{iixt} - \$

The payment for Scheduling Coordinator j for providing incremental (additional to Day-Ahead) Non-Spinning Reserve capacity in the Hour-Ahead Market from a resource i in Zone x for Trading Interval t.

C 3.37.1 NonSpinReceiveHA_{iixt} - \$

The payment from Scheduling Coordinator j for buying back from the ISO in the Hour-Ahead, Non-Spinning Reserve capacity which the ISO had purchased from Scheduling Coordinator j in the Day-Ahead Market from a resource i in Zone x for Trading Interval t.

C 3.38 NonSpinQIHA_{iixt} – MW

The total quantity of incremental (additional to Day-Ahead) Non-Spinning Reserve capacity provided from resource i in the Hour-Ahead Market by Scheduling Coordinator j in Zone x for Trading Interval t.

C 3.39 NonSpinQDHA_{iixt} – MW

The total quantity of decremental (less than Day-Ahead) Non-Spinning Reserve capacity provided in the ISO Hour-Ahead Market from resource i by Scheduling Coordinator j in Zone x for Trading Interval t.

C 3.39.1 PNonSpinHA_{xt} - \$/MW

The Hour-Ahead Zonal Market Clearing Price for units exempt from FERC Ancillary Service rate caps or the bid price for those units subject to the cap for incremental (additional to Day-Ahead) Non-Spinning Reserve capacity for Trading Interval t in Zone x. On Buyback condition, MCP applies.

C 3.40 NonSpinPayTotalHA_{ixt} - \$

The total payment to Scheduling Coordinator j for providing incremental (additional to Day-Ahead) Non-Spinning Reserve capacity in the Hour-Ahead Market in Zone x for Trading Interval t, after deduction of payments from Scheduling Coordinator j for buying back from the ISO in the Hour-Ahead, Non-Spinning Reserve capacity which the ISO had purchased from Scheduling Coordinator j in the Day-Ahead market in Zone x for Trading Interval t.

C 3.41 NonSpinRateDA_{xt} - \$/MW

The Day-Ahead Non-Spinning Reserve capacity user rate charged to Scheduling Coordinators by the ISO in Zone x for Trading Interval t.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

C 3.42 NonSpinObligTotal_{xt} – MW

The net total Non-Spinning Reserve capacity obligation in Zone x for Trading Interval t as defined in the Ancillary Services Requirements Protocol. This net total obligation equals the total minus that self-provided.

C 3.43 NonSpinChgDA_{ixt} - \$

The Non-Spinning Reserve Capacity charge for Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t.

C 3.44 NonSpinObligixt – MW

The net Non-Spinning Reserve capacity obligation for Scheduling Coordinator j in Zone x for Trading Interval t as defined in the Ancillary Services Requirements Protocol. This net obligation is the obligation minus that self-provided.

C 3.45 NonSpinRateHA_{xt} - \$/MW

The Hour-Ahead incremental (additional to Day-Ahead) Non-Spinning Reserve capacity user rate charged to Scheduling Coordinators by the ISO in Zone x for Trading Interval t.

C 3.46 NonSpinChgHA_{ixt} - \$

The incremental (additional to Day-Ahead) Non-Spinning Reserve Capacity charge for Scheduling Coordinator j in the Hour-Ahead Market in Zone x for Trading Interval t.

C 3.47 NonSpinObligHA_{ixt} – MW

The net incremental (additional to Day-Ahead) Non-Spinning Reserve capacity obligation in the Hour-Ahead Market for Scheduling Coordinator j in Zone x for Trading Interval t as defined in the Ancillary Services Requirements Protocol. This net obligation is the obligation minus that self-provided.

C 3.48 ReplPayDA_{iixt} - \$

The payment for Scheduling Coordinator j for providing Replacement Reserve capacity in the Day-Ahead Market from a resource i in Zone x for Trading Interval t.

C 3.49 ReplQDA_{iixt} – MW

The total quantity of Replacement Reserve capacity provided in the Day-Ahead Market from resource i by Scheduling Coordinator j in Zone x for Trading Interval t.

C 3.50 PRepIDA_{xt} -\$/MW

In the case of Capacity made available in accordance with ISO's Final Day-Ahead Schedules, the Day-Ahead Market Clearing Price for units exempt from FERC Ancillary Service rate caps or the bid price for those units not subject to the cap for Replacement Reserve Capacity in Zone

Issued by: Roger Smith, Senior Regulatory Counsel

x for Trading Interval t. In the case of Capacity not included in the ISO's Final Day-Ahead Schedules but made available in accordance with amended Ancillary Services supplier schedules issued in accordance with Section 2.5.21, the bid price for the unit for Replacement Reserve Capacity in Zone x for Trading Interval t.

C 3.51 ReplPayTotalDA_{jxt} - \$

The total payment to Scheduling Coordinator j for providing Replacement Reserve capacity in the Day-Ahead Market in Zone x for Trading Interval t.

C 3.51.1 ReplReceiveHA_{ijxt} - \$

The payment from Scheduling Coordinator j for buying back from the ISO in the Hour-Ahead, Replacement Reserve capacity which the ISO had purchased from Scheduling Coordinator j in the Day-Ahead Market from a resource i in the Zone x for Trading Interval t.

C 3.52 ReplPayHA_{iixt} - \$

The payment for Scheduling Coordinator j for providing of incremental (additional to Day-Ahead) Replacement Reserve capacity in the Hour-Ahead Market from a resource i in Zone x for Trading Interval t.

C 3.53 ReplQIHA_{ijxt} – MW

The total quantity of incremental (additional to Day-Ahead)
Replacement Reserve capacity provided in the Hour-Ahead Market from resource i by Scheduling Coordinator j in Zone x for Trading Interval t.

C 3.54 ReplQDHA_{iixt} – MW

The total quantity of decremental (less than Day-Ahead) Replacement Reserve capacity provided in the ISO Hour-Ahead Market from resource i by Scheduling Coordinator j in Zone x for Trading Interval t.

C 3.54.1 PRepIHA_{xt} -\$/MW

The Hour-Ahead Market Clearing Price for Non-FERC jurisdictional units or the bid price for FERC jurisdictional units for incremental (additional to Day-Ahead) Replacement Reserve capacity in Zone x for Trading Interval t. On Buyback condition, MCP applies.

C 3.55 ReplPayTotalHA_{ixt} - \$

The total payment to Scheduling Coordinator j for providing of incremental (additional to Day-Ahead) Replacement Reserve capacity in the Hour-Ahead Market in Zone x for Trading Interval t, after deduction of payments from Scheduling Coordinator j for buying back from the ISO in the Hour-Ahead, Replacement Reserve capacity which the ISO had purchased from Scheduling Coordinator j in the Day-Ahead Market in Zone x from Trading Interval t.

Issued by: Roger Smith, Senior Regulatory Counsel

C 3.56 ReplRateDA_{xt} - \$/MW

The Day-Ahead Replacement Reserve capacity user rate charged to Scheduling Coordinators by the ISO in Zone x for Trading Interval t.

C 3.57 ReplChgDA_{ixt} - \$

The Replacement Reserve capacity charge for Scheduling Coordinator j in the Day-Ahead Market in Zone x for Trading Interval t.

C 3.58 ReplRateHA_{xt} – \$/MW

The Hour-Ahead incremental (additional to Day-Ahead) Spinning Reserve capacity user rate charged to Scheduling Coordinators by the ISO in Zone x for Trading Interval t.

C 3.59 ReplChgHA_{ixt} - \$

The incremental (additional to Day-Ahead) Replacement Reserve capacity charge for Scheduling Coordinator j in the Hour-Ahead Market in Zone x for Trading Interval t.

C 3.60 ReplObligTotal_{xt} – MW

The net total Replacement Reserve capacity obligation in the Day-Ahead and Hour-Ahead Markets in Zone x for Trading Interval t as defined in the Ancillary Services Requirements Protocol. This net total obligation is the total obligation minus that self-provided.

C 3.61 ReplPayTotalixt - \$

The total payment to Scheduling Coordinator j for providing Replacement Reserve capacity in the Day-Ahead and Hour-Ahead Markets in Zone x for Trading Interval t.

C 3.62 PavgRepl_{xt} - \$/MW

The average price paid for Replacement Reserve capacity in the Day-Ahead Market and the Hour-Ahead Market in Zone x in Trading Interval t.

C 3.63 UnDispReplChgixt - \$

The undispatched Replacement Reserve Capacity charge for Scheduling Coordinator j in the Day-Ahead and Hour-Ahead Markets in Zone x for Trading Interval t.

C 3.64 ReplObligixt – MW

The Replacement Reserve capacity obligation in the Day-Ahead and Hour-Ahead Markets for Scheduling Coordinator j in Zone x for Trading Interval t as defined in the Ancillary Services Requirements Protocol.

C 3.65 ReplQDisp_{xt} – MWh

The Dispatched Replacement Reserve capacity in the Day-Ahead Market in Zone x in Trading Interval t.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

C 3.66 AGCUpPurchDA_{xt} – MW

The total quantity of Regulation Up capacity provided in the Day-Ahead Market in Zone x for Trading Interval t, not including self-provided quantities.

AGCDownPurchDA_{xt} - MW

The total quantity of Regulation Down capacity provided in the Day-Ahead Market in Zone x for Trading Interval t, not including selfprovided quantities.

C 3.67 SpinPurchDA_{xt} – MW

The total quantity of Spinning Reserve capacity provided in the Day-Ahead Market in Zone x for Trading Interval t, not including self-provided quantities.

C 3.68 NonSpinPurchDA_{xt} – MW

The total quantity of Non-Spinning Reserve capacity provided in the Day-Ahead Market in Zone x for Trading Interval t, not including self-provided quantities.

C 3.69 AGCUpPurchHA_{xt} – MW

The net quantity of Regulation Up capacity provided in the Hour-Ahead Market in Zone x for Trading Interval t, not including self-provided quantities.

AGCDownPurchHA_{xt} - MW

The net quantity of Regulation Down capacity provided in the Hour-Ahead Market in Zone x for Trading Interval t, not including self-provided quantities.

C 3.70 SpinPurchHA_{xt} – MW

The net quantity of Spinning Reserve capacity provided in the Hour-Ahead Market in Zone x for Trading Interval t, not including selfprovided quantities.

C 3.71 NonSpinPurchDA_{xt} – MW

The net quantity of Non-Spinning Reserve capacity provided in the Hour-Ahead Market in Zone x for Trading Interval t, not including self-provided quantities.

Issued by: Roger Smith, Senior Regulatory Counsel

APPENDIX D

IMBALANCE ENERGY CHARGE COMPUTATION

D 1 Purpose of charge

The Imbalance Energy charge is the term used for allocating the cost of not only the Imbalance Energy (the differences between scheduled and actual Generation and Demand), but also any Unaccounted for Energy (UFE) and any errors in the forecasted Transmission Losses as represented by the GMMs. Any corresponding cost of Dispatched Replacement Reserve Capacity that is not allocated as an Ancillary Service is also included along with the Imbalance Energy charge.

D 2 Fundamental formulae

D 2.1.1 Uninstructed Imbalance Energy Charges on Scheduling Coordinators

Uninstructed Imbalance Energy attributable to each Load Take-Out Point, Generating Unit, System Unit, or System Resource for which a Scheduling Coordinator has a Final Hour-Ahead Schedule or Metered Quantity, for each Settlement Interval shall be deemed to be sold or purchased, as the case may be, by the ISO and charges or payments for Uninstructed Imbalance Energy shall be settled by debiting or crediting, as the case may be, the Scheduling Coordinator with an amount for each Settlement Interval.

Uninstructed Imbalance Energy within a Settlement Interval shall be settled in two tiers that are defined in relation to the expected Energy associated with the Final Hour-Ahead Schedule, if any, and the Dispatch Instruction as follows:

- Deviations from the expected Energy associated with a Dispatch Instruction resulting in: 1) under delivery of Instructed Imbalance Energy that is also equal to or greater than the Final Hour-Ahead Schedule, or 2) over delivery of Instructed Imbalance Energy that is also less than or equal to the Final Hour-Ahead Schedule constitutes tier 1 Uninstructed Imbalance Energy that shall be settled at a Resource-Specific Settlement Interval Ex Post Price as described in Appendix D 2.4.
- Deviations from the expected Energy associated with a Dispatch Instruction resulting in: 1) over delivery of Instructed Imbalance Energy that is also greater than the Final Hour-Ahead Schedule, or 2) under delivery of Instructed Imbalance Energy that is also less than the Final Hour-Ahead Schedule constitutes tier 2 Uninstructed Imbalance Energy and shall be settled at the Zonal Settlement Interval Ex Post Price as described in Appendix D 2.5.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Imbalance Energy is calculated as follows:

Generator Calculation for ISO Metered Entities:

$$IE_{i,h,o} = ME_{i,h,o} - SE_{i,h,o}$$

Load Calculation:

$$IE_{i,h,o} = SE_{i,h,o} - ME_{i,h,o}$$

System Resource Calculation:

$$IE_{i,h,o} = \sum_{l=1}^{k} \sum_{l=1}^{v} REAL_TIME_FLOW_{i,h,o,k,v} - SE_{i,h,o}$$

where,

$$SE_{i,h,o} = \frac{HAfin_{i,h}}{6}$$

 $ME_{i,h,o}$ actual Meter Data for each resource i of each Settlement Interval o for each hour h.

Uninstructed Imbalance Energy is calculated as follows:

$$UIE_{i,h,o} = E_{i,h,o} - IIE_REG_{i,h,o}$$

where:

$$\begin{split} E_{i,h,o} &= IE_{i,h,o} - \sum_{l}^{k} IIE_LOSS_{i,h,o,k} - \sum_{l}^{k} IIE_ML_{i,h,o,k} - \\ & \sum_{l}^{k} \sum_{l}^{m} IIE_PREDISPATCH_{i,h,o,k,m} - \sum_{l}^{k} RE_STANDARD_{i,h,o,k} - \sum_{l}^{k} RED_{i,h,o,k} \\ & - \sum_{l}^{k} \sum_{l}^{m} IIE_ECON_{i,h,o,k,m} - \sum_{l}^{k} \sum_{l}^{L} OOS_P_{i,h,o,k,L} - \sum_{l}^{k} \sum_{l}^{L} OOS_N_{i,h,o,k,L} - \sum_{l}^{k} \sum_{l}^{m} RIE_{i,h,o,k,m} \\ & - \sum_{l}^{k} IIE_RERATE_{i,h,o,k} \end{split}$$

 $\emph{IIE_REG}_{i,h,o}$ is the Regulating Energy for resource \emph{i} during Settlement Interval \emph{o} in hour \emph{h}

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II Substitute Second Revised Sheet No. 691 Superseding First Revised Sheet No. 691

$$UIE_1_{i,h,o} = \begin{cases} \min \left(UIE_{i,h,o}, -\min \left(0, \sum_{1}^{k} \sum_{1}^{m} IIE_ECON_{i,h,o,k,m} + \sum_{1}^{k} \sum_{1}^{m} IIE_PREDISPATCH_{i,h,o,k,m} \right. \\ + \sum_{1}^{k} \sum_{1}^{L} OOS_P_{i,h,o,k,L} + \sum_{1}^{k} \sum_{1}^{L} OOS_N_{i,h,o,k,L} + \sum_{1}^{k} RED_{i,h,o,k} \\ + \sum_{1}^{k} IIE_LOSS_{i,h,o,k} + \sum_{1}^{k} \sum_{1}^{m} RIE_{i,h,o,k,m} + \sum_{1}^{k} IIE_ML_{i,h,o,k} + \sum_{1}^{k} RERATE_{i,h,o,k} \right) \\ \max \left(UIE_{i,h,o}, -\max \left(0, \sum_{1}^{k} \sum_{1}^{m} IIE_ECON_{i,h,o,k,m} + \sum_{1}^{k} \sum_{1}^{m} IIE_PREDISPATCH_{i,h,o,k,m} \\ + \sum_{1}^{k} \sum_{1}^{L} OOS_P_{i,h,o,k,L} + \sum_{1}^{k} \sum_{1}^{L} OOS_N_{i,h,o,k,L+} + \sum_{1}^{k} RED_{i,h,o,k} \\ + \sum_{1}^{k} IIE_LOSS_{i,h,o,k} + \sum_{1}^{k} \sum_{1}^{m} RIE_{i,h,o,k,m} + \sum_{1}^{k} IIE_ML_{i,h,o,k} + \sum_{1}^{k} RERATE_{i,h,o,k} \right) \end{cases}$$

$$UIE_2_{i,h,o} = UIE_{i,h,o} - UIE_1_{i,h,o}$$

$$UIEC_{i,h,o} = \left(-1 * UIE _1_{i,h,o} * STLMT _PRICE_{i,h,o}\right) + \left(-1 * UIE _2_{i,h,o} * ZONAL _EX _POST _PRICE_{i,h,o}\right)$$

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 21, 2003 Effective: Upon Notice After September 6, 2003

D 2.1.2 Coordinators

Instructed Imbalance Energy Charges on Scheduling

Standard Ramping Energy is Energy associated with a Standard Ramp and shall be deemed delivered and settled at a price of zero dollars per MWh.

Ramping Energy Deviation is Energy produced or consumed due to hourly schedule changes in excess of Standard Ramping Energy and shall be paid or charged, as the case may be, at a Resource-Specific Settlement Interval Ex Post Price calculated using the applicable Dispatch Interval Ex Post Prices as described in this Appendix D 2.4. For Scheduling Coordinators scheduling a MSS that has elected to follow its Load, this Ramping Energy Deviation will account for the units following Load.

Ramping Energy Deviation shall be settled as an explicit component of Instructed Imbalance Energy for each resource i in Dispatch Interval k of Settlement Interval o for hour h, and calculated as follows:

$$REDC_{i,h,o} = \left(\sum_{1}^{k} RED_{i,h,o,k}\right) * STLMT _ PRICE_{i,h,o}$$

Hourly Predispatched energy from System Resources is an explicit component of Instructed Imbalance Energy for each interchange resource *i* in Dispatch Interval *k* of Settlement Interval *o* for hour *h*, and settled pursuant to Sections 11.2.4.1.1 and 11.2.4.1.1.2 of the ISO Tariff. The settlement calculation is as follows:

If (
$$(COST_AT_STLMT_PRICE_{i,h,o}>=0$$
 And
$$BID_COST_{i,h,o}>=0)$$
 Then
$$IIEC_PREDISPATCH_{i,h,o}=(-1)*$$

$$\left[min(COST_AT_STLMT_PRICE_{i,h,o},BID_COST_{i,h,o})+(STLMT_PRICE_{i,h,o}*PRE_DISP_ABC_BQ_{i,h,o})\right]$$
 Else

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 22, 2005 Effective: March 24, 2005

First Revised Sheet No. 692A Superseding Original Sheet No. 692A

FIRST REPLACEMENT VOLUME NO. II

$$IIEC_PREDISPATCH_{i,h,o} = (-1) *$$

 $[BID_COST_{i,h,o} + (STLMT_PRICE_{i,h,o} * PRE_DISP_ABC_BQ_{i,h,o})]$

Where

 $COST_AT_STLMT_PRICE_{i,h,o} =$

$$\left(\sum_{1}^{k} IIE_PREDISPATCH_{i,h,o,k}\right) * STLMT_PRICE_{i,h,o}$$

 $BID_COST_{i,h,o} =$

$$\sum\limits_{i=1}^{k}\sum\limits_{j=1}^{m}IIE_PREDISPATCH_FOR_SEGMENT_{i,h,o,k,m}*IIE_PRICE_{i,h,o,k,m}$$

for the portion of incremental energy bid segments with $IIE_PRICE_{i,h,o,k,m}$ less than or equal to the Maximum Bid Level and all decremental energy bid segments with $IIE_PRICE_{i,h,o,k,m}$ limited to the Bid Floor when $IIE_PRICE_{i,h,o,k,m}$ is less than the Bid Floor.

))

where

 $PRE_DISP_ABC_BQ_{i,h,o} =$

 $\sum_{i=1}^{k} \sum_{j=1}^{m} IIE _PREDISPATCH _FOR _SEGMENT_{i,h,o,k,m}$ for the portion of

incremental energy bid segments with *IIE_PRICEi*,h,o,k,m greater than the Maximum Bid Level.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 22, 2005 Effective: March 24, 2005

The amount of Instructed Imbalance Energy that will be deemed delivered in each Dispatch Interval will be based on Dispatch Instructions, as provided for in Section 2.5.22.6, and Final Hour-Ahead Schedules. The amount of Instructed Imbalance Energy to be settled in a Settlement Interval will be equal to the sum of all Instructed Imbalance Energy for all Dispatch Intervals within the relevant Settlement Interval. Instructed Imbalance Energy for each Settlement Interval shall be settled at the relevant Resource Specific Settlement Interval Ex Post Price. Generating Units, Participating Loads, and System Units may be eligible to recover their Energy Bid costs in accordance with Section 11.2.4.1.1.1. Instructed Imbalance Energy from System Resources shall be settled in accordance with Section 11.2.4.1.1.2.

The Instructed Imbalance Energy amount for each resource *i* in Settlement Interval *o* for hour *h* shall be determined as follows:

$$IIEC_{i,h,o} = (-1) * \begin{pmatrix} \sum_{1}^{k} \sum_{1}^{m} IIE _{ECON_{i,h,o,k,m}} + \sum_{1}^{k} \sum_{1}^{m} RIE_{i,h,o,k,m} \\ + \sum_{1}^{k} IIE _{RERATE_{i,h,o,k}} + \sum_{1}^{k} IIE _{ML_{i,h,o,k}} \end{pmatrix} * STLMT _{PRICE_{i,h,o}}$$

$$+ \ \textit{IIEC} _ \textit{OOS}_{\textit{i,h,o}} \ + \ \textit{REDC}_{\textit{i,h,o}} + \textit{IIEC} _ \textit{REG}_{\textit{i,h,o}} + \textit{IIEC} _ \textit{PREDISPATC} \ H_{\textit{i,h,o}}$$

Uninstructed Imbalance Energy is Imbalance Energy due to noncompliance with a Dispatch Instruction and shall be settled as provided for in SABP Appendix D Section 2.1.1.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 23, 2005 Effective: March 24, 2005

D 2.2 Unaccounted for Energy Charge

The Unaccounted for Energy Charge on Scheduling Coordinator *g* in Settlement Interval *o* of Settlement Period *h* for each relevant Zone *j* is calculated in the following manner:

The UFE for each utility Service Area s, for which separate UFE calculation is performed, is calculated as follows,

$$UFE_{UDC,s,h,o} = \sum_{q \in UDC_s} I_{a,q,j,h,o} - \sum_{q \in UDC_s} E_{a,q,j,h,o} + \sum_{i \in UDC_s} G_{a,i,j,h,o} - \sum_{i \in UDC_s} L_{a,i,j,h,o} - TL_{s,h,o}$$

The Transmission Loss $TL_{s,h,o}$ in Settlement Interval o of Settlement Period h for utility Service Area s is calculated as follows:

$$TL_{s,h,o} = \left(\sum_{i} \left[G_{a,i,j,h,o} * (I - GMM_{a,i,h})\right] + \sum_{q} \left[I_{a,q,j,h,o} * (I - GMM_{a,q,h})\right]\right) * \frac{PFL_{s,h}}{\sum_{s} PFL_{s,h}}$$

Where $PFL_{s,h}$ are the Transmission Losses for utility Service Area s as calculated by a power flow solution for Settlement Period h, consistent with the calculation of final forecasted Generation Meter Multipliers.

Each metered demand point z in utility Service Area s, either ISO grid connected or connected through UDC s, is allocated a portion of the UFE as follows:

$$UFE_{i,j,h,o} = UFE_{UDC,s,h,o} * \frac{L_{i,j,h,o}}{\sum\limits_{i \in UDC_s} L_{i,j,h,o}}$$

The UFE charge for Scheduling Coordinator g for Settlement Interval o of Settlement Period h in Zone j is calculated as a charge or payment using the applicable Zonal Settlement Interval Ex Post Price as follows:

$$UFEC_{g,j,h,o} = \left(\sum_{i \in SCg} UFE_{i,j,h,o,i}\right) * ZONAL_EX_POST_PRICE_{j,h,o}$$

D 2.3 Hourly Ex Post Price

The Hourly Ex Post Price is the Energy-weighted average of the Dispatch Interval Ex Post Prices in each Zone *j* during each Settlement Period using the absolute value of Instructed Imbalance Energy procured from all Participating Generators, Participating Load, System Units, and System Resources in each applicable Dispatch Interval. The Hourly Ex Post Price may vary between Zones if Congestion is present.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: Upon Notice After September 6, 2003

$$HP_{j,h} = \frac{\sum\limits_{I}^{p}\sum\limits_{I}^{i}\left|IIE_TOTAL_{j,i,h,p}\right| * EX_POST_PRICE_{j,h,o,p}}{\sum\limits_{I}^{p}\sum\limits_{I}^{i}\left|IIE_TOTAL_{j,i,h,p}\right|}$$

where,

p is the Dispatch Interval index for hour h.

D 2.4 Resource-Specific Settlement Interval Ex Post Price

The Resource-Specific Settlement Interval Ex Post Price is the weighted-average of the Dispatch Interval Ex Post Prices in each Settlement Interval using the Instructed Imbalance Energy from the respective Participating Generator, Participating Load, or System Resource, in each applicable Dispatch Interval. If there is no Instructed Imbalance Energy from a Participating Generator, Participating Load, or System Resource, in any of the applicable Dispatch Intervals, the Resource-Specific Settlement Interval Ex Post Price for that resource would be the simple average of the applicable Dispatch Interval Ex Post Prices in the Settlement Interval.

The Resource-Specific Settlement Interval Ex Post Price is calculated as follows:

$$STLMT_PRICE_{i,h,o} = \frac{\sum\limits_{1}^{k} IIE_TOTAL_{i,h,o,k} * EX_POST_PRICE_{j,h,o,k}}{\sum\limits_{1}^{k} IIE_TOTAL_{i,h,o,k}}$$

Where:

$$\begin{split} & IIE_TOTAL_{i,h,o,k} = \\ & \sum_{1}^{m} IIE_ECON_{i,h,o,k,m} + \sum_{1}^{m} IIE_PREDISPATCH_{i,h,o,k,m} + \\ & IIE_ML_{i,h,o,k} + \sum_{1}^{m} RIE_{i,h,o,k,m} + \sum_{1}^{L} OOS_P_{i,h,o,k,L} + \\ & \sum_{1}^{L} OOS_N_{i,h,o,k,L} + IIE_LOSS_{i,h,o,k} + RED_{i,h,o,k} + \sum_{1}^{k} IIE_RERATE_{i,h,o,k} \end{split}$$

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

D 2.5 Zonal Settlement Interval Ex Post Price

The Zonal Settlement Interval Ex Post Price is the weighted-average of the Dispatch Interval Ex Post Prices in each Settlement Interval using the absolute value of Instructed Imbalance Energy procured from all Participating Generators, Participating Load, System Units, and System Resources in each applicable Dispatch Interval. If there is no Instructed Imbalance Energy from a Participating Generator, Participating Load, or System Resource, in any of the applicable Dispatch Intervals, the Zonal Settlement Interval Ex Post Price for that Zone would be the simple average of the applicable Dispatch Interval Ex Post Prices in the Settlement Interval.

The Zonal Settlement Interval Ex Post Price is calculated as follows:

$$\begin{split} ZONAL_EX_POST_PRICE_{j,h,o} = \\ \frac{\sum\limits_{p=1}^{2}\sum\limits_{l}^{i}\left|IIE_TOTAL_{i,h,p}\right|*EX_POST_PRICE_{j,h,o,p}}{\sum\limits_{p=1}^{2}\sum\limits_{l}^{i}\left|IIE_TOTAL_{i,h,p}\right|} \end{split}$$

where p is the Dispatch Interval index for hour h.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 8, 2003 Effective: Upon Notice After September 6, 2003

D 2.6 Calculation of Unrecovered Cost Payment for Generating Units, System Units, Dynamically Scheduled System Resources, and Curtailable Demand.

As set forth in 11.2.4.1.1.1, Generating Units, System Units, dynamically scheduled System Resources, and Curtailable Demand resources will be eligible to recover their bid costs (less than or equal to the Maximum Bid Level) for extra-marginal Energy dispatched above Pmin, if such costs are not recovered from the net of expected revenues earned through participation in the ISO's Real Time Market during the Trade Day (24-hour period).

The Unrecovered Cost Payment for each resource i shall be determined for the Trade Day *d* then evenly divided over n-Settlement Intervals as follows:

$$COST_RECOVERY_{i,d} = min(0, \sum_{i=1}^{h} \sum_{j=1}^{o} (MR_DEFICIT_{i,h,o} + MR_SURPLUS_{i,h,o}))$$

where,

 $MR_DEFICIT_{i,h,o}$ = Market Revenue deficit for resource i in hour h for Settlement interval o based on the difference between the expected revenues earned in the Settlement Interval and and/or its bid cost; $MR_SURPLUS_{i,h,o}$ = Market Revenue surplus for resource i in hour h for Settlement interval o based on the difference between the expected revenues earned in the Settlement Interval and/or its bid cost.

Resource i shall receive a share of its total cost recovery in each Settlement Interval o that is included in the COST_RECOVERY_{i,d} calculation.

$$COST_RECOVERY_{i,h,o} = COST_RECOVERY_{i,d} / n$$
 where,

n is the number of Settlement Intervals o that are included in the COST RECOVERY_{id} calculation for resource i in Trade Day d.

Calculation of Market Revenue Surplus or Deficit

The market revenue surplus or deficit for each resource i will be computed for each Settlement Interval o based on the difference between the revenues earned in the Settlement Interval at the relevant 10-minute Ex Post price and the resource's bid cost (less than or equal to the Maximum Bid Level) as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004 Effective: Upon Notice On or After May 1, 2004

$$MR_DIFF_{i,h,o} = \left(\sum_{1}^{k} \sum_{1}^{m} IIE_ECON_{i,h,o,k,m} + \sum_{1}^{k} \sum_{1}^{m} RIE_{i,h,o,k,m}\right) * STLMT_PRICE_{i,h,o}$$

$$- BID_COST_{i,h,o} - BID_COST_RIE_{i,h,o}$$

for all incremental energy bid segments m with $IIE_PRICE_{i,h,o,k,m}$ and $RIE_PRICE_{i,h,o,k,m}$ less than or equal to the Maximum Bid Level and all decremental energy bid segments m with $IIE_PRICE_{i,h,o,k,m}$ and $RIE_PRICE_{i,h,o,k,m}$ greater than or equal to the Bid Floor.

$$MR_DEFICIT_{i,h,o} = min(0, MR_DIFF_{i,h,o})$$

$$MR_SURPLUS_{i,h,o} = \max(0, MR_DIFF_{i,h,o})$$

where

$$BID_COST_{i,h,o} = \left(\sum_{1}^{k} \sum_{1}^{m} IIE_ECON_{i,h,o,k,m} * IIE_PRICE_{i,h,o,k,m}\right)$$

$$BID_COST_RIE_{i,h,o} = \sum_{l=1}^{k} \sum_{j=1}^{m} RIE_{i,h,o,k,m} * RIE _ PRICE_{i,h,o,k,m}$$

D 2.6.1 Tolerance Band and Performance Check

The ISO shall determine the Tolerance Band for each Settlement Interval *o* for PGA resources and dynamically scheduled System Resources based on the data from the Master File as follows:

TOLERANCE_BAND_{i,h,o} =
$$\pm \max(FIX _LIM , TOL_PERCENT * P \max_i) / 6$$

where,

FIX_LIM is a fixed MW limit and is initially equal to 5 MW.

TOL_PERCENT is a fixed percentage and is initially equal to 3%. Pmax_i is the maximum operating capacity in MW of resource *i* specified in the Master File.

The ISO shall determine the Tolerance Band for each Settlement Interval o for PLA resources as follows:

$$TOLERANCE_BAND_{i,h,o} = \pm max(FIX_LIM, TOL_PERCENT*HAfin_{i,h})/6$$
 where $HAfin_{i,h}$ is the Final Hour Ahead Energy Schedule.

Resources must operate within their relevant Tolerance Band in order to receive any above-Ex Post Price payments. The ISO shall determine the performance status of the resource for each Settlement Interval o.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004 Effective: Upon Notice On or After May 1, 2004

A resource shall have met its performance requirement if its $UIE_{i,h,o}$ is within its relevant Tolerance Band. A resource meeting its performance requirement in Settlement Interval o will have a PERF_STAT_{i,h,o} = 1. A resource that has not met its performance requirement in Settlement Interval o will have a PERF_STAT_{i,h,o} = 0.

Must-offer resources that produce a quantity of Energy above Minimum Load due to an ISO Dispatch Instruction during a Waiver Denial Period are not subject to the Tolerance Band requirement for purposes of receiving Minimum Load Cost Compensation, as defined in section 5.11.6.1.1. Accordingly, the PERF_STAT_{i,h,o} for eligible must-offer resources, as defined in section 5.11.6.1.1, shall be set to 1, irrespective of deviations outside of the Tolerance Band, for the purpose of determining eligibility for Minimum Load Cost Compensation during a Waiver Denial Period. The Tolerance Band shall be used to apply UDP during a Waiver Denial Period.

Non-dynamically scheduled System Resources do not have a Tolerance Band. Non-Participating Load Agreement (PLA) load resources are not subject to the performance requirement.

D 2.6.2 Unrecovered Costs Neutrality Allocation

For each Settlement Interval o, the total Unrecovered Costs for Trade Day d shall be allocated pro-rata to each Scheduling Coordinator g based on its Metered Demand, calculated as follows:

$$URC_ALLOC_{g,h,o} = M_{g,h,o} * Per Unit Price$$
 where,

 $M_{g,h,o}$ = the Metered Demand in the ISO control area for Scheduling Coordinator g in Settlement Interval o for hour h;

Per Unit Price =
$$\frac{-1 * \sum_{i=1}^{i} COST _RECOVERY_{i,h,o}}{\sum_{i=1}^{g} M_{g,h,o}}$$

D 2.6.3 Calculation of Unrecovered Bid Cost Payment for System Resources

As set forward in Section 11.2.4.1.1.2, System Resources that are predispatched hourly incremental or decremental Instructed Imbalance Energy will be settled based on their Energy bid costs for each Settlement Interval for the quantity of Energy delivered in each Settlement Interval. The hourly pre-dispatched Instructed Imbalance Energy is first settled as set forth in Section D 2.1.2. An additional uplift payment for any applicable Settlement Interval shall be determined when settlement as set forth in Section D 2.1.2 is insufficient recovery

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 23, 2005 Effective: March 24, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II Superseding

First Revised Sheet No. 694E.00 Superseding Original Sheet No. 694E.00

of its bid costs for the Settlement Interval. For pre-dispatched hourly Instructed Imbalance Energy, where the resource-specific settlement amount is positive and the bid-cost is positive, an uplift payment is determined for each Settlement Interval based on the minimum of zero or the difference between the resource-specific settlement amount and the bid cost settlement amount as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 23, 2005 Effective: March 24, 2005

The predispatched uplift payment for each applicable Settlement Interval is calculated as follows:

If (
$$(COST_AT_STLMT_PRICE_{i,h,o}>=0$$
 And
$$BID_COST_{i,h,o}>=0)$$
 Then
$$PREDISPATCH_UPLIFT_{i,h,o}=\min\left(0,COST_AT_STLMT_PRICE_{i,h,o}-BID_COST_{i,h,o}\right)$$
 Where
$$COST_AT_STLMT_PRICE_{i,h,o}=\left(\sum_{1}^{k}IIE_PREDISPATCH_{i,h,o,k}\right)*STLMT_PRICE_{i,h,o}$$

$$BID_COST_{i,h,o}=\sum_{1}^{k}\sum_{1}^{m}IIE_PREDISPATCH_FOR_SEGMENT_{i,h,o,k,m}*IIE_PRICE_{i,h,o,k,m}$$

PREDISPATC H _UPLIFT $_{i,h,o} = 0$)

Else

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 22, 2005 Effective: March 24, 2005

for the portion of incremental energy bid segments with IIE_PRICE_{jh,o,k,m} less than or equal to the Maximum Bid Level and all decremental energy bid segments with IIE_PRICE_{jh,o,k,m} limited to the Bid Floor when IIE_PRICE_{jh,o,k,m} is less than the Bid Floor.

D 2.6.4 Allocation of Unrecovered Cost Payments for Hourly Predispatched System Resources

For each Settlement Interval o, the total uplift payments ($PREDISPATCH_PMT_{i,h,o}$) for all hourly pre-dispatched System Resources will be included in the Excess Cost Payments to be allocated to a Scheduling Coordinator's Net Negative Deviation through allocation of excess costs and/or ISO metered Demand through excess cost neutrality allocation.

D 2.6.5 Excess Cost Payments for Instructed Incremental Energy Bids above the Maximum Bid Level

Incremental Instructed Imbalance Energy above the Maximum Bid Level will receive an additional Excess Cost Payment subject to operating within a resource's Tolerance Band.

Excess cost payments are calculated as follows:

$$EXCESS_COST_{i,h,o} = \left[\left(\sum_{1}^{k} \sum_{1}^{m} IIE_ECON_{i,h,o,k,m} + \sum_{1}^{k} \sum_{1}^{m} IIE_PREDISPATCH_{i,h,o,k,m} + \sum_{1}^{k} \sum_{1}^{m} IIE_PREDISPATCH_{i,h,o,k,m} + \sum_{1}^{k} \sum_{1}^{m} RIE_{i,h,o,k,m} \right) * STLMT_PRICE_{i,h,o} - BID_COST_{i,h,o} - BID_COST_RIE_{i,h,o} \right] * PERF_STAT_{i,h,o}$$

for the portion of energy bid segments with IIE PRICE_{i,h,o,k,m} and RIE_PRICE_{i,h,o,k,m} greater than the Maximum Bid Level.

D 2.7 Transmission Loss Obligation

The transmission loss obligation charge shall be determined as follows: For Generators:

$$TL_{i,h,o} = ME_{i,h,o} * (1 - GMMa_h)$$

For System Resources, the transmission loss obligation shall be determined as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 22, 2005 Effective: March 24, 2005

$$TL_{i,h,o} = \sum_{i=1}^{k} \sum_{j=1}^{v} REAL _TIME _FLOW_{i,h,o,k,v} * (1 - GMMa_h)$$

The transmission loss charge will be calculated based on the following formulation:

$$TLC_{i,h,o} = \\ -\sum_{1}^{k} IIE_LOSS_{i,h,o,k} * STLMT_PRICE_{i,h,o} + TL_{i,h,o} * STLMT_PRICE_{i,h,o}$$

D 2.8 Uninstructed Deviation Penalty Charges

The ISO will calculate but not assess charges for UDP according to this Section 2.8 until the first day of the month two months after the software that calculates UDP is put into service.

For negative Uninstructed Deviation Penalty billable quantities where $UDP_BQ_{h,o} < 0$ and $ZONAL_EX_POST_PRICE_{j,h,o} > 0$, $UDP_NEG_Amt_i \ AMT_{i \ h,o} = -1 * UDP_BQ_{i,h,o} * ZONAL_EX_POST_PRICE_{i,h,o} * .5$

For positive UDP billable quantities where $UDP_BQ_{i,h,o} > 0$ and $ZONAL_EX_POST_PRICE_{i,h,o} > 0$, then $UDP_POS_AMT_{i,h,o} = UDP_BQ_{i,o,h} * ZONAL_EX_POST_PRICE_{i,h,o}$

where,

*UDP_BQ*_{i,o,h} is the Uninstructed Deviation Penalty (UDP) billable quantity in MWh for a resource, or aggregated resource, denoted by i for Settlement Interval o of hour h.

 $UDP_POS_AMT_{i,o,h}$ or $UDP_NEG_AMT_{i,o,h}$ are the penalty amounts in Dollars for either an aggregated or individual resource i for Settlement Interval o of hour h.

The ISO will not calculate UDP settlement amounts for Settlement Intervals when the corresponding Zonal Settlement Interval Ex Post Price is negative or zero.

For an MSS that has elected to follow its own Load, the Scheduling Coordinator for the MSS Operator will be assessed the Uninstructed Deviation Penalty charges based on the Deviation Band and Deviation Price in Section 23.12.2 of the ISO Tariff.

D 2.9 Minimum Load Cost Compensation

The ISO shall calculate a Must-Offer Generator's Minimum Load Cost Compensation (MLCC), pursuant to section 5.11.6.1.1 of the ISO Tariff, as the Minimum Load Cost for each resource *i* during Settlement Interval *o* of hour *h*, as defined in section 5.11.6.1.2 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004 Effective: Upon Notice

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II Su

Substitute Original Sheet No. 694H

- D 3 Meaning of terms in the formulae
- D 3.1 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: September 7, 2004 Effective: Upon Notice After September 6, 2003

D 3.2 COST_AT_STLMT_PRICE_{i.h.o} - \$/MWh

The sum of all dollar amounts from each dispatched bid segment for Energy quantities settled at the Resource-Specific Ex Post Price, for resource i during Settlement Interval o of hour h, and limited to those bid segments with Energy Bid prices below the Maximum Bid Level.

D 3.3 BID_COST_{i,h,o} - \$/MWh

The sum of all dollar amounts from each dispatched bid portion of Energy quantities settled at the maximum of either the corresponding Energy Bid price for those bids with Energy Bid prices below the Maximum Bid Level or the Bid Floor, for resource i during Settlement Interval o during hour h.

D 3.4 PRE_DISP_ABC_BQ_{i,h,o} - MWh

The pre-dispatched Energy from all Energy Bids with any Energy Bid price above the Maximum Bid Level, for resource i during Settlement Interval o during hour h.

D 3.5 IIE_PREDISPATCH_FOR_SEGMENT_{i,h,o,k,m} - MWh

The pre-dispatched Energy for resource i during Dispatch Interval k of Settlement Interval o of hour h for bid segment m.

D 3.6 [Not Used]

D 3.6.1 [Not Used]

D 3.6.2 [Not Used]

D 3.6.3 [Not Used]

D 3.7 $G_{a.i.ih.o}$ – MWh

The total actual metered Generation of Generator i in Zone j during Settlement Interval o during Settlement Period h.

D 3.8 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 22, 2005 Effective: March 24, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Second Revised Sheet No. 696 Superseding First Revised Sheet No. 696

| D 3.9 | [Not Used] |
|----------|---|
| D 3.9.1 | [Not Used] |
| D 3.10 | [Not Used] |
| D 3.11 | [Not Used] |
| D 3.12 | GMM _{a,i,h} – fraction |
| | The final forecasted Generation Meter Multiplier (GMM) for a Generator i in Settlement Period h as calculated by the ISO at the hour-ahead stage (but after close of the Hour-Ahead Market). |
| D 3.13 | GMM _{a,j,h} – fraction |
| | The forecasted Generation Meter Multiplier for an Energy import at Scheduling Point q in Settlement period h as provided to the Scheduling Coordinator by the ISO after close of the Hour-Ahead Market. |
| D 3.14 | [Not Used] |
| | |
| D 3.15 | $L_{a,i,j,h,o} - MWh$ |
| | The actual metered Demand of Demand i in Zone j in Settlement Interval o during Settlement Period h. |
| D 3.15.1 | [Not Used] |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: July 8, 2003 Effective: Up

Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Third Revised Sheet No. 697 Superseding Second Revised Sheet No. 697

| D 3.15.2 | [Not Used] |
|----------|---|
| D 3.16 | [Not Used] |
| D 3.17 | [Not Used] |
| D 3.17.1 | [Not Used] |
| D 3.18 | [Not Used] |
| D 3.19 | I _{a,q,j,h,o} – MWh The total actual Energy import of Scheduling Coordinator g through Scheduling Point q in Settlement Interval o during Settlement Period h. This is deemed to be equal to the scheduled Energy over the same interval. |
| D 3.20 | [Not Used] |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: July 8, 2003 Effective: Up Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF First Revised Sheet No. 697A FIRST REPLACEMENT VOLUME NO. II Superseding Original Sheet No. 697A

D 3.21 [Not Used]

D 3.22 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: July 8, 2003 Effective: Up Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II Superseding Third Revised Sheet No. 698

D 3.23 $E_{a.o.i.h.o}$ – MWh

The total actual Energy export of Scheduling Coordinator g through Scheduling Point q in Settlement Interval o for Settlement Period h. This is deemed to be equal to the total scheduled Energy export during the same interval.

Fourth Revised Sheet No. 698

D 3.24 [Not Used]

D 3.25 [Not Used]

D 3.25.1 [Not Used]

D 3.26 UFEC_{ixt} – \$

The Unaccounted for Energy Charge for Scheduling Coordinator j in Zone x in Settlement Period t. It is the cost for the Energy difference between the net Energy delivered into each utility Service Area, adjusted for utility Service Area Transmission Losses (calculated in accordance with ISO Tariff Section 7.4.2), and the total metered Demand within that utility Service Area adjusted for distribution losses using Distribution System loss factors approved by the Local Regulatory Authority.

This Energy difference (UFE) is attributed to meter measurement errors, power flow modeling errors, energy theft, statistical Load profile errors, and distribution loss deviations.

D 3.27 UFE_{UDC.bkt} – MWh

The Unaccounted for Energy (UFE) for utility Service Area k.

D 3.28 UFE – MWh

The portion of Unaccounted for Energy (UFE) allocated to metering point z.

D 3.29 [Not Used]

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Third Revised Sheet No. 699 Superseding Second Revised Sheet No. 699

| [Not Used] |
|---|
| [Not Used] |
| TLs,h,o – MWh |
| The Transmission Losses per Settlement Interval o in Settlement Period hour h in utility Service Area s . |
| [Not Used] |
| |
| [Not Used] |
| |
| [Not Used] |
| |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: July 8, 2003 Effective: Up

Effective: Upon Notice After September 6, 2003

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

[Not Used]

FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. II

D 3.41

Third Revised Sheet No. 700 Superseding Second Revised Sheet No. 700

| D 0.+1 | [Hot occup |
|--------|--|
| D 3.42 | [Not Used] |
| D 3.43 | [Not Used] |
| D 3.44 | [Not Used] |
| D 3.45 | [Not Used] |
| D 3.46 | [Not Used] |
| D 3.47 | [Not Used] |
| D 3.48 | [Not Used] |
| D 3.49 | $EX_POST_PRICE_{j,h,o,k} - $/MWh$ |
| | The Ex-Post Price in Dispatch Interval k of Settlement Interval o in Settlement Period h in Zone j . |
| D 3.50 | HRLY_EX_POST_PRICE _{j,h} – \$/MWh |
| | The energy-weighted Ex Post Price for Settlement Period h in Zone j . |
| D 3 51 | STIMT PRICE \$/MWh |

D 3.51 STLMT_PRICE_{i,h,o} – \$/MWh

The 10-minute Settlement price (Resource-Specific Settlement Interval Ex Post Price) for resource *i* in the Settlement Interval *o* for the Settlement Period *h*.

D 3.52 SE_{i,h,o} – MWh

The Scheduled Energy from resource i during Settlement Interval o of Settlement Period h.

D 3.53 TOLERANCE_BAND_{i,h,o} – MWh

The Tolerance Band limit for resource *i* during Settlement Interval *o* of Settlement Period *h*.

D 3.54 IIE_ECON_{i,h,o,k,m} - MWh

The dispatched incremental or decremental Instructed Imbalance Energy (IIE) for resource i during Dispatch Interval k in Settlement Interval o of Settlement Period f for bid segment f.

Decremental Energy shall be represented as a negative quantity. IIE_ECON_{i,h,o,k,m} shall be comprised of any of the four IIE_TYPE's: SUPP, SPIN, NSPN or RPLC and be associated with its respective IIE_PRICE_{i,h,o,k,m}

D 3.55 $IIE_PRICE_{i,h,o,k,m} - \$/MWh$

The bid price for energy bid segment m for resource i during Dispatch Interval k in Settlement Interval o of Settlement Period h for bid segment m

D 3.56 IIE_PREDISPATCH_{i,h,o,k,m} - MWh

The Settlement Period pre-dispatched Energy for resource i during Dispatch Interval k of Settlement Interval o of Settlement Period h for bid segment m (MWh).

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 700A Superseding Original Sheet No. 700A

D 3.57 $RIE_{i,h,o,k,m} - MWh$

The Residual Energy for resource *i* during Dispatch Interval *k* in Settlement Interval *o* of Settlement Period *h* for bid segment *m*.

D 3.58 RIE_PRICE_{i,h,o,k,m} - $\frac{MWh}{M}$

The reference bid price for the Residual Energy for resource i during Dispatch Interval k in Settlement Interval o of Settlement Period h for bid segment m.

D 3.59 OOS_PRICE_{i,h,o,k,L} - \$/MWh

The Settlement price for the Instructed Out of Stack Energy for resource *i* during Dispatch Interval *k* in Settlement Interval *o* of Settlement Period *h* for index number *L*.

D 3.60 IIE_REG_{i,h,o} – MWh

The Regulating Energy for resource *i* during Settlement Interval *o* in Settlement Period *h*.

D 3.61 IIE_PREDISPATCH_{i,h,p} - MWh

The Settlement Period pre-dispatched Energy for resource *i* during Dispatch Interval *p* of Settlement Period *h*.

D 3.62 $E_{i,h,o}$ – MWh

Calculated as the difference of $IE_{i,h,o}$ and $IIE_TOTAL_{i,h,o,k}$ and is equal to the sum of Uninstructed Imbalance Energy and Regulating Energy of resource i during Settlement Interval o in Settlement Period h.

D 3.63 IIEC_{i,h,o} - \$

The Instructed Imbalance Energy payment (charge) for resource *i* during Settlement Interval *o* of Settlement Period *h*.

D 3.64 IIEC_OOS_{i,h,o} - \$

The total OOS Energy payment (charge) for resource *i* during Settlement Interval *o* of Settlement Period *h*.

D 3.65 IIEC OOS P_{i,h,o}-\$

The incremental Instructed OOS Imbalance Energy payment (charge) for resource *i* during Settlement Interval *o* of Settlement Period *h*.

D 3.66 IIEC_OOS_N_{i,h,o}-\$

The decremental Instructed OOS Imbalance Energy payment (charge) for resource *i* during Settlement Interval *o* of Settlement Period *h*.

D 3.67 IIE_LOSS_{i,h,o,k} – MWh

The transmission loss self-provided Energy from resource *i* during Dispatch Interval *k* in Settlement Interval *o* of Settlement Period *h*.

D 3.68 IIE_ $ML_{i,h,o,k}$ – MWh

The Imbalance Energy due to Minimum Load from resource i during Dispatch Interval k in Settlement Interval o of Settlement Period h.

Issued by: Charles F. Robinson, Vice President and General Counsel

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II First Revised Sheet No. 700B Superseding Original Sheet No. 700B

D 3.69 IIE_TOTAL_{i,h,o,k} – MWh

The total Instructed Imbalance Energy from all energy sources except Regulation for resource *i* during Dispatch Interval *k* in Settlement Interval *o* of Settlement Period *h*.

D 3.70 IIE_RERATE_{i,h,o,k} – MWh

The SLIC derated Pmin or Pmax value as a result of an SC modifying its operating output level for a given resource *i* during Dispatch Interval *k* in Settlement Interval *o* of Settlement Period *h*.

D 3.71 UIE_{i,h,o} – MWh

The total Uninstructed Imbalance Energy from resource *i* during Settlement Interval *o* of Settlement Period *h*.

D 3.72 UIE_1_{i,h,o} – MWh

The Uninstructed Imbalance Energy attributed to non-compliance of *IIE_ECON* from resource *i* during Settlement Interval *o* of Settlement Period *h*.

D 3.73 UIE_2_{i,h,o} – MWh

The Uninstructed Imbalance Energy exclusive of UIE_1 from resource *i* during Settlement Interval *o* of Settlement Period *h*.

D 3.74 UIEC_{i,h,o} – \$

The Uninstructed Imbalance Energy payment (charge) for resource *i* during Settlement Interval *o* of Settlement Period *h*.

D 3.75 ZONAL_EX_POST_PRICE_{i,h,o} - \$/MWh

The energy weighted average Ex Post Price for Imbalance Energy for Zone *j* in Settlement Interval o for Settlement Period *h*.

D 3.76 ME_{i,h,o} – MWh

The Metered Energy from resource *i* during Settlement Interval *o* of Settlement Period *h*.

D 3.77 $RED_{i,h,o,k}-MWh$

The Ramping Energy Deviation from resource *i* during Dispatch Interval *k* in Settlement Interval *o* of Settlement Period *h*.

D 3.78 REDC_{i,h,o} - \$

The Ramping Energy Deviation payment (charge) for resource *i* during Settlement Interval *o* of Settlement Period *h*.

D 3.79 $MR_ML_{i,h,o}$ – \$

The expected Real Time Market revenue from Minimum Load Energy for resource *i* in Settlement Interval *o* for Settlement Period *h*.

D 3.80 COST_RECOVERY_{i,d} - \$

The Unrecovered Cost Payment for resource i for Trading Day d.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II First Revised Sheet No. 700C Superseding Sub. Original Sheet No. 700C

D 3.81 $MR_DIFF_{i,h,o}$

is the market revenue surplus or deficit for resource *i* in Settlement Period *h* for Settlement Interval *o*.

D 3.82 $MR_DEFICIT_{i,h,o}$ - \$

The market revenue deficit for resource *i* in Settlement Period *h* for Settlement Interval *o*.

D 3.83 $MR_SURPLUS_{i,h,o} - $$

The market revenue surplus for resource *i* in Settlement Period *h* for Settlement Interval *o*.

D 3.84 PERF_STAT_{i,h,o} – True/False

The performance status of resource *i* for Settlement Interval *o* of Settlement Period *h*. The performance status is equal to 1 (compliant) or 0 (non-compliant).

D 3.85 BID_COST i.h.o - \$

The bid costs for IIE, except OOS Energy and RIE, for resource *i* in Settlement Period *h* for Settlement interval *o*.

D 3.86 BID_COST_RIE $_{i,h,o}$ - \$

The bid costs for RIE for resource *i* in Settlement Period *h* for Settlement Interval *o*.

D 3.87 PREDISPATCH PMT_{i,h,o} - \$

The unrecovered bid cost payment for a Settlement Period predispatched System Resource *i* in Settlement Interval *o* for Settlement Period *h*.

D 3.88 EXCESS_COST_{i,h,o} - \$

The excess cost payment for resource i in Settlement Interval o for Settlement Period h.

D 3.89 $TL_{i,h,o}$ – MWh

The Transmission Loss Obligation for resource *i* during Settlement Interval *o* of Settlement Period *h*.

D 3.90 EXCESS_COST_ALLOC_{q,h,o} - \$

The excess cost allocation for Scheduling Coordinator g in Settlement Period h for Settlement Interval o.

D 3.91 REAL_TIME_FLOW_{i,h,o,k,v} - MWh

The real-time actual flow for intertie resource *i* during Dispatch Interval *k* during Settlement Interval *o* of Settlement Period *h* for Real Time Flow Type index v. Real Time Flow Type index v must be one of the following Energy types: FIRM NFIRM, SUPP, WHEEL, DYN, ESPN, ENSPN, OOM, ERPLC.

D 3.92 RE_STANDARD_{i,h,o,k} - MWh

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 700D Superseding Original Sheet No. 700D

The Standard Ramping Energy from resource *i* during Dispatch Interval *k* of Settlement Interval *o* of Settlement Period *h*.

D 3.93 $OOS_{P_{i,h,o,k,L}} - MWh$

The incremental Out of Stack Energy for resource *i* during Dispatch Interval *k* in Settlement Interval *o* of Settlement Period *h* for index number *L*.

D 3.94 OOS $_N_{i,h,o,k,L}$ – MWh

The decremental Out of Stack Energy for resource *i* during Dispatch Interval *k* in Settlement Interval *o* of Settlement Period *h* for index number *L*.

D 3.95 URC_ALLOC_{g,h,o} -\$

The unrecovered cost neutrality allocation for Scheduling Coordinator g in Settlement Interval o for Settlement Period h.

D 3.96 IIE_TYPE_{i,h,o,k,m}

is the energy type for $IIE_ECON_{i,h,o,k,m}$. Energy type is one of the following: Supplemental, Spin, Non-Spin or Replacement Reserve Energy.

Issued by: Charles F. Robinson, Vice President and General Counsel

APPENDIX E

USAGE CHARGE COMPUTATION

E 1 Purpose of Charge

The Usage Charge is payable by Scheduling Coordinators who schedule Energy across Congested Inter-Zonal Interfaces pursuant to Section 7.2.5 of the ISO Tariff. Scheduling Coordinators who counterschedule across Congested Inter-Zonal Interfaces are entitled to Usage Charge Payments. The right to schedule across a Congested Inter-Zonal Interface is determined through the ISO's Congestion Management procedures.

The following categories of Payments and Charges are covered in this Appendix E:

- (a) Usage Charges payable by Scheduling Coordinators for Energy transfers scheduled across Congested Inter-Zonal Interfaces and which contribute to Congestion.
- (b) Usage Charge rebates payable to Scheduling Coordinators for Energy transfers scheduled across Congested Inter-Zonal Interfaces and which contribute to relieving Congestion.
- (c) Credits of net Usage Charge revenues to Participating TOs and FTR Holders.
- (d) Debits of net Usage Charge revenues to Participating TOs and FTR Holders.
- (e) Debits and rebates of Usage Charge to Scheduling Coordinators as set out in E 2.3.3.

E 2 Fundamental Formulae

E 2.1 ISO Usage Charges on Scheduling Coordinators

Each Scheduling Coordinator j whose Final Schedule includes the transfer of Energy scheduled across one or more Congested Inter-Zonal Interfaces shall (save to the extent that the transfer involves the use of transmission capacity represented by Existing Rights) pay, or be paid, Usage Charges in Trading Interval t calculated in accordance with the following formulae:

In the Day-Ahead Market:

$$UC_{jtd} = \sum_{x} NetZoneImp_{jtxd} * \lambda_{dxt}$$

In the Hour-Ahead Market:

$$UC_{jth} = \sum_{x} (NetZoneImp_{jtxh} - NetZoneImp_{jtxd}) * \lambda_{hxt}$$

E 2.2 Payments of Usage Charges to Scheduling Coordinators

Each Scheduling Coordinator j whose Final Schedule includes the transfer of Energy from one Zone to another in a direction opposite that

Issued by: Roger Smith, Senior Regulatory Counsel

of Congestion shall (save to the extent that the transfer involves the use of transmission capacity represented by Existing Rights) receive a Usage Charge payment from the ISO calculated in accordance with the formulae described in Section E 2.1.

E 2.3 ISO Credits and Debits to Transmission Owners and FTR Holders of Usage Charge Revenues

E 2.3.1 Day-Ahead Market

The ISO will pay to the Participating TO n and FTR Holder n its share of the total net Usage Charge revenue for Trading Interval t in the Day-Ahead Market in accordance with the following formula:

$$PayUC \qquad _{ntd} = \sum_{v} \mu_{ytd} * K_{yn} * L_{ytd}$$

E 2.3.2 Hour-Ahead Market

The ISO will pay to the Participating TO n and FTR Holder n its share of the total net Usage Charge revenue for Trading Interval t in the Hour-Ahead Market in accordance with the following formula:

$$PayUC \qquad_{nth} = \sum_{y} \mu_{yth} *_{Kyn} *_{(Lyth} - L_{ytd})$$

Under normal operating conditions, (L_{yth} - L_{ytd}) is positive and Participating TOs and FTR Holders will receive a refund on the net Usage Charge for the relevant Trading Interval t in the Hour-Ahead Market.

E 2.3.3 Debits to Participating TOs and FTR Holders and Debits/Rebates to Scheduling Coordinators

If, after the close of the Day-Ahead Market, Participating TOs instruct the ISO to reduce interface limits based on operating conditions or an unscheduled transmission Outage occurs and as a result of either of those events, Congestion is increased and Available Transfer Capacity is decreased in the Inter-Zonal Interface in the Hour-Ahead Market, the $(L_{Vth} - L_{Vtd})$ will be negative. In this case:

- (a) Participating TOs and FTR Holders will be charged for the Usage Charge payments they received for the relevant Trading Interval t in the Day-Ahead Market with respect to the reduced interface limits;
- (b) Any Scheduling Coordinator whose Schedule was adjusted for the relevant Trading Interval t in the Hour-Ahead Market due to the reduced interface limits will be credited with μ_{yth} for each MW of the adjustment; and
- (c) Each Scheduling Coordinator will be charged an amount equal to it proportionate share, based on Schedules in the Day-Ahead Market in the direction of Congestion, of the difference between $\mu_{\mbox{\scriptsize Myth}}(\mbox{\scriptsize Lyth}$ $\mbox{\scriptsize Lytd})$ and the total amount charged to Participating TOs and FTR Holders in accordance with item (a) above.

Issued by: Charles F. Robinson, Vice President and General Counsel

The ISO will issue a notice to Scheduling Coordinators of the operating hour, and extent, for which the derate will apply in the relevant Hour-Ahead Markets. The timing and form of such notices shall be set forth in ISO procedures.

E 3 Meaning of terms of formulae

E 3.1 UC_{itd} (\$)

The Usage Charge payable by or to Scheduling Coordinator j for the relevant Trading Interval t in the Day-Ahead Market.

E 3.2 UC_{ith} - \$

The Usage Charge payable by or to Scheduling Coordinator j for Trading Interval t in the Hour-Ahead Market.

E 3.3 NetZoneImp_{itxd} (MWh)

The net Zonal import scheduled by Scheduling Coordinator j in Zone x for the relevant Trading Interval t in the Day-Ahead Market. For Zones internal to the ISO Control Area, net Zonal import equals scheduled Demand minus scheduled Generation plus transfers. For zones external to the ISO Control Area (i.e., for Scheduling Points), net zonal import equals scheduled imports (i.e., out of the ISO Control Area) minus scheduled exports (i.e., into the ISO Control Area).

E 3.4 NetZoneImpitxh (MWh)

The net Zonal import scheduled by the Scheduling Coordinator j in Zone x for the relevant Trading Interval t in the Hour-Ahead Market. For Zones internal to the ISO Control Area, net Zonal import equals scheduled Demand minus scheduled Generation plus transfers. For Zones external to the ISO Control Area (i.e., for Scheduling Points), net zonal import equals scheduled imports (i.e., out of the ISO Control Area) minus scheduled exports (i.e., into the ISO Control Area).

E 3.5 λ_{dxt} (\$/MWh)

The reference Zonal marginal price for Zone x for the relevant Trading Interval t in the Day-Ahead Market, as calculated by the ISO's Congestion Management computer optimization algorithm.

E 3.6 λ_{hxt} (\$/MWh)

The reference Zonal marginal price for Zone x for the relevant Trading Interval t in the Hour-Ahead Market, as calculated by the ISO's Congestion Management computer optimization algorithm.

E 3.7 PayUCntd (\$)

The amount calculated by the ISO to be paid to or by the Participating TO n (in respect of its Transmission Revenue Balancing Account) and FTR Holder n for the relevant Trading Interval t in the Day-Ahead Market.

Issued by: Roger Smith, Senior Regulatory Counsel

E 3.7.1 PayUC_{nth} (\$)

The amount calculated by the ISO to be paid to the Participating TO n (in respect of its Transmission Revenue Balancing Account) and FTR Holder n for the relevant Trading Interval t in the Hour-Ahead Market.

E 3.8 μ_{Vtd} (\$/MW)

The Day-Ahead Congestion price (shadow price) at Inter-Zonal Interface y for Trading Interval t. This price is calculated by the ISO's Congestion Management computer optimization algorithm.

E 3.8.1 μ_{yth} (\$/MW)

The Hour-Ahead Congestion price (shadow price) at Inter-Zonal Interface y for Trading Interval t. This price is calculated by the ISO's Congestion Management computer optimization algorithm.

E 3.9 K_{ytn} (%)

The percentage of the Inter-Zonal Congestion revenue alocation for Participating TO n and FTR Holder n of the Congested Inter-Zonal interface y for the relevant Trading Interval t for both Day-Ahead and Hour-Ahead Markets.

E 3.10 L_{vtd} (MW)

The total loading of Inter-Zonal Interface y for Trading Interval t in the Day-Ahead as calculated by the ISO's Congestion Management optimization algorithm.

E 3.11 L_{Vth} (MW)

The total loading of Inter-Zonal Interface y for Trading Interval t in the Hour-Ahead as calculated by the ISO's Congestion Management optimization algorithm.

Issued by: Charles F. Robinson, Vice President and General Counsel

APPENDIX F

WHEELING ACCESS CHARGES COMPUTATION

F 1 Purpose of Charge

The Wheeling Access Charge is paid by Scheduling Coordinators for Wheeling as set forth in Section 7.1.4 of the ISO Tariff. The ISO will collect the Wheeling revenues from Scheduling Coordinators on a Trading Interval basis and repay these to the Participating TOs based on the ratio of each Participating TO's Transmission Revenue Requirement to the sum of all Participating TOs' Revenue Requirements.

F 2 Fundamental Formulae

F 2.1 ISO Charges on Scheduling Coordinators for Wheeling

The ISO will charge Scheduling Coordinators scheduling a Wheeling Out or a Wheeling Through, the product of the Wheeling Access Charge and the total of the hourly schedules of Wheeling in MWh for each Trading Interval at each Scheduling Point associated with that transaction pursuant to Section 7.1.4 of the ISO Tariff.

F 2.1.1 Wheeling Access Charge

The Wheeling Access Charge for each Participating TO shall be as specified in Section 7.1.4 of the ISO Tariff.

F 2.1.2 [Not Used]

F 2.2 ISO Payments to Transmission Owners for Wheeling

The ISO will pay all Wheeling revenues to Participating TOs on the basis of the ratio of each Participating TO's Transmission Revenue Requirement ("TRR") (less the TRR associated with Existing Rights) to the sum of all Participating TOs' TRRs (less the TRRs associated with Existing Rights) as specified in Section 7.1.4.3 of the ISO Tariff. The Low Voltage Wheeling Access Charge shall be disbursed to the appropriate Participating TO. The sum to be paid to Participating TOn for a Trading Interval is calculated as follows:

$$PayTO_n = \frac{TRR_n}{\sum_{i} TRR_n} * \sum_{j} totalWChrg_j$$

F 3 Meaning of terms in formulae

F 3.1 WABC α (\$/kWh)

The Weighted Average Rate for Wheeling Service for Scheduling Point q.

F 3.2 P_n (\$/kWh)

The applicable Wheeling Access Charge rate for TAC Area or Participating TO n in \$/kWh as set forth in Section 7.1.4 of the ISO Tariff and Section 5 of the TO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

F 3.3 Q_n (MW)

The Available Transfer Capacity, whether from transmission ownership or contractual entitlements, of each Participating TO n for each ISO Scheduling Point which has been placed within the ISO Controlled Grid. Available Transfer Capacity does not include capacity associated with Existing Rights of a Participating TO as defined in Section 2.4.4 of the ISO Tariff.

F 3.4 WChg_{iq} (\$)

The Wheeling Charges by the ISO on Scheduling Coordinator j for Scheduling Point q in Trading Interval t. Both Wheeling Out and Wheeling Through transactions are included in this term.

F 3.5 QChargeW_{iqt} (kWh)

The summation of kWh wheeled over Scheduling Point q by Scheduling Coordinator j in Trading Interval t. Both Wheeling Out and Wheeling Through transactions are included in this term.

Issued by: Roger Smith, Senior Regulatory Counsel

APPENDIX G

VOLTAGE SUPPORT and BLACK START CHARGES COMPUTATION

G 1 Purpose of charge

- Voltage Support (VS) and Black Start (BS) charges are the charges made by the ISO to recover costs it incurs under contracts entered into between the ISO and those entities offering to provide VS or BS. Each Scheduling Coordinator pays an allocated proportion of the VS&BS charge to the ISO so that the ISO recovers the total costs incurred.
- All Generating Units are required by the ISO Tariff to provide reactive power by operating within a power factor range of 0.90 lag and 0.95 lead. Additional short-term Voltage Support required by the ISO is referred to as supplemental reactive power. If the ISO requires the delivery of this supplemental reactive power by instructing a Generating Unit to operate outside its mandatory MVar range, the Scheduling Coordinator representing this Generating Unit will only receive compensation if it is necessary to reduce the MW output to achieve the MVar instructed output. Supplemental reactive power charges to Scheduling Coordinators are made on a Trading Interval basis. As of the ISO Operations Date the ISO will contract for long-term Voltage Support Service with the Owner of Reliability Must-Run Units under Reliability Must-Run Contracts.
- G 1.3 The ISO will procure Black Start capability through contracts let on an annual basis. The quantities and locations of the Black Start capability will be determined by the ISO based on system analysis studies. Charges to Scheduling Coordinators for instructed Energy output from Black Start units are made on a Trading Interval basis.

G 2 Fundamental formulae

G 2.1 Payments to Scheduling Coordinators for providing Voltage Support

Payments to Scheduling Coordinators for additional Voltage Support service comprise:

G.2.1.1 Lost Opportunity Cost Payments (supplemental reactive power) to Scheduling Coordinators for Generating Units

When the ISO obtains additional Voltage Support by instructing a Generating Unit to operate outside its mandatory MVar range by reducing its MW output the ISO will select Generating Units based on their Supplemental Energy Bids (\$/MWh). Subject to any locational requirements the ISO will select the Generating Unit with the highest decremental Supplemental Energy Bid to reduce MW output by such amount as is necessary to achieve the instructed MVar reactive energy production. Each Trading Interval the ISO will pay Scheduling Coordinator j for that Generating Unit i in Zone x, the lost opportunity cost (\$) resulting from the reduction of MW output in Trading Interval t in accordance with the following formula:

Issued by: Charles F. Robinson, Vice President and General Counsel

$$VSST_{xijt} = Max \{0, P_{xt} - Sup_{xdecit}\} *DEC_{xit}$$

G 2.1.2 Long-term contract payments to Scheduling Coordinators for Reliability Must-Run Units for Generating Units and other Voltage Support Equipment

The ISO will pay Scheduling Coordinator j for the provision of Voltage Support from its Reliability Must-Run Units located in Zone x in month m a sum (VSLT_{xim}) consisting of:

- (a) the total of the Ancillary Service Pre-empted Dispatch
 Payments if the ISO has decreased the output of the Reliability
 Must-Run Units for the provision of Voltage Support outside the
 power factor range of the Reliability Must-Run Unit in any
 Trading Interval in month m and/or
- (b) (if applicable) the total payments for the provision of Voltage Support in month m requested by the ISO from the synchronous condensers of the Reliability Must-Run Units,

calculated in each case in accordance with the terms of the relevant Reliability Must-Run Contract. Data on these payments will not be generated by the ISO. Such data will be based on the invoices issued by the Owners of Reliability Must-Run Generating Units pursuant to their Reliability Must-Run Contracts and will be verified by the ISO.

G 2.2 Charges to Scheduling Coordinators for Voltage Support

G 2.2.1 User Rate

The user rate (\$/MWh) for the lost opportunity cost for Voltage Support referred to in G 2.1.1 in Zone x for Trading Interval t will be calculated using the following formula:

$$VSSTRate_{xt} = \frac{\sum_{ij} VSST_{xijt}}{\sum_{i} QCharge VS_{xjt}}$$

The user rate (\$/MWh) for month m for long-term Voltage Support referred to in G2.1.2 in Zone x will be calculated using the following formula:

$$VSSTRate_{xm} = \frac{\displaystyle\sum_{j} VSLT_{xjm}}{\displaystyle\sum_{jm} QChargeVS_{xjt}}$$

G 2.2.2 Voltage Support Charges

The lost opportunity cost Voltage Support charge (\$) payable to recover the sums under G 2.1.1 for Zone x for Trading Interval t for Scheduling Coordinator j will be calculated using the following formula:

$$VSSTCharge_{xjt} = VSSTRate_{xt} * QChargeVS_{xjt}$$

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Sheet No. 709 Superseding Original Sheet No. 709

The monthly long-term Voltage Support charge (\$) payable to recover sums under G 2.1.2 for Zone x for month m for Scheduling Coordinator j will be calculated using the following formula:

$$VSLTCharge_{xjm} = VSLTRate_{xm} * \sum_{m} QChargeVS_{xjt}$$

G 2.3 Payments to Participating Generators for Black Start

Payments to Participating Generators that provide Black Start Energy or capability shall be made in accordance with the agreements they have entered into with the ISO for the provision of Black Start services and shall be calculated as follows:

G 2.3.1 Black Start Energy Payments

Whenever a Black Start Generating Unit provides a Black Start in accordance with the ISO's instructions, the ISO will pay the Black Start Generator for that Unit for the Generating Unit's energy output and start-up costs. The ISO will pay Black Start Generator for Generating Unit i, the Black Start energy and start-up costs (\$) in Trading Interval t in accordance with the following formula:

$$BSEn_{ijt} = (EnQBS_{ijt} * EnBid_{ijt}) + BSSUP_{ijt}$$

G 2.3.2 Black Start Energy Payments to Owners of Reliability Must-Run Units

Whenever a Reliability Must-Run Unit provides a Black Start in accordance with the ISO's instructions, the ISO will pay the Scheduling Coordinator of the Reliability Must-Run Unit the Generating Unit's Energy and start-up costs. The ISO will pay Scheduling Coordinator j for Reliability Must-Run Unit i the Black Start Energy and start-up costs (\$) in Trading Interval t in accordance with the following formula:

$$BSEn_{iit} = (EnQBS_{iit} * EnBid_{iit}) + (BSSUP_{iit})$$

G 2.4 Charges to Scheduling Coordinators for Black Start

G 2.4.1 User Rate

The user rate (\$/MWh) for Black Start Energy payments referred to in G 2.3.1 and G 2.3.2 for Trading Interval t will be calculated using the following formula:

$$BSRate_{t} = \frac{\sum_{ij} BSEn_{ijt}}{\sum_{i} QChargeBlackStart_{jt}}$$

G 2.4.2 Black Start Charges

The user charge (\$/MWh) for Black Start Energy to recover the costs of payments under G 2.3.1 and G 2.3.2 for Trading Interval t for Scheduling Coordinator j will be calculated using the following formula:

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 710 Superseding Original Sheet No. 710

 $BSCharge_{it} = BSRate_{t} * QChargeBlackStart_{it}$

G 3 Meaning of Terms in the Formulae

G 3.1 $VSST_{xiit}$ (\$)

The lost opportunity cost paid by the ISO to Scheduling Coordinator j for Generating Unit i in Zone x, resulting from the reduction of MW output in Trading Interval t.

G 3.2 P_{xt} (\$/MWh)

The Hourly Ex Post Price for Imbalance Energy in Trading Interval t in Zone x.

G 3.3 Sup_{xdecit} (\$/MWh)

The Supplemental Energy Bid submitted by Scheduling Coordinator j for Generating Unit i in Zone x in Trading Interval t, whose output is reduced by the ISO to provide additional short-term Voltage Support.

G 3.4 Dec_{xit} (MW)

The reduction in MW by Scheduling Coordinator j for Generating Unit i in Zone x in Trading Interval t, in order to provide short-term additional Voltage Support.

G 3.5 $VSLT_{xim}$ (\$)

The payment from the ISO to Scheduling Coordinator j for its Reliability Must-Run Units in Zone x for Voltage Support in month m calculated in accordance with the relevant Reliability Must-Run Contract.

G 3.6 VSSTRate_{xt} (\$/MWh)

The Trading Interval lost opportunity cost Voltage Support user rate charged by the ISO to Scheduling Coordinators for Trading Interval t for Zone x.

G 3.7 VSLTRate_{xm} (\$/MWh)

The monthly long-term Voltage Support user rate charged by the ISO to Scheduling Coordinators for month m for Zone x.

G 3.8 QChargeVS_{xit} (MWh)

The charging quantity for Voltage Support for Scheduling Coordinator j for Trading Interval t in Zone x equal to the total metered Demand (including exports to neighboring Control Areas) for Scheduling Coordinator j in Zone x for Trading Interval t.

G 3.9 $VSSTCharge_{Xit}$ (\$)

The lost opportunity cost Voltage Support user charge for Zone x for Trading Interval t for Scheduling Coordinator j.

G 3.10 VSLTCharge_{xim} (\$)

The long-term charge for Voltage Support for month m for Zone x for Scheduling Coordinator j.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

FIRST REPLACEMENT VOLUME NO. II

First Revised Sheet No. 711 Superseding Original Sheet No. 711

G 3.11 BSEn iit (\$)

The ISO payment to Scheduling Coordinator j (or Black Start Generator j) for that Generating Unit i providing Black Start Energy in Trading Interval t.

G 3.12 EnQBS iit (MWh)

The energy output, instructed by the ISO, from the Black Start capability of Generating Unit i from Scheduling Coordinator j (or Participating Generator j) for Trading Interval t.

G 3.13 EnBid jit (\$/MWh)

The price for Energy output from the Black Start capability of Generating Unit i of Scheduling Coordinator j or (Black Start Generator j) for Trading Interval t calculated in accordance with the applicable Reliability Must-Run Contract or Interim Black Start Agreement.

G 3.14 BSSUP_{iit} (\$)

The start-up payment for a Black Start successfully made by Generating Unit i of Scheduling Coordinator j (or Black Start Generator j) in Trading Interval t calculated in accordance with the applicable Reliability Must-Run Contract or Interim Black Start Agreement.

G 3.15 BSRate_f (\$/MWh)

The Black Start Energy payment user rate charged by the ISO to Scheduling Coordinators for Trading Interval t.

G 3.16 QChargeBlackstartit (MW)

The charging quantity for Black Start for Scheduling Coordinator j for Trading Interval t equal to the total metered Demand (excluding exports to neighboring Control Areas) of Scheduling Coordinator j for Trading Interval t.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 712

Effective: January 1, 2001

APPENDIX H
[NOT USED]

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: December 29, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 713

<u>APPENDIX I</u> **DRAFT SAMPLE OF INVOICE**

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: December 29, 2000

Effective: January 1, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 714

Independent System Operator

MARKET INVOICE

 CUSTOMER 1
 Invoice:
 181

 101 N. Harbor Blvd.
 Date:
 20-JUN-97

 Anaheim
 CA 92808
 Customer Number:
 1000

Please send payment to:

1000 South Fremont Avenue For all inquiries contact:
Building A-11 For all inquiries contact:
1-800-ISO-HELP

Alhambra CA 91803

Comments:

Charges settlement date: 20-JUN-97 to 20-JUN-97

| Charge Type | Description | Amount |
|---------------|--|-------------|
| 0001 | 0001-Day-Ahead Spinning Reserve due SC | -\$845.00 |
| 0002 | 0002-Day-Ahead Non-Spinning Reserve due SC | -\$1,025.00 |
| 0003 | 0003-Day-Ahead AGC/Regulation due SC | -\$1,025.00 |
| 0004 | 0004-Day-Ahead Replacement Reserve due SC | -\$1,385.00 |
| 0051 | 0051-Hour-Ahead Spinning Reserve due SC | -\$1,565.00 |
| 0052 | 0052-Hour-Ahead Non-Spinning Reserve due SC | -\$1,745.00 |
| 0053 | 0053-Hour-Ahead AGC/Regulation due SC | -\$1,925.00 |
| 0054 | 0054-Hour-Ahead Replacement Reserve due SC | -\$2,105.00 |
| 0101 | 0101-Day-Ahead Spinning Reserve due ISO | \$22,075.00 |
| 0102 | 0102-Day-Ahead Non-Spinning Reserve due ISO | \$23,935.00 |
| 0103 | 0103-Day-Ahead AGC/Regulation due ISO | \$25,795.00 |
| 0104 | 0104-Day-Ahead Replacement Reserve due ISO | \$27,655.00 |
| 0251 | 0251-Hour-Ahead Intra-Zonal Congestion Settlement due ISO | \$385.00 |
| 0252 | 0252-Hour-Ahead Intra-Zonal Congestion Charge/Refund due ISO | \$4,925.00 |
| 0253 | 0253-Hour-Ahead Inter-Zonal Congestion Settlement due ISO | \$5,285.00 |
| 0301 | 0301-Ex-Post A/S Energy due SC | -\$6,005.00 |
| 0302 | 0302-Ex-Post Supplemental Reactive Power due SC | -\$6,365.00 |
| 0303 | 0303-Ex-Post Replacement Reserve due ISO (Dispatched) | \$6,725.00 |
| 0304 | 0304-Ex-Post Replacement Reserve due ISO (Undispatched) | \$7,085.00 |
| Invoice Total | | |

Issued by: Roger Smith, Senior Regulatory Counsel

Issued on: December 29, 2000 Effective: January 1, 2001

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 714A

Effective: January 1, 2001

Independent System Operator

FERC FEES INVOICE

| CUSTOMER 1 101 N. Harbor Blvd. Anaheim | CA 92808 | Invoice: Date: Customer Number: | | 181 20-JUN-97 1000 | |
|---|-----------------------------|---|-----|--------------------------|-----------------|
| Please send payment | t to: | | | | |
| 1000 South Fremont A Building A-11 Alhambra C | Avenue CA 91803 | For all inquiries contact 1-800-ISO-HELP | ct: | | |
| Comments: | | | | | |
| Charges settlement d | late: | 20-JUN-97 | to | 20-JUN-97 | |
| Charge Type De | escription | | | | Amount |
| [Charge type tobe determined] | FERC Annual Charges due ISO | | | | [Sample charge] |
| Invoice Total | | | | _ | |

SETTLEMENT AND BILLING PROTOCOL **ANNEX 1**

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

ANNEX 1

SETTLEMENT AND BILLING OF

RELIABILITY MUST-RUN CHARGES AND PAYMENTS

1 Objectives, Definitions and Scope

1.1 Objectives

The objective of this Annex 1 is to inform RMR Owners which are responsible for preparation of invoices, and Responsible Utilities, which are responsible for payment of Reliability Must-Run Charges pursuant to Section 5.2.8 of the ISO Tariff, of the manner in which the RMR Charges referred to in Section 5.2.7 of the ISO Tariff shall be verified and settled and of the procedures regarding the billing, invoicing and payment of these RMR Charges.

1.2 Definitions

1.2.1 Master Definitions Supplement

Unless the context otherwise requires, any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Annex 1. A reference to a paragraph is to a paragraph of this Annex. References to SABP are to the Settlement and Billing Protocol or to the stated paragraph of that Protocol. References to Appendices are to Appendices of SABP.

1.2.2 Definitions of SABP

Unless otherwise specified, any word or expression defined in SABP shall have the same meaning where used in this Annex.

1.2.3 Special Definitions for this Annex

In this Annex the following words and expressions shall have the following meanings:

"Adjusted RMR Invoice" means the monthly invoice issued by the RMR Owner to the ISO for adjustments made to the Revised Estimated RMR Invoice pursuant to the RMR Contract, reflecting actual data for the billing month.

"Business Day" shall have the meaning ascribed to it in the RMR Contract.

"Estimated RMR Invoice" means the monthly invoice issued by the RMR Owner to the ISO for estimated RMR Payments or Refunds pursuant to the RMR Contract.

"Facility Trust Account" means, for each RMR Contract, the account established and operated by the ISO to and from which all payments under this Annex shall be made. Each Facility Trust Account will have two segregated commercial bank accounts, a RMR Owner Facility Trust Account and a Responsible Utility Facility Trust Account.

Issued by: Roger Smith, Senior Regulatory Counsel

- "Prior Period Change" means any correction, surcharge, credit, refund or other adjustment pertaining to a billing month which is discovered after the Revised Adjusted RMR Invoice for such billing month has been issued.
- "Prior Period Change Worksheet" means a worksheet prepared by the RMR Owner and submitted to the ISO following discovery of a necessary change to an RMR invoice after the Revised Adjusted RMR Invoice for the billing month has been issued.
- "Responsible Utility Facility Trust Account" means a segregated commercial bank account under the Facility Trust Account containing funds held in trust for the Responsible Utility.
- "RMR Invoice" means any Estimated RMR Invoice, Revised Estimated RMR Invoice, Adjusted RMR Invoice, or Revised Adjusted RMR Invoice.
- "RMR Owner Facility Trust Account" means a segregated commercial bank account under the Facility Trust Account containing funds held in trust for the RMR Owner.
- "RMR Payment" means any amounts which the ISO is obligated to pay to RMR Owners under RMR Contracts, net of any applicable credits under RMR Contracts.
- "RMR Payments Calendar" means the Payments Calendar issued by the ISO pursuant to Section 3 of this Annex 1.
- "RMR Refund" means any amounts which RMR Owners are obligated to pay the ISO and the ISO is obligated to pay Responsible Utilities under RMR Contracts, or resulting from an order by the Federal Energy Regulatory Commission, for deposit into the Responsible Utility Facility Trust Account.
- "RMR Security" means the form of security provided by a Responsible Utility to cover its liability under this Annex pursuant to Section 5.2.7.3 of the ISO Tariff.

1.2.4 Rules of Interpretation and Other Terms and Conventions

The rules of interpretation set out in SABP 1.2.3, and the provisions of SABP 1.2.4, 1.2.5 and 1.2.6 shall apply to this Annex.

1.3 Scope of Application to Parties

This Annex applies to the RMR Payments owed RMR Owners by the ISO, the RMR Charges owed by the Responsible Utilities to the ISO and the RMR Refunds owed to the ISO by RMR Owners and owed to

Issued by: Charles F. Robinson, Vice President and General Counsel

the Responsible Utilities by the ISO for costs incurred under the RMR Contract.

For the avoidance of doubt, this Annex shall not apply to charges for Energy or Ancillary Services which are payable by the ISO under Sections 2.5 and 11 of the ISO Tariff to Scheduling Coordinators representing RMR Owners. Such payments shall be made by the ISO to such Scheduling Coordinators pursuant to Section 11 of the ISO Tariff and the provisions of SABP. The RMR Owners shall account for such payments received by or due to their Scheduling Coordinators in each RMR Invoice.

1.4 Relationship of this Annex with SABP

Appendices B, G and H of SABP shall apply as appropriate to this Annex. Unless otherwise specified, other provisions of SABP shall not apply to this Annex.

1.5 Relationship of this Annex with the ISO Tariff

For the avoidance of doubt, Sections 11.3 to 11.24 inclusive of the ISO Tariff shall not apply to this Annex.

2 Accounts

2.1 Facility Trust Account

The ISO shall establish a Facility Trust Account for each RMR Contract. Each Facility Trust Account shall consist of two segregated commercial bank accounts: an RMR Owner Facility Trust Account, which will be held in trust for the RMR Owner, and a Responsible Utility Facility Trust Account, which will be held in trust for the Responsible Utility. RMR Charges paid by the Responsible Utility to the ISO in connection with the RMR Contract will be deposited into the RMR Owner Facility Trust Account and RMR Payments from the ISO to the RMR Owner will be withdrawn from such Account, all in accordance with this Annex 1. Section 5.2.7 of the ISO Tariff and the RMR Contract. RMR Refunds received by the ISO from the RMR Owner in accordance with the RMR Contract will be deposited into the Responsible Utility Facility Trust Account and such RMR Refunds will be withdrawn from such Account and paid to the Responsible Utility in accordance with this Annex 1, Section 5.2.7 of the ISO Tariff, and the RMR Contract. The RMR Owner Facility Trust Account and the Responsible Utility Facility Trust Account shall have no other funds commingled in them at any time.

2.2 RMR Owner's Settlement Accounts

Each RMR Owner shall establish and maintain a settlement account at a commercial bank located in the United States and reasonably acceptable to the ISO which can effect money transfers via Fed-Wire where payments to and from the Facility Trust Accounts shall be made in accordance with this Annex. Each RMR Owner shall notify the ISO of its settlement account details upon entering into its RMR Contract with the ISO and may notify the ISO from time to time of any changes by giving at least 15 days notice before the new account becomes operational.

Issued by: Roger Smith, Senior Regulatory Counsel

3 RMR Payments Calendar

The ISO shall issue an RMR Payments Calendar for the purposes of this Annex which shall contain those dates set forth in Section 9.1 (b) of the RMR Contract and the following information:

- the date on which RMR Owners are required to issue to the ISO, with a copy to the Responsible Utility, their Estimated RMR Invoice pursuant to their RMR Contract;
- (b) the date on which the ISO is required to initiate proposed adjustments to the Estimated RMR Invoice to the Responsible Utility and to the RMR Owner;
- (c) the date by which the RMR Owners are required to issue their Revised Estimated RMR Invoice reflecting appropriate revisions to the original Estimated RMR Invoice agreed upon by the Responsible Utility and the RMR Owner (In the event no revisions are required, Owner shall submit an e-mail to the ISO and Responsible Utility stating there are no revisions and the Estimated RMR Invoice should be deemed as the Revised Estimated RMR Invoice.);
- (d) the date on which the ISO is required to issue to the Responsible Utility or RMR Owner, with an e-mail notification to both parties, the ISO Invoice based on the Revised Estimated RMR Invoice;
- the date on which RMR Owners are required to issue to the ISO, with a copy to the Responsible Utility, their Adjusted RMR Invoice pursuant to their RMR Contract;
- (f) the date on which the ISO is required to initiate proposed adjustments to the Adjusted RMR Invoice to the Responsible Utility and the RMR Owner;
- (g) the date by which the RMR Owners are required to issue their Revised Adjusted RMR Invoice reflecting appropriate revisions to the original Adjusted RMR Invoice agreed upon by the Responsible Utility and the RMR Owner. (In the event no revisions are required, Owner shall submit an e-mail to the ISO and Responsible Utility stating there are no revisions and the Adjusted RMR Invoice should be deemed as the Revised Adjusted RMR Invoice.);
- the date on which the ISO is required to issue to the Responsible
 Utility or the RMR Owner, with an e-mail notification to both parties,
 the ISO Invoice based on the Revised Adjusted RMR Invoice;
- the dates by which the Responsible Utility and RMR Owner must have notified the ISO of any dispute in relation to the ISO Invoice, Estimated or Adjusted RMR Invoices (including the Revised Estimated and Revised Adjusted RMR Invoice) or the ISO's proposed adjustments;
- (j) the date and time by which Responsible Utilities or RMR Owners are required to have made payments into the RMR Owner Facility Trust Account or Responsible Utility Facility Trust Account in payment of the ISO Invoices relating

Issued by: Roger Smith, Senior Regulatory Counsel

to each Revised Estimated RMR Invoice and each Revised Adjusted RMR Invoice;

(k) the date and time by which the ISO is required to have made payments into the RMR Owners' Facility Trust Accounts or Responsible Utilities' Facility Trust Accounts in payment of the Revised Estimated RMR Invoice and the Revised Adjusted RMR Invoice pursuant to their RMR Contract;

If the day on which any ISO Invoice, any RMR Invoice, or payment is due, is not a Business Day, such statement or invoice shall be issued or payment shall be due on the next succeeding Business Day.

Information relating to charges for Energy or Ancillary Services which are payable by the ISO pursuant to Sections 2.5 and 11 of the ISO Tariff and SABP to the Scheduling Coordinators representing the RMR Owners will be contained in the RMR Payments Calendar pursuant to SABP 2.3.

4 Information to be provided by RMR Owners to the ISO

Each RMR Invoice and any Prior Period Change Worksheet shall include, or be accompanied by, information about RMR Payments and RMR Refunds in sufficient detail to enable the ISO to verify all RMR Charges and all RMR Refunds, and such information shall be copied to the Responsible Utility. Each RMR Invoice shall separately show the amounts due for services from each Reliability Must-Run Unit.

This information shall be provided in an electronic form in accordance with the RMR Invoice template developed jointly and agreed to by the ISO, Responsible Utilities and RMR Owners in accordance with the RMR Contracts and the principles in Schedule O to those Contracts, and maintained on the ISO Home Page.

5 Validation of RMR Charges and RMR Refunds

The ISO shall validate, based on information provided by each RMR Owner pursuant to paragraph 4, the amount due form the relevant Responsible Utility for RMR Charges and the amount due to the relevant Responsible Utility for RMR Refunds applicable to the Reliability Must-Run Generation and Ancillary Services of that RMR Owner, but shall not represent or warrant the accuracy or completeness of the information provided by the RMR Owner. The ISO shall provide copies of its exception report and information to the relevant Responsible Utility and RMR Owner.

The ISO shall not be obligated to pay the Responsible Utility any RMR Refunds unless and until the ISO has received corresponding RMR Refunds into the Responsible Utility Facility Trust Account from the RMR Owner.

6 Description of the Billing Process

6.1 Issuance of RMR Invoices by the RMR Owner

Each RMR Owner shall provide any RMR Invoice to the ISO in the electronic form, mutually agreed by the parties, which may be updated

Issued by: Roger Smith, Senior Regulatory Counsel

by agreement of the ISO, Responsible Utilities and RMR Owners from time to time in accordance with the requirements of Schedule O of the RMR Contract, on each of the days specified in the RMR Payments Calendar, and shall send to the relevant Responsible Utility a copy of that invoice on the day of issue.

6.2 Review of the RMR Invoice by the ISO

The ISO shall review each RMR Invoice within the period specified in the RMR Payments Calendar and is required to initiate proposed adjustments to that invoice to the RMR Owner and the relevant Responsible Utility. Once the ISO initiates proposed adjustments, the RMR Owner shall issue a Revised Estimated RMR Invoice or Revised Adjusted RMR Invoice.

6.3 Issuance of ISO Invoices by the ISO

The ISO shall provide to the Responsible Utility and the RMR Owner on the dates specified in the RMR Payments Calendar ISO Invoices showing:

- (a) the amounts which, on the basis of the Revised Estimated RMR Invoice or the Revised Adjusted RMR Invoice, as the case may be, and pursuant to paragraph 5 of this Annex 1, are to be paid by or to the relevant Responsible Utility and RMR Owner;
- (b) the Payment Date, being the date on which such amounts are to be paid and the time for such payment;
- (c) details (including the account number, bank name and Fed-Wire transfer instructions) of the RMR Owner Facility Trust Account to which any amounts owed by the Responsible Utility are to be paid, or of the RMR Responsible Utility Facility Trust Account to which any amounts owed by the RMR Owner are to be paid.

6.4 Resolving Disputes Relating to Invoices

6.4.1 Review of the Invoices by the Responsible Utility

Each Responsible Utility shall have the review period specified in the RMR Payments Calendar to review RMR Invoices, and ISO Invoices, validate, and propose adjustments to such invoices and notify the ISO of any dispute. Notwithstanding the above, each Responsible Utility shall have the review time specified in ISO Tariff Section 5.27 to dispute such invoice.

6.4.2 Dispute Notice

If a Responsible Utility disputes any item or calculation relating to any Revised RMR Invoice, or any ISO Invoice, it shall provide the ISO, with a copy to the RMR Owner, via email or such other communication mode as the parties may mutually agree upon, a notice of dispute at any time from the receipt of the copy of such invoice from the RMR Owner or the ISO to the expiration of the period for review set out in Section 6.4.1. The ISO shall initiate a corresponding dispute with the RMR Owner under the RMR Contract.

Issued by: Roger Smith, Senior Regulatory Counsel

6.4.3 Contents of Dispute Notice

The notice of dispute shall state clearly the Revised Estimated RMR Invoice, Revised Adjusted RMR Invoice, or ISO Invoice in dispute, the item disputed (identifying specific Reliability Must-Run Units and time periods), the reasons for the dispute, and the proposed amendment (if appropriate) and shall be accompanied by all available evidence reasonably required to support the claim.

6.4.4 Prior Period Change Agreed to by the RMR Owner

Subject to paragraph 6.4.5 or 6.4.6 of this Annex 1, if the RMR Owner agrees with the proposed change, the change shall be shown in a Prior Period Change Worksheet and included in the next appropriate May or December Estimated RMR Invoice as specified in Article 9.1 of the RMR Contract.

6.4.5 Dispute Involving the RMR Owner

If the dispute relates to an item originating in any RMR Invoice the applicable provisions of the RMR Contract and Section 5.2.7.1 of the ISO Tariff shall apply.

6.4.6 Dispute Involving an Alleged Error or Breach or Default of the ISO's Obligations Under Section 5.2.7 of the ISO Tariff

If the dispute relates to an alleged error or breach or default of the ISO's obligations under Section 5.2.7 of the ISO Tariff, the applicable provisions of the RMR Contract and Section 5.2.7.1 of the ISO Tariff shall apply.

6.4.7 Payment Pending Dispute

Subject to Section 5.2.7.1 of the ISO Tariff, if there is any dispute relating to an item originating in an RMR Invoice that is not resolved prior to the Payment Date, the Responsible Utility shall be obligated to pay any amounts shown in the relevant ISO Invoice on the Payment Date irrespective of whether any such dispute has been resolved or is still pending. The Responsible Utility may notify the ISO that the payment is made under protest, in which case the ISO shall notify the RMR Owner that payment is made under protest. In accordance with Section 9.6 of the RMR Contract, if such dispute is subsequently resolved in favor of the Responsible Utility that made the payment under protest, then any amount agreed or determined to be owed by the RMR Owner to the ISO shall be repaid by the RMR Owner to the ISO, with interest at the interest rate specified in the RMR Contract from the date of payment by the ISO to the RMR Owner of the disputed amount to the date of repayment by the RMR Owner, as specified in Section 6.4.4 of this Annex 1. If RMR Owner does not agree to make the change pursuant to Section 6.4.4, then such repayment shall be made by ISO's deduction of such amount from the next ISO Invoices

Issued by: Roger Smith, Senior Regulatory Counsel

until extinguished, or if the RMR Contract has terminated, by paying a RMR Refund in such amount to the Responsible Utility Facility Trust Account, subject to the limitation of Section 5.2.7.1.1 of the ISO Tariff.

7 Payment Procedures

7.1 Payment Date

The Payment Date for RMR Payments to and RMR Refunds from RMR Owners shall be the Due Date specified in the RMR Contract and in the RMR Payments Calendar and the same shall be the Payment Date for the ISO and Responsible Utilities in relation to RMR Charges, provided that the RMR Owner has furnished the Responsible Utility and the ISO with the Revised Estimated RMR Invoice or the Revised Adjusted RMR Invoice no less than 9 calendar days before the Due Date. The Payment Date shall be stated on the ISO Invoice.

7.2 Payment Method

All payments and refunds by the ISO to RMR Owners and Responsible Utilities shall be made via Fed-Wire.

However, if the RMR Owner is also the Responsible Utility, at the discretion of the RMR Owner, payments and refunds may be made by memorandum account instead of wire transfer.

7.3 Payment by RMR Owners and Responsible Utilities

Each RMR Owner shall remit to the Responsible Utility Facility Trust Account the amount shown on the relevant ISO Invoice as payable by that RMR Owner not later than 10:00 am on the Payment Date.

Subject to Section 5.2.7 of the ISO Tariff, each Responsible Utility shall remit to the RMR Owner Facility Trust Account the amount shown on the relevant ISO Invoice not later than 10:00 am on the Payment Date.

7.4 Payment by the ISO

The ISO shall verify the amounts available for distribution to Responsible Utilities and/or RMR Owners on the Payment Date and shall give instructions to the ISO Bank to remit from the relevant Facility Trust Account to the relevant settlement account maintained by each Responsible Utility or RMR Owner the amounts determined by the ISO to be available for payment to each Responsible Utility or RMR Owner.

7.5 Payment Default by RMR Owner or Responsible Utility

If by 10.00 am on a Payment Date the ISO, in its reasonable opinion, believes that all or any part of any amount due to be remitted to the relevant Facility Trust Account by the RMR Owner or the Responsible Utility will not or has not been remitted ("the Default Amount") the ISO shall immediately notify the RMR Owner and the Responsible Utility. Where the Default Amount was due from the Responsible Utility, the ISO and RMR Owner shall proceed as set forth in Section 5.2.7 of the ISO Tariff and the applicable provision of the RMR Contract. Where the Default Amount was due from the RMR Owner, the ISO and the

Issued by: Roger Smith, Senior Regulatory Counsel

Responsible Utility shall proceed as set forth in the applicable provision of the RMR Contract.

7.5.1 Default relating to Market Payments

For the avoidance of doubt, non payment to RMR Owners, or their respective Scheduling Coordinators, of charges for Energy or Ancillary Services which are payable by the ISO to Scheduling Coordinators representing such RMR Owners shall be dealt with pursuant to Sections 11.3 to 11.24 (inclusive) of the ISO Tariff and the provisions of SABP.

7.6 Set-off

7.6.1 Set-off in the case of a defaulting Responsible Utility

The ISO is authorized to apply any amount to which any defaulting Responsible Utility is or will be entitled from the Responsible Utility Facility Trust Account in or towards the satisfaction of any amount owed by that Responsible Utility to the RMR Owner Facility Trust Account arising under the settlement and billing process set out in this Annex.

For the avoidance of doubt, neither the ISO nor any Responsible Utility will be authorized to set off any amounts owed by that Responsible Utility in respect of one Facility Trust Account against amounts owed to that Responsible Utility in respect of another Facility Trust Account or any amounts owed by that Responsible Utility under this Annex against amounts owed to that Responsible Utility except as provided by Sections 2.5.27.7 and 5.2.7 of the ISO Tariff.

7.6.2 Set-off in the case of a defaulting RMR Owner

The ISO is authorized to apply any amount to which any defaulting RMR Owner is or will be entitled from the RMR Owner Facility Trust Account in or towards the satisfaction of any amount owed by that RMR Owner to the Responsible Utility Facility Trust Account in accordance with Article 9 of the RMR Contract and Sections 5.2.7 and 2.5.28 of the ISO Tariff.

For the avoidance of doubt, neither the ISO nor any RMR Owner will be authorized to set off any amounts owed by that RMR Owner in respect of one Facility Trust Account against amounts owed to that RMR Owner in respect of another Facility Trust Account or any amounts owed by that RMR Owner under this Annex against amounts owed to that RMR Owner under the RMR Contract.

7.7 Default Interest

Responsible Utilities shall pay interest on Default Amounts to the ISO at the interest rate specified in the RMR Contract for the period from the relevant Payment Date to the date on which the payment is received by the ISO.

RMR Owners shall pay interest to the ISO on Default Amounts at the interest rate specified in the RMR Contract for the period from the date on which payment was due to the date on which the payment is received by the ISO.

Issued by: Roger Smith, Senior Regulatory Counsel

The ISO shall pay interest to RMR Owners at the interest rate specified in the RMR Contract for the period from the date on which payment is due under the RMR Contract to the date on which the payment is received by the RMR Owner.

The ISO shall pay interest to Responsible Utilities at the interest rate specified in the relevant RMR Contract for the period from the date following the date it received an RMR Refund from the relevant RMR Owner to the date in which the payment is received by the relevant Responsible Utility.

Where payment of a Default Amount is made by exercise of a right of set-off or deduction, payments shall be deemed received when payment of the sum which takes that set-off or deduction into account is made.

8 Overpayments

The provisions of SABP 7.1.1, 7.1.2 and 7.1.3 shall apply to RMR Owners and Responsible Utilities which have been overpaid by the ISO and references to "ISO Creditors" in these sections and in the relevant Sections of the ISO Tariff shall be read, for the purposes of this Annex, to mean RMR Owners and Responsible Utilities as applicable. Disputed amounts shall not be considered to be overpayments until and unless the dispute is resolved.

9 Communications

9.1 Method of Communication

ISO Invoices will be issued by the ISO via Electronic Data Interchange ("EDI"). RMR Invoices and Prior Period Change Worksheets will be issued by the RMR Owner in an electronic form mutually agreed by the parties and maintained on the ISO's Home Page. ISO shall also post prior period change examples and prior period change guidelines as specified in Article 9.1 of the RMR Contract.

9.2 Emergency Procedures

9.2.1 Emergency Affecting the ISO

In the event of an emergency or a failure of any of the ISO software or business systems, the ISO may deem any Estimated RMR Invoice or any Adjusted RMR Invoice to be correct without thorough verification and may implement any temporary variation of the timing requirements relating to the settlement and billing process contained in this Annex.

9.2.2 Emergency Affecting the RMR Owner

In the event of an emergency or a failure of any of the RMR Owner's systems, the RMR Owner may use Estimated RMR Invoices as provided in the applicable section of the RMR Contract or may implement any temporary variation of the timing requirements relating to the settlement and billing process

Issued by: Roger Smith, Senior Regulatory Counsel

contained in this Annex and its RMR Contract. Details of the variation will be published on the ISO Home Page.

Communications of an emergency nature on a Due Date or a Payment Date relating to payments shall be made by the fastest practical means including by telephone.

10 Confidentiality

The provisions of SABP 9, 10 and 11 shall apply to this Annex between and among the RMR Owners, the ISO and Responsible Utilities.

Except as may otherwise be required by applicable Law, all information and data provided by RMR Owner or the ISO to the Responsible Utility pursuant to the RMR Contract, Section 5.2.7 of the ISO Tariff or this Annex 1 ("confidential information") shall be treated as confidential and proprietary to the providing party to the extent required by Section 12.5 and Schedule N of the RMR Contract and will be used by the receiving party only as permitted by such Section 12.5 and Schedule N.

11 Amendments to this Annex

If the ISO determines a need for an amendment to this Annex 1, the ISO shall follow the requirements as set forth in Section 16 of the ISO Tariff, provided that ISO may not modify Annex 1 as it applies to any RMR contract without the consent of the relevant RMR Owner and Responsible Utility.

Issued by: Roger Smith, Senior Regulatory Counsel

METERING PROTOCOL

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

METERING PROTOCOL

Table of Contents

| MP1 OBJE | CTIVES, DEFINITIONS AND SCOPE | 733 |
|--|--|------------------------------------|
| MP 1.1 O MP 1.1.1 MP 1.1.2 | bjective Applicable Reference Materials Role of the ISO | 733 733 733 |
| MP 1.2.1 | efinitions Master Definitions Supplement Special Definitions for this Protocol Rules of Interpretation | 733 733 733 735 |
| MP 1.3.1 MP 1.3.2 | | 736 736 736 737 |
| MP 2 REVE (MDA | NUE METER DATA ACQUISITION AND PROCESSING SYSTEM S) | 737 |
| MP 2.1 P | urpose of MDAS | 737 |
| MP 2.2.1 MP 2.2.2 MP 2.2.3 MP 2.2.4 | Method of Providing Meter Data to ISO Interface with MDAS Frequency of Recording and Collecting Data Format for Data Submission Format for Data Requests | 737 737 737 737 738 739 |
| MP 2.3.1 MP 2.3.2 MP 2.3.3 | Interface with MDAS Frequency of Submitting Data Format for Data Submission | 739 739 739 739 739 740 740 |
| MP 2.4 D | ata Retention by the ISO | 740 |
| MP3 CERT | IFICATION OF METERING FACILITIES | 740 |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

Original Sheet No. 729

| MP 3.1 IS | SO Metered Entities | 740 |
|------------|--|-----|
| MP 3.1.1 | Requirement to Certify | 740 |
| MP 3.1.2 | Responsibility for Obtaining Certification | 741 |
| MP 3.1.3 | | 741 |
| MP 3.1.4 | Certification by the ISO | 741 |
| MP 3.1.5 | Criteria for Certification | 741 |
| MP 3.1.6 | Certificate of Compliance | 741 |
| MP 3.1.7 | Obligation to Maintain Certification | 742 |
| MP 3.1.8 | Revocation of Certification | 742 |
| MP 3.1.9 | Changes to Certified Metering Facilities | 742 |
| | O Authorized Inspectors | 742 |
| | Published List of Inspectors | 742 |
| MP 3.2.2 | Current Certificates | 742 |
| MP 3.3 S | C Metered Entities | 743 |
| MP 3.3.1 | Requirement to Certify | 743 |
| MP 3.3.2 | SC to Ensure Certification | 743 |
| MP 3.3.3 | Certification of Meter Data Servers | 743 |
| MP 3.3.4 | Confirmation of Certification | 743 |
| | ISO's Request for Certificates | 743 |
| MP 3.3.6 | Deemed Certification | 744 |
| MP 4 AUDI | TING AND TESTING OF METERING FACILITIES | 744 |
| MP 4.1 IS | SO Metered Entities | 744 |
| MP 4.1.1 | Requirement for Audits and Tests | 744 |
| MP 4.1.2 | Failure to Comply | 744 |
| MP 4.2 S | C Metered Entities | 744 |
| | Requirement for Audit and Testing | 744 |
| MP 4.2.2 | Failure to Comply | 745 |
| MP 5 INSTA | ALLATION OF ADDITIONAL METERING FACILITIES | 745 |
| MP 5.1 IS | O Requirement to Install Additional Metering | 745 |
| MP 5.1.1 | | 745 |
| MP 5.1.2 | Requirement to Install | 745 |
| MP 5.1.3 | Obligations of ISO Metered Entity | 745 |
| MP 5.1.4 | Approval or Rejection of a Proposal for Installation | 746 |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

Original Sheet No. 730

| MP 5. ⁻ MP 5. ⁻ | • • • • • • • • • • • • • • • • • • • | 746 746 |
|--|---|------------|
| | 1.7 Rejection | 740 |
| | | |
| MP 5.2 | ISO Metered Entities' Election to Install Additional Metering | 747 |
| MP 6 M | AINTENANCE OF METERING FACILITIES | 748 |
| MP 6.1 | ISO Metered Entities | 748 |
| MP 6. | 3 | 748 |
| MP 6. | 1.2 Repairs | 748 |
| MP 6.2 | SC Metered Entities | 749 |
| MP7 ST | TANDARDS FOR METERING FACILITIES | 749 |
| MP 7.1 | ISO Metered Entities | 749 |
| MP 7. | 1.1 Obligation to Meet Standards | 749 |
| | 1.2 Applicable Standards | 749 |
| MP 7. | 1.3 Failure to Comply with Standards | 749 |
| MP 7.2 | SC Metered Entities | 749 |
| MP8 LC | OW VOLTAGE SIDE METERING | 750 |
| MP 8.1 | Requirement for ISO Approval | 750 |
| MP 8.2 | Request for Approval | 750 |
| MP 8.3 | ISO's Grounds for Approval | 750 |
| MP 8.4 | Application of Transformer and/or Line Loss Correction Factor | 750 |
| MP9 SE | ECURITY OF METER DATA | 751 |
| MP 9.1 | ISO Metered Entities | 751 |
| MP 9. | 1.1 Meter Site Security | 751 |
| MP 9. | 1.2 Third Party Access to Meters | 751 |
| MP 9. | 1.3 Third Party Access Withdrawn | 752 |
| MP 9.2 | SC Metered Entities | 752 |
| MP 9.3 | MDAS Security | 752 |
| MP 10 V | ALIDATION EDITING AND ESTIMATING OF METER DATA | 752 |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

Original Sheet No. 731

| MP 10.1 ISO Metered Entities MP 10.1.1 Obligation to Assist | 752 752 |
|--|---------------------------------|
| MP 10.2 SC Metered Entities | 752 |
| MP 11 COMMUNICATIONS | 753 |
| MP 11.1 Facilities Provided by the ISO MP 11.1.1 MDAS Master Station MP 11.1.2 WEnet MP 11.1.3 Points of Presence (POP) MP 11.1.4 Facilities Failure | 753 753 753 753 753 |
| MP 11.2 Facilities Provided by ISO Metered Entities MP 11.2.1 Telecommunications Channels MP 11.2.2 Router/Terminal Server MP 11.2.3 Meter Data Server | 753 754 754 754 |
| MP 11.3 Facilities provided by SCs | 754 |
| MP 12 METER IDENTIFICATION | 754 |
| MP 12.1 SC Metered Entities | 754 |
| MP 13 EXEMPTIONS FROM COMPLIANCE | 755 |
| MP 13.1 Authority to Grant Exemptions | 755 |
| MP 13.2 Guidelines for Granting Exemptions | 755 |
| MP 13.3 Procedure for Applying for Exemptions | 755 |
| MP 13.4 Information to be Included in the Application | 756 |
| MP 13.5 Permitted Exemptions MP 13.5.1 Exemptions from Providing Meter Data Directly to MDAS MP 13.5.2 Exemptions from Meter Standards MP 13.5.3 Exemptions from Audit, Testing or Certification | 756 756 758 760 |
| MP 14 AMENDMENTS TO THE PROTOCOL | 760 |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

| MP APPENDIX A – FAILURE OF ISO FACILIT | TIES 76 | 32 |
|---|-------------------------------|------------|
| MP APPENDIX B – CERTIFICATION PROCES | SS FOR METERING FACILITIES 76 | 3 |
| MP APPENDIX C – METER CONFIGURATION | N CRITERIA 76 | 3 7 |
| MP APPENDIX D – STANDARDS FOR METER | RING FACILITIES 77 | 71 |
| EXHIBIT 1 TO APPENDIX D - SPE ENGINEERING SPECIFICATION I ELECTRICITY REVENUE QUALIT ISO CONTROLLED GRID | FOR POLYPHASE SOLID-STATE | '3 |
| EXHIBIT 2 TO APPENDIX D - ISO CERTIFICATION OF OIL-FILLED, TRANSFORMERS FOR REVENUE | WOUND INSTRUMENT | 0 |
| MP APPENDIX E – TRANSFORMER AND LIN FACTORS | IE LOSS CORRECTION 81 | ۱6 |
| MP APPENDIX F – INSTRUMENT TRANSFOR CORRECTION FACTORS | RMER RATIO AND CABLE LOSS 82 | 29 |
| MP APPENDIX G – ISO DATA VALIDATION, I | ESTIMATION AND EDITING 83 | 37 |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

ISO METERING PROTOCOL (MP)

MP 1 OBJECTIVES, DEFINITIONS AND SCOPE

MP 1.1 Objective

The objective of this Metering Protocol is to implement ISO Tariff Section 10 in relation to the acquisition by the ISO of revenue quality meter data for Settlement and billing purposes.

MP 1.1.1 Applicable Reference Materials

This Protocol must be read and interpreted in accordance with:

- (a) Section 10 and Appendix J of the ISO Tariff;
- (b) Settlement and Billing Protocol (SABP);
- (c) American National Standards Institute (ANSI) C12 standards; and
- (d) ISO Metered Entity Meter Service Agreements and SC Meter Service Agreements.

MP 1.1.2 Role of the ISO

The ISO is responsible for establishing and maintaining the revenue meter data acquisition and processing system (MDAS). MDAS will acquire revenue quality meter data for use in the ISO's Settlement and billing process. The ISO is also responsible for:

- (a) setting standards and procedures for the registration, certification, auditing, testing and maintenance of revenue quality meters and meter data servers; and
- (b) for establishing procedures for the collection, security, validation and estimation of Meter Data.

for metered entities that are subject to the ISO Tariff.

MP 1.2 Definitions

MP 1.2.1 Master Definitions Supplement

Any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. A reference to a Section or an Appendix is to a Section or an Appendix of the ISO Tariff. References to MP are to this Protocol or to the stated paragraph of this Protocol.

MP 1.2.2 Special Definitions for this Protocol

In this Protocol, the following words and expressions shall have the meanings set opposite them:

"Authorized Users" means a person or an entity identified as an authorized user in a meter service agreement between the ISO and an ISO Metered Entity or a meter service agreement between the ISO and a SC.

Issued by: Roger Smith, Senior Regulatory Counsel

First Revised Sheet No. 734 Superseding Original Sheet No. 734

- "Certificate of Compliance" means a certificate issued by the ISO which states that the Metering Facilities referred to in the certificate satisfy the certification criteria for Metering Facilities contained in the ISO Tariff and this Protocol.
- "Check Meter" means a redundant revenue quality meter which is identical to and of equal accuracy to the primary revenue quality meter connected at the same metering point which must be certified in accordance with the ISO Tariff and this Protocol.
- "Compatible Meter Data Server" means a meter data acquisition and processing system which is capable of passing Meter Data and/or Settlement Quality Meter Data to MDAS via File Transfer Protocol (FTP) and which has been certified in accordance with this Protocol by the ISO or its authorized representative.
- "ISO Metered Entity Meter Service Agreements" means the meter service agreements between the ISO and ISO Metered Entities.
- "Line Loss Correction Factor" means the line loss correction factor as set forth in the Technical Specifications.

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Sheet No. 735 Superseding Original Sheet No. 735

- "MDAS" means the ISO's revenue meter data acquisition and processing system.
- "Meter Data Exchange Format" means the format for submitting Meter Data to the ISO which will be published by the ISO on the ISO Home Page or available on request to the Meter and Data Acquisition Manager, ISO Client Service Department.
- "Meter Data Request Format" means the format for requesting Settlement Quality Meter Data from the ISO which will be published by the ISO on the ISO Home Page or available on request to the Meter and Data Acquisition Manager, ISO Client Service Department.
- "Metering Facilities" means revenue quality meters, instrument transformers, secondary circuitry, secondary devices, meter data servers, related communication facilities and other related local equipment.
- "MP Appendix" means an appendix to this Protocol.
- "**Proposal for Installation**" means a written proposal submitted by an ISO Metered Entity to the ISO describing a proposal for the installation of additional Metering Facilities.
- "SC" means Scheduling Coordinator.
- "SC Meter Service Agreements" means the meter service agreements between the ISO and SCs.
- "Technical Specifications" means Appendices B to G (inclusive) of this Protocol.
- "Transformer Loss Correction Factor" means the transformer loss correction factor as set forth in the Technical Specifications to be applied to revenue quality meters of ISO Metered Entities which are installed on the low voltage side of step-up transformers.

MP 1.2.3 Rules of Interpretation

The following rules of interpretation and conventions have been adopted in this Protocol:

(a) Unless the context otherwise requires, if the provisions of this Protocol and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency. The provisions of the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.

Issued by: Charles F. Robinson, Vice President and General Counsel

- (b) A reference in this Protocol to a given agreement, ISO Protocol or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made.
- (c) The captions and headings in this Protocol are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.
- (d) This Protocol shall be effective as of the ISO Operations Date.
- (e) Any reference to a day, week, month or year is a reference to a calendar day, week, month or year except that a reference to a Business Day shall mean a day on which the banks in California are open for business.

MP 1.3 Scope

MP 1.3.1 Scope of Application to Parties

This Protocol applies to the following entities:

- (a) the ISO;
- (b) ISO Metered Entities; and
- (c) SCs in respect of the SC Metered Entities they represent.

If an ISO Metered Entity is also a SC, it shall be treated as an ISO Metered Entity for the purposes of this Protocol and Section 10 of the ISO Tariff. Such an ISO Metered Entity will not be required to enter into a SC Meter Service Agreement unless it represents any metered entities other than itself. A SC Meter Service Agreement entered into by an ISO Metered Entity shall only apply to those metered entities that the ISO Metered Entity represents; the SC Meter Service Agreement shall not apply to the ISO Metered Entity other than in its capacity as SC for those metered entities. If a SC Metered Entity is also a SC, it shall be treated as a SC for the purposes of this Protocol and Section 10 of the ISO Tariff and any references to entities that such a SC represents shall be deemed to include that SC itself.

MP 1.3.2 Scope of SC Responsibilities

SCs will be responsible:

- (a) for ensuring that those SC Metered Entities that they represent and which are subject to the procedures and standards set forth in the ISO Tariff and this Protocol, comply with those procedures and standards; and
- (b) for providing the ISO with Settlement Quality Meter Data in accordance with the ISO Tariff and this Protocol for those SC Metered Entities that they represent.

Issued by: Charles F. Robinson, Vice President and General Counsel

MP 1.3.3 Liability of the ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

MP 2 REVENUE METER DATA ACQUISITION AND PROCESSING SYSTEM (MDAS)

MP 2.1 Purpose of MDAS

MDAS will be used:

- (a) by the ISO to obtain and receive the revenue quality meter data of ISO Metered Entities and SC Metered Entities for Settlement and billing purposes; and
- (b) by SCs to access Settlement Quality Meter Data held by the ISO in respect of the SC Metered Entities and ISO Metered Entities that they represent.

MP 2.2 ISO Metered Entities

MP 2.2.1 Method of Providing Meter Data to ISO

Subject to any exemption granted by the ISO under MP 13, each ISO Metered Entity must provide Meter Data to MDAS by direct interface between MDAS and its revenue quality meter or Compatible Meter Data Server.

MP 2.2.2 Interface with MDAS

ISO Metered Entities will, in accordance with the ISO Tariff and this Protocol, use WEnet to interface directly with MDAS:

- in the case of Meter Data provided to MDAS from a revenue quality meter, via compatible metering communication equipment; or
- (b) via a Compatible Meter Data Server.

MP 2.2.3 Frequency of Recording and Collecting Data

Subject to any exemption granted by the ISO under MP 13, Meter Data must be recorded:

- (a) at 5-minute intervals by Loads and Generators providing Ancillary Services and/or Supplemental Energy; and
- (b) at 1-hour intervals by other ISO Metered Entities.

Meter Data will be collected regularly by MDAS in accordance with the frequency for collection determined by the ISO from time to time. The ISO may also collect Meter Data on demand. The ISO will issue such demands using voice communications. If the ISO issues a demand for Meter Data, the ISO Metered Entity from which the ISO demands that Meter Data must provide that Meter Data to the ISO within 10 minutes

Issued by: Roger Smith, Senior Regulatory Counsel

of receiving the demand from the ISO or, if that ISO Metered Entity has been granted an exemption from directly interfacing with MDAS pursuant to MP 13, within the time period specified in that exemption.

MP 2.2.4 Format for Data Submission

MP 2.2.4.1 Data Provided Directly From Meters

ISO Metered Entities must ensure that the Meter Data obtained by MDAS directly from their revenue quality meters is raw, unedited and unaggregated Meter Data in kWh and kVarh values. The ISO will be responsible for the validation, editing and estimation of that Meter Data in order to produce Settlement Quality Meter Data.

MP 2.2.4.2 Data Provided From Meter Data Servers

ISO Metered Entities or SCs representing ISO Metered Entities must ensure that the Meter Data provided to MDAS from a Compatible Meter Data Server identifies the relevant ISO Metered Entity and is raw, unedited and unaggregated Meter Data in kWh and kVarh values. The ISO will be responsible for the validation, editing and estimation of that Meter Data in order to produce Settlement Quality Meter Data.

MP 2.2.4.3 Netting

(a) Permitted Netting

ISO Metered Entities may, when providing Meter Data to the ISO pursuant to this MP 2.2, net values for Generating Unit output and auxiliary Load equipment electrically connected to that Generating Unit at the same point provided that the Generating Unit is on-line and is producing sufficient output to serve all of that auxiliary load equipment. For example, where a Generating Unit's auxiliary load equipment is served via a distribution line that is separate from the switchyard to which the Generating Unit is connected, that Generating Unit and auxiliary load equipment will not be considered to be electrically connected at the same point.

(b) Prohibited Netting

ISO Metered Entities may not net values for Generating Unit output and Load. ISO Metered Entities that serve third party Load connected to a Generating Unit's auxiliary system must add that third party Load to the Generating Unit's output. The ISO Metered Entity may add that third party Load to the Generating Unit's output either by means of a hard wire local meter connection between the metering systems of the third party Load and the Generating Unit or by requesting the ISO to use MDAS to perform the addition. The ISO Metered Entity must ensure that the third party Load has Metering Facilities that meet the standards referred to in the ISO Tariff and this Protocol.

Issued by: Roger Smith, Senior Regulatory Counsel

MP 2.2.5 Format for Data Requests

SCs may obtain Settlement Quality Meter Data relating to the ISO Metered Entities they represent by directly polling MDAS using the Meter Data Request Format. The ISO will use its best efforts to ensure that such data is made available to SCs within 5 Business Days of the relevant Trading Day.

MP 2.3 SC Metered Entities

MP 2.3.1 Method of Submitting Meter Data to ISO

SCs must submit Settlement Quality Meter Data for those SC Metered Entities they represent to MDAS when required to submit that data in order to meet the requirements of SABP and the ISO Payments Calendar.

MP 2.3.2 Interface with MDAS

SCs shall utilize a Compatible Meter Data Server to interface with MDAS via WEnet.

MP 2.3.3 Frequency of Submitting Data

SCs shall submit Settlement Quality Meter Data to the ISO when required to do so by the SABP and the ISO Payments Calendar. SCs must also submit Settlement Quality Meter Data on demand. The ISO will issue such demands using voice communications. If the ISO issues a demand for Settlement Quality Meter Data, the SC from which the ISO demands that data must submit it to the ISO within 4 hours of receiving the demand from the ISO.

MP 2.3.4 Format for Data Submission

SCs shall submit Settlement Quality Meter Data to MDAS for the SC Metered Entities they represent using the Meter Data Exchange Format. Subject to any exemption granted by the ISO under MP 13, SCs must ensure that Settlement Quality Meter Data submitted to the ISO is in intervals of:

- (a) 5 minutes for Loads and Generators providing Ancillary Services and/or Supplemental Energy; and
- (b) 1 hour for other SC Metered Entities.

Each SC shall submit Settlement Quality Meter Data for all of the SC Metered Entities that it schedules aggregated by:

- (a) Demand Zone, Load group or bus for Demand;
- (b) the relevant unit for Generation; or
- (c) the Scheduling Point for imports and exports.

The Settlement Quality Meter Data submitted by SCs may be in either kWh or MWh values.

Issued by: Charles F. Robinson, Senior Regulatory Counsel

MP 2.3.5 Netting

(a) Permitted Netting

SCs may, when providing Settlement Quality Meter Data to the ISO pursuant to this MP 2.3, net values for Generating Unit output and auxiliary load equipment electrically connected to that Generating Unit at the same point.

(b) Prohibited Netting

SCs may not net values for Generating Unit output and Load. SCs representing SC Metered Entities that serve third-party Load connected to the auxiliary system of a Generating Unit must ensure that those SC Metered Entities add the Energy consumed by such third-party Load to that Generating Unit's output so as to ensure proper Settlement of that Generating Unit's gross output.

MP 2.3.6 Format for Data Requests

SCs may obtain Settlement Quality Meter Data relating to the SC Metered Entities they represent by requesting extracts from MDAS using the Meter Data Request Format. The ISO will ensure that such data is made available in a timely manner.

MP 2.4 Data Retention by the ISO

The ISO will maintain a record of all:

- (a) Meter Data provided to it;
- (b) Settlement Quality Meter Data provided to it; and
- (c) Settlement Quality Meter Data produced by it,

for a period of 18 months on site at the ISO's facilities and for a period of 10 years in the ISO's archive storage facilities. The ISO will, on reasonable notice, provide an SC with access to Meter Data or Settlement Quality Meter Data provided that the SC requesting access represented the entity that submitted that data at the time the data was submitted to the ISO.

MP 3 CERTIFICATION OF METERING FACILITIES

MP 3.1 ISO Metered Entities

MP 3.1.1 Requirement to Certify

Subject to any exemption granted by the ISO under MP 13, the ISO will not accept Meter Data from an ISO Metered Entity unless that Meter Data is produced by Metering Facilities that are certified in accordance with this Protocol and the ISO Tariff and have a current Certificate of Compliance.

Issued by: Roger Smith, Senior Regulatory Counsel

MP 3.1.2 Responsibility for Obtaining Certification

An ISO Metered Entity that is required to make Meter Data available to the ISO under this Protocol or the ISO Tariff is responsible for having the Metering Facilities that it will use to produce that Meter Data certified by the ISO or an ISO Authorized Inspector in accordance with the ISO Tariff and this Protocol.

MP 3.1.3 Requesting Certification

An ISO Metered Entity seeking certification of its Metering Facilities shall independently engage an ISO Authorized Inspector to perform certification of its Metering Facilities. An ISO Metered Entity may request the ISO to perform the certification of its Metering Facilities if it would be impractical or impossible for that ISO Metered Entity to engage an ISO Authorized Inspector to perform the certification. The ISO may refuse any such request by an ISO Metered Entity if it is of the opinion that it is not impractical or impossible for that ISO Metered Entity to engage an ISO Authorized Inspector.

MP 3.1.4 Certification by the ISO

All requests made to the ISO to perform the certification of Metering Facilities must be made in accordance with the Technical Specifications and be accompanied by the documents referred to in the Technical Specifications. If the ISO agrees to perform the certification of Metering Facilities, the ISO and that ISO Metered Entity will agree the terms and conditions on which the ISO will undertake the certification including the assistance to be provided by the ISO Metered Entity, the responsibility for costs and the indemnities to be provided.

MP 3.1.5 Criteria for Certification

Subject to any exemption granted by the ISO under MP 13, the criteria for certifying the Metering Facilities of ISO Metered Entities pursuant to the ISO Tariff and this Protocol are the criteria set forth in the Technical Specifications.

MP 3.1.6 Certificate of Compliance

If the Metering Facilities satisfy the certification criteria (after taking into account any exemptions to the certification criteria granted by the ISO), the ISO will:

- (a) issue a Certificate of Compliance in respect of those Metering Facilities: and
- (b) provide the original Certificate of Compliance to the ISO Metered Entity that requested the certification of those Metering Facilities.

Issued by: Roger Smith, Senior Regulatory Counsel

MP 3.1.7 Obligation to Maintain Certification

ISO Metered Entities must ensure that their Metering Facilities continue to comply with the certification criteria referred to in the ISO Tariff and this Protocol.

MP 3.1.8 Revocation of Certification

The ISO may revoke in full or in part any Certificate of Compliance if:

- (a) it has reasonable grounds to believe that all or some of the Metering Facilities covered by that Certificate of Compliance no longer meet the certification criteria for Metering Facilities contained in the ISO Tariff or this Protocol; and
- (b) it has given written notice to the relevant ISO Metered Entity stating that it does not believe that the identified Metering Facilities meet the certification criteria (including the reasons for that belief) and that ISO Metered Entity fails to satisfy the ISO, within the time period specified in the ISO's notice, that the Metering Facilities meet the certification criteria.

If the ISO revokes in full or part a Certificate of Compliance, the relevant ISO Metered Entity may seek recertification of the relevant Metering Facilities by requesting certification in accordance with this MP 3.1. Such request must indicate that it relates to Metering Facilities in respect of which the ISO has previously revoked a Certificate of Compliance.

MP 3.1.9 Changes to Certified Metering Facilities

The ISO's approval must be obtained before any modifications or changes are made to any Metering Facilities of an ISO Metered Entity which have been certified pursuant to the ISO Tariff or this Protocol. The ISO may, at its discretion, require those Metering Facilities to be recertified.

MP 3.2 ISO Authorized Inspectors

MP 3.2.1 Published List of Inspectors

The ISO will publish on the ISO Home Page, for informational purposes only, a list of the ISO Authorized Inspectors and details of the procedure for applying to become an ISO Authorized Inspector. The ISO will, on request, provide a copy of that list to entities that do not have access to the ISO Home Page.

MP 3.2.2 Current Certificates

It is the responsibility of the relevant ISO Metered Entity to ensure that any inspector it engages to undertake the certification of its Metering Facilities holds a current certificate of approval issued by the ISO which authorizes that inspector to carry out the duties of an ISO Authorized Inspector.

Issued by: Roger Smith, Senior Regulatory Counsel

MP 3.3 SC Metered Entities

MP 3.3.1 Requirement to Certify

Subject to any exemption granted by the ISO under MP 13, the ISO will not accept Settlement Quality Meter Data relating to a SC Metered Entity unless it is produced by Metering Facilities that are certified in accordance with:

- (a) the certification or similar criteria prescribed by the relevant Local Regulatory Authority; or
- (b) if that Local Regulatory Authority has not prescribed any certification or similar criteria for Metering Facilities, the certification criteria prescribed by this Protocol and those Metering Facilities have a current Certificate of Compliance.

MP 3.3.2 SC to Ensure Certification

If the relevant Local Regulatory Authority has not prescribed any certification criteria for the Metering Facilities of a SC Metered Entity, the SC representing that SC Metered Entity must promptly notify the ISO in writing that no such criteria have been prescribed. That SC will then be responsible for ensuring that the SC Metered Entities it represents obtain and maintain Certificates of Compliance in respect of all of the Metering Facilities of those SC Metered Entities in accordance with MP 3.1. SCs must engage an ISO Authorized Inspector to perform the certification of any Metering Facilities that are to be certified under this Protocol or the ISO Tariff.

MP 3.3.3 Certification of Meter Data Servers

Subject to any exemption granted by the ISO under MP 13, the ISO will not accept Settlement Quality Meter Data relating to a SC Metered Entity from a meter data server unless that meter data server is a Compatible Meter Data Server.

MP 3.3.4 Confirmation of Certification

On the written request of the ISO, each SC must give the ISO written confirmation that the Metering Facilities of each SC Metered Entity that it represents are certified in accordance with either the criteria of the relevant Local Regulatory Authority or the criteria prescribed by this Protocol within 5 Business Days of receiving a request from the ISO.

MP 3.3.5 ISO's Request for Certificates

The ISO may require SCs to provide it with a copy of any certificate issued by a Local Regulatory Authority in respect of the Metering Facilities of each SC Metered Entity they represent. The SC must provide to the ISO a copy of such certificate within 5 Business Days of receiving the request for the certificate from the ISO.

Issued by: Charles F. Robinson, Vice President and General Counsel

MP 3.3.6 Deemed Certification

In accordance with Section 10.6.6.2 of the ISO Tariff, those revenue quality meters of SC Metered Entities that are subject to certification pursuant to this Protocol and the ISO Tariff and which were installed and operational as of the ISO Operations Date will be deemed to be certified for the purposes of the ISO Tariff and this Protocol. Revenue quality meters that have been fully installed as of the ISO Operations Date but which are not operational as of that date because they were undergoing maintenance or repairs will also be deemed to be certified in accordance with the ISO Tariff and this Protocol.

MP 4 AUDITING AND TESTING OF METERING FACILITIES

MP 4.1 ISO Metered Entities

MP 4.1.1 Requirement for Audits and Tests

Subject to any exemption granted by the ISO under MP 13, the Metering Facilities of ISO Metered Entities are subject to audit and testing by the ISO, or its authorized representative, in accordance with Section 10.5.1 of the ISO Tariff and this Protocol. The ISO will have the right to either conduct any audit or test it considers necessary or to witness such audit or test carried out by the ISO Metered Entity or an ISO Authorized Inspector engaged by the ISO Metered Entity or the ISO to carry out those audits or tests.

MP 4.1.2 Failure to Comply

The rights, powers, authorities and measures available to the ISO in respect of any failure by an ISO Metered Entity to comply with the ISO's audit or test procedures will be set forth in the ISO Metered Entity Meter Service Agreements.

MP 4.2 SC Metered Entities

MP 4.2.1 Requirement for Audit and Testing

(a) Audit and Testing by SC

Each SC shall at least annually conduct (or engage an independent, qualified entity to conduct) audits and tests of the Metering Facilities of the SC Metered Entities that it represents and the Meter Data provided to the SC in order to ensure compliance with all applicable requirements of any relevant Local Regulatory Authority. SCs shall undertake any other actions that are reasonable necessary to ensure the accuracy and integrity of the Settlement Quality Meter Data provided by them to the ISO.

(b) Audit and Testing by ISO

Subject to any applicable Local Regulatory Authority requirements, the Metering Facilities and data handling and processing procedures of SCs and SC Metered Entities are subject to audit and testing by the ISO or an ISO Authorized Inspector in accordance with Section

Issued by: Charles F. Robinson, Vice President and General Counsel

Superseding Sub. First Revised Sheet No. 745

10.6.7.7 of the ISO Tariff and this Protocol. Subject to any applicable Local Regulatory Authority requirements, the ISO will have the right to either conduct any audit or test it considers necessary or to witness such audit or test carried out by the SC, SC Metered Entity or an ISO Authorized Inspector engaged by the SC, SC Metered Entity or the ISO to carry out those audits or tests.

MP 4.2.2 Failure to Comply

The rights and measures available to the ISO with respect to any failure by a SC or a SC Metered Entity to comply with any applicable audit or test procedures contained in the ISO Tariff and this Protocol, will be set forth in the SC Meter Service Agreements.

MP 5 INSTALLATION OF ADDITIONAL METERING FACILITIES

MP 5.1 ISO Requirement to Install Additional Metering

MP 5.1.1 ISO Authority to Require Additional Metering Facilities

The ISO has authority under Section 10.2.2 the ISO Tariff to require an ISO Metered Entity to install Metering Facilities in addition to those Metering Facilities on the ISO Controlled Grid at the ISO Operations Date. In directing the addition of meters and metering system components that would impose increased costs on an ISO Metered Entity, the ISO shall give due consideration to whether the expected benefits of such equipment are sufficient to justify such increased costs. An ISO Metered Entity may not commence installing those additional Metering Facilities until the ISO has approved its Proposal for Installation.

MP 5.1.2 Requirement to Install

If the ISO determines that there is a need to install additional Metering Facilities on the ISO Controlled Grid, it will notify the relevant ISO Metered Entity of that need. The ISO's notice to that ISO Metered Entity will include the following information:

- (a) the location of the Meter Point at which the additional Metering Facilities are required;
- (b) the date by which the ISO Metered Entity must install the relevant Metering Facilities;
- (c) the reason for the need to install the additional metering Facilities; and
- (d) any other information that the ISO considers relevant.

MP 5.1.3 Obligations of ISO Metered Entity

An ISO Metered Entity that is notified by the ISO that it is required to install additional Metering Facilities must:

(a) give the ISO written confirmation of receipt of that notice within 3 Business Days of receiving that notice;

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Sheet No. 745A Superseding Sub. Original Sheet No. 745A

(b) submit a Proposal for Installation to the ISO within 45 Business Days of receiving that notice. The Proposal for Installation must set out the following information:

Issued by: Charles F. Robinson, Vice President and General Counsel

- i. a description of the proposed Metering Facilities to be installed (which shall include all relevant schematic drawings and one-line drawings);
- ii. a proposed timetable for the installation; and
- iii. any other information requested by the ISO in the notice referred to in MP 5.1.2.

MP 5.1.4 Approval or Rejection of a Proposal for Installation

The ISO may either:

- (a) unconditionally approve;
- (b) conditionally approve; or
- (c) reject,

a Proposal for Installation.

MP 5.1.5 Unconditional Approval

If the ISO unconditionally approves a Proposal for Installation, it will promptly notify the ISO Metered Entity that the Proposal for Installation has been approved. The ISO Metered Entity shall then commence installation of the Metering Facilities in accordance with the Proposal for Installation.

MP 5.1.6 Conditional Approval

(a) Notification of Conditional Approval

If the ISO conditionally approves a Proposal for Installation, it will promptly notify the ISO Metered Entity that the Proposal for Installation has been conditionally approved and set out in that notice the conditions on which approval is granted and the time period in which each such condition must be satisfied by the ISO Metered Entity.

(b) Ability to Satisfy Conditions

If the ISO Metered Entity disputes any condition imposed by the ISO, the ISO Metered Entity must immediately notify the ISO of its concerns and provide the ISO with the reasons for its concerns. If the ISO Metered Entity gives the ISO such a notice, the ISO may amend or waive any of the conditions on which it granted its approval or it may require the ISO Metered Entity to satisfy other conditions. The ISO and the ISO Metered Entity will use all reasonable good faith efforts to reach agreement, and in the absence of agreement either entity may refer the dispute to the ISO ADR Procedures.

(c) Notification of Satisfaction of Conditions

The ISO Metered Entity must promptly notify the ISO when each condition in the approval has been satisfied and provide to the ISO any information reasonably requested by the ISO as evidence that such condition has been satisfied.

Issued by: Roger Smith, Senior Regulatory Counsel

(d) Confirmation of Satisfaction of Conditions

If the ISO determines that a condition in the approval of the Proposal for Installation has been satisfied, it will give the ISO Metered Entity written confirmation that the condition has been satisfied.

(e) Unsatisfied Conditions

If the ISO determines that a condition has not been satisfied after having received notice from an ISO Metered Entity pursuant to MP 5.1.6(c), the ISO will notify the ISO Metered Entity that it does not consider the condition satisfied and shall set out in that notice the reason(s) that it does not consider the condition satisfied. If, after using all reasonable good faith efforts, the ISO and the ISO Metered Entity are unable to agree on whether that condition is satisfied, either entity may refer the dispute to the ISO ADR Procedures.

MP 5.1.7 Rejection

If the ISO rejects a Proposal for Installation, it will promptly notify the ISO Metered Entity that the Proposal for Installation has been rejected and set out in that notice the reason for its rejection. The ISO Metered Entity must submit to the ISO a revised Proposal for Installation within 14 Business Days of receiving such notice of rejection. If the ISO rejects for a second time a Proposal for Installation submitted by an ISO Metered Entity in respect of the same or similar notice issued by the ISO under MP 5.1.2, the ISO and the ISO Metered Entity will use all reasonable good faith efforts to reach agreement on the requirements and disputed items and in the absence of agreement either entity may refer the dispute to the ISO ADR Procedures.

MP 5.2 ISO Metered Entities' Election to Install Additional Metering

In accordance with Section 10.2.2 of the ISO Tariff, an ISO Metered Entity may choose to install additional metering, including Check Meters. If an ISO Metered Entity installs such additional metering, such metering must, unless the ISO agrees otherwise:

- (a) be installed and maintained at the ISO Metered Entity's cost;
- (b) be located on the ISO Metered Entity's side of any primary meter; and
- (c) not interfere with the accuracy of any primary meter and, if that primary meter is directly polled by the ISO, the ISO's ability to directly poll that meter.

Any Meter Data produced by any such additional metering may be used by the ISO for Settlement and billing purposes in the event of the failure, or during tests or repairs of, the primary meter provided that such additional metering has a current Certificate of Compliance, the ISO Metered Entity gives the ISO prior verbal notice that such meter will be used and the period for which it will be used and, if the primary meter is directly polled by the ISO, the additional metering must also be capable of being directly polled by the ISO.

Issued by: Charles F. Robinson, Vice President and General Counsel

MP 6 MAINTENANCE OF METERING FACILITIES

MP 6.1 ISO Metered Entities

MP 6.1.1 Duty to Maintain Metering Facilities

ISO Metered Entities must maintain their Metering Facilities so that those Metering Facilities continue to meet the standards prescribed by the ISO Tariff (including Appendix J) and this Protocol.

If the Metering Facilities of an ISO Metered Entity require maintenance in order to ensure that they operate in accordance with the requirements of the ISO Tariff and this Protocol, the ISO Metered Entity shall notify the ISO by telephone or other means specified by the ISO of the need for such maintenance. The ISO Metered Entity must also inform the ISO of the time period during which such maintenance is expected to occur. During that period, the ISO Metered Entity or its authorized representative shall be entitled to access those sealed Metering Facilities to which access is required in order to undertake the required maintenance.

During periods for which no Meter Data is available from a meter which has a current Certificate of Compliance, the ISO will substitute estimated meter data for that ISO Metered Entity using the estimation procedures referred to in MP 10.1. That estimated meter data will be used by the ISO in its Settlement and billing process.

MP 6.1.2 Repairs

If a revenue quality meter of an ISO Metered Entity requires repairs to ensure that it operates in accordance with the requirements of the ISO Tariff and this Protocol, the ISO Metered Entity must immediately notify the ISO of the need for repairing that meter and must ensure that those repairs are completed:

- (a) where there is no Check Meter installed, within 12 hours of the notification to the ISO; or
- (b) where there is a Check Meter installed, within 5 Business Days of the notification to the ISO.

During periods for which no Meter Data is available from a meter which has a current Certificate of Compliance, the ISO will substitute estimated meter data for that ISO Metered Entity using the estimation procedures referred to in MP 10.1. That estimated meter data will be used by the ISO in its Settlement and billing process.

In respect of Metering Facilities (other than a revenue quality meter) of an ISO Metered Entity that need repair, the ISO Metered Entity shall notify the ISO of that need and, after consultation with the ISO Metered Entity, the ISO will set the time period in which such repairs must be completed.

Issued by: Charles F. Robinson, Vice President and General Counsel

MP 6.2 SC Metered Entities

SCs will be required to ensure that the SC Metered Entities that they represent maintain their Metering Facilities in accordance with the requirements of the relevant Local Regulatory Authority. If a SC Metered Entity's Local Regulatory Authority has not set any requirements in relation to the maintenance of its Metering Facilities, the SC representing that SC Metered Entity must ensure that it maintains its Metering Facilities in a manner that ensures that those Metering Facilities continue to meet the standards set forth in the ISO Tariff (including Appendix J) and this Protocol.

MP 7 STANDARDS FOR METERING FACILITIES

MP 7.1 ISO Metered Entities

MP 7.1.1 Obligation to Meet Standards

ISO Metered Entities must ensure that their Metering Facilities comply with the standard and accuracy requirements referred to in Section 10.2.3 of the ISO Tariff and this Protocol. In relation to revenue quality meters, the ISO will publish on the ISO Home Page, for information purposes and without liability on the part of the ISO, a list of the types and manufacturers of revenue quality meters that have been independently certified as meeting the standards for revenue quality meters referred to in the ISO Tariff and this Protocol.

MP 7.1.2 Applicable Standards

ISO Metered Entities must ensure that their Metering Facilities comply with the standards for Metering Facilities referred to in:

- (a) Appendix J to the ISO Tariff; and
- (b) the Technical Specifications.

MP 7.1.3 Failure to Comply with Standards

The rights, powers, authorities and measures available to the ISO with respect to any failure by ISO Metered Entities to comply with the standards for Metering Facilities referred to in the ISO Tariff and this Protocol, will be set forth in the ISO Metered Entity Meter Service Agreements.

MP 7.2 SC Metered Entities

SCs will be required to ensure that the SC Metered Entities that they represent comply with the standards for Metering Facilities of the relevant Local Regulatory Authority. If a SC Metered Entity's Local Regulatory Authority has not set any requirements in relation to standards for Metering Facilities, the SC representing that SC Metered Entity must ensure that it complies with the standards for Metering Facilities referred to in the ISO Tariff (including Appendix J) and this Protocol.

Issued by: Roger Smith, Senior Regulatory Counsel

MP 8 LOW VOLTAGE SIDE METERING

MP 8.1 Requirement for ISO Approval

After the ISO Operations Date, ISO Metered Entities may only install revenue quality meters on the low voltage side of step-up transformers if they have obtained the prior approval of the ISO in accordance with Section 10.4 of the ISO Tariff and this Protocol. ISO Metered Entities that have installed low voltage side metering, whether such installation was before or after the ISO Operations Date, shall apply the Transformer Loss Correction Factor in accordance with MP 8.4.

MP 8.2 Request for Approval

If an ISO Metered Entity wishes to install low voltage side metering, it shall submit a written request to the ISO. That ISO Metered Entity must:

- request approval to apply the Transformer and/or Line Loss Correction Factor to its revenue quality meter or request approval to have MDAS apply the Transformer and/or Line Loss Correction Factor;
- (b) provide detailed reasons to support the request for low side metering;
- (c) provide all of the information in relation to the Transformer and/or Line Loss Correction Factor required by the Technical Specifications; and
- (d) any other information reasonably requested by the ISO.

MP 8.3 ISO's Grounds for Approval

The ISO shall approve a request made under MP 8.2 only if the ISO is satisfied that adequate accuracy and security of Meter Data obtained can be assured in accordance with Section 10.4 of the ISO Tariff. The ISO's rejection of such a request may be referred to the ISO ADR Procedures if, after using all reasonable good faith efforts, the ISO and an ISO Metered Entity are unable to reach agreement.

MP 8.4 Application of Transformer and/or Line Loss Correction Factor

ISO Metered Entities will apply the Transformer and/or Line Loss Correction Factor as set forth in the Technical Specifications. If the ISO has approved a request from an ISO Metered Entity for MDAS to apply the Transformer and/or Line Loss Correction Factor, MDAS will apply the Transformer and/or Line Loss Correction Factor set forth in the Technical Specifications. If MDAS is used to apply the Transformer and/or Line Loss Correction Factor, the ISO may require the ISO Metered Entity to pay the reasonable costs incurred by it in applying the Transformer and/or Line Loss Correction Factor.

Issued by: Roger Smith, Senior Regulatory Counsel

MP 9 SECURITY OF METER DATA

MP 9.1 ISO Metered Entities

ISO Metered Entities will either submit Meter Data directly to MDAS via Compatible Meter Data Servers or their revenue quality meters will be directly polled by MDAS.

MP 9.1.1 Meter Site Security

Metering Facilities of ISO Metered Entities must meet the following requirements:

- (a) secondary devices that could have any impact on the performance of the Metering Facilities must be sealed; and
- (b) all Metering Facilities (including terminal servers and multiport devices) must be sealed.

MP 9.1.2 Third Party Access to Meters

(a) Local Access

If an ISO Metered Entity desires to grant a third party local access to its revenue quality meters, those meters must be equipped with ISO certified RS-232 or optical ports and software. The ISO may set the password and any other security requirements for locally accessing the revenue quality meters of ISO Metered Entities so as to ensure the security of those meters and their Meter Data. The ISO may alter the password and other requirements for locally accessing those meters from time to time as it determines necessary. The ISO must provide ISO Metered Entities with the current password and other requirements for locally accessing their revenue quality meters. ISO Metered Entities must not give a third party local access to its revenue quality meters or disclose to that third party the password to its revenue quality meters without the ISO's prior approval which shall not unreasonably be withheld. ISO Metered Entities will be responsible for ensuring that a third party approved by the ISO to access its revenue quality meters only accesses the data it is approved to access and that the data are only accessed for the purposes for which the access was approved.

(b) Remote Access

The ISO may set the password and any other security requirements for remotely accessing the revenue quality meters of ISO Metered Entities so as to ensure the security of those meters and their Meter Data. The ISO will alter the password and other requirements for remotely accessing those meters from time to time as it determines necessary. The ISO must provide ISO Metered Entities with the current password and other requirements for remotely accessing their revenue quality meters. ISO Metered Entities must not give a third party remote access to its revenue quality meters or disclose to that third party the password to its revenue quality meters without the ISO's prior approval which shall not unreasonably be withheld. ISO Metered Entities will be

Issued by: Roger Smith, Senior Regulatory Counsel

responsible for ensuring that a third party approved by the ISO to access its revenue quality meters only accesses the data it is approved to access and that the data are only accessed for the purposes for which the access was approved.

MP 9.1.3 Third Party Access Withdrawn

If, in the reasonable opinion of the ISO, access granted to a third party by an ISO Metered Entity in any way interferes or impedes with the ISO's ability to poll any revenue quality meter, the ISO may require that ISO Metered Entity to immediately withdraw any access granted to a third party.

MP 9.2 SC Metered Entities

SCs must use Compatible Meter Data Servers to submit Settlement Quality Meter Data to the ISO for those SC Metered Entities that they represent. SCs shall provide the ISO with the current password and any other information it needs to access, at all times, the Compatible Meter Data Servers of those SCs so as to ensure the security of those servers. Each SC must also provide the ISO with the WEnet protocol address of the SC's file server with which MDAS will interface to obtain or provide Settlement Quality Meter Data.

MP 9.3 MDAS Security

The ISO will provide to entities that are permitted to access MDAS, the access password and any other requirements needed to access MDAS. The ISO must maintain the security and integrity of Meter Data and Settlement Quality Meter Data received by MDAS.

MP 10 VALIDATION, EDITING AND ESTIMATING OF METER DATA

MP 10.1 ISO Metered Entities

Subject to any exemption granted by the ISO under MP 13, the raw Meter Data which ISO Metered Entities submit to the ISO will be processed by MDAS using the validation, editing and estimation procedures published on the ISO Home Page from time to time in order to produce Settlement Quality Meter Data.

MP 10.1.1 Obligation to Assist

At the request of the ISO, ISO Metered Entities shall assist the ISO in correcting or replacing defective data and in detecting and correcting underlying causes for such defects. Such assistance shall be rendered in a timely manner so that the Settlement process is not delayed.

MP 10.2 SC Metered Entities

SCs are responsible for providing the ISO with Settlement Quality Meter Data for the SC Metered Entities they represent and for ensuring that any validation, editing and estimation requirements of any relevant Local Regulatory Authority or the ISO (where the SC Metered Entity is subject to the ISO requirements for validation, editing and estimation)

Issued by: Roger Smith, Senior Regulatory Counsel

First Revised Sheet No. 753 Superseding Original Sheet No. 753

have been properly implemented. The ISO will not perform any validation, editing or estimating on the Settlement Quality Meter Data it receives from SCs.

MP 11 COMMUNICATIONS

MP 11.1 Facilities Provided by the ISO

The ISO will provide the facilities referred to in this MP 11.1 to acquire Meter Data from ISO Metered Entities and receive Settlement Quality Meter Data from SCs.

MP 11.1.1 MDAS Master Station

The MDAS master station will have a redundant configuration. The primary master station is located in Folsom, the redundant master station is located in Alhambra.

MP 11.1.2 WEnet

MDAS will use WEnet to acquire Meter Data from ISO Metered Entities and receive Settlement Quality Metered Data from SCs. WEnet is an ISO-provided Wide Area Network (WAN). WEnet will use the TCP/IP networking protocol.

MP 11.1.3 Points of Presence (POP)

WEnet will have a Point of Presence (POP) in the general vicinity of most ISO Metered Entities and SCs. The POP is the interface point between WEnet and the facilities provided by ISO Metered Entities and SCs pursuant to MP 11.2 and MP 11.3.

MP 11.1.4 Facilities Failure

In the event that the primary or redundant MDAS master station or WEnet fails, the procedures referred to in Appendix A will be followed by the ISO, ISO Metered Entities and SCs.

MP 11.2 Facilities Provided by ISO Metered Entities

ISO Metered Entities must provide the telecommunication facilities referred to in MP 11.2.1 to MP 11.2.3 inclusive to connect their Compatible Meter Data Servers to the WEnet POP.

Issued by: Charles F. Robinson, Vice President and General Counsel

MP 11.2.1 Telecommunications Channels

The ISO Metered Entity must provide one of the following types of telecommunication channels from the WEnet POP to its Compatible Meter Data Servers:

- (a) Digital leased line;
- (b) ISDN channel; or
- (c) frame relay channel.

With the ISO's approval, the revenue quality meters of two or more ISO Metered Entities may be served by one telecommunications channel.

MP 11.2.2 Router/Terminal Server

ISO Metered Entities must provide router/terminal servers to interface the telecommunication channels to revenue quality meters. Each revenue quality meter will use an RS-232 interface nominally operating at 9600 bits/second.

MP 11.2.3 Meter Data Server

ISO Metered Entities must use a Compatible Meter Data Server to interface with MDAS.

MP 11.3 Facilities provided by SCs

SCs must use a Compatible Meter Data Server to interface with MDAS.

MP 12 METER IDENTIFICATION

MP 12.1 SC Metered Entities

If a SC Metered Entity is required to identify its revenue quality meters by the relevant:

- (a) Local Regulatory Authority; or
- (b) UDC.

then the SC representing that SC Metered Entity must, at the ISO's request, provide the ISO with a copy of that information within 5 Business Days of a request by the ISO in a format to be prescribed by the ISO.

If a SC Metered Entity is not required by either the relevant Local Regulatory Authority or UDC to identify its revenue quality meters, the SC representing that SC Metered Entity shall maintain an accurate record of the revenue quality meter of each of the SC Metered Entities that it represents from time to time. The record maintained by SCs must include the information set out in the Technical Specifications. The SC must, at the ISO's request, provide the ISO with a copy of any information contained in that record within 5 Business Days of a request by the ISO in a format to be prescribed by the ISO.

Issued by: Charles F. Robinson, Vice President and General Counsel

MP 13 EXEMPTIONS FROM COMPLIANCE

MP 13.1 Authority to Grant Exemptions

In addition to the specific exemptions granted under the ISO Tariff, the ISO has the authority under the ISO Tariff to grant exemptions from compliance with certain requirements imposed by the ISO Tariff and this Protocol.

MP 13.2 Guidelines for Granting Exemptions

The ISO will use the following guidelines when considering applications for exemptions from compliance with the ISO Tariff and this Protocol.

(a) Publication of Guidelines

The ISO will from time to time publish the general guidelines that it may use when considering applications for exemptions so as to achieve consistency in its reasoning and decision making and to give prospective applicants an indication of whether an application will be considered favorably.

(b) Publication of Exemption Applications

The ISO will promptly publish on the ISO Home Page a description of each application it receives for an exemption.

(c) Publication of Decision

The ISO will publish on the ISO Home Page details of whether the application was approved or rejected by it and, if the ISO considers it appropriate, the reasons for rejecting the application.

(d) Class Exemptions

In addition to exemptions granted to individual entities, the ISO may grant exemptions that will apply to a class of entities. The ISO may grant class exemptions whether or not it has received any application for an exemption. The ISO will publish details of the class exemptions it has granted on the ISO Home Page.

MP 13.3 Procedure for Applying for Exemptions

All applications to the ISO for exemptions from compliance with the requirements of the ISO Tariff or this Protocol must be made in writing addressed to the Meter and Data Acquisition Manager, Client Service Department. The ISO will confirm receipt of each application it receives within 3 Business Days of receiving the application. The ISO will decide whether to grant the exemption within 45 Business Days of receiving the application. At any time during that period, the ISO may require the applicant to provide additional information in support of its application. The applicant must provide such additional information to the ISO within 5 Business Days of receiving the request for additional information or within such other period as the ISO may notify to the applicant. If the ISO makes a request for additional information more than 40 Business Days after the date on which it received the

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Sheet No. 756 Superseding Original Sheet No. 756

application, the ISO will have an additional 7 Business Days after receiving that additional information in which to consider the application. If the applicant does not provide the additional information requested, the ISO may refuse the application in which case it will notify the applicant that its application has been rejected for failure to provide the additional information.

MP 13.4 Information to be Included in the Application

The application submitted to the ISO must provide:

- a detailed description of the exemption sought (including specific reference to the relevant section(s) of the ISO Tariff and/or this Protocol giving the ISO authority to grant the exemption) and the facilities to which the exemption will apply;
- (b) a detailed statement of the reason for seeking the exemption (including any supporting documentation);
- (c) details of the entity(s) (if any) to which the exemption will apply;
- (d) details of the location (if any) to which the exemption will apply;
- details of the period of time for which the exemption will apply (including the proposed start and finish dates of that period);
 and
- (f) any other information requested by the ISO.

MP 13.5 Permitted Exemptions

MP 13.5.1 Exemptions from Providing Meter Data Directly to MDAS

(a) General

The ISO has the authority under Section 10.2.5 of the ISO Tariff to exempt ISO Metered Entities from the requirement to make Meter Data directly available to the ISO via MDAS.

In addition to the specific exemptions provided under MP 13.5.1(b), the ISO may, at its discretion, grant such an exemption where it considers the requirement to install communication links (or related facilities) between the ISO Metered Entity and WEnet to allow the ISO to directly poll that ISO Metered Entity would be unnecessary, impractical or uneconomic.

(b) Specific Exemptions Available

i. Tie Points

Meters located at tie points are exempted from the requirement that they be directly polled by the ISO provided that the meters at those tie points are revenue quality and they provide hourly, raw Meter Data to the ISO's Power Management System.

Issued by: Charles F. Robinson, Vice President and General Counsel

The entities responsible for Tie Point Meters must designate a primary meter and the entity responsible for providing the relevant Meter Data to the ISO. Meter Data from any other meter located at that tie point may be provided to the ISO in the event that the primary meter is unable to provide Meter Data to the ISO.

Existing Tie Point Meters will be exempt from the metering standards referred to in this Protocol and the ISO Tariff, if such meters are only used to measure bidirectional Energy.

ii. Generation not Providing Regulation

ISO Metered Entities that are Generators or Participating Generators that are not directly connected to the ISO Controlled Grid and which do not provide Regulation may request the ISO for an exemption from the requirement that they be directly polled by the ISO in which case they will be treated as SC Metered Entities for the purposes of this Protocol and the ISO Tariff.

iii. SCs inability to directly poll MDAS

If a SC does not have the ability as at the ISO Operations Date to directly poll MDAS for the Settlement Quality Meter Data of the ISO Metered Entities that it represents, that SC shall have a period of 12 months from the ISO Operations Date in which to install the necessary equipment to enable it to directly poll MDAS. During the period in which a SC is unable to directly poll MDAS, that SC will be responsible for providing the ISO with Settlement Quality Meter Data for its ISO Metered Entities in accordance with this Protocol and the ISO Tariff.

iv. Generator Profiling

The ISO may permit Generators and Participating Generators with Generating Units of less than 1 MW to use generator profiles, provided that such profiles are reconciled against revenue quality cumulative meters and the ISO has given prior approval to the use of the proposed generator profile. The revenue quality meters used by such Generators and Participating Generators will not be required to have a current Certificate of Compliance at the ISO Operations Date. However, such meters maybe required to have a Certificate of Compliance within a time period prescribed by the ISO after consultation with the relevant Generator or Participating Generator.

Issued by: Roger Smith, Senior Regulatory Counsel

v. Small Remote Generators

Remote Generators of less than 10 MW and capacity factors of less than 20% over the past three years, may be granted an exemption from the requirement to be directly polled by the ISO provided that the ISO is able to receive Meter Data for that Generator from a Compatible Meter Data Server in accordance with this Protocol.

MP 13.5.2 Exemptions from Meter Standards

(a) General

The ISO has the authority under Section 10.5.2 of the ISO Tariff to exempt ISO Metered Entities from the requirement to comply with the meter standards referred to in the ISO Tariff and this Protocol.

(b) Specific Exemptions Available

i. Data Storage for Existing Meters

Revenue quality meters installed as at the ISO Operations Date are required to have 30 days data storage capacity (new revenue quality meters are required to have 60 days data storage capacity). Existing revenue quality meters that otherwise comply with the meter standards referred to in the ISO Tariff and this Protocol but which do not have 30 days data storage will be exempted from that requirement if there is alternative time stamped meter data storage of 30 days or more.

ii. Voltage Transformers

ISO Metered Entities will be exempt from the requirement to install Voltage Transformers (VT) at 500 kV and higher voltage levels provided that those ISO Metered Entities install Capacity Coupled Voltage Transformers (CCVT) that meet the metering standards referred to in the ISO Tariff and this Protocol. The ISO Metered Entity must establish a testing program to ensure that the CCVT remains within the ISO's accuracy requirements. A copy of such test program must be supplied to the ISO and the ISO may require amendments and/or additions to that program that it reasonably believes are necessary to ensure the accuracy of the CCVT.

Issued by: Roger Smith, Senior Regulatory Counsel

iii. Loss Correction Factors

The ISO may grant an ISO Metered Entity an exemption from compliance with the metering standards referred to in this Protocol and the ISO Tariff if, in the ISO's sole discretion, applicable loss correction factors can be applied to existing meters without any materially adverse effect on the accuracy or security of the Meter Data obtained from such meters.

iv. 5 Minute Interval Data

Generators that are ISO Metered Entities and that provide Ancillary Services to the ISO will not be required to provide the ISO with 5 minute interval data until such time as specified by the ISO. Until such time as the ISO requires 5 minute interval data, these entities will be required to provide the ISO with hourly interval data.

v. Request for Direct Polling

SCs may request the ISO to grant an exemption from the requirement to provide Settlement Quality Meter Data to the ISO for SC Metered Entities they represent if those entities are Generators which have requested the ISO, and the ISO has agreed, to directly poll them for Meter Data. Such Generators will be treated as ISO Metered Entities and must comply with all of the requirements relating to ISO Metered Entities in accordance with this Protocol and the ISO Tariff. The SC representing such Generators will be required to apply the relevant distribution loss factors to that Generator's Meter Data (the SC may obtain that Meter Data from the ISO).

vi. QF Exemptions

If a QF sells all of its Energy (excluding any Energy consumed by auxiliary load equipment electrically connected to that QF at the same point or any Energy sold through "over the fence" arrangements as authorized by Section 218(b) of the California Public Utilities Code) and Ancillary Services to the UDC in whose Service Area it is located pursuant to an existing power purchase agreement (which is authorized under Section 218(b) of the California Public Utilities Code) and there is any inconsistency between that existing power purchase agreement and this Protocol, Section 10 of the ISO Tariff or Appendix J to the ISO Tariff, the

Issued by: Roger Smith, Senior Regulatory Counsel

existing power purchase agreement shall prevail to the extent of that inconsistency for the term of the agreement. In this context, an existing power purchase agreement shall mean an agreement which has been entered into and is effective as of December 20, 1995.

vii. Combining Generation

A metered entity may elect to meter a group of Generating Units which are electrically connected to the same point by combined total generation output or by individual Generating Unit provided that those Generating Units are Scheduled in the same fashion as they are metered and the Generating Units are not individually providing Ancillary Services.

MP 13.5.3 Exemptions from Audit, Testing or Certification

The ISO has the authority under Section 10.5.2 of the ISO Tariff to exempt ISO Metered Entities from the metering standards referred to in the ISO Tariff and this Protocol.

MP 14 AMENDMENTS TO THE PROTOCOL

If the ISO determines a need for an amendment to this Protocol, the ISO will follow the requirements as set forth in Section 16 of the ISO Tariff.

Issued by: Roger Smith, Senior Regulatory Counsel

METERING PROTOCOL APPENDICES A-G

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

First Revised Sheet No. 762 Superseding Original Sheet No. 762

APPENDIX A

FAILURE OF ISO FACILITIES

A 1 WEnet Unavailable

A 1.1 Unavailable Functions of WEnet

During a total disruption of the WEnet the ISO will not be able to:

- (a) communicate with ISO Metered Entities or SCs to acquire or provide any Meter Data or Settlement Quality Meter Data; and
- (b) communicate general information.

A 1.2 Communications during WEnet Unavailability

During any period of WEnet unavailability, the ISO shall:

- (a) make all reasonable efforts to provide general information to ISO Metered Entities and SCs using voice communications; and
- (b) inform ISO Metered Entities and SCs of the methods they must use to provide Meter Data and Settlement Quality Meter Data to the ISO during that period.

A 2 Primary MDAS Master Station Completely Unavailable

A 2.1 Notification of Loss of Primary MDAS Master Station

In the event that the primary MDAS master station becomes completely unavailable, the ISO will use alternate communications to notify the redundant MDAS master station that the primary MDAS master station is unavailable. The ISO will post information on the situation on the WEnet. Additional voice notifications will be made as time permits.

A 2.2 Notification of Restoration of Primary MDAS Master Station

The ISO will post confirmation on WEnet that all computer systems are functioning normally (if such be the case) and use the redundant MDAS master station to take complete control of the all MDAS functions. Once the primary MDAS master station is again available, all functions will be transferred back to the primary MDAS master station and the ISO will notify all ISO Metered Entities and SCs via the WEnet.

Issued by: Charles F. Robinson, Vice President and General Counsel

APPENDIX B

CERTIFICATION PROCESS FOR METERING FACILITIES

Paragraphs B1 to B3 of this Appendix describe the steps that ISO Authorized Inspectors and the ISO will take to certify Metering Facilities of ISO Metered Entities.

The steps described here will also be applicable to SC Metered Entities where no certification requirements are imposed on a SC Metered Entity by its Local Regulatory Authority.

Paragraph B5 of this Appendix describes the manner in which requests must be made to the ISO to perform the certification of Metering Facilities.

B 1 Documentation to be Provided by ISO/SC Metered Entity

The ISO Metered Entity or SC Metered Entity shall provide the ISO and the ISO Authorized Inspector with schematic drawings (both detailed and one line) of the Metering Facilities being considered for ISO certification. Such drawings shall be dated, bear the current drawing revision number and show all wiring, connections and devices in the circuits. Drawings shall also be provided for instrument transformers to the meter and the meter to the WEnet POP.

In addition, the ISO Metered Entity or SC Metered Entity will provide the ISO and the ISO Authorized Inspector with a completed ISO Meter Certification Form (a copy of which forms part of this Appendix) in respect of each set of Metering Facilities being considered for ISO certification.

B 2 Documentation to be completed by the ISO Authorized Inspector

The ISO Authorized Inspector will complete an ISO approved site verification form (an internal ISO document) in relation to each set of Metering Facilities that it inspects. The site verification form and the ISO Meter Certification Form will be the official forms used to document whether Metering Facilities meet the ISO certification criteria.

If there are any discrepancies between the ISO certified drawings on file and the actual metering circuitry inspected by the ISO Authorized Inspector or the ISO, then the ISO Authorized Inspector or the ISO will document that discrepancy and revise the schematic drawings provided to the ISO. The ISO Authorized Inspector will notify the ISO of the discrepancy and give the ISO Metered Entity or SC Metered Entity a notice detailing the discrepancies within 24 hours of that notification.

B 3 Review by the ISO

The ISO will review all documentation provided to it by the ISO Metered Entity or SC Metered Entity (including the ISO Meter Certification Form) and the site verification form prepared by the ISO Authorized Inspector.

If the ISO finds that the data is incomplete or fails to meet the relevant standards referred to in the ISO Tariff and this Protocol, the ISO shall

Issued by: Roger Smith, Senior Regulatory Counsel

provide written notice of the deficiencies to the ISO Metered Entity or SC Metered Entity within seven days of receiving the documentation referred to above.

If the ISO finds that the data is complete, it shall, subject to any exemptions granted under MP 13.5.1 in relation to providing Meter Data directly to MDAS, initiate tests to certify the MDAS interface with the relevant Metering Facilities.

Upon successful completion of the MDAS interface tests the ISO will issue a Certificate of Compliance. The ISO shall return the original schematic drawings, stamped by the ISO as approved and certified, and the original ISO Meter Certification Form and site verification form. The ISO will retain copies of these documents. Once all conditions have been satisfied to the ISO's satisfaction, the ISO shall promptly issue an original Certificate of Compliance.

B 4 Provisional Certification

If the ISO finds that:

- (a) the data provided to it by the ISO Metered Entity or SC Metered Entity is incomplete or fails to meet the relevant standards referred to in the ISO Tariff and this Protocol; or
- (b) the Metering Facilities fail the MDAS interface test,

the ISO may, at its discretion, elect to issue a provisional Certificate of Compliance in respect of those Metering Facilities. The term of and conditions on which such a provisional Certificate of Compliance is issued shall be at the ISO's discretion. However, the ISO will not issue an original Certificate of Compliance to the ISO Metered Entity until such time as all of the conditions of the provisional Certificate of Compliance have been fulfilled to the satisfaction of the ISO.

B 5 Requests for the ISO to Perform Certification

If an ISO Metered Entity would like the ISO to perform the certification of its Metering Facilities in accordance with MP 3.1.3, that ISO Metered Entity shall submit a written request to the ISO. The written request must:

- (a) specify the Metering Facilities to be certified;
- (b) provide the documentation referred to in paragraph B1 of this Appendix; and
- (c) detail the reasons why it would be impossible or impractical for the ISO Metered Entity to engage the services of an ISO Authorized Inspector to perform the certification.

The ISO will, within 14 days of receiving a request for it to certify Metering Facilities, inform the ISO Metered Entity whether it will undertake the certification or require the ISO Metered Entity to engage an ISO Authorized Inspector to perform the certification.

Issued by: Roger Smith, Senior Regulatory Counsel

Effective: October 13, 2000

| | | ISO M | eter Cert | ification Form | | | | |
|---|------------------------|-------------|---|----------------------------------|----------------|--------|---------------------|--------|
| Facility Information | n | | | | | | | |
| Name: | | | Unit Name: | | | | | |
| Address: | | | | Drawing Numbers: (see note 1) | | | | |
| ISO Metered Entity | Contact : | | | Phone Number: | | | | |
| Scheduled ISO Ins | pection Da | ite: | | | | | | |
| Generator Informa | ation | | | | | | | |
| Gross Output | | | | Auxiliary Load | | | | |
| Net Output | Net Output | | | Voltage / Connections | | | | |
| Revenue Billing Ir | nformation | 1 | | | <u>,</u> | | | |
| Meter Manufacture | r | | | Register Constant | | | | |
| Meter Serial Number | | | Program ID Number | | | | | |
| Meter Type | | | | Device ID | | | | |
| Meter Form | | | IP Address/Router Port # | | | | | |
| Does meter have e | xternal pul | se inputs f | or totaliza | tion purposes? Yes | s (in | fo. is | attache | ed) No |
| | | Internal | Mass Me | mory Constants | | | | |
| Function | Channel K _e | | PRI KWH Constant | | Interv Size | - | Display Sequence | |
| KWH DELIVERED | | | | | | | | |
| KVARH DEL | | | | | | | | |
| KVARH REC | | | | | | | | |
| KWH RECEIVED | | | | | | | | |
| Voltage Tra | ınsformer | Information | on. | Current Tra | neform | ar Inf | ormati | on |
| Voltage Transformer Information Name Plate A B C | | | Current Transformer Information Name Plate A B C | | | | | |
| Manufa cturer | ^ | | | Manufacturer | Α | | | |
| Serial Number | | | | Serial Number | | | | |
| | ļ | | 1 | | | | | |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

| Ratio | | | | Ratio | | | |
|--------------------------------|----------------|---------|---------------|------------------------|------------------------|----------------|----------------|
| Voltage Class | | | | Voltage Class | | | |
| BIL Rating | | | | BIL Rating | | | |
| Accuracy Class | | | | Accuracy Class | | | |
| Burden Rating | | | | Rating Factor | | | |
| Connected Burden | | | | Burden Rating | | | |
| | | | | Connected Burden | | | |
| | | | | Applied Test Burden | | | |
| | | | | Burden Test | Pass _. Fail | Pass . Fail | Pass . Fail |
| Instrument Transf (see note 2) | former Correc | tion Fa | actors (FC | F) | | | |
| Full Load | | Powe | r Factor | | Light Lo | ad | |
| Line Loss Compe | nsation Value | s (at F | ull Load N | leter Rating) (s | ee note 2 ar | nd 3) | |
| % Watt Fe Loss | | | | % Var Fe Loss | | | |
| % Watt Cu Loss | | | % Var Cu Loss | | | | |
| Total Compensati | ion Values (at | Full Lo | oad Meter | Rating) | | | |
| % Watt Total Loss | | | | % Var Total Loss | | | |
| Completed by: | | | Date: | | | | |
| Remarks: | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Notes:

- 1. ISO Metered Entities shall provide a copy of the one line diagram and schematics detailing the connections from the instrument transformer to the meter, communication circuit and local meter data server (if applicable)in accordance with this Appendix.
- 2. ISO Metered Entities shall attach a copy of the calculations used to determine these values.
- 3. For Power Transformer Loss Correction and Radial Line Loss Correction values the appropriate sign (+/-) should be utilized depending on the flow of Energy (delivered/received) and the location of the ISO Meter Point.

Issued by: Roger Smith, Senior Regulatory Counsel

APPENDIX C

METER CONFIGURATION CRITERIA

C 1 Power Flow Conventions

Meters shall be installed and configured in such a manner so as to define the 4 Quadrants referred to in Exhibit 1 to Appendix D of this Protocol.

C 2 ISO Standard Meter Memory Channel Assignments

Metering Facilities shall be installed and configured in such a manner so as to comply with the following ISO requirements:

- Channel 1 shall record active power delivered by the ISO Controlled Grid;
- Channel 2 shall record reactive power delivered by the ISO Controlled Grid;
- Channel 3 shall record reactive power received by the ISO Controlled Grid; and
- Channel 4 shall record active power received by the ISO Controlled Grid.

For metering with bi-directional power flows, the ISO reserves the right to require metering which will measure 4 quadrant Vars. Situations like a generating plant that nets gross generator output and auxiliary loads on one meter which could swap from a supplying to a buying mode and vice versa may require this type of metering. To properly account for such cases, six channels of data will be required. This configuration is considered optional unless specified by ISO as required. Such Metering Facilities shall be installed and configured in such a manner so as to comply with the following ISO requirements:

- Channel 1 shall record active power delivered by the ISO Controlled Grid;
- Channel 2 shall record quadrant 1 reactive power delivered by the ISO Controlled Grid;
- Channel 3 shall record quadrant 3 reactive power received by the ISO Controlled Grid;
- Channel 4 shall record active power received by the ISO Controlled Grid;
- Channel 5 shall record quadrant 2 reactive power delivered by the ISO Controlled Grid; and
- Channel 6 shall record quadrant 4 reactive power received by the ISO Controlled Grid.

C 3 ISO Standard Meter Display Modes

The following display readings shall be displayed in the normal display mode to comply with ISO requirements.

Issued by: Roger Smith, Senior Regulatory Counsel

Normal Display Mode (Standard Configuration, Uni-directional/Bi-directional kWh and kVarh)

For standard metering applications the display items should be utilized in the sequence listed below. When metering uni-directional power flows, the quantities listed below that do not apply (i.e. for generation only applications, the delivered quantities should have zero accumulation) may be omitted. The only exception to this would be where the display items correlate to the load profile channel assignments. The 4 display readings that correlate to the 4 load profile channels must also be displayed.

- Date MM:DD:YY.
- Time HH:MM:SS (Pacific Standard Time, military format).
- Total kWh delivered by the ISO Controlled Grid.
- Maximum kWd (5 minute or hourly demand interval) delivered by the ISO Controlled Grid.
- Date and time of maximum kWd delivered by the ISO Controlled Grid.
- Total kVarh delivered by the ISO Controlled Grid.
- Total kVarh received by the ISO Controlled Grid.
- Total kWh received by the ISO Controlled Grid.
- Maximum kWd (5 minute or hourly demand interval) received by the ISO Controlled Grid.
- Date and time of maximum kWd received by the ISO Controlled Grid

Normal Display Mode (Optional Configuration, Bi-directional Kwh and Four Quadrant kVarh)

For metering bi-directional power flows in which ISO requires optional 4 quadrant Var measurement, the following display items should be displayed in the sequence listed below:

- Date MM:DD:YY.
- Time HH:MM:SS (Pacific Standard time, military format).
- Total kWh delivered by the ISO Controlled Grid.
- Maximum kWd (5 minute or hourly demand interval) delivered by the ISO Controlled Grid.
- Date and time of maximum kWd delivered by the ISO Controlled Grid.
- Total kVarh for Quadrant 1.
- Total kVarh for Quadrant 2.
- Total kVarh for Quadrant 3.

Issued by: Roger Smith, Senior Regulatory Counsel

- Total kVarh for Quadrant 4.
- Total kWh received by the ISO Controlled Grid.
- Maximum kWd (5 minute or hourly demand interval) received by the ISO Controlled Grid.
- Date and time of maximum kWd received by the ISO Controlled Grid.

Consumption Values

The consumption values shall be in XXXXX.X format and demand in XXXX.XX format. The register scaling factor should be set such that the display does not roll over in less than 60 days.

Alternative Display Mode

The values listed below should be displayed in the alternate display mode to comply with ISO requirements:

- Phase A voltage magnitude and phase angle.
- Phase B voltage magnitude and phase angle.
- Phase C voltage magnitude and phase angle.
- Phase A current magnitude and phase angle.
- Phase B current magnitude and phase angle.
- Phase C current magnitude and phase angle.
- Neutral current magnitude and phase angle (if available).
- Instantaneous kW delivered by the ISO Controlled Grid (for bidirectional power flows and/or applications where the power flow is out of ISO Controlled Grid).
- Instantaneous kW received by the ISO Controlled Grid (for bidirectional power flows and/or applications where the power flow is received by the ISO Controlled Grid).

When available, the alternative display mode may also be used by ISO Metered Entities to display other definable quantities in sequence after the values defined above.

C 4 Instantaneous Power Factor - Test Mode

The following values should be displayed in the test mode to comply with ISO requirements:

- total pulse count for test; and
- total consumption during test.

During the test mode the above values should be provided for each function being tested (Watts, Vars). The data displayed by the meter while in test mode shall not change the normal mode display registers nor shall it be recorded in the load profile channels. This requirement is

Issued by: Roger Smith, Senior Regulatory Counsel

imposed to prevent the test data from being recorded as actual load/generation data.

ISO Metered Entities may add additional display quantities in sequence in the test mode after the values defined above.

C 5 Transformer and Line Loss Correction

The ISO Metered Entity will be responsible for properly calculating and applying the transformer and line loss corrections to its meters in accordance with this Protocol to reflect the actual meter usage (on the low side) as opposed to the theoretical meter usage at the transmission point.

C 6 CT/VT and Cable Loss Correction Factors

Where the connected burden of a metering circuit exceeds the burden rating of a CT or VT or if an existing instrument transformer does not meet the minimum ISO accuracy requirements, then one of the actions listed below must to be taken:

- (a) replace the instrument transformer(s) with higher burden rated revenue class units; or
- (b) reduce the burden on the circuit to comply with the name plate of existing instrument transformer(s); or
- (c) apply correction factors to the meter to adjust the meter's registration to compensate for inaccuracies.

The ISO preferred action is that referred to in paragraph (a) above.

The ISO Metered Entity will be responsible for properly calculating and applying the CT/VT and cable loss correction factors to its meters in accordance with this Protocol to adjust for inaccuracies in the metering circuit.

C 7 Special Applications, Configurations and Unique Situations

ISO Metered Entities are responsible for providing the ISO with the necessary Meter Data and other information to enable the ISO to prepare Settlement Quality Meter Data. For instance, where there is a generating plant with multiple generators and auxiliary loads, the ISO Metered Entity must provide appropriate information (i.e. documentation, descriptions, one line diagrams, etc.) to the ISO to ensure that the ISO can properly account for the net generator output of each unit under all combinations of generation and load (e.g. where only one generator is operating but all auxiliary loads are being supplied).

Issued by: Roger Smith, Senior Regulatory Counsel

APPENDIX D

STANDARDS FOR METERING FACILITIES

The standards for Metering Facilities referred to in this Appendix provide additional details to the standards referred to in Appendix J to the ISO Tariff.

The standards referred to in Appendix J to the ISO Tariff and this Appendix apply to ISO Metered Entities and, where the relevant Local Regulatory Authority has not set any standards, to SC Metered Entities.

D 1 Standards for Existing Metering Facilities

Existing Metering Facilities are those facilities that are fully installed as of the ISO Operations Date. Existing Metering Facilities used by ISO Metered Entities shall meet the following general standards:

- revenue quality instrument transformers at the generator output level (specifically at all main generators, banks and local distribution load supplied from the generator) must have an accuracy of 0.3% or better
- generator auxiliary load metering must have an overall accuracy of 3%
- revenue quality instrument transformers at transmission metering points must have an accuracy of 0.3% or better

D 2 General Standards for New Meters

New Meters are those meters that are installed after the ISO Operations Date. New Meters used by ISO Metered Entities shall meet the following general standards:

- they must be revenue quality in an accuracy class of 0.25%
- they must be remotely accessible, reliable, 60 Hz, three phase, bidirectional, programmable and multifunction electronic meters
- they must be capable of measuring kWh and kVarh and providing calculated three phase values for kVah, kVa
- they must have a demand function including cumulative, rolling, block interval demand calculation and maximum demand peaks
- there must be battery back-up for maintaining RAM and a real-time clock during outages of up to thirty days
- there must be AC potential indicators on each of the three phases
- they must be capable of being powered either internally from the bus or externally from a standard 120 volt AC source.
- they must be capable of providing MDAS (MV-90) addressable metering protocol
- they must be capable of 60 days storage of kWh and KVarh interval data

Issued by: Roger Smith, Senior Regulatory Counsel

If there is any inconsistency between these general standards and the detailed standards referred to in paragraphs D3 and D4 of this Appendix, the detailed standards shall prevail.

D 3 Detailed Standards for New Meters

Exhibit 1 to this Appendix provides the detailed specifications with which new meters must comply.

D 4 Detailed Standards for New Oil Filled, Wound Instrument Transformers

Exhibit 2 to this Appendix provides the detailed specifications with which new oil filled, wound instrument transformers must comply.

D 5 Standards for Compatible Meter Data Servers

In order for a meter data acquisition and processing system of a metered entity to be certified by the ISO as a Compatible Meter Data Server, that metered entity must satisfy the ISO that the server is capable of providing:

- Meter Data and/or Settlement Quality Meter Data to MDAS in the Meter Data Exchange Format via WEnet and/or REMnet via File Transfer Protocol (FTP);
- Meter Data to the ISO which is real data at least comparable to data obtained directly by MDAS from meters;
- Meter Data and/or Settlement Quality Meter Data to the ISO on demand within 10 minutes of receiving such a demand from the ISO;
- System Back Up procedures that permit submission of data within 41 days of a Trading Day to MDAS even in the event of a major facility or system problem. Back Up procedures must be documented and available for review by ISO.
- System Security procedures that limit the accessibility to meter data and the system parameters. The System Security procedures must be documented and available for review by ISO.
- If applicable, procedures that define methods of profiling consumption meter data into intervals. These procedures must be documented, they must follow any appropriate regulatory guidelines and they must be available for review by the ISO.
- System day-to-day operational procedures, these procedures should be available for ISO review and audit.

Issued by: Roger Smith, Senior Regulatory Counsel

EXHIBIT 1 TO APPENDIX D

SPECIFICATION MTR1-96

ENGINEERING SPECIFICATION FOR POLYPHASE SOLID-STATE **ELECTRICITY REVENUE QUALITY METERS** FOR USE ON THE ISO CONTROLLED GRID

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

Effective: October 13, 2000

TABLE OF CONTENTS

| 1 | GENERAL INFORMATION |
|------|---|
| 2 | SCOPE |
| 2.1 | General |
| 2.2 | Applicability |
| 3 | METERING FUNCTIONS |
| 3.1 | Measured Quantities |
| 3.2 | Basic Default Metering Function |
| 3.3 | Demand Metering Function |
| 3.4 | Time-of-Use (TOU) Metering Function |
| 3.5 | Self-Read TOU Metering Function |
| 3.6 | Load Profile Function |
| 3.7 | Function during Power Disturbances |
| 3.8 | Meter Test Mode Function |
| 4 | DISPLAY REQUIREMENTS |
| 4.1 | LCD Display |
| 4.2 | Viewing Characteristics |
| 4.3 | Display Components |
| 4.4 | Digits |
| 4.5 | Time Format |
| 4.6 | Date Format |
| 4.7 | Operating Modes |
| 4.8 | Normal Mode |
| 4.9 | Alternate Mode |
| 4.10 | Display Items |
| 4.11 | Constants and Correction Factors. |
| 4.12 | Identifiers |
| 5 | METER DIAGNOSTICS |
| 5.1 | Self-test |
| 5.2 | Diagnostic Checks |
| 5.3 | Pulse Overrun |
| 5.4 | Error and Warning Displays |
| 5.5 | Error Reset |
| 6 | PROGRAMMING AND SOFTWARE |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 775

Effective: October 13, 2000

| 6.1 | Optical Communications Interface. |
|------|--|
| 6.2 | Meter Programmers |
| 6.3 | Software |
| 6.4 | Rate Development Program |
| 6.5 | Rate Development Program Functions |
| 6.6 | Field Program |
| 6.7 | Field Program Functions |
| 6.8 | Field Disk Serialization Program |
| 6.9 | DOS or Windows |
| 6.10 | Communication Protocol |
| 6.11 | Optical Probe |
| 7 | COMMUNICATION |
| 7.1 | Optical Port |
| 7.2 | Baud Rate |
| 7.3 | Optical Port Location |
| 7.4 | Optical Port Cable |
| 7.5 | RS232 or RS 485 or RSXXX. |
| 8 | OPTIONAL METER FUNCTIONS |
| 8.1 | Pulse Outputs |
| 8.2 | Current Loop |
| 8.3 | Internal Modem |
| 8.4 | Demand Threshold Alarm |
| 9 | ACCURACY |
| 9.1 | ANSI C12.10 |
| 9.2 | Factory Calibration |
| 9.3 | Test Equipment |
| 9.4 | Creep |
| 9.5 | Starting Current |
| 9.6 | Start-up Delay |
| 9.7 | Pulse Outputs |
| 10 | ELECTRICAL REQUIREMENTS |
| 10.1 | Meter Forms, Voltage Ratings and Classes |
| 10.2 | Circuit Boards |
| 10.3 | LCD Display Connectors |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 776

| 10.4 | Metering Application |
|-------|---|
| 10.5 | Connections |
| 10.6 | Meter Register Power Supply |
| 10.7 | Clock |
| 10.8 | Batteries |
| 10.9 | Electromagnetic Compatibility |
| 10.10 | Radio Interference Suppression |
| 11 | MECHANICAL REQUIREMENTS |
| 11.1 | General |
| 11.2 | Corrosion Protection |
| 11.3 | Solar Radiation |
| 11.4 | Corrosive Atmospheres |
| 11.5 | Meter Package |
| 11.6 | Nameplate |
| 12 | SECURITY |
| 12.1 | Billing Period Reset |
| 12.2 | Meter Password |
| 12.3 | Test Mode |
| 12.4 | Program Security |
| 12.5 | Revenue Protection |
| 13 | METER APPROVAL TESTING |
| 13.1 | General Requirement |
| 13.2 | Meter Failure Definition |
| 13.3 | Meter Design Rejection Criteria |
| 13.4 | Test Setup |
| 13.5 | Functional Test (No Load Test) |
| 13.6 | Accuracy Test |
| 13.7 | Line Voltage Variation Test |
| 13.8 | Momentary Power Loss |
| 13.9 | Power Failure Backup System Test |
| 13.10 | Brownout and Extended Low Voltage Test |
| 13.11 | Effect of Power Failure Backup System Voltage Variation on Clock Accuracy |
| 13.12 | Effect of Temperature Variation on Clock Accuracy |
| | |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 777

| 13.13 | Temperature Cycle Test |
|-------|--|
| 13.14 | Humidity Cycle Test |
| 13.15 | Insulation Withstand Test |
| 13.16 | Standard Waveform Surge Withstand Test |
| 13.17 | Fast Transient Waveform Surge Withstand Test |
| 13.18 | Powerline Surge Voltage and Current Test |
| 13.19 | Electrostatic Susceptibility Test |
| 13.20 | Visual Inspection |
| 13.21 | Shipping Test |
| 14 | SAFETY |
| 14.1 | Hazardous Voltage |
| 14.2 | Grounding |
| 14.3 | Toxic Materials |
| 14.4 | Fire Hazard |
| 15 | DATA SECURITY AND PERFORMANCE |
| 16 | DOCUMENTATION |
| 16.1 | Hardware Documentation To Be Provided For ISO Review |
| 16.2 | Software |
| 17 | APPLICABLE STANDARDS |
| 18 | DEFINITIONS |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

1 General Information

This Exhibit applies to all solid-state polyphase electricity meters used in revenue metering applications on the ISO Controlled Grid (Meters).

2 Scope

2.1 General

This Exhibit provides the minimum functional and performance requirements for Meters. All requirements in this Exhibit are intended to ensure the expected life cycles, security, accuracy, reliability and minimum maintenance requirement of Meters. Some requirements, however, are specified to maintain the compatibility and interchangeability of the Meter.

2.2 Applicability

Meters approved under this Exhibit may not be required to have all of the specified features. Meters shall meet the specified minimum requirements and the requirements of Section 13 (Meter Approval Testing) of this Exhibit.

3 Metering Functions

3.1 Measured Quantities

As used in this Exhibit, the term "delivered" applies to Energy flowing out of the ISO Controlled Grid and the term "received" applies to Energy flowing into the ISO Controlled Grid.

3.1.1 Consumption

The following consumption quantities are required for all Meters approved for use on the ISO Controlled Grid:

- (a) Kilowatt-hours—delivered;
- (b) Kilowatt-hours—received;
- (c) Kilovar-hours—delivered, received, for each quadrant;
- (d) Kilovoltamp-hours—delivered, received, for each quadrant;
- (e) Ampere-squared-hours; and
- (f) Volts-squared-hours.

3.1.2 **Demand**

The following demand quantities are required for all meters approved for use on the ISO Controlled Grid:

- (a) Kilowatts—delivered;
- (b) Kilowatts-received;
- (c) Kilovars—delivered, received, for any quadrant; and
- (d) Kilovoltamps—delivered, received, for any quadrant.

3.1.3 Power Factors

The ISO may specify average power factors for the previous demand subinterval in any quadrant or any combination of two quadrants.

Issued by: Roger Smith, Senior Regulatory Counsel

3.1.4 Reverse Consumption/Demand

The Meter shall be programmable to take one of the following actions for reverse consumption and demand quantities:

- (a) ignore the reverse quantities; and
- (b) add the reverse quantities to the appropriate consumption and demand quantities.

3.2 Basic Default Metering Function

When power is applied to the Meter, it shall immediately begin recording bidirectional total kilowatt-hours. Reverse power flow shall carry a negative sign. This function shall be performed regardless of whether the Meter is programmed or not and shall not require a battery. An unprogrammed Meter shall indicate that it is unprogrammed. The ISO may request a Meter to be programmed with a specific program.

3.3 Demand Metering Function

Meters shall have the following demand metering functions:

- (a) as a minimum, the Meter shall be programmable for fixed and/or rolling interval demand calculations on bi-directional kilowatts and kilovars:
- (b) a battery shall not be required to perform demand calculations, to save the results or to communicate the results to a handheld meter reader connected to the optical port;
- (c) the Meter shall be programmable for one minute delivered kilowatt demand (as an approximation of "instantaneous" kilowatts delivered) in addition to the rolling interval demand calculation. The one minute demand is not required to be synchronous with the other demand quantities;
- (d) the Meter shall be programmable for rolling interval demand calculations for any optional demand quantity (see Section 3.1.2) that ISO specifies.
- (e) demand intervals shall be programmable for a duration of 5, 10, 15, 30 or 60 minutes:
- (f) the demand interval shall be composed of an integral number of subintervals. Sub-interval duration shall be a programmable duration of 1, 5, 10, 15 or 30 minutes;
- (g) demand functions shall be capable of temporary suspension for a programmable time interval after power is restored following a power outage. The length of time shall be programmable from zero to 60 minutes in one minute intervals:
- (h) after a demand reset, further manual demand resets shall be prevented with a programmable lockout time. A demand reset from a Meter Programmer connected to the optical port is not subject to this delay and can be initiated as frequently as required; and
- (i) if the Meter has been programmed for Time-of-Use (TOU) functions, the time at which maximum demand occurred shall be recorded at the end of that demand interval.

Issued by: Roger Smith, Senior Regulatory Counsel

3.4 Time-of-Use (TOU) Metering Function

Meters shall have the following TOU metering functions:

- (a) as a minimum, the Meter shall be programmable for TOU calculations for bi-directional kilowatt-hours and kilovarhours and bi-directional kilowatt and kilovar demand.;
- (b) the Meter shall be programmable for TOU calculations for any optional consumption or demand quantity (see Section 3.1.1 or 3.1.2) that the ISO specifies;
- (c) the calendar shall be programmable into one to four mutually exclusive seasons;
- (d) each season shall be further programmable into one to four mutually exclusive daily TOU schedules;
- (e) the Meter shall be capable of distinguishing weekdays, weekends, days of the week, and holidays.
- each consumption and demand quantity shall be metered independently for each TOU schedule;
- (g) only one season and one TOU schedule shall be active at a given time. There shall always be one active season and one active TOU schedule;
- (h) each daily TOU schedule shall be capable of a minimum of eight switch points with a minimum resolution of a quarter hour;
- (i) the calendar shall be capable of accommodating leap years, daylight saving time changes and recurring holidays; and
- (j) the Meter shall have capacity for a minimum calendar of 20 years, taking into account 12 holidays/year, 4 seasons/year, and 2 daylight savings time adjustments/year.

3.5 Self-Read TOU Metering Function

Meters shall have the following self-read TOU metering functions:

- (a) as a minimum the Meter shall perform a self-read of all consumption and demand quantities on season changes. A self-read shall consist of reading the quantities, resetting the demand and storing the data;
- (b) the change of season self-reads shall occur at midnight of the day before the season change:
- (c) the ISO may specify that the Meter be programmable for up to three consecutive self-reads. The self-reads shall be programmable for:
 - i. a specific day of each month at midnight;
 - ii. a specific number of days from the last demand reset (read) at midnight; and
 - iii. self-read time of use metering; and

Issued by: Roger Smith, Senior Regulatory Counsel

(d) self-read data, other than previous season data, need not be displayed but shall be retrievable with a Meter Programmer connected to the optical port.

3.6 Load Profile Function

Meters shall have the following load profile functions:

- (a) the ISO may specify that the Meter provide load profile recording of interval data for 1 to 4 channels of consumption quantities;
- (b) load recording of interval data shall operate independently of the TOU functions;
- (c) date and time shall be stored with the load recording of interval data;
- (d) load recording of interval data shall use a "wraparound" memory that stores new interval data by writing over the oldest interval data;
- (e) the load recording of interval data function shall be capable of storing and communicating a minimum of 60 days of 4 channel, 5 minute interval data, in addition to allowances for event recording (power outages, resets, time sets, etc.);
- (f) the load recording of interval data function shall have the capacity to count and store at least 16,000 counts in a 15 minute period of time; and
- (g) load recording of interval data shall continue while the Meter is communicating with a Meter Programmer connected to the optical port.

3.7 Function during Power Disturbances

Meters shall have the following functions during power disturbances:

- during powerline disturbances such as brownout or outage conditions the Meter shall maintain all meter data as well as time keeping functions. Display and communication functions are not required during these conditions;
- (b) the Meter shall withstand the following outages during a continuous ten year or longer service without the need to maintain its auxiliary power system, including replacing the battery:
 - 20 short outages per year of less than 30 seconds per outage;
 and
 - ii. 40 days of continuous/cumulative outage;
- (c) during a power outage, critical program and billing data shall be written to non-volatile memory. When power is restored, data shall be returned to active memory and data collection resumed;
- (d) following a power outage, register "catch-up" time shall be a maximum of 30 seconds. During the "catch-up" time the Meter shall still calculate consumption and demand quantities. Optional outputs shall also function during this time;
- (e) during power outages, time shall be maintained with a cumulative error of no more than 2 minutes per week (0.02%);
- (f) the Meter shall record the date and time of any power outage; and

Issued by: Roger Smith, Senior Regulatory Counsel

(g) Meters may also record the duration of any power outage.

3.8 Meter Test Mode Function

Meters shall have the following meter test mode functions:

- (a) the Meter shall have the capability of a Test Mode function that suspends normal metering operation during testing so that additional consumption and demand from the tests are not added to the Meter's totals;
- (b) the Test Mode function shall be activated by a permanently mounted physical device that requires removal of the Meter cover to access or by a Meter Programmer connected to the optical port;
- (c) activation of the Test Mode shall cause all present critical billing data to be stored in non-volatile memory and restored at the time of exit from the Test Mode;
- (d) upon activation of the Test Mode, register displays shall accumulate beginning from zero;
- (e) actuation of the billing period reset device during Test Mode shall reset the test mode registers;
- (f) after a programmable time-out period, the Meter will automatically exit from Test Mode and return to normal metering; and
- (g) the default Test Mode registers for an unprogrammed meter shall include as a minimum:
 - i. time remaining in the test interval;
 - ii. maximum kilowatt block demand; and
 - iii. total kilowatt-hours.

4 Display Requirements

4.1 LCD Display

The Meter shall have an electronic display for displaying the consumption and demand quantities. A liquid crystal display (LCD) is preferred.

4.2 Viewing Characteristics

Digits for displaying the consumption and demand quantities shall be a minimum of 7/16" in height and be legible in normal daylight conditions from a distance of six feet by an observer. The viewing angle shall be a minimum of fifteen degrees from the front Meter face line of sight.

4.3 Display Components

The display shall provide the following:

- (a) six digits for display of the consumption and demand quantities and constants with decimal points for the three least significant digits;
- (b) three digits for numeric display identifiers (ID numbers);
- (c) alternate and Test Mode indication;

Issued by: Roger Smith, Senior Regulatory Counsel

- (d) potential indication for each phase;
- (e) current TOU rate indicator;
- end of interval indicator;
- (g) visual representation of the magnitude and direction of kilowatt loading;
- (h) visual representation of the magnitude and direction of kilovar loading if the Meter is capable of measuring kilovars; and
- (i) Annunciators for most consumption and demand quantities.

4.4 Digits

Consumption and demand quantities shall be programmable for display with leading zeroes in four, five or six digits with a decimal point at any of the least significant three digits.

4.5 Time Format

Time shall be displayed in the 24 hour military format.

4.6 Date Format

Date shall be displayed programmable in either Day/Month/Year or Month/Day/Year format.

4.7 Operating Modes

The display shall have at least three of the following operating modes:

- (a) Normal Mode in this mode, the display shall scroll automatically through the programmed displays for normal meter reading;
- (b) Alternate Mode in this mode, the display shall scroll automatically, scroll manually or freeze for up to one minute for alternate programmed displays;
- (c) Test Mode in this mode, the display shall scroll automatically, scroll manually or freeze for up to one minute for test quantity displays; and
- (d) Segment Check in this mode, all segments or displays are activated to verify display integrity.

Display ID numbers and display sequence shall be independently programmable for each of the modes referred to above. Display times shall be programmable.

4.8 Normal Mode

Upon power-up, the Meter display shall operate in the Normal Mode. The Meter display shall operate in Normal Mode until power is disconnected or until either the Alternate Mode or the Test Mode is activated.

4.9 Alternate Mode

The Alternate Mode shall be initiated with a display control device that does not require Meter cover removal or with a Meter Programmer connected to the optical port.

Issued by: Roger Smith, Senior Regulatory Counsel

Display Items

As a minimum, the Meter shall provide the display quantities and items for each of the modes referred to in Section 4.7 as detailed in Attachment 2.

4.10 Constants and Correction Factors.

The Meter shall have programmable multi-variable polynomial function multipliers and/or summers to account for instrument transformer ratios, instrument transformer correction factors, the Meter constant, radial line losses and power transformer loss correction.

4.11 Identifiers

The Meter shall have programmable identifiers for the Meter ID, the person who programmed the Meter (programmer ID) and the current program ID. The Meter ID shall be capable of eight alphanumeric characters.

5 Meter Diagnostics

5.1 Self-test

The Meter register shall be capable of performing a self-test of the register software. As a minimum, the self-test shall be performed at the following times:

- (a) whenever communications are established to the register;
- (b) after a power-up; and
- (c) once per day.

5.2 Diagnostic Checks

As a minimum, the following diagnostic checks shall be performed during a self-test:

- (a) check the backup battery capacity;
- (b) verify the program integrity; and
- (c) verify the memory integrity.

5.3 Pulse Overrun

The register shall be capable of detecting that the maximum number of pulses have been exceeded during a demand interval.

5.4 Error and Warning Displays

Meters shall be capable of the following displays:

- (a) any detected error or warning shall be stored in memory and an error or warning code displayed on the display;
- (b) error code displays shall freeze the display; and
- (c) warning code displays shall be programmable to one of the following choices:
 - i. freeze the warning code on the display;
 - ii. ignore the warning code (not displayed); or

Issued by: Roger Smith, Senior Regulatory Counsel

iii. warning code display at the end of the Normal, Alternate or Test Modes display sequences.

5.5 Error Reset

Error or warning conditions shall only be reset upon an explicit command invoked via the Meter Programmer or upon some other explicit action by the Meter technician.

6 Programming and Software

6.1 Optical Communications Interface.

The Meter shall be capable of communicating with a handheld reader (Itron DataCap or similar) through the optical port.

6.2 Meter Programmers

The ISO and ISO Authorized Inspectors will use PC DOS based laptop and handheld computers with LCD displays as meter reader/programming devices (Meter Programmers). Communications with the Meter shall be through the optical port.

6.3 Software

The ISO Metered Entity shall ensure that its supplier provides all software for maintenance, programming and operation of the Meter. The software shall include the following:

- (a) Rate Development Program;
- (b) Field Program;
- (c) Field Disk Serialization Program; and
- (d) Password protection to preclude 3rd party access for all levels of access except read-only.

6.4 Rate Development Program

The ISO Metered Entity shall ensure that its supplier provides a Rate Development Program software package which allows the ISO to customize the Meter's rate schedules and the Meter's operating parameters. The Rate Development Program shall be capable of utilizing all programmable functions of the Meter.

6.5 Rate Development Program Functions

The Rate Development Program as a minimum shall provide the following functions in a "user-friendly" manner:

- (a) originate or modify Meter configuration records;
- (b) validate user entries for format and range;
- (c) translate user entry into code for configuring the Meter;
- (d) send and receive configurations to and from the Meter;
- (e) compare configuration files from the Meter with desired files and report discrepancies;

Issued by: Roger Smith, Senior Regulatory Counsel

- (f) read Meter billing data and load profile data;
- (g) generate Meter data and diagnostic reports for printing; and
- (h) generate configuration files for loading into the Meter via the Field Program.

6.6 Field Program

The ISO Metered Entity shall ensure its supplier provides a Field Program software package for use with ISO's Meter Programmer. The Field Program in conjunction with any such Meter Programmer shall be capable of loading the rate schedule and meter operating parameters as generated by the Rate Development Program into the Meter.

6.7 Field Program Functions

The Field Program as a minimum shall provide the following functions:

- (a) set date and time on the Meter;
- (b) preset the Meter consumption registers;
- (c) send and receive configurations to and from the Meter;
- (d) compare configuration files from the Meter with desired files and report discrepancies;
- (e) read Meter billing data and load profile data;
- (f) generate Meter data and diagnostic reports for printing;
- (g) read, display and modify the present settings of field configurable items;
- (h) execute a billing period reset;
- (i) reset all consumption and demand quantities; and
- (j) not have the capability to alter the configuration files as generated by the Rate Development Program.

6.8 Field Disk Serialization Program

The ISO Metered Entity shall ensure that its supplier provides a Field Disk Serialization Program software package that associates an unique password with each copy of the Field Program. The Field Disk Serialization Program shall use an ASCII text file in a specified format as input and place a different password on one or more copies of a field disk generated by the Rate Development Program.

6.9 DOS or Windows

All software programs shall be PC DOS or Windows based. The Rate Development Program shall be either a Microsoft Windows 9x application or a DOS application capable of running under Microsoft Windows 9x without any loss of function. The Field Program and the Field Disk Serialization Program shall be DOS applications capable of running under PC-DOS Version 7 or later.

Issued by: Roger Smith, Senior Regulatory Counsel

6.10 Communication Protocol

The protocol used for communication with the Meter through either the optical port or the optional modem shall be an asynchronous, byte oriented protocol.

6.11 Optical Probe

The Rate Development Program and the Field Program shall support use of a compatible optical probe (ABB Unicomm or similar) connected to the standard PC serial port of the Meter Programmer.

7 Communication

7.1 Optical Port

The primary communication port to the Meter for reading and programming of the internal data shall be an optically isolated communication port per ANSI C12.13, Type 2 or other serial port.

7.2 Baud Rate

The optical port shall communicate at a minimum of 9600 baud.

7.3 Optical Port Location

The optical port shall be located in the front of the Meter and be accessible without removing the Meter's cover. The optical port shall also be functional with the Meter cover removed.

7.4 Optical Port Cable

There shall be no cable connection between the optical port on the Meter cover and the register.

7.5 RS232 or RS 485 or RSXXX.

One RSXXX port shall be provided at the Meter for bi-directional communications (with security provisions included) to computers and/or data acquisition devices. The Meter must have the capability for being polled every 15 minutes for data by MDAS or a Compatible Meter Data Server. An optional RSXXX port or ports with read-only access can be provided for others desiring the data. All RSXXX ports shall be optically isolated.

The Meter shall be capable of being polled simultaneously by more than one entity on one or more of it's ports without loss of data, interference, lockup or other such problems. In all cases, priority servicing shall be given to the ISO required RSXXX port (used by MDAS).

The Meter shall support and be implementable with ISO WEnet communication chains, including:

- (a) Meter RSXXX port to ISDN line (or lease line) to ATM Cloud POP to MDAS; and
- (b) Meter RSXXX port to Compatible Meter Data Server to Frame Relay or ISDN line to ATM Cloud POP to MDAS.

Issued by: Roger Smith, Senior Regulatory Counsel

8 Optional Meter Functions

8.1 Pulse Outputs

The ISO may specify one to four channels of pulse outputs that are proportional to the consumption quantities. The pulse output values shall be programmable with pulse durations of at least 100 milliseconds. The outputs may be either 2-wire, Form A or 3-wire, Form C configuration.

8.2 Current Loop

The ISO may specify an additional serial communication port consisting of a 2-wire, 20 milliamp current loop that is optically isolated from the rest of the Meter. At a minimum, the baud rate shall be selectable as 300/ 1200/ 2400/ 9600 baud.

8.3 Internal Modem

The ISO may specify an internal modem having telephone communications at autobaud rates of up to 28800 baud. The modem shall include automatic baud select, configurable answer time window and configurable answer ringcounter. The ring detect circuitry shall not be affected by spurious voltage rises in the telephone line.

8.4 Demand Threshold Alarm

The ISO may specify a kilowatt threshold relay that closes at a programmable demand value and stays closed for the remainder of the interval and until at least one complete interval does not exceed the threshold value. The value shall be independently programmable for each TOU rate season and schedule.

9 Accuracy

9.1 ANSI C12.10

The Meter shall meet or exceed the accuracy specifications contained in ANSI C12.10 over its entire service life without the need for adjustment.

9.2 Factory Calibration

The Meter shall be calibrated to provide the following level of accuracy:

- (a) $\pm 0.2\%$ at full load at power factor of 100%;
- (b) $\pm 0.25\%$ at full load at power factor of 50% lag;
- (c) \pm 0.25% at full load power factor at 50% lead; and
- (d) \pm 0.25% at light load at power factor of 100%.

9.3 Test Equipment

Meter accuracy and calibration tests, both shop and field, shall require only standard test equipment. No special laboratory-type test equipment or test procedures shall be required to assure accuracy of the Meter.

9.4 Creep

The Meter shall not creep. No pulse generation or registration shall occur for any consumption or demand quantity which depends on current while the current circuit is open.

Issued by: Roger Smith, Senior Regulatory Counsel

9.5 Starting Current

The Meter shall start to calculate consumption and demand quantities when the per phase current reaches Class 20 - 5 milliamps.

9.6 Start-up Delay

The Meter shall start to calculate consumption and demand quantities less than 3 seconds after power application.

9.7 Pulse Outputs

Pulse outputs shall have the same accuracy as the Meter displays.

10 Electrical Requirements

10.1 Meter Forms, Voltage Ratings and Classes

The following forms, voltage ratings and classes of Meters are approved for installation on the ISO Controlled Grid:

- (a) A Base Type, FORMS 5A and 9A, 120 Volts, Class 10 and Class 20;
- (b) Socket Type, FORMS 5S and 9S, 120 Volts, Class 10 and Class 20;
- (c) Switchboard Type, 2 Element and 3 Element, 120 Volts, Class 10 & Class 20; and
- (d) Rack mounted meter assemblies 2 element and 3 element, Class 10 & Class 20.

10.2 Circuit Boards

All circuit boards in the Meter shall be designed to meet ISO's environmental and electrical testing requirements and the service life and performance expectations detailed in this Exhibit.

10.3 LCD Display Connectors

Gold pins encased in an elastomer or carbonized contacts, or some other better construction, shall be used to connect the LCD display to the register circuit board.

10.4 Metering Application

The Meter shall be used to meter electrical service on a continuous duty.

10.5 Connections

The Meter's internal electrical connections shall be in accordance with ANSI C12.10.

10.6 Meter Register Power Supply

The Meter register shall be powered from the line side of the Meter and shall have provision for external backup power. Neither the normal power supply nor the backup power supply (when so equipped) shall be fused.

Issued by: Roger Smith, Senior Regulatory Counsel

10.7 Clock

Clocks shall meet the following requirements:

- (a) the clock internal to the Meter shall be accurate within 2 minutes per week (0.02%) when not synchronized to the ISO Controlled Grid operation line frequency and shall be resettable through the ISO communications interface. The ISO will transmit a periodic master synchronizing signal to the meter;
- (b) the internal clock shall have two modes of operation as follows:
 - the clock shall synchronize with the ISO Controlled Grid operation line frequency until an outage occurs. During the outage, the clock will then synchronize with its own internal crystal. When power returns, the clock shall resynchronize with the ISO's master synchronizing signal and follow line frequency; and
 - the clock shall always synchronize with its own internal crystal, as a default; and
- (c) the choice of clock mode shall be programmable.

10.8 Batteries

Batteries shall meet the following requirements:

- (a) when the Meter design requires a battery as auxiliary power supply, the requirements of Section 3.7 shall apply;
- (b) the battery shall be secured with a holder securely attached to the Meter. The battery holder and electrical connections shall be designed to prevent the battery from being installed with reversed polarity;
- (c) replaceable batteries shall be easily accessible by removing the Meter cover. Battery replacement while the Meter is in service shall not interfere with any of the specified functions;
- (d) no fuse external to the battery shall be installed in the battery circuit;
- (e) the Meter battery shall provide a minimum carryover capability at 23° C for the functions listed in Section 3.7 and have a 15 year shelf life; and
- (f) the following information shall be clearly identified on the battery:
 - i. manufacturer;
 - ii. date of manufacture, including year and month (i.e. 9601) or year and week (i.e. 9644);
 - iii. polarity;
 - iv. voltage rating; and
 - v. type.

Issued by: Roger Smith, Senior Regulatory Counsel

10.9 Electromagnetic Compatibility

The Meter shall be designed in such a way that conducted or radiated electromagnetic disturbances as well as electrostatic discharges do not damage nor substantially influence the Meter.

10.10 Radio Interference Suppression

The Meter shall:

- (a) not generate conducted or radiated radio frequency noise which could interfere with other equipment; and
- (b) meet FCC Part 15 Class B computing device radio frequency interference standards.

11 Mechanical Requirements

11.1 General

The Meter shall not pose any danger when operating under rated conditions in its normal working position. Particular attention should be paid to the following:

- (a) personnel protection against electric shock;
- (b) personnel protection against effects of excessive temperature;
- (c) protection against the spread of fire; and
- (d) protection against penetration of solid objects, dust or water.

11.2 Corrosion Protection

All parts of the Meter shall be effectively protected against corrosion under normal operating conditions. Protective coatings shall not be damaged by ordinary handling nor damaged due to exposure to air. The Meter shall be capable of operating in atmospheres of up to (and including) 95% relative humidity condensing.

11.3 Solar Radiation

The functions of the Meter shall not be impaired, the appearance of the Meter shall not be altered and the legibility of the Meter nameplate and other labels shall not be reduced due to exposure to solar radiation throughout the service life of the Meter.

11.4 Corrosive Atmospheres

ISO may specify additional requirements for Meters used in corrosive atmospheres.

11.5 Meter Package

The Meter Package shall meet the following requirements:

- (a) the socket Meter's dimensions shall be in accordance with ANSI C12.10;
- (b) the socket Meter shall be designed for mounting outdoors in a standard meter socket;

Issued by: Roger Smith, Senior Regulatory Counsel

- (c) Meters shall have a twist-on self locking cover in accordance with ANSI C12.10 requirements. The Meter cover shall:
 - i. not contain a metal or conducting locking ring;
 - ii. shall be resistant to ultraviolet radiation;
 - iii. be sealed in such a way that the internal parts of the Meter are accessible only after breaking the seal(s);
 - iv. for any non-permanent cover deformation, not prevent the satisfactory operation of the meter;
 - v. for the "sprue" hole (mold fill hole), not affect the ability to read the Meter; and
 - vi. have an optical port per ANSI C12.13, Type 2.
- (d) the method of securing the socket Meter to the meter socket shall be with either a sealing ring or a high security sealing device;
- the billing period demand reset device shall accommodate a standard electric meter seal and shall remain in place with friction if not sealed; and
- (f) filtered ventilation shall be provided in the base of the Meter to prevent condensation inside the Meter.

11.6 Nameplate

The Meter nameplate shall:

- (a) comply with the minimum information requirements of ANSI C12.10;
- include the Meter's serial number and the date of manufacture. The manufacturing date shall include the year and month (i.e. 9601) or the year and week (i.e. 9644);
- (c) have the following attributes:
 - i. it shall be mounted on the front of the Meter;
 - ii. it shall not be attached to the removable Meter cover;
 - iii. it shall be readable when the Meter is installed in the Meter socket or panel; and
 - iv. it shall not impair access for accuracy adjustment or field replacement of components (such as the battery).
- (d) include ANSI standard bar coding; and
- (e) include an easily erasable strip with minimum dimensions of 3/8 inch by 1½ inches for penciling in items such as meter multiplier or the Meter tester's initials.

Issued by: Roger Smith, Senior Regulatory Counsel

12 Security

12.1 Billing Period Reset

Operation of the billing period demand reset mechanism shall require breaking of a mechanical sealing device. Use of common utility-type sealing devices shall be accommodated.

12.2 Meter Password

The Meter shall be programmable by the Meter Programmer with up to four unique passwords to prevent unauthorized tampering by use of the optical port or the optional modem. For meters procured after 1/1/98, passwords must be a minimum of four (4) alpha/numeric characters. Access rights and capabilities shall be individually programmable for each password. The Meter shall accept multiple requests from different sources without error, lockup or loss of data.

12.3 Test Mode

Removal of the Meter cover shall be required to activate the Test Mode.

12.4 Program Security

At least four levels of security shall be available for the Rate Development Program and the Field Program. These levels include:

- (a) Read Register— the user can only read billing and load profile data;
- (b) Read Register— the user can only read billing and load profile data, and perform a billing period reset;
- (c) Read/Modify Register— the user can perform functions listed in 12.4(a) and 12.4(b), plus download Meter configuration files and operate other features of the Field Program; and
- (d) Read/Modify/Program Register— the user can perform functions listed in 12.4(a), 12.4(b) and 12.4(c), plus develop Meter configuration files and operate additional features of the Rate Development Program.

12.5 Revenue Protection

Meters that help prevent Energy diversion are preferred.

13 Meter Approval Testing

13.1 General Requirement

This Section outlines the testing required by the ISO to assure the quality of Meters, the ISO will not approve Meters which have not undergone the testing referred to in this Section.

ISO Testing using Independent Laboratory

In addition to the required manufacturer testing specified in this Section, the ISO reserves the right to require independent laboratory test data resulting from the performance of tests as outlined in this Section.

In addition to the applicable testing requirements of the ANSI C12 standards, the qualification tests specified in this Section shall be conducted to confirm correct operation of the Meter.

Issued by: Roger Smith, Senior Regulatory Counsel

The qualification testing is required for new Meter designs and for Meter product changes.

The ISO Metered Entity shall ensure that its supplier provides a certified test report documenting the tests and their results. The test report will be signed by the supplier and shall include all charts, graphs and data recorded during testing.

13.2 Meter Failure Definition

A Meter shall be designated as failed if any of the following events occur:

- (a) failure of the Meter to perform all of the specified functions;
- (b) failure of the Meter to meet the technical performance specifications included in this Exhibit:
- (c) signs of physical damage or performance degradation as a result of a test procedure, including effects which could shorten the service life of the Meter;
- (d) the occurrence of an unexpected change of state, loss of data or other unacceptable mode of operation for the Meter as a consequence of a test procedure; and
- (e) failures shall be classified as a hardware, firmware or software failure or a combination according to the following definitions:
 - firmware failures are errors made during the fabrication of programmable read only memory (PROM) chips such that the required program or instruction set that the microprocessor is to perform is incorrect;
 - ii. hardware failures are failures that are physical in nature and directly traceable to the component level. Visual observances such as discoloration, cracking, hardening of cables, poor solder joints, etc. are also included. Failures of DIP switches, jumpers, and links are also included; and
 - iii. software failures are failures such as the loss or unintended change of data, the inability to program the Meter, the loss of the Meter program or the erroneous output or display of false information.

13.3 Meter Design Rejection Criteria

A Meter design will be rejected if any of the following events occur:

(a) the failure of one Meter during one test procedure and the failure of a second Meter during another test procedure; and

the failure of two or more Meters during the same test procedure.

13.4 Test Setup

(a) the Meter shall be connected to its normal operating supply voltage with a fully charged Power Failure Backup System. The Meter shall be energized throughout the duration of the test procedures, unless otherwise stated:

Issued by: Roger Smith, Senior Regulatory Counsel

- (b) before testing commences, the Meter shall be energized for a minimum of two hours at room temperature;
- (c) all tests shall be conducted at room temperature unless otherwise specified; and
- (d) the Meter shall be loaded to the nameplate test amperes at 100% power factor for all tests unless otherwise indicated.

13.5 Functional Test (No Load Test)

This test confirms the operation of the Meter functions in accordance with this Exhibit:

- (a) the Meter shall be energized with no load;
- (b) the Meter shall be programmed with the ISO supplied parameters using a Meter Programmer;
- (c) operation of the specified functions will be verified over 24 hours by observing the Meter display and by interrogating the contents of Meter registers via a Meter Programmer; and
- (d) to pass this test, the Meter shall operate as specified with no observed anomalies.

13.6 Accuracy Test

This test confirms the accuracy of the Meter:

- (a) the accuracy of the Meter shall be tested for all combinations of the following conditions:
 - i. at ambient temperature, 85°C and -20°C;
 - ii. at power factors of 100%, 50% lag and 50% lead; and
 - iii. at 0% to 120% of class current:
- (b) accuracy curves shall be provided for all combinations of the conditions; and
- (c) to pass this test, the Meter shall have the indicated accuracy at ambient temperature for the following load conditions:
 - i. \pm 0.2% at Full load at power factor of 100%;
 - ii. \pm 0.25% at Full load at power factor of 50% lag;
 - iii. \pm 0.25% at Full load at power factor of 50% lead; and
 - iv. \pm 0.25% at Light load at power factor of 100%.

13.7 Line Voltage Variation Test

This test confirms the Meter's correct operation under varying line voltage conditions:

(a) the Meter shall be tested at line voltages ranging from 80% to 120% of rated voltage under the following load conditions:

Issued by: Roger Smith, Senior Regulatory Counsel

- i. full load at power factor of 100%; and
- ii. light load at power factor of 100%; and
- (b) to pass this test the Meter shall meet the following criteria:
 - i. operate as specified;
 - ii. have an accuracy as specified in Section 13.6(c) throughout the 80% to 120% voltage range; and
 - iii. the Power Failure Backup System shall not take over when the voltage is above 80% and below 120% of rated.

13.8 Momentary Power Loss

This test confirms the Meter's ability to withstand momentary power outages:

- (a) the test will be performed by opening the AC power supply input for the specified duration;
- (b) twelve tests shall be conducted using the following sequence:
 - i. energize the Meter;
 - ii. simulate a power loss of 0.5 cycles at 60 hertz;
 - iii. lengthen each succeeding simulated power outage by 0.5 cycles until a duration of 6.0 cycles is attained; and
 - iv. the start of each successive test shall be delayed by one minute; and
- (c) to pass this test, the Meter shall operate as specified with no observed anomalies.

13.9 Power Failure Backup System Test

This test confirms the carryover capability of the Power Failure Backup System:

- (a) this test shall be conducted at ambient temperature using a new or fully charged battery;
- (b) the test shall be conducted using the following sequence:
 - i. Energize the Meter at full load for two hours;
 - ii. De-energize the Meter for 24 hours; and
 - iii. Verify the integrity of programs and metering data stored in memory; and
- (c) to pass this test, the Meter shall operate as specified with no observed anomalies.

13.10 Brownout and Extended Low Voltage Test

This test confirms the Meter's ability to withstand brownouts and extended low voltage conditions:

- (a) the test shall be conducted using the following sequence:
 - i. Energize the Meter and verify correct operation;

Issued by: Roger Smith, Senior Regulatory Counsel

- ii. Slowly lower the line voltage to 80% of nominal;
- iii. Operate the Meter at this voltage level for 6 hours;
- iv. Verify correct Meter operation;
- v. Lower the line voltage to 50% of nominal;
- vi. Operate the Meter at this voltage level for 6 hours; and
- vii. Verify correct operation of the Meter and the Power Failure Backup System; and
- (b) to pass this test, the Meter shall operate as specified with no observed anomalies.

13.11 Effect of Power Failure Backup System Voltage Variation on Clock Accuracy

This test confirms the effects of the battery voltage on the Meter's clock accuracy:

- the Meter shall be tested with the battery disconnected and an auxiliary DC power supply connected to the battery carryover circuit. The DC power shall be varied from 95% to 105% of nominal battery voltage; and
- (b) to pass this test, the accuracy of the Meter clock shall be within 0.02% (2 minutes per week) with a voltage variation of 5 % of nominal battery voltage at ambient temperature.

13.12 Effect of Temperature Variation on Clock Accuracy

This test confirms the effects of temperature on the Meter clock accuracy:

- (a) this test shall be conducted with the register in the battery carryover mode:
- (b) the temperature shall be varied from 85° C to -20° C;
- (c) the Meter shall be exposed to each temperature for a least 2 hours prior to testing; and
- (d) to pass this test, the accuracy of the Meter clock shall be within 0.02% (2 minutes per week) at ambient temperature, 85°C, and -20°C.

13.13 Temperature Cycle Test

This test confirms the effects of an accelerated temperature cycle on the Meter:

- (a) the Meter cover shall be removed during this test;
- (b) the test duration shall be 7 days (168 hours);
- (c) the temperature shall be cycled once per 24 hour period;
- (d) temperature shall be varied linearly during the tests at a constant rate not to exceed 20°C per hour;
- (e) humidity shall not be controlled during the test;

Issued by: Roger Smith, Senior Regulatory Counsel

- (f) the Meter shall be de-energized during the fourth and fifth cycles of the test to verify the performance of the Power Failure Backup System during temperature fluctuations;
- (g) each 24 hour cycle shall consist of the following:
 - i. begin test at +20°C (or room temperature if within 5°C);
 - ii. ramp up to +85°C in approximately 3.25 hours;
 - iii. hold at +85°C for approximately 10.75 hours;
 - iv. ramp down to -20 C in approximately 5.25 hours;
 - v. hold at -20°C for approximately 2.75 hours;
 - vi. ramp up to +20°C in approximately 2.00 hours; and
 - vii. begin next 24 hour cycle or end test after 7 cycles; and
- (h) to pass this test, the Meter shall operate as specified with no observed anomalies for the entire test period.

13.14 Humidity Cycle Test

This test confirms the effects of an accelerated humidity cycle on the Meter:

- (a) the Meter cover shall be removed during this test, or a meter cover with a large hole at the bottom may be substituted;
- (b) the duration of the test shall be 24 hours;
- (c) condensation may form on the Meter during the test;
- (d) temperature shall be varied linearly during the tests at a constant rate not to exceed 20°C per hour;
- (e) humidity shall not be controlled during temperature changes;
- (f) the test shall consist of the following sequence:
 - i. begin at +20°C (or room temperature if within 5°C);
 - ii. ramp up to +85°C in approximately 3.25 hours;
 - iii. ramp up to a relative humidity of 95% in approximately 1 hour;
 - iv. hold at +85°C at a relative humidity of 95% ±1% for approximately 14.5 hours;
 - v. ramp down to +20°C in approximately 3.25 hours;
 - vi. concurrently with Section 13.14(f)v. ramp down to a relative humidity of 75% in approximately 15 minutes;
 - vii. hold relative humidity at 75% for remainder of temperature ramp down; and
 - viii. hold at 20°C at a relative humidity of 75% ±1% for approximately 2 hours; and
- (g) to pass this test, the Meter shall operate as specified with no observed anomalies for the entire test period.

Issued by: Roger Smith, Senior Regulatory Counsel

13.15 Insulation Withstand Test

This test confirms the insulation levels of the Meter:

- (a) the Meter shall not be energized for this test;
- (b) the insulation between power line voltage and current carrying parts and any other metallic or conductive part shall be tested by applying 2500 volts rms, 60 Hz for a period of one minute; and
- (c) to pass this test the leakage current shall not exceed one milliamp for the duration of the test and the Meter shall operate after completion of the test.

13.16 Standard Waveform Surge Withstand Test

This test confirms the ability of the Meter to withstand voltage transients:

- (a) the Meter shall be energized but not loaded during the test;
- (b) the test shall be conducted in accordance with the latest recognized industry standards;
- the oscillatory test wave shall be applied at a repetition rate of 100 tests per second for 25 seconds;
- (d) the test signal shall be applied in both the common and transverse modes;
- (e) the test shall be conducted on all voltage, current, and optional equipment inputs and outputs;
- (f) this test will be performed two times with a maximum period of 1 minute between tests; and
- (g) to pass this test, the Meter shall operate as specified with no observed anomalies:

13.17 Fast Transient Waveform Surge Withstand Test

This test confirms the ability of the Meter to withstand fast voltage transients:

- (a) the Meter shall be energized but not loaded during the test;
- (b) this test shall be conducted in accordance with the latest industry recognized standard;
- (c) the unipolar test wave shall be applied at a repetition rate of 100 tests per second for 25 seconds:
- (d) the test signal shall be applied in both the common and transverse modes;
- (e) the test shall be conducted on all voltage, current, and optional equipment inputs and outputs;
- (f) this test will be performed two times with a maximum period of 1 minute between tests: and
- (g) to pass this test, the Meter shall operate as specified with no observed anomalies.

Issued by: Roger Smith, Senior Regulatory Counsel

13.18 Powerline Surge Voltage and Current Test

This test confirms the ability of the Meter to withstand power line voltage and current surges:

- (a) the meter shall be energized but not loaded during the test;
- (b) the test shall be performed using the unipolar and the ring waveform specified in the latest industry recognized standard;
- (c) the test surges shall be applied to the power line in both the normal and common modes;
- (d) the following number of surges shall be applied at the indicated voltages:
 - i. 12 surges at 6 kV;
 - ii. 12 surges at 5 kV; and
 - iii. 36 surges at 4 kV.
- (e) the first test surges at 5 kV and 6 kV shall be injected at 0 degrees on the positive half-cycle of the waveform. Each successive test surge shall be shifted 15 degrees on the positive half-cycle of the waveform up to 180 degrees;
- (f) the first test surge at 4 kV shall be injected at 0 degrees on the positive half-cycle of the waveform. Each successive test surge shall be shifted 15 degrees on both the positive and negative half-cycles of the waveform up to 360 degrees;
- (g) sufficient time shall be allowed in between test surges for the electronic components to return to normal operating temperatures. A minimum of 5 minutes shall be allowed between each surge test;
- the applied test signals shall be monitored and recorded. The Meter under test shall be monitored to confirm that correct operation is maintained;
- (i) after the tests each meter shall be inspected for visible damage, such as signs of arcing, etc.; and
- (j) to pass this test, the Meter shall operate as specified with no visible damage observed.

13.19 Electrostatic Susceptibility Test

This test verifies the ability of the Meter to withstand electrostatic discharges:

- (a) this test shall be tested in accordance with the latest revision of Military Handbook DOD-HDBK-263;
- (b) the test generator shall simulate a human body with a capacitance of 100 picofarads and a series resistance of 1500 ohms;
- (c) the test probe shall be a 3/8 inch rod with a rounded tip;
- (d) the following procedures shall be followed:

Issued by: Roger Smith, Senior Regulatory Counsel

- test all surfaces, including switches and buttons and other components that will be contacted by personnel under normal handling, installation and use of the Meter. This shall include any safety grounded or neutral terminals on the exterior of the meter enclosure;
- ii. with the test probe voltage set at 10 kV, contact each of the above surfaces with the probe;
- iii. with the test probe voltage set to 15 kV, locate the probe to within approximately 0.5 inch (avoiding contact) with each of the above surfaces; and
- iv. the functions of the Meter shall be periodically verified for correct operation; and
- (e) to pass this test, the Meter shall operate as specified with no observed anomalies.

13.20 Visual Inspection

This test shall be performed after all of the other tests except the Shipping Test have been performed:

- (a) visual inspection shall be performed for all electronic circuit boards in the Meter; and
- (b) to pass this test, the Meter shall not have any defect which would result in rejection under the latest recognized industry standards on any electronic circuit board.

13.21 Shipping Test

This test confirms the ability of the Meter and its packaging to withstand the rigors of shipping and handling:

- the Meter shall not be energized during this test, but shall be programmed and operating in the power Backup mode;
- (b) the packaged Meter shall be subjected to the following tests:
 - i. the National/International Safe Transit Association Preshipment Test Procedures, Project IA; and
 - Method B, Single Container Resonance Test, of the latest revision of American Society for Testing and Materials (ASTM) Standard D-999. Test intensities, frequency ranges and test durations shall meet or exceed the recommended values of ASTM D-999; and
- (c) to pass this test, the Meter shall be inspected and tested to verify that no damage had occurred and that the time and all stored data is correct.

14 Safety

14.1 Hazardous Voltage

Hazardous voltages shall not be easily accessible with the Meter cover removed.

Issued by: Roger Smith, Senior Regulatory Counsel

14.2 Grounding

All accessible conductive parts on the exterior of the Meter and conductive parts that are accessible upon removal of the Meter cover shall be electrically connected to the Meter grounding tabs. All connections in the grounding circuit shall be made with an effective bonding technique.

14.3 Toxic Materials

No materials that are toxic to life or harmful to the environment shall be exposed in the Meter during normal use.

14.4 Fire Hazard

Materials used in the construction of the Meter shall not create a fire hazard.

15 Data Security And Performance

- (a) Manual access for changing data or reprogramming shall require the physical removal or breaking of an ISO seal by the ISO or an ISO Authorized Inspector.
- (b) No loss of data shall occur as a result of the following events within design specifications:
 - i. power outages, frequency changes, transients, harmonics, reprogramming, reading; and
 - ii. environmental factors—dampness, heat, cold, vibration, dust.
- (c) 5-minute interval data for the most recent 60 day period shall always be available and accessible via the communications interface or the optical interface.

16 Documentation

16.1 Hardware Documentation To Be Provided For ISO Review

- (a) Drawing(s) showing the external meter connections.
- (b) Instruction booklets detailing the necessary procedures and precautions for installation of the Meter provided for use by field personnel during initial installation written in the style of a step by step outline.
- (c) One (1) technical/maintenance manual and one (1) repair manual shall be provided for each Meter style. These manuals shall be sufficiently detailed so that circuit operation can be understood and equipment repair facilitated.
- (d) The above documents shall be submitted for approval by ISO before equipment is installed. Approval of documents by the ISO shall not relieve any responsibility for complying with all the requirements of this Exhibit.

Issued by: Roger Smith, Senior Regulatory Counsel

16.2 Software

A complete set of manuals detailing the operation of the Rate Development Program, the Field Program, and the Field Disk Serialization Program shall be provided to ISO for review. These manuals shall explain to a person with only basic computer knowledge how to generate and download Meter configuration files.

17 Applicable Standards

The standards referred to in Appendix J to the ISO Tariff shall apply to all Meters.

18 Definitions

The following terms and expressions used in this Exhibit are detailed as set forth below:

- "Ambient Temperature" means temperature of 23°±2° Celsius.
- "Average Power Factor" means the power factor calculated using the average active and reactive power flows over the latest demand interval.
- "**Delivered**" means Energy (active, reactive, or apparent) that flows from the ISO Controlled Grid to an End-User.
- "Failed Meter" means a Meter in which any part or component, except the removable battery, has failed.
- "Failure" means any hardware, firmware or software failure, or any combination.
- "Field Disk Serialization Program" means a software package that allows the user to assign a separate password to each disk copy of the Field Program.
- "Field Program" means a software package that allows the user to download Meter configuration files into the Meter and perform other testing and maintenance activities.
- "Hazardous Voltage" means any voltage exceeding 30 volts rms.
- "Meter" means all single phase and three phase electricity meters with electronic registers, including hybrid and solid state meters, but excluding solid state recorders, and including any optional devices included under the Meter cover.
- "Meter Programmer" means the PC DOS based laptop computers used for meter reading/programming.
- "MSDS" means the Material Safety Data Sheet.
- "Power Failure Backup System" means a sub-system in the Meter that provides power to the electronic circuitry when the normal power line voltage is below operating limits. The sub-system usually consists of a battery and may or may not include a super capacitor.
- "Quadrant" means the term used to represent the direction of power flows (active and reactive) between the ISO Controlled Grid and an End-User. The 4 quadrants are defined as follows:

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 804

- (a) Quadrant 1 shall measure active power and reactive power delivered by the ISO Controlled Grid;
- (b) Quadrant 2 shall measure active power received by ISO Controlled Grid and reactive power delivered by the ISO Controlled Grid;
- (c) Quadrant 3 shall measure active power and reactive power received by the ISO Controlled Grid; and
- (d) Quadrant 4 shall measure active power delivered by ISO Controlled Grid and reactive power received by the ISO Controlled Grid.
- "Rate Development Program" means a software package that allows the user to generate Meter configuration files including operating parameters and TOU schedules.
- "Received" means Energy (active, reactive or apparent) that flows from a Generator to the ISO Controlled Grid.
- "RFI" means the Radio Frequency Interference.
- "Temperature tolerance" means ±2° Celsius.

Issued by: Roger Smith, Senior Regulatory Counsel

Attachment 1 **Physical and Electronic Attribute Criterion for Electricity Meters**

| | Test / Inspection Description | Pass | Fail |
|----|--|------|------|
| 1. | Bayonets | | |
| A. | Missing or loose parts, i.e., cotter pin, arc gap, etc. | | |
| 2. | Meter Base | | |
| A. | Any cracked and/or missing/damaged gasket | | |
| B. | Any broken leg | | |
| C. | Missing or loose voltage link or screw | | |
| D. | Any missing or loose arc gaps | | |
| E. | Missing or damaged ventilation screen or filter on applicable meter | | |
| F. | Sealing hole unusable for sealing | | |
| G. | Any chips on upper half of meter (gasket ring area) | | |
| H. | Any chips which may jeopardize meter integrity | | |
| I. | Any sign of water damage in meter such as corrosion, oxidation, stain | | |
| J. | Missing or loose rivets holding frame to base | | |
| 3. | Meter Frame | | |
| A. | Nameplate data incorrect or flawed | | |
| B. | Missing or loose hardware on frame | | |
| 4. | Module | | |
| A. | Loose or defective power connectors | | |
| B. | Improper routing of voltage leads | | |
| C. | Improper fit (loose or crooked) | | |
| D. | Crimped or pinched voltage leads | | |
| E. | Incorrect module | | |
| F. | Calibration screw access should not be significantly affected (or covered) | | |
| 5. | Meter Cover | | |
| A. | Wiring to communication port is correct & solid | | |
| B. | Proper meter cover is used for meter type and class | | |
| C. | Mechanical reset mechanism works properly | | |
| D. | Proper alignment, positioning, and operation of all cover mechanisms | | |

Original Sheet No. 806

Attachment 1 Physical and Electronic Attribute Criterion for Electricity Meters (cont.)

| 6. | Electronic Register | | |
|----|--|--|--|
| A. | Program register to verify acceptance of rate schedule | | |
| В. | Check display that all segments are operational | | |
| C. | Check battery carryover function, if appropriate | | |
| D. | Check register tracking by inputting disk revolutions | | |
| E. | Check for any visual defects in the register assembly | | |

Only scratches and/or chips that are cosmetically or functionally objectionable will be classified as defective and failing.

Attachment 2 **Meter Display Items**

| Meter Display Items Normal Alternate Test | | | | | |
|---|------|------|------|--|--|
| Display Item | Mode | Mode | Mode | | |
| Minimum Requirements for Delivered kWh | | | | | |
| Complete Display (Segment) Test | x | x | | | |
| Demand Reset Count | | x | | | |
| Demand Reset Date | | x | | | |
| Instantaneous kW | x | x | | | |
| Interval length | | х | | | |
| Minutes of Battery Use | | х | | | |
| Present time | х | х | | | |
| Previous Billing Rate A kWh | | х | | | |
| Previous Billing Rate A Maximum kW | | х | | | |
| Previous Billing Rate B kWh | | х | | | |
| Previous Billing Rate B Maximum kW | | х | | | |
| Previous Billing Rate C kWh | | x | | | |
| Previous Billing Rate C Maximum kW | | x | | | |
| Previous Billing Rate D kWh | | x | | | |
| Previous Billing Rate D Maximum kW | | x | | | |
| Previous Billing Total kWh | | x | | | |
| Previous Season Rate A kWh | x | x | | | |
| Previous Season Rate A Maximum kW | x | x | | | |
| Previous Season Rate B kWh | x | x | | | |
| Previous Season Rate B Maximum kW | x | x | | | |
| Previous Season Rate C kWh | x | x | | | |
| Previous Season Rate C Maximum kW | x | x | | | |
| Previous Season Rate D kWh | x | x | | | |
| Previous Season Rate D Maximum kW | x | x | | | |
| Previous Season Total kWh | | x | | | |
| Program ID | | x | | | |
| Rate A kWh | x | x | | | |
| Rate A Maximum kW | x | x | | | |
| Rate B kWh | x | x | | | |
| Rate B Maximum kW | x | x | | | |
| Rate C kWh | x | x | | | |
| Rate C Maximum kW | x | x | | | |
| Rate D kWh | x | x | | | |
| Rate D Maximum kW | X | X | | | |

Attachment 2 Meter Display Items (cont.)

| Meter Display Items (cont | Normal | Alternate | Test |
|---|--------|-----------|------|
| Display Item | Mode | Mode | Mode |
| Minimum Requirements for Delivered kWh (cont.) | | | |
| Total kWh | х | x | Χ |
| Wh per disk revolution (Kh) | | Х | |
| Wh per pulse (Ke) | | Х | |
| Minimum Requirements for Test Mode | | | |
| Present Interval Demand—kW | | | X |
| Pulse count | | | Х |
| Time left in subinterval | | | Х |
| Total kWh | | | Х |
| Additional requirements for Received kWh (if specified) | | | |
| Previous Billing Total Received kWh | | Х | |
| Previous Season Total Received kWh | | Х | |
| Total Received kWh | х | Х | |
| Additional requirements for kVARh (if specified) | | | |
| Maximum Delivered kVAR | | Х | |
| Maximum Received kVAR | | Х | |
| Previous Billing Maximum Delivered kVAR | | Х | |
| Previous Billing Maximum Received kVAR | | Х | |
| Previous Billing Total Delivered kVARh | | Х | |
| Previous Billing Total Received kVARh | | x | |
| Previous Season Maximum Delivered kVAR | | x | |
| Previous Season Maximum Received kVAR | | Х | |
| Previous Season Total Delivered kVARh | | x | |
| Previous Season Total Received kVARh | | Х | |
| Total Delivered kVARh | | Х | |
| Total Received kVARh | | Х | |
| Previous Billing Maximum Delivered kVA | | Х | |
| Previous Billing Maximum Received kVA | | Х | |
| Previous Billing Total Delivered kVAh | | Х | |
| Previous Billing Total Received kVAh | | Х | |
| Previous Season Maximum Delivered kVA | | Х | |
| Previous Season Maximum Received kVA | | Х | |

Original Sheet No. 809

Attachment 2 Meter Display Items (cont.)

| Additional requirements for kVAh (cont.) | | |
|---|---|--|
| Previous Season Total Delivered kVAh | х | |
| Previous Season Total Received kVAh | х | |
| Total Delivered kVAh | x | |
| Total Received kVAh | x | |
| Additional requirements for Power Factor (if specified) | | |
| Quadrant 1 Average Power Factor | x | |
| Quadrant 2 Average Power Factor | x | |
| Quadrant 3 Average Power Factor | x | |
| Quadrant 4 Average Power Factor | x | |
| Total Average Power Factor Delivered | x | |
| Total Average Power Factor Received | Х | |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

EXHIBIT 2 TO APPENDIX D

ISO SPECIFICATION FOR CERTIFICATION OF OIL-FILLED, **WOUND INSTRUMENT TRANSFORMERS** FOR REVENUE METERING

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

1 Purpose

This Exhibit specifies the technical requirements for reliable high-accuracy Current Transformers (CT) and Voltage Transformers (VT) to be used for revenue quality metering on the ISO Controlled Grid.

2 Scope

- **2.1** This Exhibit applies only to the following:
 - Oil-filled Single-Phase CTs 35kV-230kV.
 - Oil-filled Single-Phase VTs 35kV-230kV.
 - Oil-filled Single-Phase Combination Current/Voltage Transformers 35kV-230kV.
- 2.2 This Exhibit applies only to the following Oil-filled Wound Devices, which are VTs < 35kv.</p>

VTs > 230kv must be individually specified in accordance with the engineered installations.

3 Standards

All instrument transformers covered by this Exhibit shall be designed, manufactured, tested and supplied in accordance with the applicable standards referred to in Appendix J to the ISO Tariff.

4 Definitions

"Hermetically Sealed" means completely sealed by fusion, soldering, etc., so as to keep air or gas from getting in or out (i.e. airtight).

"Metering Unit" means one or more Voltage element(s) and one or more Current element(s) contained in one common housing.

"BIL Rating" means basic lightning impulse insulation level.

"Burden Rating" means the total impedance (in ohms) that can be connected to the secondary circuit(s) of an instrument transformer while still maintaining metering accuracy of plus-or-minus 0.3%

5 Specifications

5.1 General

All instrument transformers covered by this Exhibit shall be hermetically sealed, oil-filled type and have a minimum BIL Rating appropriate for the designated nominal System voltage:

- 60 69 kV 350 kV BIL
- 115 kV 550 kV BIL
- 230 kV 900 kV BIL

Issued by: Roger Smith, Senior Regulatory Counsel

5.2 Current Transformers

- **5.2.1** Current Transformer windings (typical configurations) shall be either:
 - (a) a single primary winding and single secondary winding with dual ratio tap;
 - (b) a dual primary winding and a single ratio tap;
 - (c) a single primary winding and one or more secondary windings with dual ratio tap(s); or
 - (d) other combinations as available and approved by the ISO.

5.2.2 Rated primary current

The rated primary current must be as specified by the ISO Metered Entity.

5.2.3 Rated secondary current

The rated secondary current must be 5 amperes @ rated primary current.

5.2.4 Accuracy and burden

All current transformers shall have an accuracy and burden of:

- (a) standard plus-or-minus 0.3% @ B0.1 1.8 ohms, 10% 100% rated current; or
- (b) optional plus-or-minus 0.15 % @ B0.1 1.8 ohms, 5% 100 % rated current.

5.2.5 Continuous current rating factor

All current transformers shall have a continuous current rating factor of:

- (a) standard 1.5 @ 30 degrees C Ambient; or
- (b) optional 1.0 @ 30 degrees C Ambient.

5.2.6 Short time thermal current rating

The short time thermal current rating varies with transformer rating as follows:

25/50: 5 ratio, 4 kA RMS to 1500/3000:5 ratio, 120 kA RMS.

5.2.7 Mechanical short time current rating

The mechanical short time current rating varies with transformer rating as follows:

25/50:5 ratio, 3 kA RMS to 1500/3000:5 ratio, 90 kA RMS.

5.3 Voltage Transformers

- **5.3.1** Transformer windings shall consist of a single primary winding and one or more tapped secondary windings.
- **5.3.2** Rated primary voltage, as specified by the ISO Metered Entity, must be 34,500 volts through 138,000 volts, L-N.

Issued by: Roger Smith, Senior Regulatory Counsel

- **5.3.3** Rated secondary voltage must typically be 115/69 volts.
- **5.3.4** The ratio of primary to secondary windings must be 300/500:1 through 1200/2000:1.

5.3.5 Accuracy and burden

All voltage transformers shall have accuracy and burden of:

- (a) standard plus-or-minus 0.3% through B. ZZ @ 90% through 110% of nominal voltage; or
- (b) optional plus-or-minus 0.15% through B. Y 90% through 110% of nominal voltage.

5.3.6 Thermal burden rating

All voltage transformers shall have a thermal burden rating of:

- (a) 34.5 kV 2500 VA, 60 hertz;
- (b) 60 kV & 69 kV 4000 VA, 60 hertz; or
- (c) 115 kV 6000 VA, 60 hertz.

5.4 Combination Current/Voltage Transformers (Metering Units)

Combination Current/Voltage Transformers shall maintain the same electrical, accuracy and mechanical characteristics as individual CTs and VTs. Physical dimensions may vary according to design.

5.5 Grounding

The neutral terminal of the VT shall exit the tank via a 5kV insulated bushing and be grounded by means of a removable copper strap to a NEMA 2-hole pad.

5.6 Primary Terminals

The primary terminals shall be tin-plated NEMA 4-hole pads (4"x4").

5.7 Paint

Exterior metal non current-carrying surfaces shall be painted with a weather-resistant paint system consisting of one primer and two industry recognized gray finish coats. As an option, for high-corrosion areas, special corrosion-resistant finishes (e.g. zinc-rich paint, stainless steel tank) shall be used.

Issued by: Roger Smith, Senior Regulatory Counsel

5.8 Porcelain

Porcelain shall be of one-piece wet-process, glazed inside and outside. The outside color shall be in accordance with industry recognized gray glaze. The minimum creepage and strike-to-ground distances for various voltages shall be as follows:

| Voltage (nominal kV) | Creepage (inches) | Strike (inches) |
|----------------------|----------------------|--------------------|
| 34.5 | 34 | 13 |
| 60 & 69 | 52 | 24 |
| 115 | 101 | 42 |
| 230 | 169 | 65 |
| 230 (1050 BIL) | 214 | 84 |

5.9 Insulating Oil

The nameplate shall be of non-corroding material and shall indicate that the dielectric fluid is free of polychlorinated biphenyls by the inscription:

"CONTAINS NO PCB AT TIME OF MANUFACTURE".

5.10 Accessories

All units shall be equipped with the following standard accessories:

- 1/2" brass ball drain valve with plug
- 1" oil filling opening with nitrogen valve
- Magnetic oil level gauge, readable from ground level
- Primary bypass protector
- Sliding CT shorting link
- Four 7/8"x 2-3/8" mounting slots
- Four 1" eyebolts on base for four-point lifting sling
- 1/4" threaded stud secondary terminals
- Two conduit boxes, each with three 1-1/2" knockout

6 Testing

The ISO Metered Entity shall ensure that, before shipment, each transformer is subjected to testing as prescribed by recognized industry standards and other tests including:

- (a) Applied voltage test for primary and secondary winding withstand to ground;
- (b) Induced voltage test for proper turn-to-turn insulation:
- (c) Accuracy test for ratio correction factor and phase-angle verification to confirm 0.3% metering accuracy per recognized industry standards;

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 815

- (d) Ratio test;
- (e) Insulation Power Factor test;
- (f) Polarity test;
- (g) Leak test to assure integrity of gaskets and seals; and
- (h) Partial Discharge Test may be done in conjunction with applied voltage testing to assure proper line-to-ground withstand.

The tests shall be submitted to the ISO on a formal certified test report.

7 Required Information

The following drawings and information shall be required:

- (a) 3 sets of drawings showing physical dimensions including mounting holes and primary CT terminal details, nameplate. The ISO Metered Entity shall ensure that it receives a schematic of connections from its supplier; and
- (b) a copy of quality controls/quality assurance (QC/QA) manuals applicable to production of the transformer(s).

Issued by: Roger Smith, Senior Regulatory Counsel

APPENDIX E

TRANSFORMER AND LINE LOSS CORRECTION FACTORS

E 1 Introduction

Transformer loss correction refers to the practice of metering electrical Energy delivered at a high-voltage billing point using metering equipment connected on the low-voltage side of the delivery point. The metering equipment is provided with a means of correction that adds to, or subtracts from, the actual active and reactive metered values in proportion to losses that are occurring in the transformer.

Transformer losses are divided into two parts:

- the core or iron loss (referred to as the no-load loss); and
- the copper loss (referred to as the load loss).

Both the no-load loss and the load loss are further divided into Watts and Var components.

The no-load (iron) loss is composed mostly of eddy current and hystersis losses in the core. No-load loss varies in proportion to applied voltage and is present with or without load applied. Dielectric losses and copper loss due to exciting current are also present, but are generally small enough to be neglected.

The load (copper) watt loss (I² + stray loss) is primarily due to the resistance of conductors and essentially varies as the square of the load current. The Var component of transformer load loss is caused by the leakage reactance between windings and varies as the square of the load current.

Line losses are considered to be resistive and have I²R losses. The lengths, spacings and configurations of lines are usually such that inductive and capacitive effects can be ignored. If line losses are to be compensated, they are included as part of the transformer load losses (Watts copper).

The coefficients, which are calculated at the calibration point of the meter, are entered into the meter as Percent Loss Watts Copper %LWCU), Percent Loss Watts Iron (%LWFE), Percent Loss Vars Copper (%LVCU), and Percent Loss Vars Iron (%LVFE).

Percent losses are losses expressed as a percent of the full load on a meter.

The formulas used to determine the compensation values at a particular operating point are:

| WATTS | | Measured Voltage ² | | Measured Current ² | |
|--------------|---|-------------------------------|-----------|-------------------------------|---------|
| Compensation | = | | * %LWFE + | | * %LWCU |
| Value | | Calibration Point Voltage 2 | | Calibration Point Current 2 | |

Issued by: Roger Smith, Senior Regulatory Counsel

E 2 Calculating Transformer Loss Constants

Transformer Loss correction calculations with electronic meters are accomplished internally with firmware. Various setting information and test data is required to calculate the four values which are to be programmed into the meter.

The following information is required about meter installations:

- the transformer high voltage (HV) voltage rating
- the transformer kVa rating
- the transformer high voltage (HV) tap settings
- the transformer low voltage (LV) tap settings
- the transformer connection (wye or delta)
- the transformer phases (1 or 3)
- the voltage transformer (VT) ratio
- the current transformer (CT) ratio
- · the number of meter elements

The following data from a transformer test report is required:

- no-load (iron) loss
- full-load (copper) loss
- percent impedance
- percent excitation current

The test data required may be obtained from the following sources:

- the manufacturer's test report
- a test completed by a utility or independent electrical testing company

If the transformer bank is used to deliver power to more than one entity (that is, it is a joint use transformer bank) additional data is required, including the:

- maximum available kVa from the transformer bank
- contracted amount of load to be compensated in kW
- contractual power factor amount to be used in calculations

E 3 Calculating Line Loss Constants

Line Loss correction calculations with electronic meters are accomplished internally with firmware. Various information about the

Issued by: Roger Smith, Senior Regulatory Counsel

radial line is required to calculate the value which is programmed into the meter. The resistance of the conductors are used to calculate a value which is added to the Watts copper loss value which is programmed into the meter. It is not practical to compensate for line losses in a network connected line, only radial lines.

The following information is required about the transmission line:

- the transmission line type
- the ohms per mile
- the length in miles of each type of line

E 4 Applications

Joint Use Transformers

Where a transformer bank is used to deliver power to more than one entity (that is, a joint use transformer bank), no-load iron losses are adjusted by the transformer percent use. This percent use is determined by dividing a negotiated contract kW load (*Contract kW*) at a negotiated power factor (*% Power Factor*) by the maximum available kVa from the transformer bank (*Max. Available kVa*).

$$Percent \ Use = \frac{Contract \ kW}{Max. Available \ kVa}$$

Switched Lines

Line Loss correction for radial lines which are switched, must be based on a negotiated average resistance based on the typical operating characteristics.

Transformer Load Tap Changer

Transformers equipped with a load tap changer (i.e., which has the capability to change transformer voltage tap positions or settings under Load) for regulating voltage, must have the corrections calculated at the median tap voltage. Differences in the corrections must be minimal and must even out over time as the bank operates above and below the median tap voltage.

E 5 Worksheets

A pro forma Transformer and Line Loss Correction Worksheet which can be used to perform the above calculation is attached to this Appendix. Instructions for completing the worksheet are as follows:

- Complete the Name, Delivery, Location and Revision Date fields using the ISO Metered Entity's name, operating name, city, state, and the date of the calculation.
- Enter Transformer High Voltage (HV) winding rated voltage, this is the voltage at which the transformer tests were performed.

Issued by: Roger Smith, Senior Regulatory Counsel

- Enter the HV and Low Voltage (LV) transformer tap settings.
- Enter 'Y' or 'D' to indicate the secondary winding connection of either wye or delta.
- Enter '1' to indicate that the transformer bank is comprised of single phase units or '3' to indicate the bank is comprised of three phase units.
- Enter '2' or '3' to indicate the number of elements in the meter.
- Enter the VT and CT ratios of the instrument transformers used in the metering.
- Enter 'Y' or 'N' to indicate if the transformer bank is utilized by more than one entity.
- Enter the negotiated contract and power factor for the joint use portion of the transformer (if any).
- If compensation coefficients are required at a calibration point other than five amps, enter the new value.
- Space is provided to make comments about the calculation or delivery configuration.
- Enter the manufacturer and serial number of the transformer(s).
- Enter the kVa rating of each bank. For multiple rated banks, the base kVa should be used. Enter the test data collected at base kVa.
- Enter the no-load losses in Watts from the test data.
- Enter the load losses in Watts from the test data.
- Enter the impedance from the test data.
- Enter the Exciting current from the test data.
- If the maximum available kVa from the transformer bank is more than the rated kVa, this value can be entered manually. An example may be for a triple rated transformer that has fans with a rating which is more than the base kVa. This value only affects the percent use calculation.
- Enter the line type for each type of line to be compensated.
- Enter the resistance in ohms per mile of each type of line to be compensated.
- Enter the total length in miles of each type of line to be compensated.

E 6 Reference Materials

The following additional references may be referred to for assistance when calculating the correction factors referred to in this Appendix.

Issued by: Roger Smith, Senior Regulatory Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 820

- Handbook For Electricity Metering, Ninth Edition. Edison Electric Institute. Washington, D.C.
- Eastern Specialty Company Bulletin No. 63.
- American National Standard Institute. Test Code for Distribution, Power and Regulating Transformers.
- System Loss Compensation, Schlumberger Industries, Quantum Multifunction Meter Hardware Instruction Manual 1610, November 1993.
- Transformer Loss Calculation Method, Process System Manual, Appendix E.

Issued by: Roger Smith, Senior Regulatory Counsel

Transformer and Line Loss Correction Worksheet (Example) TRANSFORMER AND LINE LOSS CORRECTION

Name: Acme Power Company

Delivery Number 5 Delivery: Location: Surf Beach, CA

Rev. Date: 5/6/97

| HV Rated Voltage: | 110000 V | VT Ratio: | 60:1 |
|---------------------|----------|--------------------|-----------|
| HV Tap: | 101200 V | CT Ratio: | 600:5 |
| LV Tap: | 13090 V | Joint Use (Y/N): | N |
| Trf. Conn. (Y/D): | Υ | Metering Trf. Use: | 100 % |
| Trf. Phase (1 or 3) | 3 | Contract kW: | 10,000 kW |
| # Meter Elem.: | 3 | Power Factor: | 95 % |

| Compensation Values (@ 5A F.L.) | | Compensation Values at: | 10 A |
|---------------------------------|---------|-------------------------|---------|
| Watt Fe Loss: | 0.16 % | Watt Fe Loss: | .08 % |
| Watt Cu Loss: | 0.53 % | Watt Cu Loss: | 1.06 % |
| Watt Tot. Loss: | 0.69 % | Watt Tot. Loss: | 1.14 % |
| Var Fe Loss: | 0.31 % | Var Fe Loss: | 0.16 % |
| Var Cu Loss: | 10.96 % | Var Cu Loss: | 21.92 % |
| Var Tot. Loss: | 11.27 % | Var Tot. Loss: | 22.08 % |

Comments:

TRANSFORMER DATA

| Serial Number | KVa Rating | No Load | Load | (Z) | (IE) |
|---------------|------------|-----------|-----------|-----------|----------|
| | | (Fe) Loss | (Cu) Loss | Impedance | Exciting |
| | | | | | Current |
| ABB 1000001 | 12000 | 22200 w | 51360 w | 8.84 % | 0.45 % |

| Total kVa rating: | 12000 | | Max Available kVa: | 12000 |
|-------------------|-------|--|--------------------|-------|
|-------------------|-------|--|--------------------|-------|

LINE DATA

| | Resistance | Length |
|---------------|------------|--------|
| #1 Line Type: | Ohms/mile | miles |
| #2 Line Type: | Ohms/mile | miles |
| #3 Line Type: | Ohms/mile | miles |
| #4 Line Type: | Ohms/mile | miles |
| #5 Line Type: | Ohms/mile | miles |
| #6 Line Type: | Ohms/mile | miles |

Transformer and Line Loss Correction Worksheet (Example, continued) TRANSFORMER AND LINE LOSS CORRECTION

Name: ACME Power Company

Delivery: Delivery Number 5

Location: Surf Beach, CA

Rev. Date: 5/6/97

| HV Rated Voltage: | 110000 V | VT Ratio: | 60:1 |
|---------------------|----------|--------------------|-----------|
| HV Tap: | 101200 V | CT Ratio: 600:5 | |
| LV Tap: | 13090 V | Joint Use (Y/N): N | |
| Trf. Conn. (Y/D): | Y | Metering Trf. Use: | 100 % |
| Trf. Phase (1 or 3) | 3 | Contract kW: | 10,000 kW |
| # Meter Elem.: | 3 | Power Factor: 95 % | |

TRANSFORMERS

| Serial Number | kVa |
|---------------|-------|
| ABB 1000001 | 12000 |

^{**}TRANSFORMER LOSS COMPENSATION TEST POINTS FOR WATTHOURS**

SERIES TEST

| Test Load | % Iron | % Copper | % Total |
|-----------|--------|----------|---------|
| Light | 1.60 | 0.05 | 1.65 |
| Full | 0.16 | 0.53 | 0.69 |
| 0.5 P.F. | 0.32 | 1.06 | 1.38 |

^{**}TRANSFORMER LOSS COMPENSATION TEST POINTS FOR VARHOURS**

Issued by: Roger Smith, Senior Regulatory Counsel

SERIES TEST

| Test Load | % Iron | % Copper | % Total |
|-----------|--------|----------|---------|
| Light | 3.10 | 1.10 | 4.20 |
| Full | 0.31 | 10.96 | 11.27 |
| 0.5 P.F. | 0.62 | 21.92 | 22.54 |

Pro Forma Transformer and Line Loss Correction Worksheet TRANSFORMER AND LINE LOSS CORRECTION

| Name: |
|------------|
| Delivery: |
| Location: |
| Rev. Date: |
| |

| HV Rated Voltage: | V | VT Ratio: | :1 |
|---------------------|---|--------------------|-------|
| HV Tap: | V | CT Ratio: | :5 |
| LV Tap: | V | Joint Use (Y/N): | |
| Trf. Conn. (Y/D): | | Metering Trf. Use: | 100 % |
| Trf. Phase (1 or 3) | | Contract kW: | kW |
| # Meter Elem.: | | Power Factor: | % |

| Compensation Values (@ 5A F.L.) | | Compensation Values at: | 10 A |
|---------------------------------|---|-------------------------|------|
| Watt Fe Loss: | % | Watt Fe Loss: | % |
| Watt Cu Loss: | % | Watt Cu Loss: | % |
| Watt Tot. Loss: | % | Watt Tot. Loss: | % |
| Var Fe Loss: | % | Var Fe Loss: | % |
| Var Cu Loss: | % | Var Cu Loss: | % |
| Var Tot. Loss: | % | Var Tot. Loss: | % |

Comments:

TRANSFORMER DATA

| Serial | KVa | No Load | Load | (Z) | (IE) |
|--------|--------|---------|-----------|-----------|----------|
| Number | Rating | (Fe) | (Cu) Loss | Impedance | Exciting |
| | | Loss | | | Current |

| Total kVa rating: | Max Available kVa: |
|-------------------|--------------------|
|-------------------|--------------------|

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

LINE DATA

| | Resistance | Length |
|---------------|------------|--------|
| #1 Line Type: | Ohms/mile | miles |
| #2 Line Type: | Ohms/mile | miles |
| #3 Line Type: | Ohms/mile | miles |
| #4 Line Type: | Ohms/mile | miles |
| #5 Line Type: | Ohms/mile | miles |
| #6 Line Type: | Ohms/mile | miles |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

Name: Delivery:

Trf. Phase (1 or 3)

Meter Elem.:

kW

%

Pro Forma Transformer and Line Loss Correction Worksheet (continued) TRANSFORMER AND LINE LOSS COMPENSATION

| Location: | | | | |
|-------------------|---|--------------------|-------|--|
| Rev. Date: | | | | |
| | | | | |
| HV Rated Voltage: | V | VT Ratio: | :1 | |
| HV Tap: | V | CT Ratio: | :5 | |
| LV Tap: | V | Joint Use (Y/N): | | |
| Trf. Conn. (Y/D): | | Metering Trf. Use: | 100 % | |

TRANSFORMERS

Contract kW:

Power Factor:

| Serial Number | kVa |
|---------------|-----|
|---------------|-----|

^{**}TRANSFORMER LOSS COMPENSATION TEST POINTS FOR WATTHOURS**

SERIES TEST

| Test Load | % Iron | % Copper | % Total |
|-----------|--------|----------|---------|
| Full | | | |
| 0.5 P.F. | | | |
| Light | | | |

^{**}TRANSFORMER LOSS COMPENSATION TEST POINTS FOR VARHOURS**

SERIES TEST

| Test Load | % Iron | % Copper | % Total |
|-----------|--------|----------|---------|
| Full | | | |
| 0.5 P.F. | | | |
| Light | | | |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

APPENDIX F

INSTRUMENT TRANSFORMER RATIO AND CABLE LOSS CORRECTION FACTORS

Background

All current transformers (CTs) and voltage transformers (VTs) (collectively, instrument transformers) have inherent errors due to their design and the physical properties of the materials used in their construction. These errors are manifested as a magnitude and phase angle difference between the "ideal" nameplate ratio and the waveform actually present on the secondary of the transformer. The terms used to denote these errors are Ratio Correction Factor (RCF) and Phase Angle Correction Factor (PACF).

The burden (load) connected to instrument transformer secondaries has an effect on the RCF and PACF of the units. All wiring and instrumentation of any kind is part of the burden. On a CT, the burden is designated in ohms and is represented by a number ranging from B-0.1 through B-1.8. On a VT, burden is measured in volt-amps and indicated by an alpha character, such as W, X, M, Y, Z or ZZ. The magnitude of these burdens must be known and kept within specified limits or additional errors will occur in the metering.

Significant impedance in the leads between the VTs and the meter can be another source of error, where a voltage drop in the leads is caused by the load of the meter and any other connected devices between the VTs and the meter. Conductors which are too small or too long can cause metering error.

Correction when the Burden Rating is exceeded

Where the connected burden of a metering circuit exceeds the burden rating of a CT or VT or if an existing instrument transformer does not meet minimum ISO accuracy requirements, then one of the actions listed below must to be taken:

- The preferred action is to correct the problem by either replacing the instrument transformer(s) with higher burden rated revenue class units or reducing the burden on the circuit to comply with the name plate of existing instrument transformer(s).
- ii. An acceptable action is to apply ISO approved correction factors to the meter to adjust the meter's registration to compensate for inaccuracies.

The ISO Metered Entity will be responsible for properly calculating and applying the CT/VT and cable loss correction factors to its meter to adjust for inaccuracies in the metering circuit. ISO approved algorithms and spreadsheets for calculating correction factors are included in this Appendix.

Issued by: Roger Smith, Senior Regulatory Counsel

CT Ratio Correction Factor

Current transformers are usually tested by the manufacturer for the value of RCF and phase angle at both 5 and 0.5 amp secondary currents. The values for each CT in an installation would be averaged together to determine the CT Ratio Correction Factor (RCFI) and CT Phase Angle (b). If the current transformers used are revenue metering with an accuracy class of 0.3 % and are operated at or below their rated burden, then the correction factors may be disregarded.

VT Ratio Correction Factor

Voltage transformers are usually tested by the manufacturer for the value of RCF and phase angle at rated voltage. The values for each VT in an installation would be averaged together to determine the VT Ratio Correction Factor (RCFE) and VT Phase Angle (g). If the voltage transformers used are revenue metering with an accuracy class of 0.3 % and are operated at or below their rated burden, then the correction factors may be disregarded.

Cable Loss Correction Factor

The secondary voltage cables at an installation can be tested to determine the losses and phase angle of each. These values would then be averaged together to get the Cable Loss Correction Factor (CLCF) and the Phase Angle (a) for the installation. If the calculated connected burden of each phase do not exceed the VT burden rating, then the correction factors may be disregarded.

Final Correction Factor

The PACF for an installation is determined by the following formula:

$$PACF = \frac{cos(Q + b - a - g)}{cos Q}$$

Where *cosQ* is the secondary apparent power factor.

The Final Correction Factor (FCF) can then be determined as follows:

The Percent Error is the amount of error caused by the instrument transformers and cable loss, it is calculated as follows:

Percent Error = (1-FCF)*(100)

The Percent Meter Adjustment is the adjustment to the meter required to compensate for the Percent Error, it is calculated as follows:

Percent Adjustment Factor = (FCF-1)*(100)

The FCF is applied to the calibration of the meter, usually through adjustment of the calibration potentiometer or through a change in the programmed calibration values. After an adjustment to the meter is made, the meter should be tested at all test points to show that the

Issued by: Roger Smith, Senior Regulatory Counsel

meter is within calibration limits with the calibration values applied. A FCF which results in a correction of less than 0.6% can be disregarded since this is less than the required combined accuracy of the instrument transformers. However, if any correction factor (full load, light load or power factor) results in a correction of more than 0.6%, they should all be applied.

Applications

Typical Installation

The preferred meter installation would utilize revenue metering class instrument transformers (0.3 %) operated at or below rated burden. If this is not the case, one or more of the following actions may be used to correct the problem:

- Replace instrument transformers with higher burden rated units.
- Reduce the burden on the circuit to comply with the existing rated burden.
- Apply correction factors to the meter to compensate for inaccuracies.

Paralleling CTs

In normal revenue metering, current transformers would not be paralleled, but there are some applications where paralleling is done because the cost of the installation is reduced and the possibility of reduced meter accuracy is acceptable. A typical installation of this type would be to meter the net output of a generating station on a single meter rather than metering gross generator output and auxiliary power separately. In these type of installations additional rules apply:

- All of the transformers must have the same nominal ratio regardless of the ratings of the circuits in which they are connected.
- All transformers which have their secondaries paralleled must be connected in the same phase of the primary circuits.
- The secondaries must be paralleled at the meter and not at the current transformers.
- There should only be one ground on the secondaries of all transformers. This should be at their common point at the meter.
 Each utility may use their established grounding procedures.
- Modern current transformers with low exciting currents and, therefore, little shunting effect when one or more current transformers are "floating" at no load should be used. Three or more "floating" current transformers might have an effect that should be investigated.
- The secondary circuits must be so designed that the maximum possible burden on any transformer will not exceed its rating. The burden should be kept as low as possible as its effects are

Issued by: Roger Smith, Senior Regulatory Counsel

increased in direct proportion to the square of the total secondary current.

- A common voltage and frequency must be available for the meter.
- If adjustments are made at the meter to compensate for ratio and phase angle errors, the ratio and phase angle error corrections used must represent the entire combination of transformers as a unit.
- The watthour meter must be able to carry, without overload errors, the combined currents from all the transformers to which it is connected.
- While servicing meters and equipment on parallel CT secondaries, all CTs must be by-passed (shorted). When work is completed all by-passes must be removed.

Worksheets

A worksheet which can be used to perform the above calculations is attached to this Appendix. Instructions for completing the worksheet follow:

- Complete the Name, Delivery and Location fields using the ISO Metered Entity's name, the operating name of the delivery, and the city and state for the location.
- Enter the values of RCF and phase angle as tested at full load and light load for each CT in the circuit. Record the manufacturer and serial number of each transformer.
- Enter the values of RCF and phase angle as tested at rated voltage for each VT in the circuit. Record the manufacturer and serial number of each transformer.
- Enter the values of the Cable Loss Correction Factor and Phase Angle for the secondary voltage cables.
- The worksheet will calculate the Final Correction Factors, Percent Errors and Percent Adjustment Factors to be applied to the meter calibration.

Reference Materials

The following additional reference may be referred to for assistance when calculating the correction factors referred to in this Appendix.

 Handbook For Electricity Metering, Ninth Edition. Edison Electric Institute. Washington, D.C.

Issued by: Roger Smith, Senior Regulatory Counsel

CT/VT Ratio and Cable Loss Correction Worksheet (Example)

| N | 2 | m | Δ | • |
|-----|---|---|---|---|
| 1 1 | а | | | |

Delivery:

Location:

| Full Load | Light Load |
|-----------|------------|
|-----------|------------|

Effective: October 13, 2000

CT Test Data:

Phase 'A' CT

Mfr. & Serial Number:

| Ratio Correction Factor (RCF ^I) | 1.0003 | 1.0002 |
|---|--------|--------|
| Phase Angle (β) (minutes) | -0.3 | 2.2 |

Phase 'B' CT

Mfr. & Serial Number:

| Ratio Correction Factor (RCF ^I) | 1.0004 | 1.0029 |
|---|--------|--------|
| Phase Angle (β) (minutes) | -0.4 | 2.2 |

Phase 'C' CT

Mfr. & Serial Number:

| Ratio Correction Factor (RCF ^I) | 1.0019 | 1.0028 | l |
|---|--------|--------|---|
| Phase Angle (β) (minutes) | -0.3 | 3.1 | l |

Average of CT's

Mfr. & Serial Number:

| Ratio Correction Factor (RCF ^I) | 1.0009 | 1.0020 |
|---|--------|--------|
| Phase Angle (β) (minutes) | -0.3 | 2.5 |

VT Test Data:

Phase 'A' VT

Mfr. & Serial Number:

| Ratio Correction Factor (RCF ^E) | 0.9997 |
|---|--------|
| Phase Angle (γ) (minutes) | 1.5 |

Phase 'B' VT

Mfr. & Serial Number:

| Ratio Correction Factor (RCF ^E) | 0.9996 |
|---|--------|
| Phase Angle (γ) (minutes) | 1.5 |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Phase 'C' VT Mfr. & Serial Number:

| Ratio Correction Factor (RCF ^E) | 0.9997 |
|---|--------|
| Phase Angle (γ) (minutes) | 1.7 |

Average of VT's Mfr. & Serial Number:

| Ratio Correction Factor (RCF ^E) | 0.9997 |
|---|--------|
| Phase Angle (γ) (minutes) | 1.6 |

Cable Loss Test Data:

Phase 'A'

| Ratio Correction Factor (CLCF) | 0.9969 |
|--------------------------------|--------|
| Phase Angle (α) (minutes) | 4.3 |

Phase 'B'

| Ratio Correction Factor (CLCF) | 0.9949 |
|--------------------------------|--------|
| Phase Angle (α) (minutes) | 4.2 |

Phase 'C'

| Ratio Correction Factor (CLCF) | 0.9959 |
|--------------------------------|--------|
| Phase Angle (α) (minutes) | 4.7 |

Average Cable Loss Data

| Ratio Correction Factor (CLCF) | 0.9959 |
|--------------------------------|--------|
| Phase Angle (α) (minutes) | 4.4 |

Correction Factors: Full Load Power Factor Light Load

| Avg. Combined Corr. Factor | 0.9964 | 0.9964 | 0.9975 |
|-------------------------------|--------|--------|--------|
| Phase Ang Corr Factor (PACF) | 1.0003 | 1.0032 | 1.0001 |
| Final Correction Factor (FCF) | 0.9967 | 0.9996 | 0.9977 |
| Percent Error | + 0.33 | + 0.04 | + 0.23 |
| Percent Meter Adjustment | - 0.33 | - 0.04 | - 0.23 |

CT/VT Ratio and Cable Loss Correction Worksheet

| Na | me: | | | | | |
|----|------------------------------------|---------------------------------------|-------------------|-----------|------|--------|
| De | livery: | | | | | |
| Lo | cation: | | | | | |
| | | | | Full Load | Ligh | t Load |
| СТ | Test | Data: | | | | |
| | | Phase 'A' CT | Mfr. & Serial Nun | nber: | | |
| | Ratio | Correction Factor (RCF ^I) | | | | |
| | Phas | e Angle (β) (minutes) | | | | |
| | | Phase 'B' CT | Mfr. & Serial Nun | nber: | | |
| | Ratio | Correction Factor (RCF ^I) | | | | |
| | Phas | e Angle (β) (minutes) | | | | |
| | Phase 'C' CT Mfr. & Serial Number: | | | | | |
| | Ratio | Correction Factor (RCF ^I) | | | | |
| | Phas | e Angle (β) (minutes) | | | | |
| | | Average of CT's | Mfr. & Serial Nun | nber: | | |
| | Ratio | Correction Factor (RCF ^I) | | | | |
| | Phas | e Angle (β) (minutes) | | | | |
| VT | Test | Data: | | | | |
| | | Phase 'A' VT | Mfr. & Serial Nun | nber: | | |
| | Ratio | Correction Factor (RCF ^E) | | | | |
| | Phas | e Angle (γ) (minutes) | | | | |
| | | Phase 'B' VT | Mfr. & Serial Nun | nber: | | 7 |
| | | Ratio Correction Factor (RCI | ^{=E}) | | | |
| | | Phase Angle (v) (minutes) | | | | |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000

Effective: October 13, 2000

| | | Phase 'C' VT | Mfr. & Serial Nur | nber: | | | | |
|--------------------------------|------------------------------------|---|-------------------|-------|-----------|------------|--|--|
| | | Ratio Correction Factor (RCF ^E) | | | | | | |
| | | Phase Angle (γ) (minutes) | | | | | | |
| | | | | | | | | |
| | | Average of VT's | Mfr. & Serial Nur | nber: | | | | |
| | | Ratio Correction Factor (RC | F ^E) | | | | | |
| | | Phase Angle (γ) (minutes) | | | | | | |
| Ca | ble Lo | oss Test Data: | | | | | | |
| | | Phase 'A' | | | | | | |
| | | Ratio Correction Factor (CL | CF) | | | | | |
| | | Phase Angle (α) (minutes) | | | | | | |
| | | | | | | | | |
| | | Phase 'B' | | | | | | |
| | | Ratio Correction Factor (CL | CF) | | | | | |
| | Phase Angle (α) (minutes) | | | | | | | |
| | | | | | | | | |
| | | Phase 'C' | | | | | | |
| Ratio Correction Factor (CLCF) | | | CF) | | | | | |
| | Phase Angle (α) (minutes) | | | | | | | |
| | | | | | | | | |
| | | Average Cable Loss D | Data | | | | | |
| | | Ratio Correction Factor (CL | CF) | | | | | |
| | | Phase Angle (α) (minutes) | | | | | | |
| Correction Factors: | | on Factors: | Full Load | Powe | er Factor | Light Load | | |
| | Avg. | Combined Corr. Factor | | | | | | |
| | Phas | se Ang Corr Factor (PACF) | | | | | | |
| | Final | Correction Factor (FCF) | | | | | | |
| | Perc | ent Error | | | | | | |
| | Perc | ent Meter Adjustment | | | | | | |

Issued by: Roger Smith, Senior Regulatory Counsel Issued on: October 13, 2000 Effective: October 13, 2000

First Revised Sheet No. 837 Superseding Original Sheet No. 837

APPENDIX G

ISO DATA VALIDATION, ESTIMATION AND EDITING PROCEDURES

This Appendix is provided for information purposes only, it gives an overview of the procedures that the ISO will use to validate, edit and estimate Meter Data received from ISO Metered Entities and, where an exemption applies, Meter Data received from SC Metered Entities.

G 1 Validation

G 1.1 Timing of Data Validation

Meter Data will be remotely retrieved via WEnet from ISO Metered Entities by MDAS on a daily basis. Validation will be performed on the new Meter Data as it is retrieved from the meter or Compatible Meter Data Server in order to detect:

- missing data;
- data that could be invalid based upon status information returned from the meter; or
- meter hardware or communication failure.

Additional validation will be performed on a daily basis to verify data against load patterns, check meters, schedules, MDAS load interval data and data obtained by SCADA.

G 1.2 Data Validation Conditions

MDAS will detect the following conditions so that erroneous data will not be used for Settlement or billing purposes:

G 1.2.1 Validation of metering/communications hardware:

- meter hardware/firmware failures;
- metering CT/VT failures (for example, losing one phase voltage input to the meter);
- · communication errors;
- data which is recorded during meter tests;
- mismatches between the meter configuration and host system master files;
- meter changeouts (including changing CT/VT ratios);
- gaps in data;
- overflow of data within an interval;
- ROM/RAM errors reported by the meter; and
- alarms/phase errors reported by the meter.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: March 11, 2004 Effective: October 13, 2000

G 1.2.2 Validation of MDAS load Interval Data characteristics:

- data which exceeds a defined tolerance between main and check meters;
- data which exceeds a defined tolerance between metering and SCADA data;
- load factor limits;
- power factor limits; and
- for End-Users, validation of load patterns against historical load shapes.

G 1.3 Validation Criteria

Validation criteria will be defined by the ISO for each channel of MDAS load interval data (kW/kVar/kVa/Volts, etc.) depending on the load characteristics for each meter location and the type of data being recorded.

For loads that do not change significantly over time or change in a predictable manner, percentage changes between intervals will be used.

For loads that switch from no-load to load and for reactive power where capacitors may be switched to control power factors, validation will be based upon historical data for that meter location. If no historical data is available, data such as the rating of transformers or the maximum output from a Generator will be used to set maximum limits on interval data.

Validation will be based upon reasonable criteria that can detect both hardware and operational problems with a high degree of confidence but will be set so as to avoid unnecessary rejection of data.

G 1.4 Validation for Stated Criteria

Data validation will be performed only for the validation criteria that has been entered for each meter channel of data. For example, the number of intervals of zero Energy recorded by the meter for the channel indicated will be validated only when a non-zero value is entered for this criteria.

Additional validation will be performed on a daily basis to verify data which is based upon load patterns, comparisons to check meters, schedules, MDAS load profiles or data obtained by SCADA.

G 1.5 Validation Failure

Data that fails validation will be flagged with the reason for the failure, where applicable. Data that fails checks such as load factor limits or comparisons of a MDAS load profile to the previous day, check meter or other load shape will be identified so that manual intervention can be used to estimate the correct values in order to edit the data or to manually accept the data.

Issued by: Roger Smith, Senior Regulatory Counsel

G 1.6 Validation Criteria

G 1.6.1 Time of Application of Criteria

| Validation Criteria | Hourly | Daily |
|---|--------|-------|
| Meter Readings vs. MDAS load profile (Energy Tolerance) | | Yes |
| Intervals Found vs. Intervals Expected | | Yes |
| Time Tolerance Between MDAS and Meter | Yes | Yes |
| Number of Power Outage Intervals | | Yes |
| Missing Intervals (Gap In Data) | | Yes |
| High/Low Limit Check On Interval Demand | Yes | Yes |
| High/Low Limit Check on Energy | | Yes |
| CRC/ROM/RAM Checksum Error | Yes | Yes |
| Meter Clock Error | Yes | Yes |
| Hardware Reset Occurred | Yes | Yes |
| Watchdog Timeout | Yes | Yes |
| Time Reset Occurred | Yes | Yes |
| Data Overflow In Interval | Yes | Yes |
| Parity Error (Reported By Meter) | Yes | Yes |
| Alarms (From Meter) | Yes | Yes |
| Load Factor Limit | | Yes |
| Power Factor Limit | | Yes |
| Main vs. Check Meter Tolerance | | Yes |
| Actual vs Scheduled Profile | | Yes |
| Actual vs SCADA Data | | Yes |
| Comparison Of Current Day To Previous Day | | Yes |
| Percent Change Between Intervals | | Yes |

G 1.6.2 Validation Criteria

(a) Meter Reading vs. MDAS load Interval Data (Energy Tolerance)

Meter readings will be obtained from ISO approved meters on a daily basis in order to validate interval Energy measurements

Issued by: Roger Smith, Vice President and General Counsel

obtained from the MDAS approved meters data and Energy from the meter readings. This Energy tolerance check will be used to detect meter changeouts or changes in metering CT/PT ratios that have not been reflected in the MDAS master files (meter configuration files). A "tolerance type" parameter will be set in the MDAS system parameter to define the type of check to be performed.

The types of check that will be used will include the following (the constant used to convert the meter readings to kWh):

| ID | Term | Description |
|----|--------------------|---|
| M | Multiplier | Allows a percentage of the meter multiplier difference between the meter reading the recorded interval total energy. |
| P | Percent | Allows a percentage of the metered total energy difference between the metered total energy and the recorded total energy. The percent of allowed difference will be defined by the ISO on an individual meter channel basis. |
| Q | Same as Percent | Based on 30 days of data. If the data relates to a period less than 30 days then the total usage will be projected to 30 days as follows: Projected Usage=Total Usage * (30/Total Days) |
| | | Frojected Osage Total Osage (30/Total Days) |
| D | Dual Check | Percent Method (P) is the primary check. If it fails, then the Multiplier Method (M) is used. |
| E | Dual Method | Percent Method (Q) is the primary check. If it fails, then the Multiplier Method (M) is used. |
| N | None | No tolerance check |

(b) Intervals Found vs Intervals Expected

MDAS will calculate the expected number of time intervals between the start and stop time of the MDAS load profile data file and compare that number against the actual number of time intervals found in the MDAS data file. The calculation used to determine the expected number of time intervals will take into account the size or duration of the actual time intervals for the particular meter/data file (e.g., 5 min, 15 min, 30 min and 60-min interval sizes).

(c) Time Tolerance Between MDAS and Meter

When MDAS retrieves data from a meter, the MDAS workstation clock will be compared against the meter's clock. MDAS will be configured to automatically update the meter clocks within certain tolerances, limits and rules including:

 a time tolerance parameter (in seconds) which indicates the allowable difference between the MDAS workstation clock and

Issued by: Roger Smith, Vice President and General Counsel

the meter clock (if the meter clock is within that parameter, MDAS will not update the meter clock);

- an upper limit for auto timeset which is the maximum number of minutes a meter can be out of time tolerance before MDAS will perform an auto timeset;
- iii. the MDAS will not perform auto timesets across interval boundaries; and
- iv. the auto timeset feature will support DST changes and time zone differences. Since all ISO Metered Entity's meters that are polled by MDAS will be set to PST, this rule will not generally apply.

(d) Number of Power Outage Intervals

The ISO approved meter will record a time stamped event for each occurrence of a loss of AC power and a restoration of AC power. During the Meter Data retrieval process, MDAS will flag each MDAS interval between occurrences of AC power loss and AC power restoration with a power outage status bit. MDAS will sum the total number of power outages for a time frame of MDAS data and compare that value against an ISO defined Power Outage Interval Tolerance value stored in the MDAS validation parameters.

(e) Missing Intervals (Gap in Data)

The MDAS validation process will compare the stop and start times of two consecutive pulse data files for a meter and will report if a missing interval/gap exists. The MDAS automatic estimation process for "plugging" missing intervals/gaps in data is described in more detail in the Data Estimation section of this Appendix.

(f) High/Low Limit Check on Interval Demand

The MDAS validation process will compare the Demand High/Low Limits entered by the MDAS operator on a meter channel basis in the MDAS meter channel table against the actual Demand value collected from the meter. This comparison will be performed on an interval by interval basis. If the actual Demand value is less than the Low Limit or greater than the High Limit, the MDAS validation process fails.

(g) High/Low Limit Check on Energy

The MDAS validation process compares the Energy High/Low Limits entered by the MDAS operator on a meter channel basis in the MDAS meter channel table against the actual total Energy collected from the meter for the time period. If the actual total Energy is less than the Low Limit or greater than the High Limit, the MDAS validation process fails.

(h) CRC/ROM/RAM Checksum Error

This general meter hardware error condition can occur during an internal status check or an internal read/write function within the meter. This error code may not be standard on some meters (reference should be made to the meter's user manual). When available, this internal

Issued by: Roger Smith, Vice President and General Counsel

status information will be collected during the MDAS Meter Data retrieval process and stored for review/reporting purposes.

(i) Meter Clock Error

This meter hardware error condition can occur whenever an internal meter hardware clock error results in an invalid time, day, month, year, etc. This error code may not be standard on some meters (reference should be made to the meter's user manual). When available this interval status information is collected during the MDAS Meter Data retrieval process and stored for review/reporting purposes.

(j) Hardware Reset Occurred

This meter hardware error condition occurs whenever an internal meter hardware reset occurs. This error code may not be standard on some meters (reference should be made to the meter's user manual). When available this interval status information is collected during the MDAS Meter Data retrieval process and stored for review/reporting purposes.

(k) Watchdog Timeout

This error code may not be standard on some meters (reference should be made to the meter's user manual). When available, this feature watches for meter inactivity, indicating a possible meter failure.

(I) Time Reset Occurred

This is a meter error code that indicates that the meter time has been reset. See paragraph (c) above.

(m) Data Overflow In Interval

This error code occurs when the amount of data in an interval exceeds the memory capabilities of the meter to store the data. This alerts MDAS that there is corrupt data for the interval.

(n) Parity Error (Reported by Meter)

Parity error is another indicator of corrupted data.

(o) Alarms (From Meter)

ISO MDAS operator will evaluate all meter alarms to determine if the alarm condition creates data integrity problems that need to be investigated.

(p) Load Factor Limit

The MDAS validation process compares the daily Load Factor to the limit entered by the MDAS operator. MDAS will prompt the operator to investigate data integrity if the limit is out of tolerance.

(q) Power Factor Limit

The MDAS validation process compares the actual Power Factor to the limit entered by the MDAS operator. MDAS will prompt the operator to investigate if the limit is out of tolerance.

Issued by: Roger Smith, Vice President and General Counsel

(r) Main vs Check Meter Tolerance

The main and check meters can be configured in MDAS to be compared on a channel by channel basis to the check meter ID, channel number, percent tolerance allowance and the type of check. Interval or daily Meter Data will be entered into the corresponding main meter MDAS meter channel table record. This information will remain constant unless:

- i. a meter changeout occurs at the site;
- ii. the percent tolerance allowance needs adjusting; and/or
- iii. the type of check is switched.

If the percentage difference between the main channel interval Demand and the check channel interval Demand exceeds the Percent Tolerance allowed, the MDAS validation will fail. If, after applying this validation test, the percentage difference between the main channel total Energy and the check channel total Energy for each Trading Day exceeds the allowed percentage, the MDAS validation will fail. In both cases, if the percentage difference is less than the Percent Tolerance allowed, the MDAS validation will be accepted.

(s) Actual vs. Scheduled Profile

Data is compared on an interval by interval basis like Main vs Check.

(t) Actual vs. SCADA Data

Data is compared on an interval by interval basis like Main vs Check.

(u) Comparison Of Current Day To Previous Day

The MDAS validation process compares the last complete day's Demand and Energy in the validation time period to one of the following parameters configured by the MDAS operator:

- i. previous day;
- ii. same day last week; or
- iii. same day last month.

Validation Failure

If the percentage difference between the Demand and Energy exceeds the tolerance setup in the MDAS validation parameters, the data subjected to the validation process fails.

(v) Percent Change Between Intervals

The MDAS validation process uses the Interval Percent Change Tolerance set by the MDAS operator on a meter channel basis in the MDAS meter channel table to compare the percentage change in the pulses for the channel between two consecutive intervals. If the percent change exceeds the Interval Percent Change Tolerance set for that channel, the MDAS validation process fails.

Issued by: Roger Smith, Vice President and General Counsel

G 2 Data Estimation Criteria

When interval data is missing due to there not being any response from the meter or the meter reports it as missing, MDAS will supply estimated data for the missing intervals based on the guidelines discussed below.

If a certified Check Meter is available and that data is valid, the data from the Check Meter will be used to replace the invalid or missing data from the main meter. When reading meters on a frequency basis, the point-to-point linear interpolation method will be used to estimate the current interval(s) of data. This method will only normally be used when estimating one hour or less of contiguous missing interval data when the previous and next intervals are actual values from the meter. If data is missing for an extended time period, historical data will be used as the reference date so that data can be matched to time of day and day of week.

G 2.1 Data Estimation Methods

The following data estimation methods are configurable by the MDAS operator on a meter-by-meter basis. The algorithms for each method are described below in order of precedence as implemented by the MDAS automatic estimation application software. The MDAS operators can alter this order by simply not activating a certain method. In addition, the MDAS operator can manually select each data estimation method at any time during the data analysis process.

G 2.2 Main vs Check Meter

The global primary and Check Meters can be configured in the MDAS meter channel table to be compared on a channel-by-channel basis. The Check Meter ID and channel number will be entered into the corresponding primary meter MDAS meter channel table record. This information remains constant unless a meter changeout at the site occurs. During the MDAS automatic estimation process, if missing data is encountered and actual values from a certified Check Meter are available, the values for the corresponding intervals from that Check Meter will be substituted into the data file for the primary meter. All copied intervals will be tagged as an edited interval. In order for actual values from the check meter to be deemed acceptable for use in the automatic estimation process, the values must reside in an accepted data file that passed the validation criteria referred to earlier in this Appendix and no error codes or alarms can be set on the interval values. Meter Data from Check Meters may only be used where Meter Data is not available from the primary meter.

G 2.3 Point-to-Point Linear Interpolation

When reading meters on a frequency basis, the Point-to-Point Linear Interpolation Algorithm described below can be used to estimate the missing intervals of data. This method will only normally be used to estimate a maximum of one hour of contiguous missing interval data when the previous and next intervals are actual values from the meter. Even though this method will not normally be used above that

Issued by: Roger Smith, Vice President and General Counsel

maximum of one hour, the MDAS allows this maximum threshold to be set by the MDAS operator on a meter-by-meter basis. The same rules for defining acceptable actual values apply as detailed in Main vs. Check Meter description above. All estimated intervals will be tagged as an edited interval.

Point to Point Linear Interpolation Algorithm

Estimated Interval = Next Actual - Previous Actual Interval

+ Previous Actual Interval

Number of Missing Intervals + 1

G 2.4 Historical Data Estimation

Historical data estimation is the process of replacing missing or corrupt interval data in the MDAS data files. The data is replacing using historical data as a reference. There are two basic requirements when estimating data to be inserted or replaced:

- the amount of data to add or replace; and
- the shape or contour of the data over the time span requested.

G 2.4.1 Estimation Parameters

Auto Plug

The following estimation parameters are required on a per meter basis:

Controls the option to perform automatic estimation

| (Y/N) | |
|------------------------------------|---|
| Auto Plug | Indicates where to get the reference data used in the |
| Option (W/C/P/L) | estimation process: |
| , | W - use the previous week as the reference data (all data for the week must be present). |
| | C - use the current month as reference data. |
| | P - use the previous month as reference data. |
| | L - use the current month of last year as reference data. |
| Reference ID | ID from which the reference data is retrieved. The contour of the data is determined from this ID. The Reference ID can be the same as the meter ID (i.e. use historical data from the same meter) or a different Reference ID. |
| Auto Plug Missing Days Limit | Verifies that the number of missing days of data is less then the missing day limit in order to invoke automatic estimation. |

Issued by: Roger Smith, Vice President and General Counsel

Auto Plug Identifies a percent adjustment for situations where there is a need to factor the reference data by a percent increase or decrease. If this value is set to "0",

the adjustment is not performed.

Auto Plug Indicates if intervals with a power outage status are to

Power Outage be estimated/replaced automatically.

Reference Identifies the reference time span for the historical

Time Span data.

G 2.4.2 Total Data

The estimation algorithm used depends on the total amount of data to be added or replaced and the shape of that data. The MDAS operator can give the total data or that can be calculated to balance the meter usage in the file. The shape of the data is defined with the use of the reference data.

G 2.4.3 Reference Data

The reference data is based on the day of the week. All reference data is averaged and stored into a 7-day table of values for each interval. The table includes a day's worth of intervals for each day of the week (Sunday-Saturday). When the shape of a day's data is needed, this weekly table is referenced. Two data tables are set up to use in the algorithm. One stores the number of times that an interval value is needed from the reference data. While the other table maps the interval value in the reference data to the correct data in the update file. The data from the reference must be scaled up or down to match the magnitude of the data needed for the update file. This is determined by comparing the data total from the reference file with the data needed for the update file. This ratio is used when getting reference data to use for the update file.

G 2.4.4 Iterations

Iterations will be used to get the best reproduction of data in the update file. This process will attempt to get the correct shape for the data and also to get as close to the requested total data as possible by using up to ten iterations. Since MDAS data will be integer data and cannot have decimal values, the total data used will not be exactly what is requested. Definition of some of the tables and variables are:

REFTOT Total data from the reference file for the time

requested.

REQTOT Total requested data.

REFADJ Adjusted total reference data.

IP() A table containing the total times that a value

is used from the reference data.

Issued by: Roger Smith, Vice President and General Counsel

NP () A table containing the data in the update file

for that value in the reference data. A table mapping the reference data to the update data

according to the needed ratio.

G 2.4.5 Population of Tables

The first step is to populate the tables. All intervals for the requested time are read from the reference data. These values are stored into table NP(). The number of times a value is used is stored into the table IP(). For example:

If the value 54 is needed 3 times, then IP(54)=3 and NP(54)=54

The table IP() is used to quickly add up the totals. The table NP() is modified by the ratio REQROT/REFADJ. For example:

If: REQTOT=22000

REFTOT=44000

Then: REQTOT/REFTOT=0.50

and NP(54) = 0.50* NP(54) = 27

After modifying the complete NP() table, the total data is added to determine how close this total is to the requested total (REQTOT). The NP() values have to be rounded to whole numbers. This total is calculated by adding up all of the values in the NP () table multiplied by the times the value is needed (IP()). Each value used (IP(x) not zero) is multiplied by the value (NP(x)). Then each of the results is added up to a total. If the total is close enough to the requested total then the iteration process ends. After ten iterations the total will automatically be considered close enough to the requested total.

G 2.4.6 Update File

As the data is needed to insert into the update file, the reference data is read from the reference file. The mapping table (NP) modifies the value. This modified value is inserted into the update file. All intervals are inserted in this manner to complete the data estimation.

G 3 Editing

All estimated intervals will be tagged as an edited interval in MDAS. The ISO MDAS operator will notify the Metered Entity of the edited interval start and stop times, new value and technique used to estimate the data.

If estimation and editing is frequently required for the Meter Data received from a particularly metered entity, the ISO may require recertification and or facility maintenance or repair to correct the continued provision of erroneous or missing data.

Issued by: Roger Smith, Vice President and General Counsel

ELIGIBLE INTERMITTENT RESOURCES PROTOCOL

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 11, 2002 Effective: April 1, 2002

ELIGIBLE INTERMITTENT RESOURCES PROTOCOL

Table of Contents

| EIRP | 1 | Object | ives, Definitions and Scope | 851 |
|------|----------------------------------|---------------------------------|---|---------------------------------|
| EIRP | 1.1 | Object | ives | 851 |
| EIRP | 1.2 | Definit | ions | 851 |
| | EIRP 1.2 EIRP 1.2 EIRP 1.2 | .2 | Master Definitions Supplement Special Definitions for this Protocol Rules of Interpretation | 851 851 851 |
| EIRP | 1.3 | Scope | | 852 |
| | EIRP 1.3 EIRP 1.3 | | Scope of Application to Parties Liability of the ISO | 852 852 |
| EIRP | 2 | PARTIC | CIPATING INTERMITTENT RESOURCE CERTIFICATION | 852 |
| EIRP | 2.1 | No Mai | ndatory Participation | 852 |
| EIRP | 2.2 | Minimu | um Certification Requirements | 852 |
| | | .2 Comp .3 Equip | | 852 852 853 853 |
| EIRP | 2.3 | Notice | of Certification | 853 |
| EIRP | 2.4 | Requir | ements After Certification | 853 |
| | EIRP 2.4 EIRP 2.4 | .2 Modif .3 Chan .4 Conti | Forecast Fee ication of Participating Intermittent Resource Definition ges in Scheduling Coordinator nuing Obligation re to Perform | 853 853 853 854 854 |
| EIRP | 3 | COMM | UNICATIONS | 854 |
| EIRP | 3.1 | Foreca | st Data | 854 |
| EIRP | 3.2 | Standa | ırds | 854 |
| EIRP | 3.3 | Cost R | esponsibility | 854 |
| EIRP | 4 | FOREC | CASTING | 854 |
| EIRP | 4.1 | Hour-A | head Forecast | 854 |
| EIRP | 4.2 | Foreca | st Calibration | 855 |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 11, 2002 Effective: April 1, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

| FIRST REPLACEMENT VOLUME NO. I | | Original Sheet No. 850 |
|--------------------------------|---------------------------------------|------------------------|
| EIRP 4.3 | Confidentiality | 855 |
| EIRP 5 | SCHEDULING AND SETTLEMENT | 855 |
| EIRP 5.1 | Schedules | 855 |
| EIRP 5.2 | Settlement | 855 |
| EIRP 6 | DATA COLLECTION FACILITIES | 855 |
| EIRP 6.1 | Wind Resources | 855 |
| EIRP 6.2 | Other Eligible Intermittent Resources | 856 |
| EIRP 7 | PROGRAM MONITORING | 856 |
| EIRP 8 | AMENDMENTS | 866 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: April 11, 2002 Effective: April 1, 2002 FIRST REPLACEMENT VOLUME NO. I

ELIGIBLE INTERMITTENT RESOURCES PROTOCOL (EIRP)

EIRP 1 Objectives, Definitions and Scope

EIRP 1.1 Objectives

The objectives of this Protocol are to:

- (a) Implement those sections of the ISO Tariff which involve Eligible Intermittent Resources and Participating Intermittent Resources;
- (b) Describe the requirements for Eligible Intermittent Resources that intend to be certified as Participating intermittent Resources;
- (c) Describe the ISO's responsibilities for certification, forecasting and performance monitoring of Participating Intermittent Resources; and
- (d) Describe the responsibilities of Participating Intermittent Resources for operating and maintaining facilities, providing information in support of Energy forecasts, and scheduling Energy.

EIRP 1.2 Definitions

EIRP 1.2.1 Master Definitions Supplement

Unless the context otherwise requires, any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. A reference to a Section or an Appendix is a reference to a Section or an Appendix of the ISO Tariff. References to EIRP are to this Protocol or to the stated paragraph of this Protocol.

EIRP 1.2.2 Special Definitions for this Protocol

In this Protocol, the following words and expressions shall have the meanings set opposite them:

"Forecast Fee" means the charge imposed on a Participating Intermittent Resource pursuant to the terms of this Protocol and ISO Tariff Appendix F, Schedule 4.

"Hour-Ahead Forecast" means the Energy forecast to be used by the Scheduling Coordinator representing a Participating Intermittent Resource for its Preferred Hour-Ahead Schedule, in accordance with EIRP 5.

EIRP 1.2.3 Rules of Interpretation

- (a) Unless the context otherwise requires, if the provisions of this Protocol and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency. The provisions of the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.
- (b) A reference in this Protocol to a given agreement, ISO Protocol or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made.
- (c) The captions and headings in this Protocol are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.
- (d) This Protocol shall be effective as of the date posted on the ISO Home Page.
- (e) Time references in this Protocol are references to prevailing Pacific time.

Issued by: Charles F. Robinson, Vice President and General Counsel

EIRP 1.3 Scope

EIRP 1.3.1 Scope of Application to Parties

This Protocol applies to the ISO and to:

- (a) Scheduling Coordinators (SCs);
- (b) Eligible Intermittent Resources; and
- (c) Participating Intermittent Resources.

EIRP 1.3.2 Liability of the ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

EIRP 2 PARTICIPATING INTERMITTENT RESOURCE CERTIFICATION

EIRP 2.1 No Mandatory Participation

Eligible Intermittent Resources may elect to be scheduled and settled as the ISO Tariff provides for Generating Units, and are not required to seek certification as Participating Intermittent Resources.

EIRP 2.2 Minimum Certification Requirements

Those Eligible Intermittent Resources that intend to become Participating Intermittent Resources must meet the following requirements.

EIRP 2.2.1 Agreements

The following agreements must be executed:

- (a) A Participating Generator Agreement that, among other things, binds the Participating Intermittent Resource to comply with the ISO Tariff;
- (b) A Meter Service Agreement for ISO Metered Entities; and
- (c) A letter of intent to become a Participating Intermittent Resource, which when executed and delivered to the ISO shall initiate the process of certifying the Participating Intermittent Resource. The form of the letter of intent shall be specified by the ISO and published on the ISO Home Page.

EIRP 2.2.2 Composition

The ISO shall develop criteria to determine whether one or more Eligible Intermittent Resources may be included within a Participating Intermittent Resource. Such criteria shall include:

- (a) A Participating Intermittent Resource must be at least 1 MW rated capacity.
- (b) A Participating Intermittent Resource may include one or more Eligible Intermittent Resources that have similar response to weather conditions or other variables relevant to forecasting Energy, as determined by the ISO.
- (c) Each Participating Intermittent Resource shall be electrically connected at a single point on the ISO Controlled Grid, except as otherwise permitted by the ISO on a case-by-case basis as may be allowed under the ISO Tariff.
- (d) The same Scheduling Coordinator must schedule all Eligible Intermittent Resources aggregated into a single Participating Intermittent Resource.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 11, 2002 Effective: April 1, 2002

EIRP 2.2.3 Equipment Installation

A Participating Intermittent Resource must install and maintain the communication equipment required pursuant to EIRP 3, and the equipment supporting forecast data required pursuant to EIRP 6.

EIRP 2.2.4 Forecast Model Validation

The ISO must determine that sufficient historic and real-time telemetered data are available to support an accurate and unbiased forecast of Energy generation by the Participating Intermittent Resource, according to the forecasting process validation criteria described in EIRP 4.

EIRP 2.3 Notice of Certification

When all requirements described in EIRP 2.2 have been fulfilled, the ISO shall notify the Scheduling Coordinator and the representatives of the Eligible Intermittent Resources comprising the Participating Intermittent Resource that the Participating Intermittent Resource has been certified, and is eligible for the settlement terms provided under Section 11.2.4.5 of the ISO Tariff, as conditioned by the terms of this EIRP.

EIRP 2.4 Requirements After Certification

EIRP 2.4.1 Forecast Fee

Beginning on the date first certified, a Participating Intermittent Resource must pay the Forecast Fee for all metered Energy generated by the Participating Intermitted Resource over the duration of the commitment indicated in the letter of intent described in EIRP 2.2.1(c).

The amount of the Forecast Fee shall be determined so as to recover the projected annual costs related to developing Energy forecasting systems, generating forecasts, validating forecasts, and monitoring forecast performance, that are incurred by the ISO as a direct result of participation by Participating Intermittent Resources in ISO Markets, divided by the projected annual Energy production by all Participating Intermittent Resources.

The initial rate for the Forecast Fee, and all subsequent rate changes as may be necessary from time to time to recover costs incurred by the ISO for the forecasting conducted on the behalf of Participating Intermittent Resources, shall be posted on the ISO Home Page. In no event shall the level of the Forecast Fee exceed the amount specified in ISO Tariff Appendix F, Schedule 4.

EIRP 2.4.2 Modification of Participating Intermittent Resource Composition

A Participating Intermittent Resource may seek to modify the composition of the Participating Intermittent Resource (e.g., by adding or eliminating an Eligible Intermittent Resource from the Participating Intermittent Resource). Such changes shall not be implemented without prior written approval by the ISO. The ISO will apply consistent criteria and expeditiously review any proposed changes in the composition of a Participating Intermittent Resource.

EIRP 2.4.3 Changes in Scheduling Coordinator

This EIRP does not impose any additional requirement for ISO approval to change the Scheduling Coordinator for an approved Participating Intermittent Resource than would otherwise apply under the ISO Tariff to changes in the Scheduling Coordinator representing a Generating Unit.

Issued by: Charles F. Robinson, Vice President and General Counsel

EIRP 2.4.4 Continuing Obligation

A Participating Intermittent Resource must meet all obligations established for Participating Intermittent Resources under the ISO Tariff and this EIRP, and must fully cooperate in providing all data and other information the ISO reasonably requests to fulfill its obligation to validate forecast models and explain deviations.

EIRP 2.4.5 Failure to Perform

If the ISO determines that a material deficiency has arisen in the Participating Intermittent Resource's fulfillment of its obligations under the ISO Tariff and this EIRP, and such Participating Intermittent Resource fails to promptly correct such deficiencies when notified by the ISO, then the eligibility of the Participating Intermittent Resource for the settlement accommodations provided in Section 11.2.4.5 of the ISO Tariff shall be suspended until such time that the unavailable data is provided or other material deficiency is corrected to the ISO's reasonable satisfaction. Such suspension shall not relieve the Scheduling Coordinator for the deficient Participating Intermittent Resource from paying the Forecast Fee over the duration of the period covered by the letter of intent described in EIRP 2.2.1(c).

EIRP 3 COMMUNICATIONS

EIRP 3.1 Forecast Data

The ISO may require various data relevant to forecasting Energy from the Participating Intermittent Resource to be telemetered to the ISO, including appropriate operational data, meteorological data or other data reasonably necessary to forecast Energy.

EIRP 3.2 Standards

The standards for communications shall be the monitoring and communications requirements for Generating Units providing only Energy and Supplemental Energy; as such standards may be amended from time to time, and published on the ISO Home Page.

EIRP 3.3 Cost Responsibility

An applicant for certification as a Participating Intermittent Resource is responsible for expenses associated with engineering, installation, operation and maintenance of required communication equipment.

EIRP 4 FORECASTING

The ISO is responsible for overseeing the development of tools or services to forecast Energy for Participating Intermittent Resources. The ISO will use its best efforts to develop accurate and unbiased forecasts, as limited by the availability of relevant explanatory data. Objective criteria and thresholds for unbiased, accurate forecasts shall be published on the ISO Home Page, and shall be used to certify Participating Intermittent Resources in accordance with EIRP 2.2.4.

EIRP 4.1 Hour-Ahead Forecast

The ISO shall develop expert, independent hourly forecasts of Energy generation on each Participating Intermittent Resource. A forecast shall be published each hour on the half hour for each of the next seven operating hours. Other forecasts, including a dayahead forecast, may be developed at the ISO's discretion. The Scheduling Coordinator representing the Participating Intermittent Resource must use the Hour-Ahead Forecast that is available 30 minutes prior to the deadline for submitting the Preferred Hour-Ahead Schedule as specified in SP 3.3.1.

Issued by: Charles F. Robinson, Vice President and General Counsel

FIRST REPLACEMENT VOLUME NO. I

First Revised Sheet No. 855 Superseding Original Sheet No. 855

The ISO shall use best efforts to provide reliable and timely forecasts. However, if the ISO fails to deliver the Hour-Ahead Forecast to the Scheduling Coordinator prior to 15 minutes before the deadline for submitting Preferred Hour-Ahead Schedules, then the Hour-Ahead Forecast shall be the most recent Energy forecast provided by the ISO to the Scheduling Coordinator for the operating hour for which Preferred Schedules are next due.

EIRP 4.2 Forecast Calibration

The ISO shall calibrate the forecast to eliminate bias as measured by net MWh deviations across any and all relevant time periods to minimize the expected cumulative net charges or payments that are recovered or allocated through Section 11.2.4.5 of the ISO Tariff.

EIRP 4.3 Confidentiality

The ISO shall maintain the confidentiality of proprietary data for each Participating Intermittent Resource in accordance with Section 20.3 of the ISO Tariff.

EIRP 5 SCHEDULING AND SETTLEMENT

EIRP 5.1 Schedules

Scheduling Coordinators shall be required to submit Preferred Hour-Ahead Energy Schedules (MWh) for the Generating Units that comprise each Participating Intermittent Resource that are identical, in the aggregate, to the Hour-Ahead Forecast published for that Participating Intermittent Resource (MWh).

EIRP 5.2 Settlement

After a Participating Intermittent Resource is certified, settlement shall be determined for each Settlement Period based on consistency of Schedules and bids submitted on behalf of such Participating Intermittent Resources with the rules specified in the ISO Tariff and this Protocol.

No Supplemental Energy bids or Adjustment Bids may be submitted on behalf of a Participating Intermittent Resource. Submitting such bids shall render the Participating Intermittent Resource ineligible for settlement according to Section 11.2.4.5 of the ISO Tariff for that Settlement Period. Such activity will be monitored in accordance with EIRP 7.

EIRP 6 DATA COLLECTION FACILITIES

The Participating Intermittent Resource must install and maintain equipment to collect, record and transmit data that the ISO reasonably determines is necessary to develop and support a forecast model that meets the requirements of EIRP 4.

EIRP 6.1 Wind Resources

A Participating Intermittent Resource powered by wind must install at least one meteorological tower at a project location that is representative of the microclimate within the project boundary.

The meteorological tower must rely on equipment typically used in the wind industry to continuously monitor weather conditions at a wind resource site. Data collected shall be consistent with requirements published on the ISO Home Page. Such data must be gathered and telemetered to the ISO in accordance with EIRP 3.

If objective standards developed by the ISO indicate that the meteorological data may not be sufficiently representative of conditions affecting Energy output or changes in Energy output by that Participating Intermittent Resource, then the ISO may require that

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 856

additional meteorological equipment be temporarily installed at another location within the project boundary. The cost of such equipment, which may be temporarily installed by the Participating Intermittent Resource or the ISO, shall be the responsibility of the Participating Intermittent Resource.

If objective standards indicate that the data collected from such a temporary site contribute significantly to the development of an accurate and unbiased forecast, then the Participating Intermittent Resource shall be responsible for installing and arranging for the telemetry of data from an additional permanent meteorological tower at such site, and for the reasonable cost, if any, that the ISO may have incurred to install and remove the temporary equipment. Relocation of the original meteorological tower to the new site will be allowed if the ISO determines that a sufficiently accurate and unbiased forecast can be generated from a single relocated meteorological tower.

EIRP 6.2 Other Eligible Intermittent Resources

Eligible Intermittent Resources other than wind projects that wish to become Participating Intermittent Resources will be required to provide data of comparable relevance to estimating Energy generation. Standards will be developed as such projects are identified and will be posted on the ISO Home Page.

EIRP 7 PROGRAM MONITORING

The ISO shall monitor the operation of these rules, and will in particular seek to eliminate any gaming opportunities provided by the flexibility provided Participating Intermittent Resources to self-select participation on an hourly basis.

Participating Intermittent Resources are expected to schedule and otherwise perform in good faith, and not seek to act strategically in a manner that causes financial gain through systematic behavior, where such gain results solely from the settlement accommodations provided under ISO Tariff Section 11.2.4.5.

If requirements specified in this technical standard are not met, then Participating Intermittent Resource certification may be revoked pursuant to EIRP 2.4.5. Any patterns of strategic behavior by Participating Intermittent Resources will be tracked, and the statistical significance of such deviations will be used by the ISO to evaluate whether changes in the rules defined in this EIRP are appropriate.

The ISO will monitor the impact of rules for Participating Intermittent Resources on Imbalance Energy and Regulation costs to the ISO.

EIRP 8 AMENDMENTS

If the ISO determines a need for an amendment to this Protocol, the ISO will follow the requirements as set forth in Section 16 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 11, 2002 Effective: April 1, 2002

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
First Revised Sheet No. 858
FIRST REPLACEMENT VOLUME NO. II
Superseding Original Sheet No. 858

ISO Enforcement Protocol

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: Upon Commission Approval

ISO ENFORCEMENT PROTOCOL

Table of Contents

| EP 1 | OBJECTIVES, DEFINITIONS, AND SCOPE | 860 |
|---------|---|-----|
| EP 1.1 | Purpose | 860 |
| EP 1.2 | Objectives | 860 |
| EP 1.3 | Master Definitions Supplement | 860 |
| EP 1.4 | Special Terms for This Protocol | 860 |
| EP 1.5 | Rules of Interpretation | 861 |
| EP 1.6 | Scope | 861 |
| EP 1.7 | Liability of ISO | 862 |
| EP 1.8 | Application of Other Remedies | 862 |
| EP 1.9 | FERC Authority | 862 |
| EP 1.10 | Administration of the EP | 862 |
| EP 2 | COMPLY WITH OPERATING ORDERS | 863 |
| EP 2.1 | Compliance with Orders Generally | 863 |
| EP 2.2 | Failure to Curtail Load | 863 |
| EP 2.3 | Operations & Maintenance Practices | 863 |
| EP 2.4 | Must-Offer Denials/Revocations | 864 |
| EP 2.5 | Enhancements and Exceptions | 864 |
| EP 2.6 | Per-Day Limitation on Amount of Sanctions | 864 |
| EP 3 | SUBMIT FEASIBLE ENERGY AND ANCILLARY SERVICE | |
| | BIDS AND SCHEDULES | 864 |
| EP 3.1 | Bidding Generally | 864 |
| EP 3.2 | Exceptions | 866 |
| EP 4 | COMPLY WITH AVAILABILITY REPORTING REQUIREMENTS | 866 |
| EP 4.1 | Reporting Availability | 866 |
| EP 4.2 | Scheduling and Final Approval of Outages | 866 |
| EP 4.3 | Explanation of Forced Outages | 867 |
| EP 4.4 | Enhancements and Exceptions | 867 |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 29, 2004 Effective: Upon Commission Approval

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Second Substitute

FIRST REPLACEMENT VOLUME NO. II

Second Substitute Original Sheet No. 859A Superseding Original Sheet No. 859A

| EP 5 | PROVIDE FACTUALLY ACCURATE INFORMATION | 867 |
|---------|--|------|
| EP 5.1 | Accurate Information Generally | 867 |
| EP 5.2 | Inaccurate Meter Data | 868 |
| EP 6 | PROVIDE INFORMATION REQUIRED BY ISO TARIFF | 868 |
| EP 6.1 | Required Information Generally | 868 |
| EP 6.2 | Investigation Information | 869 |
| EP 6.3 | Audit Materials | 869 |
| EP 6.4 | Review by FERC | 870 |
| EP 7 | NO MARKET MANIPULATION | 870 |
| EP 7.1 | Market Manipulation Generally | 870 |
| EP 7.2 | Wash Trades | 870 |
| EP 7.3 | False Information | 871 |
| EP 7.4 | Artificial Congestion | 871 |
| EP 7.5 | Collusion | 871 |
| EP 8 | PROCESS FOR INVESTIGATION AND ENFORCEMENT | 871 |
| EP 8.1 | Purpose; Scope | 871 |
| EP 8.2 | Referrals to FERC | 871 |
| EP 8.3 | Investigation | 871A |
| EP 8.4 | Notice | 871A |
| EP 8.5 | Opportunity to Present Evidence | 871A |
| EP 8.6 | Results of Investigation | 871A |
| EP 8.7 | Statement of Findings and Conclusions | 871B |
| EP 8.8 | Officer Representative | 871B |
| EP 8.9 | Record of Investigation | 871B |
| EP 8.10 | Review of Determination | 871B |
| EP 9 | ADMINISTRATION OF SANCTIONS | 872 |
| EP 9.1 | Assessment; Waivers and Adjustments | 872 |
| EP 9.2 | Excuse | 872 |
| EP 9.3 | Settlement | 873 |
| EP 9.4 | Disposition of Proceeds | 874 |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 1, 2005 Effective: Upon Commission Approval

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 859B

| EP 10 | MISCELLANEOUS | 874 |
|---------|-------------------------------|-----|
| EP 10.1 | Time Limitation | 874 |
| EP 10.2 | No Limitation on Other Rights | 875 |
| EP 10.3 | Amendments | 875 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 1, 2005 Effective: U Effective: Upon Commission Approval

ISO ENFORCEMENT PROTOCOL ("EP")

EP 1 OBJECTIVES, DEFINITIONS, AND SCOPE

EP 1.1 Purpose

This Protocol sets forth the guiding principles for participation in the markets administered by the California Independent System Operator. The specified Rules of Conduct are intended to provide fair notice to Market Participants of the conduct expected of them, to provide an environment in which all parties may participate on a fair and equal basis, to redress instances of gaming and other instances of anticompetitive behavior, and thereby to foster confidence of Market Participants, ratepayers and the general public in the proper functioning of the ISO markets.

EP 1.2 Objectives

The objectives of this Protocol are to:

- (a) Provide clear Rules of Conduct specifying the behavior expected of Market Participants; and
- (b) Establish in advance the Sanctions and other potential consequences for violation of the specified Rules of Conduct.

EP 1.3 Master Definitions Supplement

Unless the context otherwise requires, any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. References to a Section or Appendix are to a section of or an appendix to the ISO Tariff. References to EP are to this Protocol or to the stated section or paragraph of, or appendix to, this Protocol.

EP 1.4 Special Terms for This Protocol

In this Protocol, the following words and expressions shall have the meanings set opposite them:

(a) "FERC" means the Federal Energy Regulatory Commission.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 20, 2004 Effective: Upon Commission Approval

FIRST REPLACEMENT VOLUME NO. II

- (b) "Market Behavior Rules" mean those rules established by FERC under Docket No. EL01-118.
- (c) "Market Manipulation" has the meaning set forth in EP 7.
- (d) "Market Monitoring Unit" means the component of the ISO organization (currently the "Department of Market Monitoring") that is assigned responsibility in the first instance for the functions of a Market Monitoring Unit, as that term is used in Docket No. EL01-118.
- (e) "Rules of Conduct" refers to the rules set forth in EP 2 through EP 7.
- (f) "Sanction" is a consequence specified in this EP for the violation of a Rule of Conduct, which may include a) a warning letter notifying the Market Participant of the violation and future consequences specified under this EP if the behavior is not corrected, or b) financial penalties. Neither referral to FERC nor rescission of payment for service not provided shall constitute a Sanction.

EP 1.5 Rules of Interpretation

Unless the context otherwise requires, if the provisions of this Protocol and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency. Provisions of the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.

A reference in this Protocol to a given agreement, ISO Protocol, or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented, or restated through the date as of which such reference is made. This EP does not modify the terms of any ISO agreements or the relationship of those agreements to the ISO Tariff.

The captions and headings in this EP are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.

EP 1.6 Scope

The EP applies to:

- (a) Scheduling Coordinators;
- (b) Utility Distribution Companies (UDCs);
- (c) Metered Subsystems (MSSs);

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 1, 2005 Effective: Upon Commission Approval

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Second Substitute First Revised Sheet No. 862

Superseding Original Sheet No. 862

- (d) Participating Transmission Owners (PTOs);
- (e) Participating Generators;
- (f) Control Area Operators, to the extent the agreement between the Control Area Operator and the ISO so provides;
- (g) Operators;

FIRST REPLACEMENT VOLUME NO. II

- (h) Other Market Participants;
- (i) The ISO; and
- (i) FERC

EP 1.7 Liability of ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

EP 1.8 Application of Other Remedies

The activities and remedies authorized under this Protocol are in addition to any other actions or relief that may be available to the ISO elsewhere in the ISO Tariff or under law, regulation or order. Nothing in this Protocol limits or should be construed to limit the right of the ISO to take action or seek relief otherwise available to it, and such action or relief may be pursued in lieu of or in addition to the action or relief specified in this Protocol.

EP 1.9 FERC Authority

In addition to any authority afforded Market Monitoring Unit in this Protocol, FERC shall have the authority to assess the sanctions, and otherwise to enforce the rules as set forth and described in this Protocol. FERC shall have authority to remedy a violation under this Protocol from the date of the violation. Nothing in this Protocol shall be deemed to be a limitation or condition on the authority of FERC or other entities under current law or regulation.

EP 1.10 Administration of the EP

The Market Monitoring Unit will administer the Rules of Conduct specified herein, except for EP 7, which shall be administered by FERC, and except as provided in EP 2.5 and EP 4.4. Nothing in this Protocol limits or should be construed to limit the ability of components of the ISO organization other than the Market Monitoring Unit to analyse data and refer matters to the Market Monitoring Unit for enforcement.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 1, 2005 Effective: Upon Commission Approval

EP 2 COMPLY WITH OPERATING ORDERS

EP 2.1 Compliance with Orders Generally

- **Expected Conduct.** Market Participants must comply with operating (a) orders issued by the ISO as authorized under the ISO Tariff. For purposes of enforcement under this EP 2, an operating order shall be an order(s) from the ISO directing a Market Participant to undertake, a single, clearly specified action (e.g., the operation of a specific device, or change in status of a particular Generating Unit) that is feasible and intended to resolve a specific operating condition. A Market Participant's failure to obey an operating order containing multiple instructions to address a specific operating condition will result in a single violation of EP 2. If some limitation prevents the Market Participant from fulfilling the action requested by the ISO, then the Market Participant must promptly and directly communicate the nature of any such limitation to the ISO. Compliance with ISO operating orders requires a good faith effort to achieve full performance as soon as is reasonably practicable in accordance with Good Utility Practice.
- (b) **Sanctions.** The Sanction for a violation of this Section shall be the greater of the quantity of Energy non-performance multiplied by the applicable Hourly Ex Post Price or the following: for the first violation in a rolling twelve (12) month period, \$5,000; for the second and subsequent violations in a rolling twelve (12) month period, \$10,000. Sanctions under EP 2.1 will not be greater than \$10,000 per violation and will be subject to the limitation stated in EP 2.6. If a quantity of energy cannot be objectively determined, then the financial sanctions specified above will apply. A Market Participant may incur Sanctions for more than one violation per day.

EP 2.2 Failure to Curtail Load

- (a) **Expected Conduct.** A UDC or MSS Operator shall promptly comply with any ISO operating order to curtail interruptible or firm load issued pursuant to the ISO's authority under Section 4.4.4 of the ISO Tariff.
- (b) **Sanctions.** The Sanction for non-compliance with an operating order to curtail load will be \$10,000 for each violation.

EP 2.3 Operations & Maintenance Practices

(a) **Expected Conduct.** Market Participants shall undertake such operating and maintenance practices as necessary to avoid contributing to a major outage or prolonging response time as indicated by Section 2.3.2.9.3 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 25, 2005 Effective: Upon Commission Approval

(b) **Sanctions**. The Sanction for a violation of EP 2.3 will be \$10,000.

EP 2.4 Must-Offer Denials/Revocations

- (a) Expected Conduct. A Market Participant shall start a Generating Unit and have that Generating Unit operating at minimum load within 30 minutes of the time at which a must-offer waiver revocation becomes effective, or report the derate, outage or other event outside the control of the Market Participant that prevents the Generating Unit from being started by such time. Notwithstanding the foregoing, no violation shall occur unless the Market Participant has been provided advance notice of the waiver revocation consistent with the relevant start-up time set forth in the ISO Master File. A Market Participant that fails to perform in accordance with the expected conduct described in this EP 2.4(a) shall be subject to Sanction.
- (b) **Sanctions.** The Sanctions for a violation of EP 2.4 shall be as follows: for the first violation in a rolling twelve (12) month period, \$5,000; for the second and all subsequent violations in a rolling twelve (12) month period, \$10,000. A Market Participant is limited to one Sanction per Generating Unit per calendar day.

EP 2.5 Enhancements and Exceptions

Except as otherwise specifically provided, penalty amounts shall be tripled for any violation of EP 2.1 through EP 2.4 if an ISO System Emergency exists at the time an operating order becomes effective or at any time during the Market Participant's non-performance. Notwithstanding the foregoing, violations of EP 2.1 through EP 2.4 are subject to penalty under this rule only to the extent that the ISO has issued a separate and distinct non-automated Dispatch Instruction to the Market Participant. Any penalty amount that is tripled under this provision and that would exceed the \$10,000 per day penalty limit shall not be levied against a Market Participant until the ISO proposes and the Commission approves such an enhancement. A Market Participant that is subject to an enhanced penalty amount under this EP 2.5 may appeal that penalty amount to FERC if the Market Participant believes a mitigating circumstance not covered in EP 9.2 exists. The duty of the Market Participant to pay the enhanced penalty amount will be tolled until FERC renders its decision on the appeal.

EP 2.6 Per-Day Limitation on Amount of Sanctions

The amount of Sanctions that any Market Participant will incur for committing two or more violations of EP 2.1 through EP 2.4 on the same day will be no greater than \$10,000 per day.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 25, 2005 Effective: Upon Commission Approval

EP 3 SUBMIT FEASIBLE ENERGY AND ANCILLARY SERVICE BIDS AND SCHEDULES

EP 3.1 Bidding Generally

(a) **Expected Conduct.** Market Participants must bid and schedule Energy and Ancillary Services from resources that are reasonably expected to be available and capable of performing at the levels specified in the bid and/or schedule, and to remain available and capable of so performing

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 25, 2005 Effective: Upon Commission Approval

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF Substitute First Revised Sheet No. 865 FIRST REPLACEMENT VOLUME NO. II Superseding Original Sheet No. 865

based on all information that is known to the Market Participant or should have been known to the Market Participant at the time of bidding or scheduling.

(b) **Consequence for Non-Performance.** A Market Participant that fails to perform in accordance with the expected conduct described in EP 3.1 (a) above shall be subject to having the payment rescinded for any portion of an Ancillary Service that is unavailable.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 29, 2004 Effective: Upon Commission Approval

EP 3.2 Exceptions.

Violations of EP 3.1 that result in circumstances in which an Uninstructed Deviation Penalty under Section 11.2.4.1.2 of the ISO Tariff may be assessed or for which payments have been eliminated under Section 2.5.26 of the ISO Tariff are not subject to Sanction under this section. The submission of a Schedule that causes, or that the ISO expects to cause Intra-Zonal Congestion shall not, by itself, constitute a violation of EP 3.1 unless the Market Participant fails to comply with an obligation under the ISO Tariff to modify Schedules as determined by the ISO to mitigate such congestion or such Schedules violate another element of this Rule.

EP 4 COMPLY WITH AVAILABILITY REPORTING REQUIREMENTS

EP 4.1 Reporting Availability

- (a) **Expected Conduct**. A Market Participant shall report to the ISO Control Center any Outage of a Generating Unit subject to Section 5 of the ISO Tariff within thirty (30) minutes after the Outage occurs, in accordance with Section 2.3.3.9.2 of the ISO Tariff.
- (b) Sanctions. The Sanctions for a violation of EP 4.1 shall be as follows: for the first violation in a rolling twelve (12) month period, a warning letter; for the second violation in a rolling twelve (12) month period, \$1,000; for the third violation in a rolling twelve (12) month period, \$2,000; for the fourth and subsequent violations in a rolling twelve (12) month period, \$5,000. A Market Participant shall not be subject to more than one Sanction per Generating Unit per calendar day for violating EP 4.1. A "violation" shall mean each failure to report an Outage as required.

EP 4.2 Scheduling and Final Approval of Outages

(a) **Expected Conduct.** A Market Participant shall not undertake an Outage except as approved by the ISO Outage Coordination Office in accordance with Sections 2.3.3.2, OCP 4.2, and OCP 5.1 of the ISO Tariff. A Market Participant shall not commence any Outage without obtaining final approval from the ISO Control Center in accordance with Sections 2.3.3.8, OCP 4.3.6, OCP 4.3.8, OCP 5.7, OCP 5.8, and OCP 6 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 29, 2004 Effective: Upon Commission Approval

Superseding Original Sheet No. 867

(b) **Sanctions.** The Sanctions for a violation of EP 4.2 shall be as follows: for the first violation within a rolling twelve (12) month period, \$5,000; for subsequent violations within a rolling twelve (12) month period, \$10,000. A "violation" shall mean each Outage undertaken for which all required approvals were not obtained.

EP 4.3 Explanation of Forced Outages

- (a) **Expected Conduct**. A Market Participant, within two working days of the commencement of a Forced Outage, must provide an explanation of the Forced Outage to the ISO that includes a description of the equipment failure or other cause and a description of all remedial actions taken by the Operator, in accordance with Section 2.3.3.9.5 of the ISO Tariff. An Operator must promptly provide information requested by the ISO to enable the ISO to review the explanation submitted by the Operator and to prepare a report on the Forced Outage.
- (b) **Sanctions**. The Sanction for failing to provide a timely explanation of Forced Outage shall be \$500 per day for each day the explanation is late. The Sanction for failing to provide a timely response to information requested shall be as specified in EP 6.1.

EP 4.4 Enhancements and Exceptions

Except as otherwise specifically provided, penalty amounts shall be tripled for any violation of EP 4.1 through EP 4.3 that occurs during an ISO System Emergency. Violations of the above rules that result in circumstances in which an Uninstructed Deviation Penalty under Section 11.2.4.1.2 of the ISO Tariff may be assessed shall not be subject to Sanction under this EP 4. A Market Participant that is subject to an enhanced penalty amount under this EP 4.4 may appeal that penalty amount to FERC if the Market Participant believes a mitigating circumstance not covered in EP 9.2 exists. The duty of the Market Participant to pay the enhanced penalty amount will be tolled until FERC renders its decision on the appeal.

EP 5 PROVIDE FACTUALLY ACCURATE INFORMATION

EP 5.1 Accurate Information Generally

(a) **Expected Conduct.** All applications, Schedules, reports, and other communications by a Market Participant or agent of a Market Participant to the ISO, including maintenance and outage data, bid data, transaction information, and load and resource information, must be submitted by a responsible company official who is knowledgeable of the facts submitted. The Market Participant shall provide accurate and factual information and not submit false or misleading information, or omit material information, in any communication with FERC, FERC-approved market monitors, FERC-approved regional transmission organizations, or FERC-approved independent system operators, or jurisdictional transmission providers, unless the Market Participant exercised due diligence to prevent such occurrences.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 25, 2005 Effective: Upon Commission Approval

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 867A

Sanctions. The Sanctions for a violation of EP 5.1 shall be as follows: (b) for the first violation within a rolling twelve (12) month period, \$2,500; for the second violation within a rolling twelve (12) month period), \$5,000; subsequent violations within a rolling twelve (12) month period, \$10,000.

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: November 29, 2004 Effective: U Effective: Upon Commission Approval

EP 5.2 Inaccurate Meter Data

- (a) **Expected Conduct.** Market Participants shall provide complete and accurate Settlement Quality Meter Data for each Trade hour and shall correct any errors in such data prior to the issuance of Final Settlement Statements. Failure to provide complete and accurate Settlement Quality Meter Data, as required by Section 10 of the ISO Tariff and that results in an error that is discovered after issuance of Final Settlement Statements, shall be a violation of this rule.
- (b) **Sanctions.** Violations under this EP 5.2 shall be subject to Sanction described in Appendix A to this EP.
- (c) **Disposition of Sanction Proceeds.** For purposes of redistributing collected penalties, any amounts collected under this provision shall be applied first to those parties affected by the conduct. Any excess amounts shall be disposed of as set forth in EP 9.4.

EP 6 PROVIDE INFORMATION REQUIRED BY ISO TARIFF

EP 6.1 Required Information Generally

- (a) **Expected Conduct.** Except as provided below in EP 6.4 (Review by FERC), all information that is required to be submitted to the ISO under the ISO Tariff, ISO protocols, or jurisdictional contracts must be submitted in a complete, accurate, and timely manner. Market Participants must comply with requests for information or data by the ISO authorized under the ISO Tariff, including timelines specified in the ISO Tariff for submitting Schedules and other information.
- (b) **Sanctions.** Except as otherwise provided below, in EP 6.2 and EP 6.3, a violation of this rule is subject to a penalty of \$500 for each day that the required information is late.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 29, 2004 Effective: Upon Commission Approval

EP 6.2 Investigation Information

- (a) **Expected Conduct.** Except as provided below in EP 6.4 (Review by FERC), Market Participants must submit timely information in response to a written request by the ISO for information reasonably necessary to conduct an investigation authorized by the ISO Tariff.
- (b) Sanctions. The Sanction for a violation of EP 6.2 shall be as follows: for the first violation in a rolling 12-month period, \$1000/day; for the second violation in a rolling 12-month period, \$2000/day; for the third and subsequent violations in a rolling 12-month period, \$5000/day. For purposes of this subsection, a violation shall be each failure to provide a full response to a written request and the Sanction shall be determined from the date that the response was due until a full response to the request is received.

EP 6.3 Audit Materials

- (a) **Expected Conduct.** Except as provided below in EP 6.4 (Review by FERC), Market Participants shall comply with the ISO's audit and/or test procedures, and further shall perform and timely submit an annual self-audit as required under the ISO Tariff.
- (b) Sanctions. For failure to submit an annual SC Self Audit report, the Sanction shall be \$1000/day until such report is received by the ISO. For all other violations of this rule the Sanctions shall be as follows: for the first violation in a rolling 12-month period, \$1000/day; for the second violation in a rolling 12-month period, \$2000/day; for the third and subsequent violations in a rolling 12-month period, \$5000/day. For purposes of this subsection, a "violation" shall be each failure to provide all information required under the audit or test, from the date that the information was due until all required information is received by the ISO.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 29, 2004 Effective: Upon Commission Approval

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Substitute First Revised Sheet No. 870
FIRST REPLACEMENT VOLUME NO. II
Superseding Original Sheet No. 870

EP 6.4 Review by FERC

A Market Participant who objects to an information, audit or test obligation that is enforceable under EP 6.1, 6.2 or 6.3 above shall have the right immediately (and in all events, no later than the due date for the information) to seek review of the obligation with FERC. In the event that such review is sought, the time for submitting the response or other information to the ISO shall be tolled until FERC resolves the issue.

EP 7 NO MARKET MANIPULATION

EP 7.1 Market Manipulation Generally

- (a) Expected Conduct. Actions or transactions that are without a legitimate business purpose and that are intended to or foreseeably could manipulate market prices, market conditions, or market rules for electric energy or electricity products are prohibited. Actions or transactions by a Market Participant that are explicitly contemplated in the ISO Tariff or are undertaken at the direction of the ISO are not in violation of this Rule of Conduct.
- (b) **Sanctions**. Violations or potential violations of this rule shall be referred to FERC for appropriate sanction.

EP 7.2 Wash Trades

- (a) **Expected Conduct.** Market Participants shall not engage in prearranged offsetting trades of the same product among the same parties, which involve no economic risk and no net change in beneficial ownership (sometimes called "wash trades").
- (b) **Sanctions**. Violations or potential violations of this rule shall be referred to FERC for appropriate sanction.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 29, 2004 Effective: Upon Commission Approval

EP 7.3 False Information

- (a) **Expected Conduct.** A Market Participant shall not engage in transactions predicated on submitting false information to transmission providers or other entities responsible for operation of the transmission grid (such as inaccurate load or generation data; or scheduling non-firm service or products sold as firm), unless the Market Participant exercised due diligence to prevent such occurrences.
- (b) **Sanctions**. Violations or potential violations of this rule shall be referred to FERC for appropriate sanction.

EP 7.4 Artificial Congestion

- (a) **Expected Conduct.** A Market Participant shall not engage in transactions in which it first creates artificial congestion and then purports to relieve such artificial congestion (unless the Market Participant exercised due diligence to prevent such an occurrence).
- (b) **Sanctions**. Violations or potential violations of this rule shall be referred to FERC for appropriate sanction.

EP 7.5 Collusion

- (a) **Expected Conduct.** Market Participants shall not engage in collusion with another party for the purpose of manipulating market prices, market conditions, or market rules for electric energy or electricity products.
- (b) **Sanctions**. Violations or potential violations of this rule shall be referred to FERC for appropriate sanction.

EP 8 PROCESS FOR INVESTIGATION AND ENFORCEMENT

EP 8.1 Purpose; Scope

The provisions of this EP 8 set forth the procedures by which the Market Monitoring Unit will independently investigate potential violations of the Rules of Conduct and administer enforcement activities. Except as hereinafter provided, and except as provided in EP 2.5 and EP 4.4, the provisions of this section apply to the Rules of Conduct set forth in EP 2 through EP 7.

EP 8.2 Referrals to FERC

EP 7 shall be enforced by FERC, in accordance with FERC's rules and procedures. The Market Monitoring Unit shall refer to FERC and its staff all matters in which it has formed a reasonable belief that a violation of EP 7 may have occurred. Although EP 2 through EP 6 will generally be enforced by the Market Monitoring Unit, the Market Monitoring Unit shall refer to FERC any matter for which the particular circumstances preclude the objective

Issued by: Charles F. Robinson, Vice President and General Counsel

determination of a Rules of Conduct violation, and shall refer to FERC any Sanction that it believes should be modified in accordance with EP 2.5, EP 4.4, or EP 9.1. The time limitation contained in EP 10.1 to assess a Sanction under this Protocol shall be determined as of the date that a Sanction is initially assessed by the ISO, excluding the time required for FERC to investigate a potential Rules of Conduct violation and/or determine a Sanction in accordance with this section, EP 2.5, EP 4.4, or EP 9.1.

EP 8.3 Investigation

The Market Monitoring Unit shall conduct a reasonable investigation seeking available facts, data, and other information relevant to the potential Rules of Conduct violation.

EP 8.4 Notice

The Market Monitoring Unit shall provide notice of the investigation in sufficient detail to allow for a meaningful response to the Scheduling Coordinator and, as limited below, to all Market Participants the Scheduling Coordinator represents that are the subject(s) of the investigation. The Market Monitoring Unit shall contact the Market Participant(s) that may be involved, so long as the ISO has sufficient objective information to identify and verify the role of the Market Participant(s) in the potential Rules of Conduct violation. Such Market Participant(s) will likely have an existing contractual relationship with the ISO (e.g., UDC, MSS, ISO Metered Entity, Participating Transmission Owner, Participating Generator, or Participating Load).

EP 8.5 Opportunity to Present Evidence

The Market Monitoring Unit shall provide an opportunity to the Market Participant(s) that are the subject(s) of the investigation to present any issues of fact or other information relevant to the potential Rules of Conduct violation being investigated. The Market Monitoring Unit shall consider all such information or data presented.

EP 8.6 Results of Investigation

The Market Monitoring Unit shall notify the Market Participant(s) that are the subject(s) of the investigation of the results of the investigation. The Market Participant(s) shall have 30 days to respond to the findings of the Market Monitoring Unit before the Market Monitoring Unit makes a determination of whether a Sanction is required by this EP.

EP 8.7 Statement of Findings and Conclusions

Where the investigation results in a Sanction, the Market Monitoring Unit shall state its findings and conclusions in writing, and will make such writing available to the Scheduling Coordinator and, as provided in EP 8.4, to the Market Participant(s) that are the subject(s) of the investigation.

Issued by: Charles F. Robinson, Vice President and General Counsel

EP 8.8 Officer Representative

Where an investigation results in a Sanction by the Market Monitoring Unit, the Market Monitoring Unit shall direct its notice of such result to a responsible representative of the Scheduling Coordinator and, as provided in EP 8.4, to the Market Participant(s) that are the subject(s) of the investigation at the officer level.

EP 8.9 Record of Investigation

Where an investigation results in a Sanction, the Market Monitoring Unit will maintain a record of the investigation until its decision has been finally reviewed, if review is sought, or until the period for seeking review has expired.

EP 8.10 Review of Determination

A Market Participant that receives a Sanction may obtain immediate review of the Market Monitoring Unit's determination by directly appealing to FERC, in accordance with FERC's rules and procedures. In such case, the applicable Scheduling Coordinator shall also dispute the Preliminary Settlement Statement containing the financial penalty, in accordance with Section 11 of the ISO Tariff. The Preliminary Settlement Statement dispute and appeal to FERC must be made in accordance with the timeline for raising disputes specified in Section 11.7.2 of the ISO Tariff. The penalty will be tolled until FERC renders its decision on the appeal. The disposition by FERC of such appeal shall be final, and no separate dispute of such Sanction may be initiated under Section 13 of the ISO Tariff, except as provided in EP 9.3(d). For the purpose of applying the time limitations set forth in EP 10.1, a sanction will be considered assessed when it is included on a Preliminary Settlement Statement, whether or not the ISO accepts a Scheduling Coordinator's dispute of such Preliminary Settlement Statement pending resolution of an appeal to FERC in accordance with this section or EP 9.3(c).

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
Substitute First Revised Sheet No. 872
FIRST REPLACEMENT VOLUME NO. II
Superseding Original Sheet No. 872

EP 9 ADMINISTRATION OF SANCTIONS

EP 9.1 Assessment; Waivers and Adjustments

Penalty amounts for violation of these Rules of Conduct shall be calculated as specified in EP 2 through 7. A Sanction specified in this EP may be modified by FERC when it determines that such adjustment is just and reasonable. The ISO may make a recommendation to FERC to modify a Sanction. An adjustment generally shall be deemed appropriate if the prescribed Sanction appears to be insufficient to deter the prohibited behavior, or if the circumstances suggest that the violation was inadvertent, unintentional, or some other mitigating circumstances exist.

EP 9.2 Excuse

The following circumstances shall excuse a violation of a Rule of Conduct under the terms of this Protocol:

- (a) Uncontrollable Force. No failure by a Market Participant to satisfy the Rules of Conduct shall be subject to penalty to the extent and for the period that the Market Participant's inability to satisfy the Rules of Conduct is caused by an event or condition of Uncontrollable Force affecting the Market Participant; provided that the Market Participant gives notice to the ISO of the event or condition of Uncontrollable Force as promptly as possible after it knows of the event or condition and makes all reasonable efforts to cure, mitigate, or remedy the effects of the event or condition.
- (b) **Safety, Licensing, or Other Requirements.** Failure by a Market Participant to perform its obligations shall not be subject to penalty if the Market Participant is able to demonstrate that it was acting in accordance with Section 2.3.1.2.1 of the ISO Tariff.
- (c) **Emergencies.** Failure by a Market Participant to perform its obligations may not be subject to penalty if the Market Participant is able to demonstrate that it was acting in good faith and consistent with Good Utility Practice to preserve System Reliability in a System Emergency, unless contrary to an ISO operating order.
- (d) Conflicting Directives. To the extent that any action or omission by a Market Participant is specifically required by a FERC Order or ISO operating order, the Market Participant may not be subject to penalty for that act or omission.

Issued by: Charles F. Robinson, Vice President and General Counsel

EP 9.3 Settlement

- (a) Settlement Statements. The ISO will administer any penalties issued under this Enforcement Protocol through Preliminary Settlement Statements, and Final Settlement Statements issued to the responsible Scheduling Coordinator by the ISO. Before invoicing a financial penalty through the Settlement process, the ISO will provide a description of the penalty to the responsible Scheduling Coordinator and all Market Participants the Scheduling Coordinator represents that are liable for the penalty, when the ISO has sufficient objective information to identify and verify responsibility of such Market Participants. The ISO shall specify whether such penalty is modified pursuant to EP 2.5, EP 4.4, or EP 9.1. The description shall include the identity of the Market Participant that committed the violation and the amount of the penalty. Where FERC has determined the Sanction, the ISO will provide such of the above information as is provided to it by FERC. The ISO also may publish this information under the ISO Home Page after Final Settlement Statements are issued.
- (b) **Payment.** Except as provided in EP 2.5, EP 4.4, EP 8.10, or EP 9.3(c) below, the Scheduling Coordinator shall be obligated to pay all penalty amounts reflected on the Preliminary and Final Settlement Statements to the ISO pursuant to the ISO's Settlement process, as set forth in Section 11 of the ISO Tariff.
- Other Responsible Party. Where a party or parties other than the (c) Scheduling Coordinator is responsible for the conduct giving rise to a penalty reflected on a Preliminary or Final Settlement Statement, and where the Scheduling Coordinator bears no responsibility for the conduct, such other party or parties ultimately shall be liable for the penalty. Under such circumstances, the Scheduling Coordinator shall use reasonable efforts to obtain payment of the penalty from the responsible party(ies) and to remit such payment to the ISO in the ordinary course of the settlement process. In the event that the responsible party(ies) wish to dispute the penalty, or the Scheduling Coordinator otherwise is unable to obtain payment from the responsible parties, the Scheduling Coordinator shall notify the ISO and dispute the Preliminary Settlement Statement. The ISO promptly shall notify FERC. If the ISO finds that a Market Participant separate from the Scheduling Coordinator that is unable to obtain payment from the responsible party(ies) is solely responsible for a violation, the Scheduling Coordinator that is unable to obtain payment may net its payment of its Invoice amount by the amount of the penalty in question. The ISO may refuse to offer further service to any responsible party that fails to pay a penalty, unless excused under the terms of the Tariff or this Enforcement Protocol, by providing notice of such refusal to the Scheduling Coordinator. Following such notice, the Scheduling Coordinator shall be liable for any subsequent penalties assessed on account of such responsible party.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 873A

(d) **Dispute of FERC Sanctions**. The right that a Market Participant may otherwise have under the Tariff or this Enforcement Protocol to dispute a penalty that has been determined by FERC shall be limited to a claim that the ISO failed properly to implement the penalty or other Sanction ordered by FERC, except as provided by EP 2.5 and EP 4.4.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 29, 2004 Effective: Upon Commission Approval

EP 9.4 Disposition of Proceeds

The ISO shall collect penalties assessed pursuant to this EP and deposit such amounts in an interest bearing trust account. After the end of each calendar year, the ISO shall distribute the penalty amounts together with interest earned through payments to Scheduling Coordinators as provided herein. For the purpose of this EP 9.4, "eligible Market Participants" shall be those Market Participants that were not assessed a financial penalty pursuant to this EP during the calendar year.

Each Scheduling Coordinator that paid GMC during the calendar year will identify, in a manner to be specified by the ISO, the amount of GMC paid by each Market Participant for whom that Scheduling Coordinator provided service during that calendar year. The total amount assigned to all Market Participants served by that Scheduling Coordinator in such calendar year (including the Scheduling Coordinator itself for services provided on its own behalf), shall equal the total GMC paid by that Scheduling Coordinator.

The ISO will calculate the payment due each Scheduling Coordinator based on the lesser of the GMC actually paid by all eligible Market Participants represented by that Scheduling Coordinator, or the product of a) the amount in the trust account, including interest, and b) the ratio of the GMC paid by each Scheduling Coordinator on behalf of eligible Market Participants, to the total of such amounts paid by all Scheduling Coordinators. Each Scheduling Coordinator is responsible for distributing payments to the eligible Market Participants it represented in proportion to GMC collected from each eligible Market Participant.

Prior to allocating the penalty proceeds, the ISO will obtain FERC's approval of its determination of eligible Market Participants and their respective shares of the trust account proceeds. If the total amount in the trust account to be so allocated exceeds the total GMC obligation of all eligible Market Participants, then such excess shall be treated in accordance with SABP 6.5.2(b).

EP 10 MISCELLANEOUS

EP 10.1 Time Limitation

An investigation of events potentially subject to Sanction under this Protocol must be commenced within 90 days of discovery of the events. Sanctions may be assessed under this Protocol up to one year after discovery of the events constituting the violation, but no later than three years after the date of the violation. Nothing in this section shall limit the rights or liabilities of any party under any other provision of applicable laws, regulations or tariff provisions.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
First Revised Sheet No. 875
FIRST REPLACEMENT VOLUME NO. II
Superseding Original Sheet No. 875

EP 10.2 No Limitation on Other Rights

Nothing contained in this Protocol shall limit the ability of the ISO to collect information from Market Participants or to establish new provisions pursuant to Section 19 of the ISO Tariff.

EP 10.3 Amendments

Amendments to this protocol shall be made pursuant to the ISO Protocol amendment process set forth in Section 16 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

APPENDIX A

1. Method for Calculating Inaccurate Meter Data Penalty

There is no Sanction for the submission of inaccurate meter data used for Preliminary Settlement Statements. However, an error in submitted meter data that is discovered after issuance of Final Settlement Statements constitutes a Rule of Conduct violation. The level of the Sanction depends on whether the Scheduling Coordinator or the ISO discovered the error. An increased penalty will apply for errors that are discovered by the ISO.

Table A1 below shows how the level of the Sanction depends on the following factors: whether or not the Scheduling Coordinator finds the error; whether or not the Scheduling Coordinator owes the market, and whether or not the ISO reruns settlement of the market. If the ISO reruns the market, then settlement to all Scheduling Coordinators is recalculated, and the impact of such reruns on charges assessed will be considered. A charge equal to 30% of the estimated value of the Energy error will apply if the Scheduling Coordinator discovers the error, or 75% of the estimated value of the Energy error if the ISO discovers the error. Penalty assessment and disposition of penalty proceeds will be administered as described in EP 9.1 and 9.4 respectively. A Sanction will not be imposed unless such Sanction is more than \$1,000 for at least one Trading Day during the period for which there was incomplete or inaccurate meter data.

Table A1 – Calculation of Inaccurate Meter Data Penalty When There Is A Market Rerun

| Case | Does SC Owe Market? | |
|--|------------------------|--|
| Case 1: SC Identifies Inaccurate Meter Data | Yes | Charge = (MWh x Hourly Ex Post Price ¹) x 0.30 |
| Case 1: SC Identifies Inaccurate Meter Data | No | Charge = (MWh x Hourly Ex Post Price ¹) x 0.30 |
| Case 2: ISO Identifies Inaccurate Meter Data | Yes | Charge = (MWh x Hourly Ex Post Price ¹) x 0.75 |
| Case 2: ISO Identifies Inaccurate Meter Data | No | Charge = (MWh x Hourly Ex Post Price ¹) x 0.75 |

Issued by: Charles F. Robinson, Vice President and General Counsel

Notes to Table A1:

The applicable price will be the greater of the Hourly Ex Post Price or \$10/MWh. The Hourly Ex Post Price used will be the value posted under the ISO Home Page for each Trading Hour of the applicable Trading Day.

2. Method for Calculating Inaccurate Meter Data Penalty When The Market Is Not Re-Run

If the Market is not re-run, for cases of inaccurate meter data, Table A2 will be used to determine and allocate the penalty proceeds. This method approximates the financial impact on the market; however, it does not completely reflect all the settlement consequences of inaccurately submitted meter data. This will be considered a market adjustment. The approximated value of the inaccurate meter data in question will be calculated and returned to the Market based on the average of the pro rata share of Unaccounted For Energy (UFE) charged in the UDC territory during the period of the inaccurate meter data event. The 30% or 75% penalty will be distributed as discussed in EP 9.4. For cases where the market is not re-run and the SC does not owe the market, then no market adjustment will be performed.

TABLE A2- Calculation Of Inaccurate Meter Data Penalty When There Is No Market Re-Run

| Case | Does SC Owe Market? | ISO does not perform a market settlement re-run |
|--|---------------------------|---|
| Case 1: SC Identifies Inaccurate Meter Data | Yes | Market Adjustment = (MWh x Hourly Ex Post Price ¹) Penalty = (MWh x Hourly Ex Post Price ¹) x 0.30 |
| Case 1: SC Identifies Inaccurate Meter Data | No | No Market Adjustment will be made Penalty = (MWh x Hourly Ex Post Price ¹) x 0.30 |
| Case 2: ISO Identifies Inaccurate Meter Data | Yes | Market Adjustment = (MWh x Hourly Ex Post Price ¹) Penalty = (MWh x Hourly Ex Post Price ¹) x 0.75 |
| Case 2: ISO Identifies Inaccurate Meter Data | No | No Market Adjustment will be made Penalty = (MWh x Hourly Ex Post Price ¹) x 0.75 |

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION
FERC ELECTRIC TARIFF
FIRST REPLACEMENT VOLUME NO. II
Superseding Original Sheet No. 878

Notes to Table A2:

The applicable price will be the greater of the Hourly Ex Post Price or \$10/MWh. The Hourly Ex Post Price used will be the value posted under the ISO Home Page for each Trading Hour of the applicable Trading Day.

A Sanction will be imposed only if the Sanction is more than \$1,000 for at least one Trading Day during the period for which there was incomplete or inaccurate meter data.

If the error is to the detriment of the responsible Scheduling Coordinator (e.g., under-reported generation or over-reported load), and the ISO does not rerun the market, then no correction will be made, representing an implicit penalty of 100% of the value of the Energy. If the market is rerun after the error is corrected, then the Scheduling Coordinator will be given credit for the additional Energy through the normal Settlement process. If the Scheduling Coordinator is paid for an error due to a market rerun, then a Sanction will be assessed to assure that market reruns do not diminish the incentive to correct such errors. This Sanction would be 30% of the Energy value of the error if the Scheduling Coordinator discovers the error, or 75% estimated value of the error if the ISO discovers the error.

If the error is to the detriment of the market, then a charge equal to 30% or 75% of the estimated value of the error, as appropriate, will be added to the charge for the Energy. If there is no market rerun, then the cost of Energy supplied by the ISO (and inappropriately charged to the market as Unaccounted for Energy) must be recovered as well, and the charge will be equal to 130% or 175% of the estimated value of the error, as appropriate.

Issued by: Charles F. Robinson, Vice President and General Counsel

UDP AGGREGATION PROTOCOL

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 21, 2003 Effective: November 21, 2003

UDP AGGREGATION PROTOCOL <u>Table of Contents</u>

| UAP 1 | OBJECTIVE, DEFINITIONS, AND SCOPE | 881 |
|-----------|--|-----|
| UAP 1.1 | Objective | 881 |
| UAP 1.2 | Definitions | 881 |
| UAP 1.2.1 | Master Definitions Supplement | 881 |
| UAP 1.2.2 | Special Definitions for this Protocol | 881 |
| UAP 1.3 | Scope | 881 |
| UAP 2 | SUBMITTAL OF A REQUEST FOR UDP AGGREGATION | 882 |
| UAP 3 | ISO REVIEW OF A UDP AGGREGATION REQUEST | 882 |
| UAP 3.1 | Criteria for Reviewing a Request | 882 |
| UAP 3.1.1 | Scheduling Coordinator and Interconnection Point | 882 |
| UAP 3.1.2 | Additional Criteria | 883 |
| UAP 3.1.3 | Approval of a Request | 883 |
| UAP 3.1.4 | Rejection of a Request | 884 |
| UAP 4 | MODIFICATIONS TO AN EXISTING UDP AGGREGATION | 884 |
| UAP.4.1 | Temporary Restriction by ISO | 884 |
| UAP 4.2 | Permanent Suspension by ISO | 884 |
| UAP 4.3 | Request for Modification by a Scheduling Coordinator | 884 |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 21, 2003 Effective: November 21, 2003

UAP 1 OBJECTIVE, DEFINITIONS, AND SCOPE

UAP 1.1 Objective

The UDP will be calculated and assessed for each resource individually, except that as specified in this Protocol, resources may be aggregated.

The objective of this protocol is to describe and standardize the process for reviewing and approving or denying aggregations used in calculating the UDP. It also describes the process for making changes to, temporarily restricting, or permanently suspending an existing UDP Aggregation.

UAP 1.2 Definitions

UAP 1.2.1 Master Definitions Supplement

Any word or expression defined in the Master Definition Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. A reference to a Section or Appendix is to a Section or an Appendix of the ISO Tariff. References to UAP are to this Protocol or to the stated paragraph of this Protocol.

UAP 1.2.2 Special Definitions for this Protocol

In this Protocol, the following words and expressions shall have the following meanings:

"UDP" shall mean the penalty established in Section 11.2.4.1 of the ISO Tariff.

"UDP Aggregation" shall mean two or more units scheduled by the same Scheduling Coordinator with the same resource identification that are to be considered interchangeable for calculating the UDP.

"Uninstructed Deviation" shall mean a deviation from the resources' Dispatch Operating Point.

UAP 1.3 Scope

There are two types of UDP Aggregation Classifications:

- (1) Basic UDP Aggregations: composed of Generating Units connected at the same substation and stepping up to the same voltage level bus bar, or
- (2) Custom UDP Aggregations: composed of Generating Units connected at different substations and/or different voltage levels, particularly where the Generating Units to be aggregated are separated by ISO Controlled Grid facilities. Examples of a proposed Custom UDP Aggregation include

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: November 21, 2003 Effective: November 21, 2003

hydroelectric units operating on a common watershed (but having multiple different interconnection points), or geothermal units fed from a common geothermal steam supply.

UAP 2 SUBMITTAL OF A REQUEST FOR UDP AGGREGATION

Requests for UDP Aggregation are submitted to the ISO and must include the following documentation:

- A completed UDP Aggregation Request form, which is available for downloading on the ISO website;
- (2) A simplified electrical one-line diagram, which illustrates each resource, the connection of the resources to each other and to the ISO Control Area Grid;
- (3) For Custom UDP Aggregations, a detailed description that explains physical operating interrelationships between the units, or, if there are no interrelationships, how the units are compatible and why an aggregation of these units for the purpose of calculating Uninstructed Deviation Penalties is reasonable.

UAP 3 ISO REVIEW OF A UDP AGGREGATION REQUEST

Upon receipt of a completed request form and accompanying attachments, the ISO shall review the request according to the criteria outlined herein. For Basic UDP Aggregations, the ISO shall review and approve or reject it within one week of receipt. The ISO shall review and approve or reject a request for a Custom UDP Aggregation within thirty (30) days of receipt.

UAP 3.1 Criteria for Reviewing a Request

UAP 3.1.1 Scheduling Coordinator and Interconnection Point

Uninstructed Deviations may be aggregated for resources that are:

- (1) Represented by the same Scheduling Coordinator and
- (2) Connected to the same ISO Controlled Grid bus and voltage level.

The ISO will consider, on a case-by-case basis, requests to aggregate Uninstructed Deviations among resources represented by the same Scheduling Coordinator but not sharing a common ISO Controlled Grid bus and voltage level. In particular, the ISO will consider whether the request concerns resources

Issued by: Charles F. Robinson, Vice President and General Counsel

Superseding Original Sheet No. 883

related by a common flow of fuel which cannot be interrupted without a substantial loss of efficiency of the combined output of all components: whether the Energy production from one resource necessarily causes Energy production from other resource(s); and whether the operational arrangement of resources determines the overall physical efficiency of the combined output of all of the resources.

UAP 3.1.2 Additional Criteria

Additional eligibility criteria for a UDP Aggregation are as follows:

- (1) Only Generating Units shall be eligible for UDP Aggregation. As a general rule, pump-generating Units (or a Physical Scheduling Plant [PSP] containing a pump-generating Unit) cannot be part of a UDP Aggregation. However, it is possible that generating Units could form a UDP Aggregation comprised entirely of pump-generating Units whose operation is uniform, that is, Units all operating in either Generation mode or all in pump mode, but never mixed.
- (2)UDP Aggregations cannot include any of the following:
 - (a) Load;
 - (b) Condition 2 Reliability Must Run (RMR) Units;
 - (c) Participating Intermittent Resources;
 - (d) Generating Units less than 5 MW; or
 - Generating Units that span active or inactive Congestion Zones. (e)
- (3)The resources must have ISO direct telemetry and must be fully compliant with the ISO's direct telemetry standards.
- (4) The Generating Units must have the same relative effect on all network elements for which the Generating Units have at least a five (5) percent effectiveness factor, that is, for those network elements for which a 1 MW change in the output of the Generating Unit changes the flow across that element by at least 0.05 MW. For the purposes of this item (4), the "same relative effect" means that the effectiveness factors of any Generating Unit relative to a network element cannot differ by more than 10% from the midpoint effectiveness factor of all the units. The midpoint effectiveness is the arithmetic mean of the two most different effectiveness factors to be aggregated.
- (5)Custom UDP Aggregations involving units not directly connecting to the ISO Controlled Grid must recognize the transfer limits and status of the intermediate local facilities.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 883A

UAP 3.1.3 Approval of a Request

If a UDP Aggregation request is approved, the ISO shall create a new unique Resource ID, which reflects the identity or location of the units and stipulates the UDP Aggregation, but which cannot be used for scheduling purposes. The ISO shall inform the Scheduling Coordinator of the approval and ask the Scheduling Coordinator to confirm the desired start date of the UDP Aggregation. When that

Issued by: Charles F. Robinson, Vice President and General Counsel

confirmation has been received, the new aggregation will be entered into the ISO systems. Unless otherwise agreed to by the Scheduling Coordinator and the ISO, the UDP Aggregation will become effective on the first day of the month following approval. The Units in an approved UDP Aggregation are obligated to follow their individual schedules and instructions at all times.

UAP 3.1.4 Rejection of a Request

If the ISO determines that the proposed UDP Aggregation is likely to impact grid reliability or the reliability of transmission systems or equipment of intermediate entities between the relevant resources and the ISO grid, the request will be rejected. If the ISO rejects a request, the ISO shall inform the Scheduling Coordinator, and forward to it the reason for the rejection. The ISO may suggest alternative solutions if it has adequate time and data. The Scheduling Coordinator may choose to resubmit based on the ISO's recommendations, or to close the request.

UAP 4 MODIFICATIONS TO AN EXISTING UDP AGGREGATION

UAP.4.1 Status of UDP Aggregation

An approved UDP Aggregation shall be considered active until otherwise requested by the Scheduling Coordinator.

UAP 4.2 Suspension by the ISO

The ISO may suspend previously approved UDP Aggregations if, due to changes to the grid, to the aggregated Generating Units, or to the facilities connecting aggregated Generating Units to the grid, the UDP Aggregation no longer meets the criteria set forth in Sections 3.1.1 and 3.1.2 of this ISO Protocol. If the ISO must suspend the UDP Aggregation due to a forced outage or other unanticipated event, the ISO shall provide notice that the UDP Aggregation has been suspended as soon as practical after the affecting event, but in no case longer than 72 hours after that event. If the ISO must suspend the UDP Aggregation due to future changes, the ISO shall notify the affected Scheduling Coordinator (1) that the UDP Aggregation will be suspended and (2) when the UDP Aggregation will be suspended.

The ISO shall write a report that explains the reason for the suspension and that specifies the effective date and time. The ISO will forward the report to the Scheduling Coordinator and take steps to have the aggregation removed from the ISO systems.

In the event that a resource in a UDP Aggregation changes from one Scheduling Coordinator to another, the UDP Aggregation will be suspended. In order to reinstate the aggregation, the new Scheduling Coordinator must submit a new request reflecting the change.

Issued by: Charles F. Robinson, Vice President and General Counsel

UAP 4.3 Request for Modification by a Scheduling Coordinator

A Scheduling Coordinator may request a modification to an existing aggregation up to once per calendar month. A request for modification will follow the same procedures as a new request.

Issued by: Charles F. Robinson, Vice President and General Counsel

DYNAMIC SCHEDULING PROTOCOL

Issued by: Charles F. Robinson, Vice President and General Counsel

DYNAMIC SCHEDULING PROTOCOL

TABLE OF CONTENTS

| DSP 1 | OBJECTIVES, DEFINITIONS AND SCOPE | | 936 |
|-----------|---|---|--------------------------|
| DSP 1.1 | Objectives | | 936 |
| DSP 1.2 | Definitions DSP 1.2.1 DSP 1.2.2 DSP 1.2.3 | Master Definitions Supplement Special Definitions for this Protocol Rules of Interpretation | 936 936 936 936 |
| DSP 1.3 | Scope DSP 1.3.1 DSP 1.3.2 | Scope of Application to Parties Liability of the ISO | 937 937 937 |
| DSP 2 | CONSISTEN | CY WITH NERC/WECC POLICIES AND REQUIREMENTS | 937 |
| DSP 3 | CONTRACTU | JAL RELATIONSHIPS | 937 |
| DSP 4 | COMMUNICATIONS, TELEMETRY, AND OTHER TECHNICAL REQUIREMENTS | | 938 |
| DSP 5 | LIMITS ON DYNAMIC IMPORTS | | 938 |
| DSP 6 | OPERATING AND SCHEDULING REQUIREMENTS | | 939 |
| DSP 7 | | ION, TESTING, AND PERFORMANCE MONITORING OF PORTS OF ANCILLARY SERVICES | 940 |
| DSP 8 | COMPLIANC | E, LOSSES, AND FINANCIAL SETTLEMENTS | 941 |
| DSP APPEN | SCHEDUL | ING COORDINATOR & HOST CONTROL AREA | 942 |

Issued by: Charles F. Robinson, Vice President and General Counsel

DYNAMIC SCHEDULING PROTOCOL (DSP)

DSP 1 OBJECTIVES, DEFINITIONS, AND SCOPE

DSP 1.1 Objectives

The objectives of this Protocol are to implement the ISO Tariff provisions relating to dynamic imports of Energy, Supplemental Energy, and Energy associated with non-Regulation Ancillary Services (Spinning Reserve and Non-Spinning Reserve) by Scheduling Coordinators from System Resources.

DSP 1.2 Definitions

DSP 1.2.1 Master Definitions Supplement

Any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this Protocol. A reference to a Section or an Appendix is a reference to a Section or an Appendix of the ISO Tariff. References to DSP are to this Protocol or to the stated paragraph of this Protocol.

DSP 1.2.2 Special Definitions for this Protocol

In this Protocol, the following expressions shall have the meaning set opposite them:

"Host Control Area" means the Control Area within whose electrically metered boundaries a System Resource subject to this Protocol is located. The Host Control Area may, or may not, be directly interconnected with the ISO Control Area.

"Intermediary Control Area" means any Control Area between a Host Control Area and the ISO Control Area through which dynamically exchanged Energy or Energy associated with dynamically scheduled Ancillary Services must be scheduled to reach the ISO Control Area. An Intermediary Control Area may, or may not, be directly interconnected with the ISO Control Area.

DSP 1.2.3 Rules of Interpretation

- (a) Unless the context otherwise requires, if the provisions of this Protocol and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency. Certain provisions of the ISO Tariff have been summarized or repeated in this Protocol only to aid understanding.
- (b) A reference in this Protocol to a given agreement, ISO Protocol, or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented, or restated through the date as of which such reference is made.
- (c) The captions and headings in this Protocol are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Protocol.
- (d) This Protocol shall be effective as of June 29, 2004. Any amendment to this Protocol shall be effective as of the date specified by FERC.

Issued by: Charles F. Robinson, Vice President and General Counsel

DSP 1.3 Scope

DSP 1.3.1 Scope of Application to Parties

The DSP applies to the following entities:

- (a) Scheduling Coordinators ("SCs");
- (b) System Resources;
- (c) Host Control Areas;
- (d) Intermediary Control Areas; and
- (e) the ISO.

DSP 1.3.2 Liability of the ISO

Any liability of the ISO arising out of or in relation to this Protocol shall be subject to Section 14 of the ISO Tariff as if references to the ISO Tariff were references to this Protocol.

DSP 2 CONSISTENCY WITH NERC/WECC POLICIES AND REQUIREMENTS

- DSP 2.1 Scheduling and operation of dynamic scheduling functionalities must comply with all applicable NERC and WECC policies and requirements regarding inter-Control Area scheduling, in accordance with Section 2.2.7.6 of the ISO Tariff.
- DSP 2.2 Scheduling and operation of dynamic scheduling functionalities must be consistent with the NERC Dynamic Transfer White Paper and all NERC standards or policies.
- **DSP 2.3** All new dynamic functionality implementations may be subject to NERC-specified peer review.

DSP 3 CONTRACTUAL RELATIONSHIPS

- The Host Control Area and all Intermediary Control Areas must each execute an Interconnected Control Area Operating Agreement ("ICAOA") with the ISO, with accompanying service schedule, or a special agreement particular to the operation of the functionality supporting dynamic imports of Energy, Supplemental Energy, and/or Energy associated with non-regulating Ancillary Services to the ISO Control Area.
- DSP 3.2 The SC for the System Resource must execute a special agreement with the ISO governing the operation of the dynamic scheduling functionality, which agreement will include a provision for its termination based on failure to comply with these standards.
- The SC for the System Resource must have the necessary operational and contractual arrangements in place with the Host Control Area (see Section 5 below). Such arrangements must include the Host Control Area operator's ability to receive telemetry from the System Resource and to issue a dynamic schedule signal pertinent to that System Resource to the ISO. Proof of such arrangements must be provided to the ISO.

Issued by: Charles F. Robinson, Vice President and General Counsel

DSP 4 COMMUNICATIONS, TELEMETRY, AND OTHER TECHNICAL REQUIREMENTS

- DSP 4.1 The communication and telemetry requirements set forth in the ISO's Standards for Imports of Regulation will apply to all dynamic schedules, except for (a) those dynamic functionalities established prior to the ISO Operations Date, (b) the requirements that are specific solely to Regulation, and (c) the requirements set forth below.
- DSP 4.2 Dedicated dual redundant communications links between the ISO's EMS and the Host Control Area EMS are required.
- The primary circuit will be T1-class, or equivalent, utilizing the inter-control center communications protocol ("ICCP"). The backup circuit will be diversely routed between the Host Control Area EMS and the ISO Control Area EMS on separate physical paths and devices.
- **DSP 4.4** Dedicated dual redundant communications links between the Host Control Area EMS and every Intermediary Control Area EMS are required.
- **DSP 4.5** The Control Area hosting a dynamically scheduled System Resource must have a mechanism implemented to override the associated dynamic signal.
- **DSP 4.6** The dynamic signal must be properly incorporated into all involved Control Areas' ACE equations.
- The System Resource must have communications links with the Host Control Area consistent with these standards.

DSP 5 LIMITS ON DYNAMIC IMPORTS

- DSP 5.1 The ISO reserves the right to establish limits applicable to the amount of any Ancillary Services and/or Supplemental Energy imported into the ISO Control Area, whether delivered dynamically or statically. Such limits may be established based on any one, or a combination, of the following considerations: a percentage of, or a specific import limit applicable to, total ISO Control Area requirements; a percentage at, or a specific import limit applicable to, a particular Scheduling Point or a branch group; a percentage of, or a specific import limit applicable to, total requirements in a specific Congestion Zone; or operating factors which may include, but are not limited to, operating nomograms, Remedial Action Schemes, protection schemes, scheduling and curtailment procedures, or any potential single points of failure associated with the actual delivery process.
- DSP 5.2 The ISO may, at its discretion, either limit or forego procuring Ancillary Services at particular Control Area interties to ensure that Operating Reserves are adequately dispersed throughout the ISO Control Area as required by WECC Minimum Operating Reliability Criteria ("MORC").
- DSP 5.3 A dynamically scheduled System Resource and its schedules must be permanently associated with a particular ISO intertie (the ISO may, from time to time and at its discretion, allow for a change in such pre-established association of the dynamically scheduled System Resource with a particular ISO intertie).

Issued by: Charles F. Robinson, Vice President and General Counsel

DSP 6 OPERATING AND SCHEDULING REQUIREMENTS

- For any operating hour for which Energy, Supplemental Energy, and/or Ancillary Services (and associated Energy) is scheduled dynamically to the ISO from the System Resource, a firm (or non-interruptible for that hour) matching transmission service must be reserved across the entire dynamic schedule transmission path external to the ISO Control Area.
- All dynamic schedules associated with newly implemented dynamically scheduled System Resources must be electronically tagged (e-tagged).
- Formal inter-Control Area dynamic schedules may be issued only by the dynamically scheduled System Resource's Host Control Area and must be routed through the EMSs of all Intermediary Control Areas (such schedules would be considered "wheel-through" schedules by Intermediary Control Areas).
- DSP 6.4 The ISO will treat dynamically scheduled Energy as a resource contingent firm import.

 The ISO will procure (or allow for self-provision of) WECC MORC-required Operating Reserves for loads served by dynamically scheduled System Resources.
- DSP 6.5 All Energy schedules associated with dynamically scheduled imports of Spinning Reserve and Non-Spinning Reserve will be afforded similar treatment (i.e., resource contingent firm).
- **DSP 6.6** The dynamic signal must be integrated over time by the Host Control Area for every operating hour.
- DSP 6.7 Notwithstanding any dispatches of the System Resource in accordance with the ISO Tariff, the ISO shall have the right to issue operating orders to the System Resource either directly or through the Host Control Area for emergency or contingency reasons, or to ensure the ISO's compliance with operating requirements based on WECC or NERC requirements and policies (e.g., WECC's Unscheduled Flow Reduction Procedure). However, such operating orders may be issued only within the range of the ISO-accepted Energy, Ancillary Services, and/or or Supplemental Energy Schedules and bids for a given operating hour (or the applicable "sub-hour" interval).
- DSP 6.8 If there is no dynamic schedule in the ISO's Day-Ahead, Hour-Ahead, or Supplemental Energy markets, the dynamic signal must be at "zero" ("0") except when in response to ISO's Dispatch Instructions associated with accepted Ancillary Services and/or Supplemental Energy bids.
- DSP 6.9 The SC of the dynamically scheduled System Resource must have the ability to override the associated dynamic schedule in order to respond to the operating orders of the ISO or the Host Control Area.
- Unless the dynamically scheduled System Resource (1) is implemented as a directly-telemetered load-following functionality, (2) is base-loaded Regulatory Must Take Generation, or (3) responds to an ISO intra-hour Dispatch Instruction, the dynamic schedule representing such resource must follow WECC-approved practice of 20-minute ramps centered at the top of the hour. The ISO does not provide any special settlements treatment nor offer any ISO Tariff exemptions for dynamic load following functionalities.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 9, 2005 Effective: May 9, 2005

on the associated ISO intertie.

- DSP 6.11 In real time the dynamic schedule may not exceed the maximum value established by the sum of the Day-Ahead and Hour-Ahead accepted Energy and Ancillary Services Schedules plus any accepted Supplemental Energy bids plus any response to the ISO's real-time Dispatch Instructions. The composite value of the dynamic schedule derived from the Day-Ahead and Hour-Ahead accepted Schedules plus any Supplemental Energy bids and Dispatch Instruction response represents not only the estimated
- Only one dynamically scheduled System Resource may be associated with any one physical generating resource.
- DSP 6.13 If the SC for the dynamically scheduled System Resource desires to participate in ISO's Regulation market, all provisions of the ISO's Standards for Imports of Regulation shall apply.

DSP 7 CERTIFICATION, TESTING, AND PERFORMANCE MONITORING OF DYNAMIC IMPORTS OF ANCILLARY SERVICES

SCs and Host Control Areas that are already certified under the ISO's Standards for Imports of Regulation will be deemed to have fulfilled the technical implementation requirements of this Protocol; however, such SCs and Control Areas must still be certified separately for each non-Regulating Ancillary Service (all presently implemented Regulation import functionalities may be subject to review to ensure consistency between such functionalities and the requirements of this Protocol). SCs and Host Control Areas that wish to be certified for imports of Regulation shall be subject to certification under the Standards for Imports of Regulation, subject to verification of consistency with the requirements of this Protocol.

dynamically scheduled System Resource's Energy but also the transmission reservation

- DSP 7.1 The SC and Host Control Area operator must jointly request the certification of a System Resource to provide Ancillary Services for the ISO Control Area and cooperate in the testing of such System Resource (see the "Scheduling Coordinator & Host Control Area Operator Request for Certification of Dynamic Imports of Ancillary Services" certification form attached as Appendix A to this Protocol.
- Only ISO tested and certified System Resources will be allowed to bid and/or self-provide Ancillary Services into the ISO Control Area.
- DSP 7.3 Dynamic Ancillary Services imports will be certified through testing, in accordance with the relevant sections of the ISO's Operating Procedure G-213. All requests for certification of dynamic Ancillary Services imports will be reviewed and approved by the ISO with respect to any technical limitations imposed by existing operational considerations, such as Remedial Action Schemes, operating nomograms, and scheduling procedures. These reviews may impose certain Ancillary Services import limits in addition to those outlined in Section 4.1. Therefore, interested parties are advised and encouraged to contact the ISO before they begin the process of the necessary systems design, preparation, and implementation for import of Ancillary Services to the ISO Control Area.
- The ISO will measure the performance of the dynamic Energy schedule associated with accepted Ancillary Services bids against (1) the awarded range of Ancillary Service capacity; (2) the certified limits; and (3) the bid ramp rate, which shall be validated by the ISO against the certified ramp rate.

Issued by: Charles F. Robinson, Vice President and General Counsel

- DSP 7.5 The SC for the System Resource and the Host Control Area must notify the ISO should any changes, modifications, or upgrades affecting control and/or performance of the System Resource be made. Upon such notification, the ISO, at its discretion, may require that the System Resource and Host Control Area be re-certified to import Ancillary Services into the ISO Control Area.
- DSP 8 COMPLIANCE, LOSSES, AND FINANCIAL SETTLEMENTS
- DSP 8.1 Energy delivered in association with dynamically scheduled System Resources will be subject to all provisions of the ISO's Imbalance Energy markets, including Uninstructed Deviation Penalties ("UDP") (just as is the case with ISO intra-Control Area Generating Units of Participating Generators).
- DSP 8.2 Dynamically scheduled and delivered Ancillary Services will be subject to the ISO's compliance monitoring and remedies, just as any ISO intra-Control Area Generating Units of Participating Generators.
- All Day-Ahead and Hour-Ahead submitted dynamic schedules shall be subject to ISO Congestion mitigation and as such may not exceed their transmission reservations in real time (with the exception of intra-hour Dispatch Instructions of the Energy associated with accepted Ancillary Services or Supplemental Energy bids).
- DSP 8.4 All dynamically scheduled and delivered Energy shall be subject to the standard ISO transmission loss calculation associated with the particular intertie ("TMMs" or ISO market redesign alternative).
- DSP 8.5 Any transmission losses attributed to the dynamic schedule on transmission system(s) external to the ISO Control Area will be the responsibility of the owner(s)/operator(s) of the dynamically scheduled System Resource.
- DSP 8.6 A predetermined, mutually agreed, and achievable "Pmax-like" fixed MW value will be established for every dynamically scheduled System Resource to be used as the basis for the UDP calculation. Responsible SCs will be able to report de-rates affecting the dynamically scheduled System Resource via the ISO's "SLIC" outage reporting system.
- DSP 8.7 Should there be any need or requirement, whether operational or procedural, for the ISO to make real time adjustments to the ISO's inter-Control Area schedules (to include curtailments), dynamic schedules shall be treated in the same manner as similarly situated and/or effective static ISO schedules.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 942

DSP APPENDIX A

Scheduling Coordinator & Host Control Area Operator Request for Certification of Imports of Spinning and Non-Spinning Reserves for which the associated Energy is delivered dynamically from a System Resource

With this request for certification, the Parties recognize that the ISO Tariff, Protocols, and applicable agreements require the Host Control Area operator to issue dynamic Energy schedules to the ISO based on the Scheduling Coordinator's self-provided or bid external imports of non-Regulation Ancillary Services from the System Resource(s) at any time during the operating hour.

With this request for certification, the Host Control Area operator represents and warrants that it has in place the required communications links with the ISO Control Area in order to facilitate the delivery of Ancillary Services and associated Energy from the System Resource.

With this request for certification, the Scheduling Coordinator represents and warrants that it has made the appropriate arrangements for and has put in place the equipment and services necessary for the delivery of Ancillary Services and associated Energy from the System Resource to the point of interchange ("Scheduling Point") with the ISO Control Area in accordance with the Dynamic Scheduling Protocol.

The Scheduling Coordinator further certifies that any and all dynamic imports of Energy associated with self-provided or bid imports of non-Regulation Ancillary Services will be deliverable over non-interruptible, non-recallable transmission rights, from the source of the associated Energy to the Scheduling Point with the ISO Control Area.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 943

| System Resource | External Host Control Area in which System Resource is Located | Scheduling Point (ISO interchange ID) | Maximum Amount of Ancillary Services Capacity to be Certified (MW) | Maximum Ramp Rate to be Certified (MW/minute) |
|--------------------|--|---------------------------------------|--|--|
| 1 | | | | |
| 2 | | | | |
| 3 | | | | |
| 4 | | | | |
| 5 | | | | |

Subsequent to the initial filing of this request for certification with the ISO, any prospective changes jointly made by the Parties may be filed with the Scheduling Coordinator's ISO Client Relations representative, who will acknowledge the receipt of such requested changes and indicate the date on which such changes may be tested and become effective if ISO testing proves successful. Such changes will be made by the ISO as soon as practicable, with reasonable efforts made to implement them within sixty (60) days of receipt of the requested changes.

This document _____ (does) _____ (does not) contain requested changes to previously effective certification.

Certification Requested By:
_______, as the Scheduling Coordinator

Issued by: Charles F. Robinson, Vice President and General Counsel

Title: ___
Date: ___

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 944

Effective: June 29, 2004

| | , as the Host Control Area Operator |
|--------|--|
| Name: | |
| T:41a. | |
| Date: | |
| | |
| | |
| | |
| | CERTIFICATION REQUEST ACKNOWLEDGED by: |
| | |
| | |
| | California Independent System Operator Corporation |
| | Name: |
| | Title: |
| | Date: |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: July 29, 2004

Original Sheet No. 970

ISO TARIFF APPENDIX M

Participating Generator Agreement

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR

AND

[PARTICIPATING GENERATOR]

PARTICIPATING GENERATOR AGREEMENT

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 972

PARTICIPATING GENERATOR AGREEMENT (PGA)

| THIS A | AGREEMENT is dated this day of, and is entered into, by and between: |
|------------------|--|
| (1) | [Full Legal Name] having its registered and principal place of business located at [Address] (the "Participating Generator"); |
| and | |
| (2) | California Independent System Operator Corporation, a California nonprofit public benefit corporation having a principal executive office located at such place in the State of California as the ISO Governing Board may from time to time designate, initially 151 Blue Ravine Road, Folsom, California 95630 (the "ISO"). |
| The Pa | articipating Generator and the ISO are hereinafter referred to as the "Parties". |
| Where | as: |
| A. | The ISO Tariff provides that the ISO shall not schedule Energy or Ancillary Services generated by any Generating Unit interconnected to the ISO Controlled Grid, or to the Distribution System of a Participating TO or of a UDC otherwise than through a Scheduling Coordinator. |
| В. | The ISO Tariff further provides that the ISO shall not be obliged to accept Schedules or Adjustment Bids or bids for Ancillary Services relating to Generation from any Generating Unit interconnected to the ISO Controlled Grid unless the relevant Generator undertakes in writing to the ISO to comply with all applicable provisions of the ISO Tariff. |
| C. | The Participating Generator wishes to be able to Schedule Energy and to submit Adjustment Bids, Supplemental Energy bids and bids for Ancillary Services to the ISO through a Scheduling Coordinator and, therefore, wishes to undertake to the ISO that it will comply with the applicable provisions of the ISO Tariff. |
| D. | The Parties are entering into this Agreement in order to establish the terms and conditions on which the ISO and the Participating Generator will discharge their respective duties and responsibilities under the ISO Tariff. |
| NOW ⁻ | THEREFORE, in consideration of the mutual covenants set forth herein, THE PARTIES AGREE as |

Issued by: Charles F. Robinson, Vice President and General Counsel

follows:

ARTICLE I DEFINITIONS AND INTERPRETATION

- **1.1 Master Definitions Supplement.** All terms and expressions used in this Agreement shall have the same meaning as those contained in the Master Definitions Supplement to the ISO Tariff.
- **1.2 Rules of Interpretation.** The following rules of interpretation and conventions shall apply to this Agreement:
 - (a) if there is any inconsistency between this Agreement and the ISO Tariff, the ISO Tariff will prevail to the extent of the inconsistency;
 - (b) the singular shall include the plural and vice versa;
 - (c) the masculine shall include the feminine and neutral and vice versa;
 - (d) "includes" or "including" shall mean "including without limitation";
 - (e) references to a Section, Article or Schedule shall mean a Section, Article or a Schedule of this Agreement, as the case may be, unless the context otherwise requires;
 - (f) a reference to a given agreement or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made:
 - (g) unless the context otherwise requires, references to any law shall be deemed references to such law as it may be amended, replaced or restated from time to time;
 - (h) unless the context otherwise requires, any reference to a "person" includes any individual, partnership, firm, company, corporation, joint venture, trust, association, organization or other entity, in each case whether or not having separate legal personality;
 - (i) unless the context otherwise requires, any reference to a Party includes a reference to its permitted successors and assigns;
 - (j) any reference to a day, week, month or year is to a calendar day, week, month or year; and
 - (k) the captions and headings in this Agreement are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Agreement.

ARTICLE II ACKNOWLEDGEMENTS OF PARTICIPATING GENERATOR AND ISO

2.1 ISO Responsibility. The Parties acknowledge that the ISO is responsible for the efficient use and reliable operation of the ISO Controlled Grid consistent with achievement of planning and operating reserve criteria no less stringent than those established by the Western Systems Coordinating Council and the North American Electric Reliability Council and further acknowledges that the ISO may not be able to satisfy fully these responsibilities if the Participating Generator fails to fully comply with all of its obligations under this Agreement and the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **Scope of Application to Parties.** The Participating Generator and ISO acknowledge that all Generators, except those specified in Section 2.2.1 of this Agreement, wishing to schedule Energy and to submit Adjustment Bids, Supplemental Energy bids and bids for Ancillary Services to the ISO through a Scheduling Coordinator must sign this Agreement in accordance with Section 5 of the ISO Tariff.
- 2.2.1 Exemption for Certain Generators. The Generator with an existing power purchase agreement with a UDC is not required to sign a Participating Generator Agreement if: (a) the Generator sells all of its Energy (excluding any Energy consumed by auxiliary load equipment electrically connected to that Generator at the same point) and Ancillary Services to the UDC; (b) the Generator sells any Energy through "over the fence" arrangements as authorized under Section 218(b) of the California Public Utilities Code; or (c) the Generator employs landfill gas technology for the generation of electricity as authorized under 218(c) of the California Public Utilities Code. With respect to subsections (a) and (b), an existing power purchase agreement shall mean an agreement which has been entered into and is effective as of December 20, 1995. With respect to subsection (c), an existing power purchase agreement shall mean an agreement which has been entered into and is effective as of December 31, 1996.

ARTICLE III TERM AND TERMINATION

3.1 Effective Date. This Agreement shall be effective as of the later of the date it is executed by the Parties or the date accepted for filing and made effective by FERC, and shall remain in full force and effect until terminated pursuant to Section 3.2 of this Agreement.

3.2 Termination

- 3.2.1 Termination by ISO. Subject to Section 5.2, the ISO may terminate this Agreement by giving written notice of termination in the event that the Participating Generator commits any material default under this Agreement and/or the ISO Tariff which, if capable of being remedied, is not remedied within thirty (30) days after the ISO has given, to the Participating Generator, written notice of the default, unless excused by reason of Uncontrollable Forces in accordance with Article X of this Agreement. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within 30 days of receipt of such request. This Agreement shall terminate upon acceptance by FERC of such a notice of termination.
- 3.2.2 Termination by Participating Generator. In the event that the Participating Generator no longer wishes to schedule Energy or provide Ancillary Services through a Scheduling Coordinator over the ISO Controlled Grid, it may terminate this Agreement, on giving the ISO ninety (90) days written notice, provided, however, that in accordance with Section 4.1.3, the Participating Generator may modify Schedule 1 to eliminate Generating Units which it no longer owns or no longer has contractual entitlement to and such modification shall be effective upon receipt by the ISO. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within 30 days of receipt of such request. This Agreement shall terminate upon acceptance by FERC of such a notice of termination.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE IV GENERAL TERMS AND CONDITIONS

4.1 Generating Units

- **4.1.1 Identification of Generating Units.** The Participating Generator has identified the Generating Units that it owns, operates or has a contractual entitlement to in Schedule 1, as required by Section 5.3 of the ISO Tariff.
- **4.1.2 Technical Characteristics.** The Participating Generator has provided to the ISO in Schedule 1 the required information regarding the capacity and operating characteristics of each of the Generating Units listed in that schedule. Pursuant to Section 2.5.25 of the ISO Tariff, the ISO may verify, inspect and test the capacity and operating characteristics provided in Schedule 1.
- Notification of Changes. Sixty (60) days prior to changing any technical information in 4.1.3 Schedule 1, the Participating Generator shall notify the ISO of the proposed changes. Pursuant to Section 2.5.25 of the ISO Tariff, the ISO may verify, inspect and test the capacity and operating characteristics provided in the revised Schedule 1. The ISO shall post on the ISO Home Page a schedule showing, for at least one year in advance: (i) the proposed dates on which the ISO's Master File will be updated, which dates shall occur at least every three months; (ii) the dates on which the information contained in the revised Master File will become effective; and (iii) the deadlines by which changed technical information must be submitted to the ISO in order to be tested and included in the next scheduled update of the ISO's Master File. Unless the Participating Generator fails to test at the values in the proposed change(s), the change will become effective upon the effective date for the next scheduled update of the Master File, provided the Participating Generator submits the changed information by the applicable deadline and is tested by the deadline. Subject to such notification this Agreement shall not apply to any generating unit identified in Schedule 1 which the Participating Generator no longer owns or no longer has contractual entitlement to.
- **4.2 Agreement Subject to ISO Tariff.** The Parties will comply with all applicable provisions of the ISO Tariff, including Sections 2.3.2, 2.5.3.4 and 5. This Agreement shall be subject to the ISO Tariff which shall be deemed to be incorporated herein.

4.3 Obligations Relating to Ancillary Services

- **4.3.1 Submission of Bids.** When the Scheduling Coordinator on behalf of the Participating Generator submits a bid for Ancillary Services, the Participating Generator will, by the operation of this Section 4.3.1, warrant to the ISO that it has the capability to provide that service in accordance with the ISO Tariff and that it will comply with ISO Dispatch instructions for the provision of the service in accordance with the ISO Tariff.
- **4.3.2 Certification.** Except as provided in Section 4.3.3, the Participating Generator shall not use a Scheduling Coordinator to submit a bid for the provision of an Ancillary Service or submit a schedule for the self provision of an Ancillary Service unless the Scheduling Coordinator serving that Participating Generator is in possession of a current certificate pursuant to Sections 2.5.6 and 2.5.24 of the ISO Tariff.
- 4.3.3 Initial Exemption. Not later than November 1, 1998, the ISO shall fully implement its certification process in accordance with Sections 2.5.6 and 2.5.24 of the ISO Tariff. Until full implementation of the certification process and notification of the Participating Generator and its Scheduling Coordinator of the completion of such process, the non-certified Scheduling Coordinator on behalf of a Participating Generator may submit a bid for the provision of an Ancillary Service or submit a schedule for the self provision of an Ancillary Service. Upon timely notification by the ISO, the Participating Generator must complete the certification process prior to November 1, 1998 to continue its participation in accordance with Section 4.3.2 of this Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

4.4 Obligations relating to Major Incidents

4.4.1 Major Incident Reports. The Participating Generator shall promptly provide such information as the ISO may reasonably request in relation to major incidents, in accordance with Section 5.8.3 of the ISO Tariff.

ARTICLE V PENALTIES AND SANCTIONS

- 5.1 Penalties. If the Participating Generator fails to comply with any provisions of this Agreement, the ISO shall be entitled to impose penalties and sanctions on the Participating Generator. No penalties or sanctions may be imposed under this Agreement unless a Schedule providing for such penalties or sanctions has first been filed with and made effective by FERC. Nothing in the Agreement, with the exception of the provisions relating to ADR, shall be construed as waiving the rights of the Participating Generator to oppose or protest any penalty proposed by the ISO to the FERC or the specific imposition by the ISO of any FERC-approved penalty on the Participating Generator.
- **5.2 Corrective Measures.** If the Participating Generator fails to meet or maintain the requirements set forth in this Agreement and/or the ISO Tariff, the ISO shall be permitted to take any of the measures, contained or referenced in the ISO Tariff, which the ISO deems to be necessary to correct the situation.

ARTICLE VI COSTS

Operating and Maintenance Costs. The Participating Generator shall be responsible for all its costs incurred in connection with operating and maintaining the Generating Units identified in Schedule 1 for the purpose of meeting its obligations under this Agreement.

ARTICLE VII DISPUTE RESOLUTION

7.1 Dispute Resolution. The Parties shall make reasonable efforts to settle all disputes arising out of or in connection with this Agreement. In the event any dispute is not settled, the Parties shall adhere to the ISO ADR Procedures set forth in Section 13 of the ISO Tariff, which is incorporated by reference, except that any reference in Section 13 of the ISO Tariff to Market Participants shall be read as a reference to the Participating Generator and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE VIII REPRESENTATIONS AND WARRANTIES

8.1 Representation and Warranties. Each Party represents and warrants that the execution, delivery and performance of this Agreement by it has been duly authorized by all necessary corporate and/or governmental actions, to the extent authorized by law.

Issued by: Charles F. Robinson, Vice President and General Counsel

8.2 Necessary Approvals. The Participating Generator represents that all necessary leases, approvals, permits, licenses, easements, rights of way or access to install, own and/or operate its Generating Units have been or will be obtained by the Participating Generator prior to the effective date of this Agreement.

ARTICLE IX LIABILITY

9.1 Liability. The provisions of Section 14 of the ISO Tariff will apply to liability arising under this Agreement, except that all references in Section 14 of the ISO Tariff to Market Participants shall be read as references to the Participating Generator and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE X UNCONTROLLABLE FORCES

10.1 Uncontrollable Forces Tariff Provisions. Section 15 of the ISO Tariff shall be incorporated by reference into this Agreement except that all references in Section 15 of the ISO Tariff to Market Participants shall be read as a reference to the Participating Generator and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE XI MISCELLANEOUS

- **11.1 Assignments.** Either Party may assign or transfer any or all of its rights and/or obligations under this Agreement with the other Party's prior written consent in accordance with Section 17 of the ISO Tariff. Such consent shall not be unreasonably withheld. Any such transfer or assignment shall be conditioned upon the successor in interest accepting the rights and/or obligations under this Agreement as if said successor in interest was an original Party to this Agreement.
- **11.2 Notices.** Any notice, demand or request which may be given to or made upon either Party regarding this Agreement shall be made in accordance with Section 20.1 of the ISO Tariff. A Party must update the information in Schedule 3 of this Agreement as information changes. Such changes shall not constitute an amendment to this Agreement.
- **11.3 Waivers.** Any waivers at any time by either Party of its rights with respect to any default under this Agreement, or with respect to any other matter arising in connection with this Agreement, shall not constitute or be deemed a waiver with respect to any subsequent default or other matter arising in connection with this Agreement. Any delay, short of the statutory period of limitations, in asserting or enforcing any right under this Agreement shall not constitute or be deemed a waiver of such right.
- 11.4 Governing Law and Forum. This Agreement shall be deemed to be a contract made under, and for all purposes shall be governed by and construed in accordance with, the laws of the State of California, except its conflict of law provisions. The Parties irrevocably consents that any legal action or proceeding arising under or relating to this Agreement to which the ISO ADR Procedures do not apply, shall be brought in any of the following forums, as appropriate: any court of the State of California, any federal court of the United States of America located in the State of California, or, where subject to its jurisdiction, before the Federal Energy Regulatory Commission.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 11.5 Consistency with Federal Laws and Regulations. This Agreement shall incorporate by reference Section 20.8 of the ISO Tariff as if the references to the ISO Tariff were referring to this Agreement.
- **11.6 Merger.** This Agreement constitutes the complete and final agreement of the Parties with respect to the subject matter hereto and supersedes all prior agreements, whether written or oral, with respect to such subject matter.
- 11.7 Severability. If any term, covenant, or condition of this Agreement or the application or effect of any such term, covenant, or condition is held invalid as to any person, entity, or circumstance, or is determined to be unjust, unreasonable, unlawful, imprudent, or otherwise not in the public interest by any court or government agency of competent jurisdiction, then such term, covenant, or condition shall remain in force and effect to the maximum extent permitted by law, and all other terms, covenants, and conditions of this Agreement and their application shall not be affected thereby, but shall remain in force and effect and the Parties shall be relieved of their obligations only to the extent necessary to eliminate such regulatory or other determination unless a court or governmental agency of competent jurisdiction holds that such provisions are not separable from all other provisions of this Agreement.
- **11.8 Section Headings.** Section headings provided in this Agreement are for ease of reading and are not meant to interpret the text in each Section.
- 11.9 Amendments. This Agreement and the Schedules attached hereto may be amended from time to time by the mutual agreement of the Parties in writing. Amendments that require FERC approval shall not take effect until FERC has accepted such amendments for filing and made them effective. If the amendment does not require FERC approval, the amendment will be filed with FERC for information.
- **11.10 Counterparts.** This Agreement may be executed in one or more counterparts at different times, each of which shall be regarded as an original and all of which, taken together, shall constitute one and the same Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 979

IN WITNESS WHEREOF, the Parties hereto have caused this Agreement to be duly executed on behalf of each by and through their authorized representatives as of the date hereinabove written.

California Independent System Operator Corporation

| Ву: | |
|--------------|-----------------------------|
| Name: | |
| | |
| Date: | |
| | |
| | |
| | |
| NAME | OF PARTICIPATING GENERATOR] |
| [NAME | OF PARTICIPATING GENERATOR] |
| NAME | OF PARTICIPATING GENERATOR] |
| | OF PARTICIPATING GENERATOR] |
| Ву: | |
| By: Name: | |

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 980

[The following page is a placeholder for Schedule 1, Section 1.]

Issued by: Charles F. Robinson, Vice President and General Counsel

[The following page is a placeholder for Schedule 1, Section 2.]

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 2

ISO IMPOSED PENALTIES AND SANCTIONS [Section 5.1]

[TO BE INSERTED UPON FERC APPROVAL]

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 3

NOTICES (Section 10.2)

Participating Generator

| Name of Primary | |
|--|---|
| Representative: | - |
| Title: | |
| Company: | |
| Address: | |
| City/State/Zip Code: | |
| Email Address: | |
| Phone: | |
| Fax No: | |
| | |
| Name of Alternative Representative: | |
| Title: | |
| Company: | |
| Address: | |
| City/State/Zip Code: | |
| Email Address: | |
| Phone: | |
| Fax No: | |

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 984

Effective: April 12, 2005

ISO

| Name of Primary | |
|----------------------|--|
| Representative: | |
| Title: | |
| Address: | |
| City/State/Zip Code: | |
| Email Address: | |
| Phone: | |
| Fax No: | |
| | |
| | |
| Name of Alternative | |
| Representative: | |
| Title: | |
| Address: | |
| City/State/Zip Code: | |
| Email Address: | |
| Phone: | |
| Fax No: | |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: April 12, 2005

ISO TARIFF APPENDIX N

Meter Service Agreement for ISO Metered Entities

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR

AND

[ISO METERED ENTITY]

METER SERVICE AGREEMENT FOR ISO METERED ENTITIES

Issued by: Charles F. Robinson, Vice President and General Counsel

METER SERVICE AGREEMENT FOR ISO METERED ENTITIES

| THIS A | GREEMENT is dated this day of, and is entered into, by and between: |
|---------|--|
| (1) | [Full legal name] having its registered and principal place of business located at [Address] (the "ISO Metered Entity"); |
| and | |
| (2) | California Independent System Operator Corporation, a California nonprofit public benefit corporation having a principal executive office located at such place in the State of California as the ISO Governing Board may from time to time designate, initially 151 Blue Ravine Road, Folsom, California 95630 (the "ISO"). |
| The ISC | Metered Entity and the ISO are hereinafter referred to as the "Parties". |

Whereas:

- A. Section 10.3.1 of the ISO Tariff requires the ISO to establish meter service agreements with ISO Metered Entities for the collection and transfer of Meter Data.
- **B.** Section 10.2.4 of the ISO Tariff further provides that an ISO Metered Entity shall certify its revenue quality meters and Section 10.2.1 provides that ISO Metered Entities shall make Meter Data available to MDAS.
- C. The Parties are entering into this Agreement in order to establish the terms and conditions upon which the ISO and the ISO Metered Entity shall discharge their respective duties and responsibilities pursuant to this Agreement, and the ISO Tariff.
- **D.** All obligations and responsibilities included in this Agreement may be set forth in further detail in the Metering Protocol of the ISO Tariff.

NOW THEREFORE, in consideration of the mutual covenants set forth herein, **THE PARTIES AGREE** as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE I

- **1.1 Master Definitions Supplement.** Unless defined in Section 1.2 of this Agreement, all terms and expressions used in this Agreement shall have the same meaning as those contained in the Master Definitions Supplement to the ISO Tariff.
- **1.2 Special Definitions for this Agreement**. In this Agreement, the following words and expressions shall have the meanings set forth below:
 - "Authorized Users" means users authorized by the ISO Metered Entity to access the Meter Data of that ISO Metered Entity held by the ISO.
 - "ISO Authorized Inspector" has the meaning as defined in the Metering Protocol of the ISO Tariff.

"ISO Metered Entity" means:

- (a) any one of the following entities that is directly connected to the ISO Controlled Grid:
 - a Generator other than a Generator that sells all of its Energy (excluding any Energy consumed by auxiliary load equipment electrically connected to that Generator at the same point) and Ancillary Services to the UDC in whose Service Area it is located;
 - ii. an Eligible Customer; or
 - iii. an End-User other than an End-User that purchases all of its Energy from the UDC in whose Service Area it is located: and
- (b) any one of the following entities:
 - a Participating Generator;
 - ii. a Participating TO in relation to its Tie Point Meters with other TOs or Control Areas; or
 - iii. a Participating Load.
- "Metering Protocol" means the Protocol of the ISO Tariff on the subject of revenue quality metering which sets forth requirements and procedures that ISO Metered Entities, amongst others, shall meet and follow in order to comply with their obligations under Section 10 and Appendix J of the ISO Tariff.
- "MDAS" means the ISO revenue metering data acquisition and processing system.
- "Metering Facilities" means revenue quality meters, instrument transformers, secondary circuitry, secondary devices, meter data servers, related communication facilities and other related local equipment.
- "SC" means Scheduling Coordinator.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **1.3** Rules of Interpretation. The following rules of interpretation and conventions shall apply to this Agreement:
 - (a) if there is any inconsistency between this Agreement and the ISO Tariff, the ISO Tariff will prevail to the extent of the inconsistency:
 - (b) the singular shall include the plural and vice versa;
 - (c) the masculine shall include the feminine and neutral and vice versa;
 - (d) "includes" or "including" shall mean "including without limitation";
 - (e) references to a section, article or schedule shall mean a section, article or a schedule of this Agreement, as the case may be, unless the context otherwise requires;
 - (f) a reference to a given agreement or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made:
 - (g) unless the context otherwise requires, references to any law shall be deemed references to such law as it may be amended, replaced or restated from time to time;
 - (h) unless the context otherwise requires, any reference to a "person" includes any individual, partnership, firm, company, corporation, joint venture, trust, association, organization or other entity, in each case whether or not having separate legal personality;
 - (i) unless the context otherwise requires, any reference to a Party includes a reference to its permitted successors and assigns:
 - (j) any reference to a day, week, month or year is to a calendar day, week, month or year;
 - (I) the captions and headings in this Agreement are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Agreement; and
 - (m) references to the Metering Protocol of the ISO Tariff and other ISO Documents shall be interpreted in accordance with any exceptions or exemptions to such as may have been granted by the ISO.

ARTICLE II TERM AND TERMINATION

2.1 Effective Date. This Agreement shall be effective as of the later of the date of execution of this Agreement, or the date it is accepted and made effective by FERC and shall remain in full force and effect until terminated by operation of law or pursuant to Section 2.2 of this Agreement.

2.2 Termination

written notice of termination in the event that the ISO Metered Entity commits any default under this Agreement and/or the ISO Tariff which, if capable of being remedied, is not remedied within thirty (30) days after the ISO has given it written notice of the default, unless excused by reason of Uncontrollable Force in accordance with Section 15 of the ISO Tariff. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within 30 days of receipt of such

Issued by: Charles F. Robinson, Vice President and General Counsel

request. This Agreement shall terminate upon acceptance by FERC of such notice of termination.

2.2.2 Termination by ISO Metered Entity. In the event that the ISO Metered Entity wishes to terminate this Agreement, the ISO Metered Entity shall give the ISO ninety (90) days written notice. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within 30 days of receipt of such request. This Agreement shall terminate upon acceptance by FERC of such notice of termination.

ARTICLE III GENERAL TERMS AND CONDITIONS

- 3.1 Agreement Subject to ISO Tariff and ISO Metering Protocol. This Agreement shall be subject to the provisions of the ISO Tariff which shall be deemed to be incorporated herein, as the same may be changed or superseded from time to time. The Parties agree that they will comply with the provisions of Section 10 of the ISO Tariff and the Metering Protocol of the ISO Tariff.
- 3.2 Obligations and Rights of the ISO Metered Entity.
- 3.2.1 Submission of Meter Data through MDAS. The ISO Metered Entity agrees to make available to the ISO through MDAS its Meter Data in accordance with the ISO Tariff. The ISO's requirements regarding the frequency with which it requires Meter Data to be made available to it through MDAS by the ISO Metered Entity are referred to in the Metering Protocol of the ISO Tariff.
- 3.2.2 Meter Information. The ISO Metered Entity shall provide in the format prescribed by Schedule 1 to this Agreement the required information with respect to all of its meters used to provide Meter Data to the ISO. The ISO Metered Entity must immediately notify the ISO of any changes to the information provided to the ISO in accordance with this Section 3.2.2 and provide the ISO with any information in relation to such change as reasonably requested by the ISO. The ISO Metered Entity shall have the right to modify Schedule 1, which modification shall not constitute an amendment to this Agreement. Such modification shall be effective upon receipt of notice by the ISO.
- **3.2.3 Transformer and/or Line Loss Correction Factors.** If the ISO Metered Entity uses low voltage side metering, it shall use the ISO approved transformer and/or line loss correction factor referred to in the Metering Protocol of the ISO Tariff.
- 3.2.4 Rights to Access Metering Facilities. The ISO Metered Entity shall use its best efforts to procure any rights necessary for the ISO to access all Metering Facilities of the ISO Metered Entity to fulfill its obligations under the ISO Tariff and its obligations under this Agreement. If, after using its best efforts, the ISO Metered Entity is unable to provide the ISO with such access rights, the ISO Metered Entity shall ensure that one of its employees is an ISO Authorized Inspector and such employee undertakes, at the ISO's request, the certification, testing, inspection and/or auditing of those Metering Facilities in accordance with the procedures established pursuant to the Metering Protocol of the ISO Tariff, including the requirement to complete and provide to the ISO all necessary documentation. The ISO acknowledges that it will not be prevented from fulfilling its obligations under the ISO Tariff or this Agreement by reason of the fact that it is provided with escorted access to the Metering Facilities of the ISO Metered Entity.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **3.2.5 Security and Validation Procedures.** The security measures and the validation, editing and estimation procedures that the ISO will apply to Meter Data made available to the ISO by the ISO Metered Entity shall be as referred to in the Metering Protocol of the ISO Tariff.
- 3.3 Obligations and Rights of the ISO.
- **3.3.1 Direct Polling of MDAS.** The ISO shall allow the SC representing the ISO Metered Entity and all Authorized Users to directly poll MDAS for the Meter Data relating to the ISO Metered Entity in accordance with the procedures referred to in the Metering Protocol of the ISO Tariff.
- **3.3.2 ISO** as Third-Party Beneficiary. The ISO shall be a third-party beneficiary to any future agreement between the ISO Metered Entity and any other party relating to the Metering Facilities of the ISO Metered Entity for the purpose of granting the ISO access to any relevant information, records and facilities as needed by the ISO to fulfill its obligations under the ISO Tariff and its obligations under this Agreement.
- **3.3.3** Remote and Local Access to Metering Data. The ISO shall provide the ISO Metered Entity any password or other requirements necessary for the ISO Metered Entity to access its Metered Data remotely or locally at the Meter.
- **3.4 Exemptions Granted by the ISO.** Any exemptions provided for under the ISO Tariff that are granted by the ISO shall be set forth in Schedule 2 of this Agreement. Any amendment or addition to Schedule 2 shall not constitute an amendment to this Agreement.

ARTICLE IV PENALTIES AND SANCTIONS

- 4.1 Penalties. If an ISO Metered Entity provides inaccurate or incorrect Meter Data or fraudulent Meter Data to the ISO, the ISO shall be entitled to impose penalties and sanctions, including but not limited to suspension of trading rights following 14 days written notice to the ISO Metered Entity. Fraudulent Meter Data means any Meter Data provided to the ISO by the ISO Metered Entity that it knows to be false, incorrect or incomplete at the time it provided that Meter Data to the ISO. All penalties and sanctions shall be set forth in Schedule 4 Part A to this Agreement. No penalties or sanctions, including suspension of trading rights, may be imposed under this Agreement unless a Schedule providing for such penalties or sanctions has first been filed with and made effective by FERC. Nothing in the Agreement, with the exception of the provisions relating to ADR, shall be construed as waiving the rights of the ISO Metered Entity to oppose or protest any penalty proposed by the ISO to the FERC or the specific imposition by the ISO of any FERC-approved penalty on the ISO Metered Entity.
- **4.2 Corrective Measures.** If the ISO Metered Entity fails to meet or maintain the standards for Metering Facilities or comply with the audit or test procedures as referred to in the ISO Tariff, the ISO shall be permitted to take corrective measures. The corrective measures and rights the ISO may exercise upon any failure by any entity to meet those standards for Metering Facilities or to comply with the audit or test procedures shall be set forth in Schedule 4 Part B.

ARTICLE V ACCESS TO METERING DATA

5.1 Authorized Users. In addition to the persons referred to in the ISO Tariff, including the ISO Metered Entity and the relevant Scheduling Coordinator, as being entitled to access Meter Data on MDAS, the ISO Metered Entity may set forth in Schedule 3 of this Agreement any additional authorized users that shall be entitled to access the ISO Metered Entity's Settlement Quality Meter Data held by the ISO. The ISO Metered Entity shall include in Schedule 3 as authorized

Issued by: Charles F. Robinson, Vice President and General Counsel

users the relevant UDCs and TOs. The ISO shall provide the authorized users with any password or other information necessary to access the ISO Metered Entity's Settlement Quality Metered Data held by the ISO on MDAS. Any amendment or addition to Schedule 3 shall not constitute an amendment to this Agreement.

ARTICLE VI COSTS

6.1 Certification, Inspection and Auditing of Meters. The ISO Metered Entity shall be responsible for all reasonable costs incurred by the ISO or an ISO Authorized Inspector in connection with them carrying out the certification, inspection, testing or auditing of the meters identified in Schedule 1 from which the ISO Metered Entity provides Meter Data to the ISO. The ISO or ISO Authorized Inspector will furnish the ISO Metered Entity, upon request, an itemized bill for such costs.

ARTICLE VII DISPUTE RESOLUTION

7.1 Dispute Resolution. The Parties shall make reasonable efforts to settle all disputes arising out of or in connection with this Agreement. In the event any dispute is not settled, the Parties shall adhere to the ISO ADR Procedures set forth in Section 13 of the ISO Tariff, which is incorporated by reference, except that all reference in Section 13 of the ISO Tariff to Market Participants shall be read as a reference to the ISO Metered Entities and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE VIII REPRESENTATIONS AND WARRANTIES

- **8.1** Representations and Warranties. Each Party represents and warrants that the execution, delivery and performance of this Agreement by it has been duly authorized by all necessary corporate and/or governmental actions, to the extent authorized by law.
- **8.2 Necessary Approvals.** The ISO Metered Entity represents that all necessary approvals, permits, licenses, easements, right of way or access to install, own and operate its meters have been or will be obtained by the ISO Metered Entity prior to the effective date of this Agreement.

ARTICLE IX LIABILITY AND INDEMNIFICATION

9.1 Liability and Indemnification. The provisions of Section 14 of the ISO Tariff will apply to liability arising under this Agreement, except that all references in Section 14 of the ISO Tariff to Market Participants shall be read as references to the ISO Metered Entity and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLES X UNCONTROLLABLE FORCES

10.1 Uncontrollable Forces Tariff Provisions. Section 15 of the ISO Tariff shall be incorporated by reference into this Agreement except that all references in Section 15 of the ISO Tariff to Market

Issued by: Charles F. Robinson, Vice President and General Counsel

Participants shall be read as references to the ISO Metered Entity and all references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE XI MISCELLANEOUS

- 11.1 Assignments. Either Party may assign or transfer any or all of its rights and/or obligations under this Agreement with the other Party's prior written consent in accordance with Section 17 of the ISO Tariff. Such consent shall not be unreasonably withheld. Any such transfer or assignment shall be conditioned upon the successor in interest accepting the rights and/or obligations under this Agreement as if said successor in interest was an original Party to this Agreement.
- **11.2 Notices.** Any notice, demand or request which may be given to or made upon either Party regarding this Agreement shall be made in accordance with Section 20.1 of the ISO Tariff. A Party must update the information in Schedule 5 as information changes. Such changes shall not constitute an amendment to this Agreement.
- **11.3 Waivers.** Any waiver at any time by either Party of its rights with respect to any default under this Agreement, or with respect to any other matter arising in connection with this Agreement, shall not be deemed a waiver with respect to any subsequent default or other matter arising in connection with this Agreement. Any delay short of the statutory period of limitations, in asserting or enforcing any right under this Agreement shall not constitute or be deemed a waiver of such right.
- 11.4 Governing Law and Forum. This Agreement shall be deemed to be a contract made under and for all purposes shall be governed by and construed in accordance with the laws of the State of California, except its conflict of law provisions. The Parties irrevocably consent that any legal action or proceeding arising under or relating to this Agreement to which the ISO ADR Procedures do not apply shall be brought in any of the following forums, as appropriate: any court of the State of California, any federal court of the United States of America located in the State of California or, where subject to its jurisdiction, before the Federal Energy Regulatory Commission.
- 11.5 Consistency with Federal Laws and Regulations. This Agreement shall incorporate by reference Section 20.8 of the ISO Tariff as if the references to the ISO Tariff were referring to this Agreement.
- **11.6 Merger.** This Agreement constitutes the complete and final agreement of the Parties with respect to the subject matter hereto and supersedes all prior agreements, whether written or oral, with respect to such subject matter.
- 11.7 Severability. If any term, covenant, or condition of this Agreement or the application or effect of any such term, covenant, or condition is held invalid as to any person, entity, or circumstance, or is determined to be unjust, unreasonable, unlawful, imprudent, or otherwise not in the public interest by any court or government agency of competent jurisdiction, then such term, covenant, or condition shall remain in force and effect to the maximum extent permitted by law, and all other terms, covenants, and conditions of this Agreement and their application shall not be affected thereby, but shall remain in force and effect and the parties shall be relieved of their obligations only to the extent necessary to eliminate such regulatory or other determination unless a court or governmental agency of competent jurisdiction holds that such provisions are not separable from all other provisions of this Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 11.8 Amendments. This Agreement and the Schedules attached hereto may be amended from time to time by the mutual agreement of the Parties in writing. Amendments that are subject to FERC approval shall not take effect until FERC has accepted such amendments for filing and has made them effective. If the amendment does not require FERC approval, the amendment will be filed with FERC for information.
- **11.9 Counterparts.** This Agreement may be executed in one or more counterparts at different times, each of which shall be regarded as an original and all of which, taken together, shall constitute one and the same Agreement.

IN WITNESS WHEREOF, the Parties hereto have caused this Agreement to be duly executed on behalf of each by and through their authorized representatives as of the date hereinabove written.

By: Name: Title: Date: [Full legal name of ISO Metered Entity] By: Name: Title: Date:

California Independent System Operator Corporation

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 995

SCHEDULE 1 METER INFORMATION [Section 3.3.2]

| Resource ID/Meter Number | |
|----------------------------------|--|
| Name of the Facility | |
| Location (address if applicable) | |

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 2

EXEMPTIONS FROM METERING STANDARDS AND OTHER REQUIREMENTS [Section 3.4]

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 997

SCHEDULE 3

ACCESS TO METER DATA AND AUTHORIZED USERS [Section 5.1]

List authorized users and any restrictions or limitations placed on them.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 4 PART A ISO IMPOSED PENALTIES AND SANCTIONS [Section 4.1]

[TO BE INSERTED UPON FERC APPROVAL]

PART B
CORRECTIVE MEASURES
[SECTION 4.2]

[TO BE DEVELOPED]

Issued by: Charles F. Robinson, Vice President and General Counsel

Effective: April 12, 2005

SCHEDULE 5

NOTICE [Section 11.2]

| Name of Primary Representative: | |
|--|--|
| Title: | |
| Company: | |
| Address: | |
| City/State/Zip Code: | |
| Email address: | |
| Phone: | |
| Fax: | |
| | |
| | |
| Name of Alternative Representative: | |
| Title: | |
| Company: | |
| Address: | |
| City/State/Zip Code: | |
| Email address: | |
| Phone: | |
| Fax: | |
| | |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: April 12, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1000

Effective: April 12, 2005

| ISO: | | |
|-------------------------------------|---|---|
| Name of Primary Representative: | | - |
| Title: | · | _ |
| Address: | | - |
| City/State/Zip Code: | | - |
| Email address: | | - |
| Phone: | | - |
| Fax: | | - |
| Name of Alternative Representative: | | |
| Title: | | _ |
| Address: | | - |
| City/State/Zip Code: | | - |
| Email address: | | - |
| Phone: | | - |
| Fax: | | _ |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 12, 2005

ISO TARIFF APPENDIX O

Meter Service Agreement for Scheduling Coordinators

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR

AND

[SC]

METER SERVICE AGREEMENT FOR SCHEDULING COORDINATORS

Issued by: Charles F. Robinson, Vice President and General Counsel

METER SERVICE AGREEMENT FOR SCHEDULING COORDINATORS

| THIS AGR | EEMENT is dated this day of, and is entered into, by and between: |
|-----------|---|
| (1) | [Full legal name] having its registered and principal place of business located at [Address] (the "SC"); |
| and | |
| (2) | California Independent System Operator Corporation, a California non-profit public benefit corporation having a principal executive office located at such place in the State of California as the ISO Governing Board may from time to time designate, initially 151 Blue Ravine Road, Folsom, California 95630 (the "ISO"). |
| The SC an | d the ISO are hereinafter referred to as the "Parties". |

Whereas:

- A. Section 10.6.7 of the ISO Tariff requires the ISO to enter into a meter service agreement with each SC responsible for providing Settlement Quality Meter Data for SC Metered Entities that it represents.
- **B.** Section 10.6.7 of the ISO Tariff requires SCs to ensure that the SC Metered Entities that they represent adhere to the requirements and standards for Metering Facilities set forth in Section 10.6.
- C. The Parties are entering into this Agreement in order to establish the terms and conditions upon which the ISO and the SC shall discharge their respective duties and responsibilities pursuant to this Agreement and the ISO Tariff.
- **D.** All obligations and responsibilities included in this Agreement may be set forth in further detail in the Metering Protocol of the ISO Tariff.

NOW THEREFORE, in consideration of the mutual covenants set forth herein, **THE PARTIES AGREE** as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE I DEFINITIONS AND INTERPRETATION

- **1.1 Master Definitions Supplement.** Unless defined in Section 1.2 of this Agreement, all terms and expressions used in this Agreement shall have the same meaning as those contained in the Master Definitions Supplement to the ISO Tariff.
- **1.2 Special Definitions for this Agreement.** In this Agreement, the following words and expressions shall have the meanings set forth below:
 - "ISO Authorized Inspector" has the meaning as defined in the Metering Protocol of the ISO Tariff.

"ISO Metered Entity" means:

- (a) any one of the following entities that is directly connected to the ISO Controlled Grid:
 - a Generator other than a Generator that sells all of its Energy (excluding any Energy consumed by auxiliary load equipment electrically connected to that Generator at the same point) and Ancillary Services to the UDC in whose Service Area it is located;
 - ii. an Eligible Customer; or
 - iii. an End-User other than an End-User that purchases all of its Energy from the UDC in whose Service Area it is located; and
- (b) any one of the following entities:
 - i. a Participating Generator;
 - ii. a Participating TO in relation to its Tie Point Meters with other TOs or Control Areas; or
 - iii. a Participating Load.
- "Metering Protocol" means the Metering Protocol of the ISO Tariff on the subject of revenue quality metering which sets forth the requirements and procedures that SCs, amongst others, shall meet and follow in order to comply with their obligations under Section 10 of the ISO Tariff.
- "MDAS" means the ISO's revenue metering data acquisition and processing system.
- "Metering Facilities" means revenue quality meters, instrument transformers, secondary circuitry, secondary devices, meter data servers, related communication facilities and other related local equipment.
- "SC" means Scheduling Coordinator.
- "Scheduling Coordinator Metered Entity" or "SC Metered Entity" means a Generator, Eligible Customer or End-User that is not an ISO Metered Entity.
- **1.3** Rules of Interpretation. The following rules of interpretation and conventions shall apply to this Agreement:
 - (a) if there is any inconsistency between this Agreement and the ISO Tariff, the ISO Tariff will prevail to the extent of the inconsistency;
 - (b) the singular shall include the plural and vice versa;
 - (c) the masculine shall include the feminine and neutral and vice versa;

Issued by: Charles F. Robinson, Vice President and General Counsel

- (d) "includes" or "including" shall mean "including without limitation";
- (e) references to a section, article or schedule shall mean a section, article or a schedule of this Agreement, as the case may be, unless the context otherwise requires;
- (f) a reference to a given agreement or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made:
- (g) unless the context otherwise requires, references to any law shall be deemed references to such law as it may be amended, replaced or restated from time to time;
- (h) unless the context otherwise requires, any reference to a "person" includes any individual, partnership, firm, company, corporation, joint venture, trust, association, organization or other entity, in each case whether or not having separate legal personality;
- (i) unless the context otherwise requires, any reference to a Party includes a reference to its permitted successors and assigns;
- (j) any reference to a day, week, month or year is to a calendar day, week, month or year;
- (k) the captions and headings in this Agreement are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Agreement; and
- (I) references to the Metering Protocol of the ISO Tariff and other ISO Documents shall be interpreted in accordance with any exceptions or exemptions to such as may have been granted by the ISO.

ARTICLE II TERM AND TERMINATION

2.1 Effective Date. This Agreement shall be effective as of the later of the date of execution of this Agreement, or the date it is accepted and made effective by FERC, and shall remain in full force and effect until terminated by operation of law or pursuant to Section 2.2 of this Agreement.

2.2 Termination

- 2.2.1 Termination by ISO. Subject to Section 4.2, the ISO may terminate this Agreement by giving written notice of termination in the event that the SC commits any default under this Agreement and/or the ISO Tariff which, if capable of being remedied, is not remedied within thirty (30) days after the ISO has given it written notice of the default, unless excused by reason of Uncontrollable Force in accordance with Section 15 of the ISO Tariff. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within 30 days of receipt of such request. This Agreement shall terminate upon acceptance by FERC of such notice of termination.
- 2.2.2 Termination by SC. In the event that the SC wishes to terminate this Agreement, the SC shall give the ISO ninety (90) days written notice. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within 30 days of receipt of such request. This Agreement shall terminate upon acceptance by FERC of such a notice of termination.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE III GENERAL TERMS AND CONDITIONS

- **3.1 Agreement Subject to ISO Tariff**. This Agreement shall be subject to the provisions of the ISO Tariff which shall be deemed to be incorporated herein, as the same may be changed or superseded from time to time. The Parties agree that they will comply with the provisions of Section 10 of the ISO Tariff and the Metering Protocol of the ISO Tariff.
- 3.2 Requirements and Standards for Metering Facilities. The SC shall ensure that the SC Metered Entities it represents shall adhere to the requirements and standards for Metering Facilities of its Local Regulatory Authority. If that SC Metered Entity's Local Regulatory Authority has not set any requirements or standards in relation to any of its Metering Facilities, the SC representing that SC Metered Entity must comply with the requirements and standards for those Metering Facilities as set forth in this Agreement and the ISO Tariff.
- 3.3 Obligations and Rights of the SC.
- 3.3.1 Meter Information. If the ISO so requests, the SC shall provide in the format prescribed by Schedule 1 to this Agreement the required information with respect to the meters for all SC Metered Entities it represents including the reference to specific distribution loss factors or methodology it proposes to use as determined by the relevant UDC and approved by the relevant Local Regulatory Authority. The SC must immediately notify the ISO of any changes to the information provided to the ISO in accordance with this Section 3.3.1 and provide the ISO with any information in relation to such change as reasonably requested by the ISO. Any amendments or additions to Schedule 1 shall not constitute an amendment to this Agreement.
- **3.3.2** Assistance and Cooperation of SC. The SC shall ensure that the ISO shall, upon reasonable notice, have access to the entire Metering Facilities of the SC Metered Entities that it represents from the meter data server to the Metering Facilities in order to inspect, test or otherwise audit those Metering Facilities.
- 3.3.3 Profiled and Cumulative Meter Data. The SC shall provide the ISO with any applicable load profile for each SC Metered Entity that it represents that is load profiled in accordance with the ISO Tariff. The SC shall provide a copy of the load profile applicable to each SC Metered Entity (if any) that it represents which shall be set forth in Schedule 2 to this Agreement. The SC must immediately notify the ISO of any changes to the load profiles referred to in Schedule 2 to this Agreement and provide the ISO with a copy of the new or amended load profile. Such change to Schedule 2 shall not constitute an amendment to this Agreement.
- 3.3.4 Security and Validation Procedures. The SC shall apply to the Meter Data of the SC Metered Entities that it represents, the security and validation procedures prescribed by the relevant Local Regulatory Authority. If the relevant Local Regulatory Authority has not prescribed any such procedures, the SC shall apply the procedures set forth in the Metering Protocol of the ISO Tariff. Meter Data submitted by an SC for SC Metered Entities shall conform to these standards unless the ISO has, at its discretion, exempted the SC from these standards.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 3.4 Obligations and Rights of the ISO.
- **3.4.1 Exemptions Granted by ISO.** Any exemptions provided for under the ISO Tariff that are granted by the ISO shall be set forth in Schedule 3 to this Agreement. Any amendment or addition to Schedule 3 shall not constitute an amendment to this Agreement.
- **3.4.2 ISO** as Third-Party Beneficiary. The ISO shall be a third-party beneficiary to the agreements between the SC and SC Metered Entities that the SC represents. Such agreements shall grant the ISO access to any relevant information, records and facilities of the SC Metered Entity as needed for the ISO to fulfill its obligations under this Agreement and the ISO Tariff.

ARTICLE IV PENALTIES & SANCTIONS

- 4.1 Penalties. If the SC provides inaccurate or incorrect Settlement Quality Meter Data or fraudulent Meter Data to the ISO, the ISO shall be entitled to impose penalties and sanctions, including but not limited to suspension of trading rights following 14 days written notice to the SC. Fraudulent Meter Data means any data provided to the ISO by the SC that the SC knows to be false, incorrect or incomplete at the time it provided it to the ISO. All penalties and sanctions shall be set forth in Schedule 4 Part A. No penalties or sanctions, including the suspension of trading rights, may be imposed under this Agreement unless a Schedule providing for such penalties or sanctions has first been filed with and made effective by FERC. Nothing in the Agreement, with the exception of the provisions relating to ADR, shall be construed as waiving the rights of the SC to oppose or protest any penalty proposed by the ISO to the FERC or the specific imposition by the ISO of any FERC-approved penalty on the SC. The ISO shall notify the SC of those approved penalties within 14 days of their approval by the FERC.
- 4.2 Corrective Measures. If the SC or any SC Metered Entity that it represents fails to meet or maintain the standards for Metering Facilities or comply with the audit or test procedures as set forth in the ISO Tariff, the ISO shall be permitted to take corrective measures. Details of the corrective measures and rights the ISO may exercise upon any failure by any entity to meet those standards for Metering Facilities or to comply with the audit or test procedures shall be set forth in Schedule 4 Part B.

ARTICLE V ACCESS TO METER DATA

5.1 Third Parties. Third parties that are authorized by the SC to access the Meter Data of a SC Metered Entity held by the ISO and that are entitled to such Meter Data shall be identified in Schedule 5 to this Agreement. The SC shall not provide a third party access to Meter Data of a SC Metered Entity unless the SC has permission from that SC Metered Entity to provide that access. The relevant UDCs and TOs shall be included in Schedule 5 provided that the SC Metered Entity has granted those UDCs and TOs access to its Meter Data. Any amendment or addition to Schedule 5 shall not constitute an amendment to this Agreement. The Scheduling Coordinator shall, on request by the SC Metered Entity, access the Meter Data held by the ISO relating to that SC Metered Entity and provide that Meter Data to the SC Metered Entity in a timely manner.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE VI COSTS

6.1 Certification, Inspection and Auditing of Meters. The SC shall be responsible for all reasonable costs incurred by the ISO or an ISO Authorized Inspector in connection with them carrying out the certification, inspection, testing or auditing of the meters identified in Schedule 1 from which the SC provides Meter Data to the ISO. The ISO or ISO Authorized Inspector will furnish the SC, upon request, an itemized bill for such costs.

ARTICLE VII DISPUTE RESOLUTION

7.1 Dispute Resolution. The Parties shall make reasonable efforts to settle all disputes arising out of or in connection with this Agreement. In the event any dispute is not settled, the Parties shall adhere to the ISO ADR Procedures set forth in Section 13 of the ISO Tariff, which is incorporated by reference, except that all reference in Section 13 of the ISO Tariff to Market Participants shall be read as a reference to the SC Metered Entity and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE VIII REPRESENTATIONS AND WARRANTIES

- **8.1** Representations and Warranties. Each Party represents and warrants that the execution, delivery and performance of this Agreement by it has been duly authorized by all necessary corporate and/or governmental actions, to the extent authorized by law.
- **8.2 Necessary Authority.** The SC represents and warrants that all of the entities which it identifies on Schedule 1 as SC Metered Entities that it represents have granted it all necessary authority to enable it to carry out its obligations under this Agreement and the ISO Tariff, and, subject to the execution and delivery by the ISO, this Agreement will be enforceable against the SC in accordance with its terms.
- **8.3 Meter Data Access.** The SC represents and warrants that all third parties referred to in Schedule 5 to this Agreement have been authorized by the relevant SC Metered Entity as having access to its Settlement Quality Meter Data.

ARTICLE IX LIABILITY AND INDEMNIFICATION

9.1 Liability and Indemnification. The provisions of Section 14 of the ISO Tariff will apply to liability arising under this Agreement except that all references in Section 14 of the ISO Tariff to Market Participants shall be read as references to the SC and references in the ISO Tariff shall be read as references to this Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE X UNCONTROLLABLE FORCES

10.1 Uncontrollable Forces. Section 15 of the ISO Tariff shall be incorporated by reference into this Agreement except that all references in Section 15 of the ISO Tariff to Market Participants shall be read as references to the SC and all references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE XI MISCELLANEOUS

- 11.1 Assignments. Either Party may assign or transfer any or all of its rights and/or obligations under this Agreement with the other Party's prior written consent in accordance with Section 17 of the ISO Tariff. Such consent shall not be unreasonably withheld. Any such transfer or assignment shall be conditioned upon the successor in interest accepting the rights and/or obligations under this Agreement as if said successor in interest was an original Party to this Agreement.
- **Notices.** Any notice, demand or request which may be given to or made upon either Party regarding this Agreement shall be made in accordance with the SC's SC Agreement and in accordance with Section 20.1 of the ISO Tariff. A Party must update the information in Schedule 6 as information changes. Such changes shall not constitute an amendment to this Agreement.
- 11.3 Waivers. Any waiver at any time by either Party of its rights with respect to any default under this Agreement, or with respect to any other matter arising in connection with this Agreement, shall not be deemed a waiver with respect to any subsequent default or other matter arising in connection with this Agreement. Any delay short of the statutory period of limitations in asserting or enforcing any right under this Agreement shall not constitute or be deemed a waiver of such right.
- 11.4 Governing Law and Forum. This Agreement shall be deemed to be a contract made under and for all purposes shall be governed by and construed in accordance with the laws of the State of California, except its conflict of law provisions. The SC irrevocably consents that any legal action or proceeding arising under or relating to this Agreement to which the ISO ADR Procedures do not apply shall be brought in any of the following forums, as appropriate: any court of the State of California, any federal court of the United States of America located in the State of California or, where subject to its jurisdiction, before the Federal Energy Regulatory Commission.
- 11.5 Consistency with Federal Laws and Regulations. This Agreement shall incorporate by reference Section 20.8 of the ISO Tariff as if the references to the ISO Tariff were referring to this Agreement.
- **11.6 Merger.** This Agreement constitutes the complete and final agreement of the Parties with respect to the subject matter hereto and supersedes all prior agreements, whether written or oral, with respect to such subject matter.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 11.7 Severability. If any term, covenant, or condition of this Agreement or the application or effect of any such term, covenant, or condition is held invalid as to any person, entity, or circumstance, or is determined to be unjust, unreasonable, unlawful, imprudent, or otherwise not in the public interest by any court or government agency of competent jurisdiction, then such term, covenant, or condition shall remain in force and effect to the maximum extent permitted by law, and all other terms, covenants, and conditions of this Agreement and their application shall not be affected thereby, but shall remain in force and effect and the Parties shall be relieved of their obligations only to the extent necessary to eliminate such regulatory or other determination unless a court or governmental agency of competent jurisdiction holds that such provisions are not separable from all other provisions of this Agreement.
- 11.8 Amendments. This Agreement and the Schedules attached hereto may be amended from time to time by the mutual agreement of the Parties in writing. Amendments that are subject to FERC approval shall not take effect until FERC has accepted such amendments for filing and has made them effective. If the amendment does not require FERC approval, the amendment will be filed with FERC for information.
- **11.9 Counterparts.** This Agreement may be executed in one or more counterparts at different times, each of which shall be regarded as an original and all of which, taken together, shall constitute one and the same Agreement.

IN WITNESS WHEREOF, the Parties hereto have caused this Agreement to be duly executed on behalf of each by and through their authorized representatives as of the date hereinabove written.

California Independent System Operator Corporation

| Ву: | |
|----------|-----------------|
| Name: | |
| Title: | |
| Date: | |
| | |
| | |
| | |
| [Full le | gal name of SC] |
| | gal name of SC] |
| By: | |
| By: | - |

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1011

SCHEDULE 1

METER INFORMATION [Section 3.3.1]

Meter Number

Name of the Facility

Contact details for SC Metered Entity Representative

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1012

SCHEDULE 2

APPROVED LOAD PROFILE [Section 3.3.3]

Attach details of each load profile used by the SC Metered Entities represented by the SC, the names of the SC Metered Entities that use each of those load profiles and the name of the Local Regulatory Authority that approved each of those load profiles.

Issued by: Charles F. Robinson, Vice President and General Counsel

Other Exemptions

Original Sheet No. 1013

SCHEDULE 3

EXEMPTIONS FROM METERING STANDARDS AND OTHER REQUIREMENTS [Section 3.4.1]

| Exemption |
|---|
| Attach variation with an explanation. |
| |
| Name of the relevant Local Regulatory Authority which sets security and validation standards for the SC Metered Entity. |

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 4

PART A

ISO IMPOSED PENALTIES AND SANCTIONS [Section 4.1]

[TO BE INSERTED UPON FERC APPROVAL]

PART B

CORRECTIVE MEASURES [Section 4.2]

[TO BE DEVELOPED]

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1015

SCHEDULE 5

ACCESS TO METER DATA [Section 5.1]

List the third parties authorized by each SC Metered Entity represented by the SC to access that SC Metered Entities' Settlement Quality Meter Data.

Issued by: Charles F. Robinson, Vice President and General Counsel

Effective: April 12, 2005

SCHEDULE 6

NOTICE [Section 11.2]

| Name of Primary Representative: | |
|--|--|
| Title: | |
| Address: | |
| City/State/Zip Code: | |
| Email address: | |
| Phone: | |
| Fax: | |
| | |
| | |
| Name of Alternative Representative: | |
| Title: | |
| Address: | |
| City/State/Zip Code: | |
| Email address: | |
| Phone: | |
| Fax: | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 12, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1017

Effective: April 12, 2005

| ISO: | |
|---------------------------------|---|
| Name of Primary Representative: | |
| Title: | |
| Address: | |
| City/State/Zip Code: | |
| Email address: | |
| Phone: | |
| Fax: | |
| Name of Alternative | |
| Representative: | |
| Title: | |
| Address: | · |
| City/State/Zip Code: | |
| Email address: | |
| Phone: | |
| Fax: | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 12, 2005

ISO TARIFF APPENDIX P

Utility Distribution Company Operating Agreement

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR

AND

[UTILITY DISTRIBUTION COMPANY]

UTILITY DISTRIBUTION COMPANY OPERATING AGREEMENT

Issued by: Charles F. Robinson, Vice President and General Counsel

UTILITY DISTRIBUTION COMPANY OPERATING AGREEMENT

| THIS betwe | OPERATING AGREEMENT is dated this day of, and is entered into, by and een: |
|---------------|--|
| (1) | [Full legal name of UDC] having its registered and principal place of business located at [Address] (the "UDC"); |
| | and |
| (2) | California Independent System Operator Corporation, a California non-profit public benefit |

(2) California Independent System Operator Corporation, a California non-profit public benefit corporation having its principal place of business located in such place in the State of California as the ISO Governing Board may from time to time designate, initially 151 Blue Ravine Road, Folsom, California 95630 (the "ISO").

The UDC and the ISO are hereinafter referred to as the "Parties".

Whereas:

- A. The purpose of this Operating Agreement is to establish the rights and obligations of the UDC and the ISO with respect to the UDC's Interconnection with the ISO Controlled Grid and the UDC's cooperation and coordination with the ISO to aid the reliability and the operational control of the ISO Controlled Grid and the UDC's Distribution System.
- B. The UDC owns and operates a Distribution System within the ISO Control Area subject to the authority of a Local Regulatory Authority.
- C. The UDC wishes to transmit Energy and/or supply Ancillary Services to or from the ISO Controlled Grid under the terms and conditions set forth in the ISO Tariff. The UDC also wishes to support and be part of the coordinated response to System Emergencies and to System Reliability concerns relating to the ISO Controlled Grid.
- D. The ISO has certain statutory obligations under California law to maintain the reliability of the ISO Controlled Grid.
- E. This Operating Agreement obligates the UDC and the ISO to comply with the relevant sections of the ISO Tariff, the ISO Operating Procedures and the ISO Specifications.
- F. The UDC and the Participating TO with which it is interconnected intend to coordinate the planning and implementation of any expansions or modifications of the UDC's or Participating TO's systems that will affect their transmission interconnection, the ISO Controlled Grid or the transmission services to be required by the UDC.

NOW THEREFORE, in consideration of the mutual covenants set forth herein, **THE PARTIES AGREE** as follows:

ARTICLE I DEFINITIONS AND INTERPRETATION

1.1 Master Definitions Supplement. Unless defined in Section 1.2 of this Operating Agreement, all terms and expressions used in this Operating Agreement shall have the same meaning as those contained in the Master Definitions Supplement to the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **Special Definitions for this Operating Agreement**. In this Operating Agreement, the following words and expressions shall have the meanings set opposite them:
 - "ISO Specifications" means those standards pertaining to the areas of operation listed in Article IV of this Operating Agreement, approved by the ISO to establish detailed technical performance and reliability parameters at the ISO Controlled Grid and UDC Interconnection, associated with the ISO Tariff, as those standards may be amended from time to time.
 - "ISO Operating Procedure" means those procedures pertaining to the areas of operation listed in Article IV of this Operating Agreement, created by the ISO to establish detailed operating practices at the ISO Controlled Grid and UDC Interconnection, associated with general provisions required in the ISO Tariff, as those standards may be amended from time to time.
 - "Underfrequency Load Shedding (UFLS)" means automatic Load Shedding, accomplished by the use of such devices as underfrequency relays, intended to arrest frequency decline and assure continued operation within anticipated islands.
- **1.3 Rules of Interpretation.** The following rules of interpretation and conventions shall apply to this Operating Agreement:
 - (a) if there is any inconsistency between this Operating Agreement and the ISO Tariff, the ISO Tariff will prevail to the extent of the inconsistency;
 - (b) the singular shall include the plural and vice versa;
 - (c) the masculine shall include the feminine and neutral and vice versa;
 - (d) "includes" or "including" shall mean "including without limitation";
 - (e) references to a Section, Article or Schedule shall mean a Section, Article or a Schedule of this Operating Agreement, as the case may be, unless the context otherwise requires;
 - (f) a reference in this Operating Agreement to a given agreement, instrument or the ISO Tariff shall be a reference to that agreement, instrument or the ISO Tariff as modified, amended, supplemented or restated through the date as of which such reference is made:
 - (g) unless the context otherwise requires, references to any law shall be deemed references to such law as it may be amended, replaced or restated from time to time;
 - (h) unless the context otherwise requires, any reference to a "person" includes any individual, partnership, firm, company, corporation, joint venture, trust, association, organization or other entity, in each case whether or not having separate legal personality;
 - (i) unless the context otherwise requires, any reference to a Party includes a reference to its permitted successors and assigns;
 - (j) any reference to a day, week, month or year is to a calendar day, week, month or year; and the captions and headings in this Operating Agreement are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Operating Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE II TERM AND TERMINATION

- **2.1 Effective Date.** This Operating Agreement shall be effective as of the later of the date it is executed by the Parties or the date accepted for filing and made effective by the FERC and shall remain in full force and effect until the earlier of the termination date, the termination of the TCA or such other date as the Parties shall mutually agree. With respect to any such termination, the ISO must file a timely notice of termination with FERC, and this Operating Agreement shall terminate upon acceptance by FERC of such a notice of termination.
- 2.2 Termination Date. Either Party (the terminating Party) may terminate this Operating Agreement by giving written notice in the event that the other Party (the defaulting Party) commits any default under this Operating Agreement and/or the ISO Tariff which, if capable of being remedied, is not remedied within 30 days after the terminating Party has given the defaulting Party written notice of the default, unless excused by reason of Uncontrollable Forces under Article X of this Operating Agreement. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within 30 days of receipt of such request. This Operating Agreement shall terminate upon acceptance by FERC of such a notice of termination.
- 2.3 Termination Pursuant to the TCA. If the UDC is a party to the Transmission Control Agreement ("TCA"), this Operating Agreement shall terminate upon the effective date of the UDC's withdrawal from the TCA in accordance with Section 3.3 of the TCA, provided, however, that first the ISO shall have filed a timely notice of termination with FERC and FERC shall have accepted such notice of termination. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within 30 days of receipt of such request.

ARTICLE III GENERAL TERMS AND CONDITIONS

- 3.1.1 Facilities Under ISO Operational Control. Parties shall identify on Schedule 1 those facilities of the UDC that the Parties mutually agree will be placed under the ISO's operational control pursuant to section 4.9 of the ISO Tariff. In the event that a Party invokes the dispute resolution provision identified in Section 7.1 of this Operating Agreement, such dispute shall be resolved based upon whether the ISO's control over such disputed facilities is essential to meeting the Applicable Reliability Criteria, as defined in the ISO Tariff. With respect to each facility identified in Schedule 1, the Parties shall negotiate the extent of the ISO's operational control in order to meet said standard.
- 3.1.2 Facilities Financed by Local Furnishing Bonds or Other Tax-Exempt Bonds. This Section 3.1.2 applies only to facilities which are under the operational control of the ISO and are owned by a UDC with Local Furnishing Bonds or other tax-exempt bonds. Nothing in this Operating Agreement shall compel (and the ISO is not authorized to request) any UDC with Local Furnishing Bonds, or other tax-exempt bonds, to violate restrictions applicable to facilities which are part of a system that was financed in whole or part with Local Furnishing Bonds or other tax-exempt bonds. The UDC shall cooperate with and provide all necessary assistance to the ISO in developing specific schedules to be included in executed Operating Agreements with such UDC to meet the intent of Section 3.1.1 of this Operating Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 3.2 Agreement Subject to ISO Tariff. This Operating Agreement shall be subject to the provisions of the ISO Tariff which shall be deemed to be incorporated by reference herein, as the same may be changed or superseded from time to time pursuant to Sections 16.1 and 20.1.3 of the ISO Tariff. The Parties agree that they will comply with Section 4, and any other applicable provisions, of the ISO Tariff.
- **3.3 Operation of ISO Controlled Grid.** The ISO shall operate the ISO Controlled Grid in accordance with the ISO Tariff and the Transmission Control Agreement to which it is a party.
- 3.4.1 Compliance with ISO Specifications and ISO Operating Procedure. The UDC will abide by and will perform all of the obligations under the ISO Specifications and the ISO Operating Procedure placed on UDCs in respect of all matters set forth therein as the same may be changed or superseded from time to time pursuant to the procedures set forth in Sections 16.1 and 20.1.3 of the ISO Tariff. In the event of any conflict or dispute over interpretation, the ISO Tariff shall, at all times, take precedence over the ISO Specifications and ISO Operating Procedure. The ISO shall not implement any reliability requirements, operating requirements or performance standards that would impose increased costs on the UDC without giving due consideration to whether the benefits of such requirements or standards are sufficient to justify such increased costs. In any proceeding concerning the cost recovery by the UDC of capital and operation and maintenance costs incurred to comply with ISO Specifications and Operating Procedure, the ISO shall, at the request of the UDC, provide specific information regarding the nature of, and need for, the ISO-imposed requirements or standards to enable the UDC to use this information in support of cost recovery through rates and tariffs.
- **3.4.2** Review of Specifications and Operating Procedure. The ISO shall periodically review with the UDC the ISO Specifications and Operating Procedure and, through the Grid Reliability and Operations Committee process, shall modify the specifications and/or Operating Procedure as necessary.
- **3.4.3** Periods When Compliance is Required. While awaiting dispute resolution or regulatory review, the UDC shall not be required to comply with changes to the ISO Specifications and/or Operating Procedure, except where compliance is necessary in order to prevent or remedy an imminent System Emergency.
- **3.5 Scheduling Coordinator Certification.** The UDC shall ensure that any Scheduling Coordinator through which it schedules Energy and Ancillary Services to or from the ISO Controlled Grid is appropriately certified in accordance with Section 2.2.3 and 2.2.4 of the ISO Tariff in accordance with the list of Scheduling Coordinators established by the ISO on WEnet.
- 3.6 Single Point of Contact. The ISO and the UDC shall each provide a single point of contact on a 24-hour, 7-day basis for the exchange of operational procedures and information. In the case of a UDC that is also a Participating TO, there may be only one single point of contact required and, in the reasonable discretion of the ISO, duplicative reporting requirements and functions may be waived. Details of requirements relating to and the identity of the initial points of contact are set forth in Schedule 2.
- 3.7 Delegated Operational Responsibilities. The UDC undertakes to perform all operational responsibilities delegated to the UDC by the ISO in accordance with Section 4.1.2 of the ISO Tariff and described in Schedule 3.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE IV OPERATIONAL COORDINATION

The Parties will perform the operational coordination obligations and responsibilities assigned to them under the ISO Tariff, the ISO Operating Procedures, and the ISO Specifications. The obligations and responsibilities include:

4.1 Maintenance Coordination

- **4.1.1 Maintenance Coordination for Facilities under ISO Control.** The UDC shall schedule with the ISO on an annual basis any maintenance Outages of the equipment included in Schedule 1 pursuant to Schedule 4 in compliance with the Outage Coordination Protocol of the ISO Tariff and shall coordinate its Outage requirements with the Participating TO with which it is interconnected.
- **4.1.2 Maintenance Coordination for Other Facilities.** With respect to other facilities which may affect the reliability of the UDC Interconnection, the UDC shall coordinate its Outage requirements with the Participating TO with which it is interconnected.
- **System Emergencies.** The responsibilities of the Parties in relation to System Emergencies are stated in Section 4.4 of the ISO Tariff, the Dispatch Protocol of the ISO Tariff and in Schedule 5. The ISO shall adopt fair and non-discriminatory procedures among the UDCs to ensure that no UDC bears a disproportionate share of the ISO's Load Shedding program.
- **4.2.1 Underfrequency Load Shedding (UFLS).** The responsibilities of the Parties in relation to UFLS are stated in Sections 2.3.2 and 4.4.3 of the ISO Tariff, the ISO Operating Procedure, the ISO Specifications and in Schedule 6.
- **4.2.2 Other Automatic Load Shedding.** The responsibilities of the Parties in relation to automatic Load Shedding as a function of voltage and other parameters are stated in the ISO Operating Procedure, the ISO Specifications and in Schedule 7.
- **4.2.3 Manual Load Shedding.** The responsibilities of the Parties to direct and to accept direction for manual disconnection of Load, under EEP, Load curtailment programs or other emergency plans, are stated in Section 2.3 and Section 4.4.4 of the ISO Tariff, the ISO Operating Procedure, the ISO Specifications and in Schedule 8.
- **4.3 Electrical Emergency Plan (EEP).** The responsibilities of the Parties in relation to the EEP are stated in Section 4.5 of the ISO Tariff, the ISO Operating Procedure, the ISO Specifications and in Schedule 9.
- **4.4 Load Restoration.** The responsibilities of the Parties for restoring Load following a system disturbance are stated in Section 4.4.4 of the ISO Tariff, the ISO Operating Procedure, the ISO Specifications and in Schedule 10.
- **4.5** Records, Information and Reports. The Parties are required to maintain such records, to share information, and to make such reports as are stated in Section 4.1.2, 4.6 and 4.8 of the ISO Tariff, the ISO Operating Procedure, the ISO Specifications, and in Schedule 11. Additionally, the Parties shall jointly perform a review following a major Outage as provided in Section 2.3.2.9.1 of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **4.6 Interconnection Operation Standards.** The ISO and UDC shall maintain stable established operating parameters and control power and reactive flow within standards stated in the ISO Specifications and in Schedule 12.
- 4.7 Critical Protective Systems. The UDC shall (in accordance with Section 11.2 of this Operating Agreement) notify the ISO as soon as is reasonably practicable of any condition that it becomes aware of that may compromise the ISO Controlled Grid Critical Protective Systems in accordance with Section 4.3 of the ISO Tariff and Schedule 13.
- **4.8 UDC Distribution Systems.** The ISO shall (in accordance with Section 11.2 of this Operating Agreement) notify the UDC as soon as is reasonably practicable of any condition which the ISO becomes aware that may compromise the operation and reliability of the UDC Distribution System.

ARTICLE V ACCESS TO FACILITIES

- Access Rights. Pursuant to Section 4.8.4 of the ISO Tariff and Schedule 14 of this Operating Agreement, the ISO and the UDC shall each have the right to install or to have installed equipment or other facilities, including metering equipment, on the electric utility property of the other necessary for the implementation of this Operating Agreement. The ISO's installation of equipment on the property of the UDC shall comply with Local Regulatory Authority regulations, except where compliance with Local Regulatory Authority regulations would cause the ISO to violate the ISO Tariff, and with all relevant safety standards. In such case, the UDC and ISO will work together to resolve the conflict between the Local Regulatory Authority regulations and the ISO Tariff.
- **Meter Testing.** The UDC shall, at the request of the ISO and upon reasonable notice, provide access to its facilities necessary to permit the ISO or an ISO-approved meter inspector to perform such testing as necessary in accordance with Section 4.8.4 of the ISO Tariff and the procedures set forth in Schedule 14.
- **5.3 Emergency Access Rights.** Section 4.8.4.3 of the ISO Tariff shall govern the ISO's right to access the UDC's equipment or other facilities during a System Emergency or where access is needed in connection with an audit function. In a System Emergency, the UDC shall have a right of access to ISO equipment on UDC property and UDC equipment on ISO property without notice.

ARTICLE VI COSTS

- **6.1 UDC Operating and Maintenance Costs.** The UDC shall be responsible for all costs incurred in connection with procuring, installing, operating and maintaining its facilities identified in Schedule 1 for the purpose of meeting its obligations under this Operating Agreement.
- **6.2 ISO Operating and Maintenance Costs.** The ISO shall be responsible for the procurement, installation, operation and maintenance costs of ISO equipment set out in Article V of this Operating Agreement installed on UDC property.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE VII DISPUTE RESOLUTION

7.1 Alternative Dispute Resolution. The Parties shall make reasonable efforts to settle all disputes arising out of or in connection with this Operating Agreement. In the event any dispute is not settled, the Parties shall adhere to the ISO ADR Procedures set forth in Section 13 of the ISO Tariff, which is incorporated by reference, except that all reference in Section 13 of the ISO Tariff to Market Participants shall be read as a reference to the UDC and references to the ISO Tariff shall be read as references to this Operating Agreement.

ARTICLE VIII REPRESENTATIONS AND WARRANTIES

- **8.1** Representations and Warranties. Each Party represents and warrants that its execution, delivery and performance of this Operating Agreement has been duly authorized by all necessary corporate and/or governmental actions, to the extent authorized by law.
- **8.2 Necessary Approvals.** Each Party represents that all necessary approvals, permits, licenses, easements, right of way or access to install, own and operate its facilities subject to this Operating Agreement have been obtained prior to the effective date of this Operating Agreement.

ARTICLE IX LIABILITY

9.1 Extent of Liability. The provisions of Section 14 of the ISO Tariff will apply to liability arising under this Operating Agreement, except that all references in Section 14 of the ISO Tariff to Market Participants shall be read as references to the UDC and references to the ISO Tariff shall be read as references to this Operating Agreement.

ARTICLE X UNCONTROLLABLE FORCES

10.1 Uncontrollable Forces Tariff Provisions. Section 15 of the ISO Tariff shall be incorporated by reference into this Operating Agreement, except that all references in Section 15 of the ISO Tariff to Market Participants shall be read as a reference to the UDC and references to the ISO Tariff shall be read as references to this Operating Agreement.

ARTICLE XI MISCELLANEOUS

- **11.1 Assignments.** Either Party may assign its obligations under this Operating Agreement, with the other Party's prior written consent, in accordance with Section 17 of the ISO Tariff, which is incorporated by reference into this Operating Agreement. Such consent shall not be unreasonably withheld.
- 11.2 Notices. Any notice, demand or request which may be given to or made upon either Party regarding this Operating Agreement shall be made in accordance with Section 20.1 of the ISO Tariff, which is incorporated by reference, except that all reference in Section 20.1 to Market Participants shall be read as a reference to the UDC. A Party must update the information relating to its address as that information changes in accordance with Section 20.1 of the ISO Tariff. Such changes will not constitute an amendment to this Operating Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **11.3 Waivers.** Any waiver at any time by either Party of its rights with respect to any default under this Operating Agreement, or with respect to any other matter arising in connection with this Operating Agreement, shall not constitute or be deemed a waiver with respect to any subsequent default or matter arising in connection with this Operating Agreement. Any delay short of the statutory period of limitations, in asserting or enforcing any right under this Operating Agreement, shall not constitute or be deemed a waiver of such right.
- 11.4 Governing Law and Forum. This Operating Agreement shall be deemed to be a contract made under and for all purposes shall be governed by and construed in accordance with the laws of the State of California except in its conflict of laws provisions. The Parties irrevocably consent that any legal action or proceeding arising under or in relation to this Operating Agreement to which the ISO ADR Procedures do not apply, shall be brought in any of the following forums, as appropriate: any court of the State of California, any federal court of the United States of America located in the State of California or, where subject to its jurisdiction, before the Federal Energy Regulatory Commission.

11.5 Consistency with Federal Laws and Regulations.

- (a) Nothing in this Operating Agreement shall compel any person or federal entity to: (1) violate federal statutes or regulations; or (2) in the case of a federal agency, to exceed its statutory authority, as defined by any applicable federal statutes, regulations, or orders lawfully promulgated thereunder. If any provision of this Operating Agreement is inconsistent with any obligation imposed on any person or federal entity by federal law or regulation to that extent, it shall be inapplicable to that person or federal entity. No person or federal entity shall incur any liability by failing to comply with this Operating Agreement that is inapplicable to it by reason of being inconsistent with any federal statutes, regulations, or orders lawfully promulgated thereunder; provided, however, that such person or federal entity shall use its best efforts to comply with the ISO Tariff to the extent that applicable federal laws, regulations, and orders lawfully promulgated thereunder permit it to do so.
- (b) If any provision of this Operating Agreement requiring any person or federal entity to give an indemnity or impose a sanction on any person is unenforceable against a federal entity, the ISO shall submit to the Secretary of Energy or other appropriate Departmental Secretary a report of any circumstances that would, but for this provision, have rendered a federal entity liable to indemnify any person or incur a sanction and may request the Secretary of Energy or other appropriate Departmental Secretary to take such steps as are necessary to give effect to any provisions of this Operating Agreement that are not enforceable against the federal entity.
- **11.6 Integration.** This Operating Agreement constitutes the full agreement of the Parties with respect to the subject matter hereto and supercedes all prior agreements, whether written or oral, with respect to such subject matter.
- 11.7 Severability. If any term, covenant, or condition of this Operating Agreement or the application or effect of any such term, covenant, or condition is held invalid as to any person, entity, or circumstance, or is determined to be unjust, unreasonable, unlawful, imprudent, or otherwise not in the public interest by any court or government agency of competent jurisdiction, then such term, covenant, or condition shall remain in force and effect to the maximum extent permitted by law, and all other terms, covenants, and conditions of this Operating Agreement and their application shall not be affected thereby, but shall remain in force and effect and the Parties shall be relieved of their obligations only to the extent necessary to eliminate such regulatory or other determination unless a court or governmental agency of competent jurisdiction holds that such provisions are not separable from all other provisions of this Operating Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 11.8 Penalties. Any penalties to be levied under this Operating Agreement shall be established in accordance with the ISO Tariff after consultation between the UDC and the ISO, and approval by the FERC, and shall be set out in Schedule 15. No penalties or sanctions may be imposed under this Operating Agreement unless a Schedule providing for such penalties or sanctions has first been filed with and made effective by FERC. Nothing in this Operating Agreement, with the exception of the provisions relating to ADR, shall be construed as waiving the rights of the UDC to oppose or protest any penalty proposed by the ISO to the FERC or the specific imposition by the ISO of any FERC-approved penalty on the UDC.
- **11.9 Section Headings:** Section headings provided in this Operating Agreement are for ease of reading and are not meant to interpret the text in each Section.
- 11.10 Amendments. This Operating Agreement and the Schedules attached hereto may be amended from time to time by the mutual agreement of the Parties in writing. Amendments that require FERC approval shall not take effect until FERC has accepted such amendments for filing and made them effective. If the amendment does not require FERC approval, the amendment will be filed with FERC for information.
- **11.11 Counterparts.** This Operating Agreement may be executed in one or more counterparts at different times, each of which shall be regarded as an original and all of which, taken together, shall constitute one and the same Operating Agreement.

IN WITNESS WHEREOF, the Parties hereto have caused this Operating Agreement to be duly executed on behalf of each by and through their authorized representatives as of the date hereinabove written.

California Independent System Operator Corporation

Bv:

| me of UDC] | | | |
|------------|-------------|-------------|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | nme of UDC] | nme of UDC] | nme of UDC] |

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 1

FACILITIES UNDER ISO CONTROL

The UDC will supply a list of UDC facilities that are placed under the operational control of the ISO in Schedule 1.

There are no UDC facilities to be listed here at present.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 2

OPERATIONAL CONTACT

| ISO: Transmission Dispatcher (Folsom): Transmission Dispatcher (Alhambra): Shift Supervisor: Manager of Dispatch and Security Coordination: City/State/Zip Code | | | |
|---|---------------------|-----------|---|
| Other ISO Dispatch Oper | ations Phones: | | |
| Generation Dispa (Folsom) | itcher | | |
| Generation Dispa (Alhambra) | itcher | | |
| Security Coordin | ator | | |
| UDC: Name of Primary Representative: | | | |
| Name of Alternative Representative: | | | |
| Title: | | | _ |
| | Operations Shift St | upervisor | |
| Address: | | | _ |
| City/State/Zip Code | | | _ |
| Email address: | | | |
| Phone: | | | |
| Fax: | | | |

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 3

DELEGATED OPERATIONAL RESPONSIBILITIES

Currently the ISO has not delegated any operational responsibilities to the UDC in accordance with Section 4.1.2 of the ISO Tariff. If such a delegation occurs, they will be identified in this Schedule 3.

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 4

MAINTENANCE COORDINATION

By October 1st of each year, the UDC will exchange with the ISO a provisional planned outage program for all lines and equipment in Schedule 1. That document will be updated quarterly or as changes occur to the proposed schedule.

The ISO will approve all outages on equipment and lines transferred to ISO operational control.

Applications for scheduled work will be submitted to the ISO by _______'s Grid Operations group via means to be agreed to by both Parties. The UDC documents will record the details for all work and become the data base for reporting and recording outage information.

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 5

SYSTEM EMERGENCIES

The ISO will notify the UDC's operational contact (Operations Shift Supervisor - Grid Control), as identified in Schedule 2, of the emergency, including information regarding the cause, nature, extent, and potential duration of the emergency. The Operations Shift Supervisor will add any relevant data and will notify Distribution Operations. Distribution Operations will make the appropriate notifications within the UDC organization. The Operations Shift Supervisor and Distribution Control Shift Supervisor will then take such actions as are appropriate for the emergency.

The UDC will make requests for information from the ISO regarding emergencies through the Operations Shift Supervisor, or the UDC Communication Coordinator may coordinate public information with the ISO Communication Coordinator.

The UDC is required to estimate service restoration by geographic areas, and will use its call center and the media to communicate with customers during service interruptions. The UDC is also required to communicate the same information to appropriate state and local governmental entities. For transmission system caused outages the Operations Shift Supervisor will notify Distribution Operations Control Center of any information related to the outage such as cause, nature, extent, potential duration and customers affected.

Distribution Control and Grid Control Center logs, Electric Switching Orders and Energy Management System temporal data base will be used in preparation of outage reviews. These documents are defined as the chronological record of the operation of the activities which occur with the portion of the electrical system assigned to that control center. The log shall contain all pertinent information, including orders received and transmitted, relay operations, messages, clearances, accidents, trouble reports, daily switching program, etc.

The UDC will retain records in accordance with its Corporate Standard Practice for six years.

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 6

UNDERFREQUENCY LOAD SHEDDING

The objective of the Underfrequency Load Shedding (UFLS) program is to provide security and protection to the interconnected bulk power network by arresting frequency decay during periods of insufficient resources

This plan establishes Underfrequency Load Shedding objectives consistent with the load shedding policies of the Western Systems Coordinating Council, the North American Electric Reliability Council and the UDC. The UDC's load shedding program will be in accordance with the WSCC Off-nominal Frequency Report requirements.

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 7

OTHER AUTOMATIC LOAD SHEDDING

In addition to underfrequency relay load reduction, any undervoltage relay protection that is utilized in the UDC will be identified in the Attachment to this Schedule 7.

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 8

MANUAL LOAD SHEDDING

[Note: Schedule 8 will detail the criteria governing the implementation of manual Load Shedding and/or interruptible Loads, and will describe the UDC's means of effecting Load Shedding and the estimated associated MW values of various UDC Loads to be shed. For Load curtailment programs Schedule 8 will also contain the UDC's capabilities until October 1 and thereafter annually.]

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 8A

ROTATING LOAD CURTAILMENT PROCEDURES

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 8B

INTERRUPTIBLE LOAD

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 9

ELECTRICAL EMERGENCY PLAN

The ISO Specifications will outline the basic criteria for the development, coordination, and implementation of the UDC EEP and the requirements for coordination with the ISO EEP. Schedule 9 will include the UDC EEP as coordinated with the ISO EEP.

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 10

LOAD RESTORATION

The UDC will follow the procedures set forth below in this Schedule 10 in promoting orderly, coordinated restoration of electric systems after a major system disturbance has occurred which resulted in load shedding by frequency relays in California.

- 1. Immediately after load shedding by frequency relay has occurred in the UDC, the UDC will remain in contact with their respective Participating Transmission Owner (PTO) Area Control Center (ACC) until normal frequency has been restored throughout the ISO Control Area or the ISO Shift Supervisor has concluded that such full-time communications can be terminated. Emergency communications over the California ACC Hot-line will be under the direction of the ISO Shift Supervisor and the senior dispatcher present at the affected PTO ACC(s).
- 2. Manual load restoration will not normally be initiated until the California ACC Hot Line is attended. No load is to be manually restored unless directed by the ISO after the frequency has recovered and there is indication that the frequency can be maintained. The UDC will await direction from their respective PTO ACC who will be in contact with the ISO Shift Supervisor. The ISO Shift Supervisor will determine whether adequate generation resources are available on line to support the load to be restored.
- 3. Any UDC automatic load restoration will be consistent with the WSCC Coordinated Off-Nominal Frequency Load Shedding and Restoration Plan.
- 4. If the ISO cannot meet the WSCC and NERC Control Area Disturbance Control Standard or the Control Performance Standard post disturbance, no manual load restoration will be permitted. If the frequency is such that automatic load restoration occurs under these conditions, the UDC(s) which has restored load automatically will manually shed an equivalent amount of load to offset the load which was automatically restored.
- 5. Restoration of ties and off-site power supply to nuclear generating facilities should be given top priority. Manual load restoration will be deferred during periods of tie restoration. The UDC should be equipped and prepared to drop load manually when necessary to allow frequency recovery sufficient to re-establish ISO intra-area ties and ties between the ISO Control Area and outside systems. Where manual load shedding is required, the ISO shall make reasonable efforts to allocate the load shedding requirement equitably among the UDCs where load shedding will be beneficial.
- 6. The UDC will use its existing plans and priorities to restore load within the parameters given by the ISO, giving the appropriate priority to essential services such as military, public safety agencies, water treatment plants, sewage treatment plants, etc.

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 11

RECORDS, INFORMATION, REPORTS

The ISO and UDC will jointly develop any necessary forms and procedures for collection, study and transmittal of system data, information, reports, and forecasts.

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 12

INTERCONNECTION OPERATION STANDARDS

The ISO and UDC shall jointly maintain stable operating parameters and control power and reactive flow in accordance with the ISO Tariff and the following Interconnection Operation Standards.

UDC Responsibilities

- 1.0 The UDC shall operate its facilities at each point of interconnection with the ISO Controlled Grid in such manner as to avoid any material or adverse impact on the ISO Controlled Grid. In accordance with this performance goal, the UDC shall:
- 1.1 Operate its facilities at each point of interconnection with the ISO Controlled Grid within established operating parameters including normal ratings, emergency ratings, voltage limits, and balance of load between electrical phases.
- 1.2 Maintain primary and backup protective systems such that faults on UDC facilities will be cleared with minimal impact on the ISO Controlled Grid.
- 1.3 Maintain load power factor at each point of interconnection with the ISO Controlled Grid as close as possible to unity power factor and pursuant to Section 2.5.3.4 of the ISO Tariff.

ISO Responsibilities

- 2.0 The ISO shall operate the ISO Controlled Grid at each point of interconnection with the UDC in such manner as to avoid any material or adverse impact on the UDC facilities. In accordance with this performance goal, the ISO shall:
- 2.1 Participate with the UDC and TO in the development of joint power quality performance standards and jointly maintain compliance with such standards.
- 2.2 Observe UDC grid voltage limits specified in Attachment 7 including requirements for reduced voltage on ISO Controlled Grid facilities which apply during heavy fog (or other unusual operating conditions) as needed to minimize the risk of insulator flashover.
- 2.3 Approve transmission owner maintenance requests in a timely manner, and shall not unreasonably withhold approval of TO requests for authorization to perform energized insulator washing work or to take planned Outages needed to replace or insul-grease insulators.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1043

- 2.4 Support UDC investigation of power quality incidents, and provide related data to the UDC in a timely manner.
- 2.5 Support installation of apparatus on the ISO Controlled Grid to improve power quality, and take all reasonable measures to investigate and mitigate power quality concerns caused by actions or events in neighboring systems or control areas.
- 2.6 Maintain load power factor at each UDC Interconnection as close as possible to unity power factor and pursuant to Section 2.5.3.4 of the ISO Tariff.

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 13

CRITICAL PROTECTION SYSTEMS

Distribution protective relay schemes affecting the ISO Controlled Grid are those associated with transformers that would trip transmission breakers and/or busses at UDC Interconnection point when activated. These would include any of the following:

- 1. High Side Overcurrent Relays
- 2. Differential Overcurrent Relays
- 3. Sudden Pressure Relays
- 4. Low Oil Relays
- 5. Neutral Ground Overcurrent Relays
- 6. On fuse protected transformers, it would be the high-side fuses.

The information to be contained in this Schedule may be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 14

RIGHTS OF ACCESS TO FACILITIES

- 14.1 Equipment Installation. In order to give effect to this Operating Agreement, a Party that requires to use particular equipment (the equipment owner) may require installation of such equipment on property owned by the other Party (the property owner), provided that the equipment is necessary to meet the equipment owner's service obligations and that the equipment shall not have a negative impact on the reliability of the service provided, nor prevent the property owner from performing its own obligations or exercising its rights under this Operating Agreement.
- 14.1.1 Free Access. The property owner shall grant to the equipment owner free of charge reasonable installation rights and rights of access to accommodate equipment inspection, maintenance, repair, upgrading, or removal for the purposes of this Operating Agreement, subject to the property owner's reasonable safety, operational, and future expansion needs.
- 14.1.2 Notice. The equipment owner shall provide reasonable notice to the property owner when requesting access for site assessment, equipment installation, or other relevant purposes. Such access shall not be provided unless the parties mutually agree to the date, time, and purpose of each access. Agreement on the terms of the access shall not be unreasonably withheld or delayed.
- 14.1.3 Removal of Installed Equipment. Following reasonable notice, the equipment owner shall be required, at its own expense, to remove or relocate equipment, at the request of the property owner, provided that the equipment owner shall not be required to do so if it would have a negative impact on the reliability of the service provided, or be prevented from performing its own obligations or exercising its rights under this Operating Agreement.
- 14.1.4 Costs. The equipment owner shall repair at its own expense any property damage it causes in exercising its rights and shall reimburse the property owner for any other reasonable costs that it may be required to incur to accommodate the equipment owner's exercise of its rights under this Section 14.1.
- 14.2 Rights to Assets. The Parties shall not interfere with each other's assets, without prior written agreement.
- 14.3 Inspection of Facilities. In order to meet their respective obligations under this Operating Agreement, each Party may view or inspect facilities owned by the other Party. Provided that reasonable notice is given, a Party shall not unreasonably deny access to relevant facilities for viewing or inspection by the requesting Party.
- 14.4 Access During Emergencies. Either Party shall have rights of access, without prior notice, to the other Party's equipment as necessary during times of a System Emergency.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 15

PENALTIES AND SANCTIONS

[Intentionally left blank, initially, in accordance with Section 11.7]

The information to be contained in this Schedule will be filed when complete following current revisions and development and may thereafter be subject to additional filing due to subsequent revisions as these may be required from time to time.

Issued by: Charles F. Robinson, Vice President and General Counsel

ISO TARIFF APPENDIX Q

Participating Load Agreement

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR

AND

[PARTICIPATING LOAD]

PARTICIPATING LOAD AGREEMENT

Issued by: Charles F. Robinson, Vice President and General Counsel

PARTICIPATING LOAD AGREEMENT (PLA)

| THIS AGF | REEMENT is dated this day of, and is entered into, by and between: |
|----------|--|
| (1) | [Full legal name] , having its registered and principal place of business located at [legal address] (the "Participating Load"); |
| and | |
| (2) | California Independent System Operator Corporation, a California nonprofit public benefit corporation having a principal executive office located at such place in the State of California as the ISO Governing Board may from time to time designate, initially 151 Blue Ravine Road, Folsom, California 95630 (the "ISO"). |

The Participating Load and the ISO are hereinafter referred to as the "Parties".

Whereas:

- A. The ISO Tariff provides that the ISO shall not schedule Ancillary Services from a Load interconnected to the ISO Controlled Grid, or to the Distribution System of a Participating TO or of a UDC otherwise than through a Scheduling Coordinator.
- **B.** The ISO Tariff further provides that Curtailable Demand or Dispatchable Load services shall be provided by Participating Loads.
- C. The Participating Load desires to provide Curtailable Demand or Dispatchable Load services, intends to submit Adjustment Bids, Supplemental Energy bids or Ancillary Services bids, or self-provided schedules to the ISO through a Scheduling Coordinator and, therefore, represents to the ISO that it will comply with the applicable provisions of the ISO Tariff.
- **D.** The Parties are entering into this Agreement in order to establish the terms and conditions on which the ISO and the Participating Load will discharge their respective duties and responsibilities under the ISO Tariff.

NOW THEREFORE, in consideration of the mutual covenants set forth herein, **THE PARTIES AGREE** as follows:

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE I DEFINITIONS AND INTERPRETATION

- **1.1 Master Definitions Supplement.** All terms and expressions used in this Agreement shall have the same meaning as those contained in the Master Definitions Supplement to the ISO Tariff.
- **1.2 Rules of Interpretation.** The following rules of interpretation and conventions shall apply to this Agreement:
- (a) if there is any inconsistency between this Agreement and the ISO Tariff, the ISO Tariff will prevail to the extent of the inconsistency;
- (b) the singular shall include the plural and vice versa;
- (c) the masculine shall include the feminine and neutral and vice versa;
- (d) "includes" or "including" shall mean "including without limitation";
- (e) references to a Section, Article or Schedule shall mean a Section, Article or a Schedule of this Agreement, as the case may be, unless the context otherwise requires;
- (f) a reference to a given agreement or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made;
- (g) unless the context otherwise requires, references to any law shall be deemed references to such law as it may be amended, replaced or restated from time to time;
- (h) unless the context otherwise requires, any reference to a "person" includes any individual, partnership, firm, company, corporation, joint venture, trust, association, organization or other entity, in each case whether or not having separate legal personality;
- (i) unless the context otherwise requires, any reference to a Party includes a reference to its permitted successors and assigns;
- (j) any reference to a day, week, month or year is to a calendar day, week, month or year; and
- (k) the captions and headings in this Agreement are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE II ACKNOWLEDGEMENTS OF PARTICIPATING LOAD AND ISO

- 2.1 ISO Responsibility. The Parties acknowledge that the ISO is responsible for the efficient use and reliable operation of the ISO Controlled Grid consistent with achievement of planning and operating reserve criteria no less stringent than those established by the Western Systems Coordinating Council and the North American Electric Reliability Council and further acknowledge that the ISO may not be able to satisfy fully these responsibilities if the Participating Load fails to fully comply with all of its obligations under this Agreement and the ISO Tariff.
- 2.2 Scope of Application to Parties. The Participating Load and ISO acknowledge that all Loads which desire to submit Adjustment Bids, Supplemental Energy bids, or Ancillary Services bids or self-provided schedules to the ISO through a Scheduling Coordinator must be included in Schedule 1 to this Agreement. The Participating Load warrants that it owns, operates, or has sufficient contractual entitlement to provide Curtailable Demand and Dispatchable Load services from such Loads in accordance with the ISO Tariff.

ARTICLE III TERM AND TERMINATION

3.1 Effective Date. This Agreement shall be effective as of the later of the date it is executed by the Parties or the date accepted for filing and made effective by FERC, and shall remain in full force and effect until terminated pursuant to Section 3.2 of this Agreement.

3.2 Termination

- 3.2.1 Termination by ISO. Subject to Section 5.2, the ISO may terminate this Agreement by giving written notice of termination in the event that the Participating Load commits any material default under this Agreement and/or the ISO Tariff which, if capable of being remedied, is not remedied within thirty (30) days after the ISO has given, to the Participating Load, written notice of the default, unless excused by reason of Uncontrollable Forces in accordance with Article X of this Agreement. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within thirty (30) days of receipt of such request. This Agreement shall terminate upon acceptance by FERC of such a notice of termination.
- 3.2.2 Termination by Participating Load. In the event that the Participating Load no longer wishes to submit Adjustment Bids, Supplemental Energy bids, or Ancillary Service bids or self-provided schedules over the ISO Controlled Grid, it may terminate this Agreement, on giving the ISO ninety (90) days written notice, provided, however, that in accordance with Section 4.4, the Participating Load may modify Schedule 1 to eliminate Load which it no longer provides for and such modification shall be effective upon receipt by the ISO. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within thirty (30) days of receipt of such request. This Agreement shall terminate upon acceptance by FERC of such a notice of termination.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE IV GENERAL TERMS AND CONDITIONS

- 4.1 Technical Characteristics.
- 4.1.1 Curtailable Demand. As required by Section 2.5.6.1 of the ISO Tariff, the Participating Load shall provide the ISO with all technical and operational information requested in Schedule 1 for each Curtailable Demand that it owns, operates, or has a contractual entitlement to. For those Loads designated by the Participating Load as providing Curtailable Demand, Schedule 1 requires the Participating Load to indicate in Schedule 1 whether the Load can be scheduled or bid as Non-Spinning Reserve or Replacement Reserve. Pursuant to Section 2.5.25 of the ISO Tariff, the ISO may verify, inspect and test the capacity and operating characteristics provided in Schedule 1 for Curtailable Demands.
- **4.1.2 Dispatchable Load**. The Participating Load shall provide the ISO that information required in Schedule 1 which is relevant to the Dispatchable Load that it owns, operates, or has a contractual entitlement to for the provision of Adjustment Bids.
- 4.2 Metering and Communication.
- **4.2.1 Curtailable Demand**. Pursuant to Sections 2.5.6.2 and 2.5.6.3 of the ISO Tariff, Curtailable Demand that is scheduled or bid as Non-Spinning Reserve or Replacement Reserve is required to comply with the ISO's communication and metering requirements.
- **4.2.2 Dispatchable Load**. The Participating Load shall schedule Dispatchable Load pursuant to Section 2.2.11.1 of the ISO Tariff. Dispatchable Load shall comply with the ISO's communication and metering requirements.
- 4.3 UDC Interruptible Load Programs. Due to the ISO's reliance on interruptible Loads to relieve System Emergencies and its contractual relationship with each UDC, the ISO will not accept, and the Participating Load shall not submit Adjustment Bids, Supplemental Energy bids, or Ancillary Services bids or self-provided Ancillary Service Schedules from interruptible Loads which are subject to curtailment criteria established under existing retail tariffs, except under such conditions as may be specified in the ISO Tariff.
- Notification of Changes. Sixty (60) days prior to changing any technical information in Schedule 1, the Participating Load shall notify the ISO of the proposed change(s). Pursuant to Section 2.5.25 of the ISO Tariff, the ISO may verify, inspect and test the capacity and operating characteristics provided in the revised Schedule 1. The ISO shall post on the ISO Home Page a schedule showing, for at least one year in advance: (i) the proposed dates on which the ISO's Master File will be updated; (ii) the dates on which the information contained in the revised Master File will become effective; and (iii) the deadlines by which changed technical information must be submitted to the ISO in order to be tested and included in the next scheduled update of the ISO's Master File. Unless the Load fails to test at the values in the proposed change(s), the Participating Load's proposed change(s) will become effective upon the effective date for the next scheduled update of the Master File, provided that the Participating Load submits the changed information by the applicable deadline and is tested by the deadline. Subject to such notification this Agreement shall not apply to any Loads identified in Schedule 1 which the Participating Load no longer owns or no longer has a contractual entitlement to.
- **4.5 Agreement Subject to ISO Tariff.** The Parties will comply with all applicable provisions of the ISO Tariff, including Sections 2.3.2, 2.5 and 10. This Agreement shall be subject to the ISO Tariff, which shall be deemed to be incorporated herein.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 4.6 Obligations Relating to Ancillary Services
- **4.6.1 Submission of Bids and Self-provided Schedules**. When the Scheduling Coordinator on behalf of the Participating Load submits a bid or self-provided schedule for Ancillary Services, the Participating Load will, by the operation of this Section 4.6.1, warrant to the ISO that it has the capability to provide that service in accordance with the ISO Tariff and that it will comply with ISO Dispatch instructions for the provision of the service in accordance with the ISO Tariff.
- **4.6.2 Certification**. The Participating Load shall not use a Scheduling Coordinator to submit a bid for the provision of an Ancillary Service or submit a schedule for the self provision of an Ancillary Service unless the Scheduling Coordinator serving that Participating Load is in possession of a current Ancillary Service certificate pursuant to Sections 2.5.6 and 2.5.24 of the ISO Tariff.
- **4.7 Obligations relating to Major Incidents.** The Participating Load shall promptly provide such information as the ISO may reasonably require in relation to the ISO's investigations of operating situations or events, or for the ISO's reporting to the authorities such as the FERC, California Public Utilities Commission, Western Systems Coordinating Council, or North American Electric Reliability Council.

ARTICLE V PENALTIES AND SANCTIONS

- 5.1 Penalties. If the Participating Load fails to comply with any provisions of this Agreement, the ISO shall be entitled to impose penalties and sanctions on the Participating Load, including the penalties set forth in Section 2.5.26 of the ISO Tariff. No penalties or sanctions may be imposed under this Agreement unless a Schedule providing for such penalties or sanctions has first been filed with and made effective by FERC. Nothing in this Agreement, with the exception of the provisions relating to ADR, shall be construed as waiving the rights of the Participating Load to oppose or protest any penalty proposed by the ISO to the FERC or the specific imposition by the ISO of any FERC-approved penalty on the Participating Load.
- **5.2 Corrective Measures.** If the Participating Load fails to meet or maintain the requirements set forth in this Agreement and/or the ISO Tariff, the ISO shall be permitted to take any of the measures, contained or referenced in the ISO Tariff, which the ISO deems to be necessary to correct the situation.

ARTICLE VI COSTS

Operating and Maintenance Costs. The Participating Load shall be responsible for all its costs incurred in meeting its obligations under this Agreement for the Load identified in Schedule 1.

ARTICLE VII DISPUTE RESOLUTION

7.1 **Dispute Resolution.** The Parties shall make reasonable efforts to settle all disputes arising out of or in connection with this Agreement. In the event any dispute is not settled, the Parties shall adhere to the ISO ADR Procedures set forth in Section 13 of the ISO Tariff, which is incorporated by reference, except that any reference in Section 13 of the ISO Tariff to Market Participants shall

Issued by: Charles F. Robinson, Vice President and General Counsel

be read as a reference to the Participating Load and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE VIII REPRESENTATIONS AND WARRANTIES

- **8.1** Representation and Warranties. Each Party represents and warrants that the execution, delivery and performance of this Agreement by it has been duly authorized by all necessary corporate and/or governmental actions, to the extent authorized by law.
- **8.2 Necessary Approvals.** The Participating Load represents that all necessary leases, approvals, permits, licenses, easements, rights of way or access to install, own and/or operate its Load have been or will be obtained by the Participating Load prior to the effective date of this Agreement.

ARTICLE IX LIABILITY

9.1 Liability. The provisions of Section 14 of the ISO Tariff will apply to liability arising under this Agreement, except that all references in Section 14 of the ISO Tariff to Market Participants shall be read as references to the Participating Load and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE X UNCONTROLLABLE FORCES

10.1 Uncontrollable Forces Tariff Provisions. Section 15 of the ISO Tariff shall be incorporated by reference into this Agreement except that all references in Section 15 of the ISO Tariff to Market Participants shall be read as a reference to the Participating Load and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE XI MISCELLANEOUS

- 11.1 Assignments. Either Party may assign or transfer any or all of its rights and/or obligations under this Agreement with the other Party's prior written consent in accordance with Section 17 of the ISO Tariff. Such consent shall not be unreasonably withheld. Any such transfer or assignment shall be conditioned upon the successor in interest accepting the rights and/or obligations under this Agreement as if said successor in interest was an original Party to this Agreement.
- **11.2 Notices.** Any notice, demand, or request which may be given to or made upon either Party regarding this Agreement shall be made in accordance with Section 20.1 of the ISO Tariff. A Party must update the information in Schedule 3 of this Agreement as information changes. Such changes shall not constitute an amendment to this Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **11.3 Waivers.** Any waivers at any time by either Party of its rights with respect to any default under this Agreement, or with respect to any other matter arising in connection with this Agreement, shall not constitute or be deemed a waiver with respect to any subsequent default or other matter arising in connection with this Agreement. Any delay, short of the statutory period of limitations, in asserting or enforcing any right under this Agreement shall not constitute or be deemed a waiver of such right.
- 11.4 Governing Law and Forum. This Agreement shall be deemed to be a contract made under, and for all purposes shall be governed by and construed in accordance with, the laws of the State of California, except its conflict of law provisions. The Parties irrevocably consent that any legal action or proceeding arising under or relating to this Agreement to which the ISO ADR Procedures do not apply, shall be brought in any of the following forums, as appropriate: any court of the State of California, any federal court of the United States of America located in the State of California, or, where subject to its jurisdiction, before the Federal Energy Regulatory Commission.
- 11.5 Consistency with Federal Laws and Regulations. This Agreement shall incorporate by reference Section 20.8 of the ISO Tariff as if the references to the ISO Tariff were referring to this Agreement.
- **11.6 Merger.** This Agreement constitutes the complete and final agreement of the Parties with respect to the subject matter hereto and supersedes all prior agreements, whether written or oral, with respect to such subject matter.
- 11.7 Severability. If any term, covenant, or condition of this Agreement or the application or effect of any such term, covenant, or condition is held invalid as to any person, entity, or circumstance, or is determined to be unjust, unreasonable, unlawful, imprudent, or otherwise not in the public interest by any court or government agency of competent jurisdiction, then such term, covenant, or condition shall remain in force and effect to the maximum extent permitted by law, and all other terms, covenants, and conditions of this Agreement and their application shall not be affected thereby, but shall remain in force and effect and the Parties shall be relieved of their obligations only to the extent necessary to eliminate such regulatory or other determination unless a court or governmental agency of competent jurisdiction holds that such provisions are not separable from all other provisions of this Agreement.
- **11.8 Section Headings:** Section headings provided in this Agreement are for ease of reading and are not meant to interpret the text in each Section.
- 11.9 Amendments. This Agreement and the Schedules attached hereto may be amended from time to time by the mutual agreement of the Parties in writing. Amendments that require FERC approval shall not take effect until FERC has accepted such amendments for filing and made them effective. If the amendment does not require FERC approval, the amendment will be filed with FERC for information. Nothing contained herein shall be construed as affecting in any way the right of the ISO to unilaterally make application to the Federal Energy Regulatory Commission for a change in the rates, terms and conditions under section 205 of the Federal Power Act and pursuant to the Commission's Rules and Regulations promulgated thereunder.
- **11.10 Counterparts.** This Agreement may be executed in one or more counterparts at different times, each of which shall be regarded as an original and all of which, taken together, shall constitute one and the same Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1056

IN WITNESS WHEREOF, the Parties hereto have caused this Agreement to be duly executed on behalf of each by and through their authorized representatives as of the date herein above written.

California Independent System Operator Corporation

| Ву: | | |
|---------|-------------|---|
| Name: | | |
| | | _ |
| | | |
| | | |
| | | |
| Partici | pating Load | |
| Ву: | | |
| Name: | | |
| | | |
| Date: | | |

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 1 Technical Characteristics of Individual or Aggregated Loads Participating under Participating Load Agreement

| Name of ALMDS Facility or Individual Load | ISO Resource ID | Present Scheduling Point (i.e. Take Out Point, Load Group, or Demand Zone) | Capacity Available ¹ (MW) | Minimum Operating Level ¹ (MW) | Maximum Operating Level ^{1,2} (MW) | Decremental Ramp Rate ^{1,2} (MW/min) | Ancillary Service Provider (Yes or No) | Participant in UDC Interruptible Program (Yes or No) | Limitations ³ (Yes or No) |
|---|--------------------|---|--|--|--|--|---|--|--------------------------------------|
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Issued by: Charles F. Robinson, Vice President and General Counsel

¹ Current effective values for purposes of scheduling Energy and bidding to provide Energy and/or Ancillary Services in ISO markets may differ from those set forth in this Schedule 1, depending on the results of ISO performance testing pursuant to Sections 2.5.24 and 2.5.25 of the ISO Tariff and Section 9 of the ISO Ancillary Services Requirements Protocol.

² These values are subject to certification by the ISO in accordance with Section 4.6.2 of the Participating Load Agreement.
³ If "Yes," limitations should be specified in the Participating Load's implementation plan.

SCHEDULE 2

ISO IMPOSED PENALTIES AND SANCTIONS [Section 5.1]

[TO BE INSERTED UPON FERC APPROVAL]

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 3

NOTICES (Section 10.2)

| Participating Load |
|---------------------------------|
| Name of Primary Representative: |
| Title: |
| Address: |
| City/State/Zip Code |
| Email Address: |
| Phone: |
| Fax No: |
| Name of Alternative |
| Representative: |
| Title: |
| Address: |
| City/State/Zip Code |
| Email Address: |
| Phone: |
| Fax No: |

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1060

| \sim | _ |
|--------|---|
| | |
| | |

| Name of Primary Representative: | |
|-------------------------------------|--|
| Title: | |
| Address: | |
| City/State/Zip Code | |
| Email Address: | |
| Phone: | |
| Fax No: | |
| Name of Alternative Representative: | |
| Title: | |
| Address: | |
| City/State/Zip Code | |
| Email Address: | |
| Phone: | |
| Fax No: | |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: April 12, 2005 Effective: April 12, 2005

ISO TARIFF APPENDIX R

Dynamic Scheduling Agreement for Scheduling Coordinators

Issued by: Charles F. Robinson, Vice President and General Counsel

Effective: April 12, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR

AND

[SCHEDULING COORDINATOR]

DYNAMIC SCHEDULING AGREEMENT FOR SCHEDULING COORDINATORS

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 12, 2005

DYNAMIC SCHEDULING AGREEMENT FOR SCHEDULING COORDINATORS

| THIS AGR | ELEMEN I is dated this day of, and is entered into, by and between |
|----------|--|
| (1) | [Full Legal Name] having its registered and principal place of business located at [Address] (the "Scheduling Coordinator"); |
| and | |
| (2) | California Independent System Operator Corporation, a California nonprofit public benefit corporation having a principal executive office located at such place in the State of California as the ISO Governing Board may from time to time designate, initially 151 Blue Ravine Road, Folsom, California 95630 (the "ISO"). |

The Scheduling Coordinator and the ISO are hereinafter referred to as the "Parties".

Whereas:

- **A.** The ISO Tariff provides that a Scheduling Coordinator may submit dynamic schedules to the ISO from System Resources.
- **B.** The Scheduling Coordinator is currently Scheduling Coordinator for a System Resource associated with a power plant(s) interconnected in a Control Area other than the ISO Control Area (the "Host Control Area").
- C. The Scheduling Coordinator wishes to implement and operate a dynamic functionality that allows scheduling of Energy, Supplemental Energy, and Energy associated with Spinning Reserve and Non-Spinning Reserve dynamically from a System Resource into the ISO Control Area from the Host Control Area and, therefore, wishes to undertake to the ISO that it will comply with the applicable provisions of the ISO Tariff.
- **D.** The Parties are entering into this Agreement in order to establish the terms and conditions on which the ISO and the Scheduling Coordinator will discharge their respective duties and responsibilities under the ISO Tariff.

NOW THEREFORE, in consideration of the mutual covenants set forth herein, **THE PARTIES AGREE** as follows:

ARTICLE I DEFINITIONS AND INTERPRETATION

- **1.1 Master Definitions Supplement.** All terms and expressions used in this Agreement shall have the same meaning as those contained in the Master Definitions Supplement to the ISO Tariff.
- **1.2 Rules of Interpretation.** The following rules of interpretation and conventions shall apply to this Agreement:
 - (a) if there is any inconsistency between this Agreement and the ISO Tariff, the ISO Tariff will prevail to the extent of the inconsistency:
 - (b) the singular shall include the plural and vice versa;

Issued by: Charles F. Robinson, Vice President and General Counsel

- (c) the masculine shall include the feminine and neutral and vice versa;
- (d) "includes" or "including" shall mean "including without limitation";
- (e) references to a Section, Article or Schedule shall mean a Section, Article or a Schedule of this Agreement, as the case may be, unless the context otherwise requires;
- (f) a reference to a given agreement or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made;
- (g) unless the context otherwise requires, references to any law shall be deemed references to such law as it may be amended, replaced or restated from time to time;
- (h) unless the context otherwise requires, any reference to a "person" includes any individual, partnership, firm, company, corporation, joint venture, trust, association, organization or other entity, in each case whether or not having separate legal personality;
- (i) unless the context otherwise requires, any reference to a Party includes a reference to its permitted successors and assigns;
- (j) any reference to a day, week, month or year is to a calendar day, week, month or year;and
- (n) the captions and headings in this Agreement are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Agreement.

ARTICLE II ACKNOWLEDGEMENTS OF SCHEDULING COORDINATOR AND ISO

2.1 ISO Responsibility. The Parties acknowledge that the ISO is responsible for the efficient use and reliable operation of the ISO Controlled Grid consistent with achievement of planning and operating reserve criteria no less stringent than those established by the Western Electricity Coordinating Council and the North American Electric Reliability Council and further acknowledges that the ISO may not be able to satisfy fully these responsibilities if the Scheduling Coordinator fails to fully comply with all of its obligations under this Agreement and the ISO Tariff.

ARTICLE III TERM AND TERMINATION

3.1 Effective Date. This Agreement shall be effective as of the date set forth above, unless accepted for filing and made effective by FERC on some other date, if FERC filing is required, and shall remain in full force and effect until terminated pursuant to Section 3.2 of this Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

3.2 Termination

- 3.2.1 **Termination by ISO.** Subject to Section 3.2.2, the ISO may terminate this Agreement by giving written notice of termination in the event that the ISO's agreement with the Host Control Area has terminated or the Scheduling Coordinator commits any material default under this Agreement and/or the ISO Tariff which, if capable of being remedied, is not remedied within thirty (30) days after the ISO has given, to the Scheduling Coordinator, written notice of the default, unless excused by reason of Uncontrollable Forces in accordance with Article X of this Agreement. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC, if this Agreement has been filed with FERC, or must otherwise comply with the requirements of FERC Order No. 2001 and related FERC orders. The filing of the notice of termination by the ISO will be considered timely if: (1) the filing of the notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within sixty (60) days after issuance of the notice of default. This Agreement shall terminate upon acceptance by FERC of such a notice of termination, if filed with FERC, or thirty (30) days after the date of the ISO's notice of default, if terminated in accordance with the requirements of FERC Order No. 2001 and related FERC orders.
- 3.2.2 Limitation on ISO Termination. Notwithstanding the provisions of Section 3.2.1, in the event of noncompliance with the provisions of the ISO Dynamic Scheduling Protocol, the ISO shall have the right to terminate this Agreement after three (3) instances of noncompliance. In the event that the ISO determines that the Scheduling Coordinator has failed to comply with the ISO Dynamic Scheduling Protocol, the ISO will provide written notice to that effect to the Scheduling Coordinator, and the Scheduling Coordinator shall have seven (7) days to correct the noncompliant condition(s). If the ISO determines that Scheduling Coordinator has not corrected the non-compliant condition(s) within seven (7) days after the third notice of noncompliance, the ISO may, by further written notice to the Scheduling Coordinator, terminate this Agreement and the existing functionality and arrangements described herein pursuant to Section 3.2.1, but without providing for the additional thirty (30)-day cure period otherwise provided in Section 3.2.1.
- 3.2.3 Termination by Scheduling Coordinator. In the event that the Scheduling Coordinator no longer wishes to submit dynamic schedules to the ISO, it may terminate this Agreement, on giving the ISO ninety (90) days written notice. With respect to any notice of termination given pursuant to this Section, the ISO must file a timely notice of termination with FERC, if this Agreement has been filed with FERC, or must otherwise comply with the requirements of FERC Order No. 2001 and related FERC orders. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within thirty (30) days of receipt of such request. This Agreement shall terminate upon acceptance by FERC of such a notice of termination, if such notice is required to be filed with FERC, or upon ninety (90) days after the ISO's receipt of the Scheduling Coordinator's notice of default, if terminated in accordance with the requirements of FERC Order No. 2001 and related FERC orders.

ARTICLE IV GENERAL TERMS AND CONDITIONS

4.1 Dynamic Scheduling Requirements and Obligations

4.1.1 The dynamic functionality established under this Agreement shall be implemented and operated in accordance with ISO Tariff Section 2.2.7.6, other applicable provisions of the ISO Tariff, all applicable NERC and WECC policies, requirements, and provisions, and the ISO Dynamic Scheduling Protocol.

Issued by: Charles F. Robinson, Vice President and General Counsel

First Revised Original Sheet No. 1066 Superseding Original Sheet No. 1066

- **4.1.2** The maximum allowable dynamic power transfer (in MW) from the Scheduling Coordinator's System Resource(s) shall be as set forth in Schedule 1 and will be referred to as "Pmax" in all ISO scheduling and control systems.
- **4.1.3** The Scheduling Coordinator warrants that the power plant(s) listed in Schedule 1 is interconnected within the Host Control Area specified in Schedule 1, placing both the plant(s) as well as the associated System Resource under the operational jurisdiction of the Host Control Area.
- **4.1.4** The ISO intertie associated with the System Resource(s) is set forth in Schedule 1. The Scheduling Coordinator may request, and the ISO may agree, at its sole discretion, to change the foregoing ISO intertie association, subject to any limitations set forth in the ISO Dynamic Scheduling Protocol.
- **4.1.5** Unless explicitly agreed otherwise, dynamic functionalities implemented between the ISO and the Scheduling Coordinator may provide only for imports from the System Resource(s) listed in Schedule 1 to the ISO.
- **4.1.6 Identification of System Resources.** The Scheduling Coordinator has identified the System Resources that it represents in Schedule 1.
- **4.1.7 Notification of Changes.** Sixty (60) days prior to changing any technical information in Schedule 1, the Scheduling Coordinator shall notify the ISO of the proposed changes. Pursuant to Section 2.5.25 of the ISO Tariff, the ISO may verify, inspect and test the capacity and operating characteristics provided in the revised Schedule 1. Unless the Scheduling Coordinator fails to test at the values in the proposed change(s), the change will become effective upon the effective date for the next scheduled update of the ISO's Master File, provided the Scheduling Coordinator submits the changed information by the applicable deadline and is tested by the deadline.
- **4.2 Agreement Subject to ISO Tariff.** The Parties will comply with all applicable provisions of the ISO Tariff, including Sections 2.2.7.6 and 2.5.6.2. This Agreement shall be subject to the ISO Tariff, which shall be deemed to be incorporated herein.
- 4.3 Obligations Relating to Ancillary Services
- **4.3.1 Submission of Bids.** When the Scheduling Coordinator submits a bid for Ancillary Services, the Scheduling Coordinator will, by the operation of this Section 4.3.1, warrant to the ISO that it has the capability to provide that service in accordance with the ISO Tariff and that it will comply with ISO Dispatch Instructions for the provision of the service in accordance with the ISO Tariff.

ARTICLE V PENALTIES AND SANCTIONS

5.1 Uninstructed Deviations. Except for operating emergency situations, real time Energy transfers may not vary from the Final Hour Ahead Schedule as adjusted by any Dispatch Instructions by more than the greater of five (5) MW or three percent (3%) of the net dependable capacity (Pmax) of the System Resource, integrated across a ten-minute interval. If such defined performance band is exceeded by any amount in more than five percent (5%) of the ten-minute intervals on three successive days, then such deviations shall constitute one event of non-compliance with the ISO Dynamic Scheduling Protocol pursuant to Section 3.2.2. Deviations from dynamic Energy schedules will also be subject to Uninstructed Deviation Penalties pursuant to Section 11.2.4.1.2 and related provisions of the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1066A

General. The Scheduling Coordinator shall be subject to all penalties made applicable to dynamic imports from System Resources set forth in the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE VI COSTS

Operating and Maintenance Costs. The Scheduling Coordinator shall be responsible for all its costs incurred in connection with dynamic scheduling and compliance by the System Resources identified in Schedule 1 for the purpose of meeting its obligations under this Agreement.

ARTICLE VII DISPUTE RESOLUTION

7.1 Dispute Resolution. The Parties shall make reasonable efforts to settle all disputes arising out of or in connection with this Agreement. In the event any dispute is not settled, the Parties shall adhere to the ISO ADR Procedures set forth in Section 13 of the ISO Tariff, which is incorporated by reference, except that any reference in Section 13 of the ISO Tariff to Market Participants shall be read as a reference to the Scheduling Coordinator and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE VIII REPRESENTATIONS AND WARRANTIES

8.1 Representation and Warranties. Each Party represents and warrants that the execution, delivery and performance of this Agreement by it has been duly authorized by all necessary corporate and/or governmental actions, to the extent authorized by law.

ARTICLE IX LIABILITY

9.1 Liability. The provisions of Section 14 of the ISO Tariff will apply to liability arising under this Agreement, except that all references in Section 14 of the ISO Tariff to Market Participants shall be read as references to the Scheduling Coordinator and references to the ISO Tariff shall be read as references to this Agreement.

ARTICLE X UNCONTROLLABLE FORCES

10.1 Uncontrollable Forces Tariff Provisions. Section 15 of the ISO Tariff shall be incorporated by reference into this Agreement except that all references in Section 15 of the ISO Tariff to Market Participants shall be read as a reference to the Scheduling Coordinator and references to the ISO Tariff shall be read as references to this Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE XI MISCELLANEOUS

- 11.1 Assignments. Either Party may assign or transfer any or all of its rights and/or obligations under this Agreement with the other Party's prior written consent in accordance with Section 17 of the ISO Tariff. Such consent shall not be unreasonably withheld. Any such transfer or assignment shall be conditioned upon the successor in interest accepting the rights and/or obligations under this Agreement as if said successor in interest was an original Party to this Agreement.
- **11.2 Notices.** Any notice, demand or request which may be given to or made upon either Party regarding this Agreement shall be made in accordance with Section 20.1 of the ISO Tariff. A Party must update the information in Schedule 2 of this Agreement as information changes. Such changes shall not constitute an amendment to this Agreement.
- **11.3 Waivers.** Any waivers at any time by either Party of its rights with respect to any default under this Agreement, or with respect to any other matter arising in connection with this Agreement, shall not constitute or be deemed a waiver with respect to any subsequent default or other matter arising in connection with this Agreement. Any delay, short of the statutory period of limitations, in asserting or enforcing any right under this Agreement shall not constitute or be deemed a waiver of such right.
- 11.4 Governing Law and Forum. This Agreement shall be deemed to be a contract made under, and for all purposes shall be governed by and construed in accordance with, the laws of the State of California, except its conflict of law provisions. The Parties irrevocably consents that any legal action or proceeding arising under or relating to this Agreement to which the ISO ADR Procedures do not apply, shall be brought in any of the following forums, as appropriate: any court of the State of California, any federal court of the United States of America located in the State of California, or, where subject to its jurisdiction, before the Federal Energy Regulatory Commission.
- 11.5 Consistency with Federal Laws and Regulations. This Agreement shall incorporate by reference Section 20.8 of the ISO Tariff as if the references to the ISO Tariff were referring to this Agreement.
- **11.6 Merger.** This Agreement constitutes the complete and final agreement of the Parties with respect to the subject matter hereto and supersedes all prior agreements, whether written or oral, with respect to such subject matter.
- 11.7 Severability. If any term, covenant, or condition of this Agreement or the application or effect of any such term, covenant, or condition is held invalid as to any person, entity, or circumstance, or is determined to be unjust, unreasonable, unlawful, imprudent, or otherwise not in the public interest by any court or government agency of competent jurisdiction, then such term, covenant, or condition shall remain in force and effect to the maximum extent permitted by law, and all other terms, covenants, and conditions of this Agreement and their application shall not be affected thereby, but shall remain in force and effect and the Parties shall be relieved of their obligations only to the extent necessary to eliminate such regulatory or other determination unless a court or governmental agency of competent jurisdiction holds that such provisions are not separable from all other provisions of this Agreement.
- **11.8 Section Headings.** Section headings provided in this Agreement are for ease of reading and are not meant to interpret the text in each Section.
- 11.9 Amendments. This Agreement and the Schedules attached hereto may be amended from time to time by the mutual agreement of the Parties in writing. Amendments that require FERC approval shall not take effect until FERC has accepted such amendments for filing and made them effective. If the amendment does not require FERC approval, the amendment will be filed with FERC for information. Nothing contained herein shall be construed as affecting in any way the right of the ISO to unilaterally make application to FERC for a change in the rates, terms and

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1069

- conditions of this Agreement under Section 205 of the FPA and pursuant to FERC's rules and regulations promulgated thereunder.
- **11.10 Counterparts.** This Agreement may be executed in one or more counterparts at different times, each of which shall be regarded as an original and all of which, taken together, shall constitute one and the same Agreement.

IN WITNESS WHEREOF, the Parties hereto have caused this Agreement to be duly executed on behalf of each by and through their authorized representatives as of the date hereinabove written.

California Independent System Operator Corporation

| Ву: | |
|--------|----------------------------|
| Name: | |
| Title: | |
| Date: | |
| [NAME | OF SCHEDULING COORDINATOR] |
| Ву: | |
| Name: | |
| Title: | |
| Date: | |

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 1

SYSTEM RESOURCES AND CONTROL AREA INFORMATION [Sections 4.1.2, 4.1.3, 4.1.5]

| Description of System Resource(s), including Associated Power Plants and Pmax Values: | | | |
|---|--|--|--|
| | | | |
| ISO Intertie: | | | |
| Host Control Area: | | | |
| Intermediate Control Areas: | | | |

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 2

NOTICES [Section 11.2]

| Scheduling Coordinator | | | | |
|--|--|--|--|--|
| Name of Primary Representative: | | | | |
| Title: | | | | |
| Company: | | | | |
| Address: | | | | |
| City/State/Zip Code | | | | |
| Email Address: | | | | |
| Phone: | | | | |
| Fax No: | | | | |
| | | | | |
| | | | | |
| Name of Alternative Representative: | | | | |
| Title: | | | | |
| Company: | | | | |
| Address: | | | | |
| City/State/Zip Code | | | | |
| Email Address: | | | | |
| Phone: | | | | |
| | | | | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Fax No:

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1072

Effective: April 12, 2005

ISO

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 12, 2005

ISO TARIFF APPENDIX S

Dynamic Scheduling Host Control Area Operating Agreement

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR

AND

[CONTROL AREA]

DYNAMIC SCHEDULING HOST CONTROL AREA OPERATING AGREEMENT

Issued by: Charles F. Robinson, Vice President and General Counsel

DYNAMIC SCHEDULING HOST CONTROL AREA OPERATING AGREEMENT

THIS DYNAMIC SCHEDULING HOST CONTROL AREA OPERATING AGREEMENT

| ("AGR | EEMENT") is established this day of, and is accepted by and between: | | | | |
|---|--|--|--|--|--|
| [Full le | [Full legal name] ("Host Control Area"), having its registered and principal executive office at [address], | | | | |
| and | | | | | |
| California Independent System Operator Corporation ("ISO"), a California nonprofit public benefit corporation having a principal executive office located at such place in the State of California as the ISO Governing Board may from time to time designate, initially 151 Blue Ravine Road, Folsom, California 95630. | | | | | |
| The Ho | ost Control Area and the ISO are hereinafter referred to as the "Parties". | | | | |
| Where | as: | | | | |
| A. | The Parties named above operate Control Areas. | | | | |
| B. | The Parties wish to coordinate operation of dynamic scheduling functionality to satisfy North American Electric Reliability Council ("NERC") policies, Western Electricity Coordinating Council ("WECC") Minimum Operating Reliability Criteria ("MORC"), and Good Utility Practice. | | | | |
| C. | The Host Control Area does not have an Interconnected Control Area Operating Agreement ("ICAOA") with the ISO and desires to implement an agreement to facilitate dynamic scheduling from System Resources in its Control Area to the ISO Control Area without an ICAOA. | | | | |
| D. | The Parties wish to enter into this Agreement to establish the terms and conditions for the operation of the dynamic scheduling functionality from Host Control Area's Control Area to the ISO Control Area. | | | | |
| E. | The ISO has certain statutory obligations under California law to maintain power system reliability. | | | | |

1. Term and Termination

1.1 Effective Date

follows:

This Agreement shall be effective as of the date set forth above, unless this Agreement is accepted for filing and made effective by the Federal Energy Regulatory Commission ("FERC") on some other date, if FERC filing is required, and shall continue in effect until terminated.

NOW THEREFORE, in consideration of the mutual covenants set forth herein, THE PARTIES AGREE as

Issued by: Charles F. Robinson, Vice President and General Counsel

1.2 Termination

This Agreement may be terminated by either Party upon thirty (30) days written notice to the other Party or upon mutual consent of both Parties. For entities subject to FERC jurisdiction, termination will be effective upon acceptance by FERC of notice of termination, if this Agreement has been filed with FERC, or thirty (30) days after the date of the notice of default, if terminated in accordance with the requirements of FERC Order No. 2001 and related FERC orders. The ISO shall timely file any required notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within sixty (60) days after issuance of the notice of default.

2. Definitions

2.1 WECC Definitions

Except as defined below, terms and expressions used in this Agreement shall have the same meanings as those contained in the WECC MORC Definitions.

2.2 Specific Definitions

- 2.2.1 Good Utility Practice: Any of the practices, methods, and acts engaged in or approved by a significant portion of the electric utility industry in the WECC region during the relevant time period, or any of the practices, methods, and acts which, in the exercise of reasonable judgment in light of the facts known at the time the decision was made, could have been expected to accomplish the desired result at a reasonable cost consistent with good business practices, reliability, safety, and expedition. Good Utility Practice is not intended to be any one of a number of the optimum practices, methods, or acts to the exclusion of all others, but rather to be acceptable practices, methods, or acts generally accepted in the region.
- **2.2.2 ISO Dynamic Scheduling Protocol:** The ISO's Dynamic Scheduling Protocol, which is part of the ISO Tariff.
- **2.2.3 ISO Tariff:** ISO Operating Agreement, Protocols, and Tariff as amended from time to time, together with any appendices or attachments thereto.
- **2.2.4 Point of Contact:** A person or entity having the authority to receive and act upon scheduling or dispatch communications from the other Control Area operator and available through a communications device mutually agreed upon on a 24-hour, 7-day basis.
- **2.2.5 Scheduling Coordinator:** An entity certified by the ISO for the purposes of undertaking the functions of: submitting schedules for energy, generation, transmission losses, and ancillary services; coordinating generation; tracking, billing, and settling trades with other Scheduling Coordinators; submitting forecast information; paying the ISO's charges; and ensuring compliance with ISO protocols.
- **2.2.6 System Resource:** "System Resource" is defined in the ISO Tariff and, in the context of this Agreement, may include combinations of resources as described in the ISO Dynamic Scheduling Protocol.

Issued by: Charles F. Robinson, Vice President and General Counsel

3. General

3.1 Purpose

This Agreement sets forth the requirements that must be satisfied by the Host Control Area should it elect to support Scheduling Coordinators' requests for implementation of a dynamic scheduling functionality and delivery of energy, supplemental energy, and energy associated with ancillary services (except regulation service) into the ISO Control Area. The requirements encompass technical (energy management system ("EMS")/ automatic generation control ("AGC") and communications), interchange scheduling, telemetry, and aspects of Control Area operations.

3.2 NERC/WECC Operating Standards Observed

Nothing in this Agreement is intended to change, supercede, or alter either Party's obligations to abide by NERC standards and policies and WECC criteria.

3.3 Applicable Standards

This Agreement incorporates, by reference, the ISO Dynamic Scheduling Protocol.

3.4 Communication

The ISO and the Host Control Area shall each operate and maintain a 24-hour, 7-day control center with real time scheduling and control functions. Appropriate control center staff will be provided by each Party who shall be responsible for operational communications and who shall have sufficient authority to commit and bind that Party. The ISO and the Host Control Area shall jointly develop communication procedures necessary to support scheduling and dispatch functions. The Points of Contact and the procedures for insuring reliable communication are identified in Schedule 1.

4. Telecommunications Requirements

The ISO and Host Control Area shall establish and maintain real time, redundant, diversely routed, communications links between the ISO EMS and the Host Control Area EMS, with the primary link utilizing the standard inter-control center communications protocol ("ICCP") in accordance with the ISO Dynamic Scheduling Protocol for the dynamically scheduled System Resources listed in Schedule 2.

5. Telemetry

For each operating hour for which a System Resource is scheduled to deliver energy, supplemental energy, and/or energy associated with any of the non-regulating ancillary services to the ISO Control Area, the Host Control Area shall provide, via the ICCP communication links to the ISO EMS, the data for each System Resource, as set forth in the ISO Dynamic Scheduling Protocol.

6. Interchange Scheduling Requirements

6.1 Dynamic Scheduling

The Host Control Area shall support Scheduling Coordinators' requests to arrange dynamic interchange schedules for the delivery of energy to the ISO Control Area, reflecting the System Resource's instantaneous energy production or allocation level and taking into account available transmission capacity.

Issued by: Charles F. Robinson, Vice President and General Counsel

6.2 **Treatment of Area Control Error ("ACE")**

The Host Control Area shall instantaneously compensate its AGC for the System Resource's energy output that is generated or allocated for establishing the dynamic schedule to the ISO such that the System Resource energy production or allocation changes have an equal in magnitude and opposite in sign effect on the Host Control Area's ACE.

6.3 Integration of Dynamic Scheduling

For each operating hour during which energy was dynamically scheduled for delivery to the ISO Control Area, the Host Control Area shall compute an integrated amount of interchange based on the System Resource's integrated energy production, by integrating the instantaneous System Resource production levels. Such integrated MWH value shall be agreed to hourly by the real time schedulers.

6.4 Delivery of Megawatts ("MW")

The Host Control Area shall not be obligated to make up any difference between the dynamic energy schedule and the MW being generated or allocated by the System Resource.

6.5 **Access to Information**

The Parties agree to exchange information related to telemetry sent and received with respect to the delivery of energy (i) at the request of the other Party for purposes of after-the-fact interchange accounting or (ii) on demand for any other purpose.

7. Other Host Control Area Responsibilities

7.1 **Operational Jurisdiction**

The Host Control Area will have, at a minimum, the level of operational jurisdiction over the System Resource and the associated dynamic schedule that NERC and WECC vest in Host Control Areas.

7.2 E-Tagging

The Host Control Area must support associated e-tagging as described in the ISO Dynamic Scheduling Protocol and deemed to be consistent with NERC and/or WECC requirements.

7.3 **Real-Time Adjustments**

The Host Control Area must have a means to manually override and/or otherwise adjust the dynamic signal in real time, if needed.

7.4 **Coordination with Other Control Areas**

The Host Control Area must provide in real time the instantaneous value of each dynamic schedule to every intermediary Control Area through whose systems such dynamic schedule may be implemented to the ISO.

Issued by: Charles F. Robinson, Vice President and General Counsel

8. Other

8.1 Losses

The ISO shall not be responsible for transmission losses caused by transmitting energy dynamically within or across the Host Control Area for delivery to the ISO.

8.2 Certification

Only ISO-certified System Resource/Host Control Area arrangements will be allowed to bid or self provide ancillary services in the ISO's ancillary services market through an ISO-certified Scheduling Coordinator.

8.3 No Guarantee of Award

Certification of a System Resource/Host Control Area arrangement allows for bidding of supplemental energy and/or certain ancillary services into the ISO market; it does not, however, guarantee selection of such bid.

8.4 Performance Assessment

The ISO will monitor and measure dynamically imported ancillary services, whether bid or self-provided, against the performance benchmarks described in the ISO Dynamic Scheduling Protocol.

8.5 Description of System Resources

Each dynamically scheduled System Resource permitted pursuant to this Agreement is described in Schedule 2.

9. Notifications

The ISO and the Host Control Area shall jointly develop methods for coordinating the notification of all affected scheduling entities within their respective Control Areas regarding schedule changes in emergency or curtailment conditions.

10 Liability

10.1 Uncontrollable Forces

An Uncontrollable Force means any act of God, labor disturbance, act of the public enemy, war, insurrection, riot, fire, storm, flood, earthquake, explosion, any curtailment, order, regulation or restriction imposed by governmental, military or lawfully established civilian authorities, or any other cause beyond the reasonable control of a control area operator which could not be avoided through the exercise of Good Utility Practice.

Neither the ISO nor the Host Control Area will be considered in default of any obligation under this Agreement or liable to the other for direct, indirect, and consequential damages if prevented from fulfilling that obligation due to the occurrence of an Uncontrollable Force. Neither the ISO nor the Host Control Area will be considered in default of any obligation under this Agreement to the extent caused by any act, or failure to act, of any intermediary Control Area.

In the event of the occurrence of an Uncontrollable Force, which prevents either the ISO or the Host Control Area from performing any obligations under this Agreement, the affected entity shall not be entitled to suspend performance of its obligations in any greater scope or for any longer duration than is required by the Uncontrollable Force. The ISO and the Host Control Area shall each use its best efforts to mitigate the effects of such Uncontrollable Force, remedy its inability to perform, and resume full performance of its obligations hereunder.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: July 1, 2005 Effective: July 1, 2005

10.2 Liability To Third Parties

Except as otherwise expressly provided herein, nothing in this Agreement shall be construed or deemed to confer any right or benefit on, or to create any duty to, or standard of care with reference to any third party, or any liability or obligation, contractual or otherwise, on the part of ISO or the Host Control Area.

10.3 Liability Between the Parties

The Parties' duties and standard of care with respect to each other, and the benefits and rights conferred on each other, shall be no greater than as explicitly stated herein. Neither Party, its directors, officers, employees, or agents, shall be liable to the other Party for any loss, damage, claim, cost, charge, or expense, whether direct, indirect, or consequential, arising from the Party's performance or nonperformance under this Agreement, except for a Party's gross negligence, or willful misconduct.

11 Miscellaneous

11.1 Assignments

Either Party to this Agreement may assign its obligations under this Agreement, with the other Party's prior written consent. Such consent shall not be unreasonably withheld.

Obligations and liabilities under this Agreement shall be binding on the successors and assigns of the Parties. No assignment of this Agreement shall relieve the assigning Party from any obligation or liability under this Agreement arising or accruing prior to the date of assignment.

11.2 Notices

Any notice, demand, or request which may be given to or made upon either Party regarding this Agreement shall be made in writing and shall be deemed properly served, given, or made: (a) upon delivery if delivered in person, (b) five (5) days after deposit in the mail if sent by first class United States mail, postage prepaid, (c) upon receipt of confirmation by return facsimile if sent by facsimile, or (d) upon delivery if delivered by prepaid commercial courier service. A Party must update the information in Schedule 3 relating to its address as that information changes. Such changes shall not constitute an amendment to this Agreement.

11.3 Waivers

Any waiver at any time by either Party of its rights with respect to any default under this Agreement, or with respect to any other matter arising in connection with this Agreement, shall not constitute or be deemed a waiver with respect to any subsequent default or matter arising in connection with this Agreement. Any delay short of the statutory period of limitations, in asserting or enforcing any right under this Agreement, shall not constitute or be deemed a waiver of such right.

11.4 Governing Law and Forum

Subject to ICAA 11.5, this Agreement shall be deemed to be a contract made under and for all purposes shall be governed by and construed in accordance with the laws of the State of California. The Parties irrevocably consent that any legal action or proceeding arising under or relating to this Agreement shall be brought in any of the following forums, as appropriate: a court of the State of California or any federal court of the United States of America located in the State of California or, where subject to its jurisdiction, before the Federal Energy Regulatory Commission. No provision of this Agreement shall be deemed to waive the right of any Party to protest, or challenge in any manner, whether this Agreement, or any action or proceeding arising under or relating to this Agreement, is subject to the jurisdiction of the Federal Energy Regulatory Commission.

Issued by: Charles F. Robinson, Vice President and General Counsel

11.5 Consistency with Federal Laws and Regulations

- (a) Nothing in this Agreement shall compel any person or federal entity to: (1) violate federal statutes or regulations; or (2) in the case of a federal agency, to exceed its statutory authority, as defined by any applicable federal statutes, regulations, or orders lawfully promulgated thereunder. If any provision of this Agreement is inconsistent with any obligation imposed on any person or federal entity by federal law or regulation to that extent, it shall be inapplicable to that person or federal entity. No person or federal entity shall incur any liability by failing to comply with any provision of this Agreement that is inapplicable to it by reason of being inconsistent with any federal statutes, regulations, or orders lawfully promulgated thereunder; provided, however, that such person or federal entity shall use its best efforts to comply with the ISO Tariff to the extent that applicable federal laws, regulations, and orders lawfully promulgated thereunder permit it to do so.
- (b) If any provision of this Agreement requiring any person or federal entity to give an indemnity or impose a sanction on any person is unenforceable against a federal entity, the ISO shall submit to the Secretary of Energy or other appropriate Departmental Secretary a report of any circumstances that would, but for this provision, have rendered a federal entity liable to indemnify any person or incur a sanction and may request the Secretary of Energy or other appropriate Departmental Secretary to take such steps as are necessary to give effect to any provisions of this Agreement that are not enforceable against the federal entity.

11.6 Severability

If any term, covenant, or condition of this Agreement or the application or effect of any such term, covenant, or condition is held invalid as to any person, entity, or circumstance, or is determined to be unjust, unreasonable, unlawful, imprudent, or otherwise not in the public interest by any court or government agency of competent jurisdiction, then such term, covenant, or condition shall remain in force and effect to the maximum extent permitted by law, and all other terms, covenants, and conditions of this Agreement and their application shall not be affected thereby, but shall remain in force and effect and the parties shall be relieved of their obligations only to the extent necessary to eliminate such regulatory or other determination unless a court or governmental agency of competent jurisdiction holds that such provisions are not separable from all other provisions of this Agreement.

11.7 Section Headings

Section headings provided in this Agreement are for ease of reading and are not meant to interpret the text in each Section.

11.8 Amendments

This Agreement and the Schedules attached hereto may be amended from time to time by the mutual agreement of the Parties in writing. Amendments that are subject to FERC approval shall not take effect until FERC has accepted such amendments for filing and has made them effective. If the amendment does not require FERC approval, the amendment will be filed with FERC for information. Nothing contained herein shall be construed as affecting in any way the right of the ISO or the Host Control Area to unilaterally make application to FERC for a change in the rates, terms and conditions of this Agreement under Section 205 of the FPA and pursuant to FERC's rules and regulations promulgated thereunder.

11.9 Counterparts

This Agreement may be executed in one or more counterparts at different times, each of which shall be regarded as an original and all of which, taken together, shall constitute one and the same Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1082

IN WITNESS WHEREOF, the Parties hereto have caused this Agreement to be duly executed on behalf of each by and through their authorized representatives as of the date first written above.

By: Name: Title: Date: [Full legal name of Host Control Area] By: Name: Title: Date:

California Independent System Operator Corporation

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 1

POINTS OF CONTACT [Section 3.4]

OPERATIONAL CONTACT

| ISO: | | |
|--|--|--|
| Transmission Dispatcher (Folsom-Primary): | | |
| Transmission Dispatcher (Alhambra-Backup): | | |
| Generation Dispatcher (Folsom-Primary): | | |
| Generation Dispatcher (Alhambra-Backup): | | |
| Real Time Scheduler (Folsom): | | |
| Real Time Scheduler (Alhambra): | | |
| Pre Scheduler: | | |
| Shift Manager: | | |
| Control Room Fax: | | |
| Outage Coordination: Fax: | | |
| Director of Grid Operations: | | |
| WECC Reliability Coordinator: | | |
| Address: | California ISO 151 Blue Ravine Road P.O. Box 639014 Folsom, CA 95763-9014 | |

Issued by: Charles F. Robinson, Vice President and General Counsel

OPERATIONAL CONTACT

| Transmission Dispatcher (Primary): | |
|------------------------------------|--|
| Transmission Dispatcher (Backup): | |
| | |
| Generation Dispatcher (Primary): | |
| Generation Dispatcher (Backup): | |
| Real Time Scheduler: | |
| Dispatch Supervisor: | |
| Outage Coordination: | |
| Fax: | |
| Chief Dispatcher: | |
| Address: | |
| | |
| | |

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 2

DESCRIPTION OF DYNAMICALLY SCHEDULED SYSTEM RESOURCES [Section 4]

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 3

NOTICES [Section 11.2]

| Host Control Area | |
|-------------------------------------|--|
| Name of Primary Representative: | |
| Title: | |
| Company: | |
| Address: | |
| City/State/Zip Code | |
| Email Address: | |
| Phone: | |
| Fax No: | |
| | |
| | |
| Name of Alternative Representative: | |
| Title: | |
| Company: | |
| Address: | |
| City/State/Zip Code | |
| Email Address: | |
| Phone: | |
| Fax No: | |

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1087

Effective: April 12, 2005

ISO

| Name of Primary Representative: | |
|-------------------------------------|--|
| Title: | |
| Address: | |
| City/State/Zip Code | |
| Email Address: | |
| Phone: | |
| Fax No: | |
| | |
| | |
| Name of Alternative Representative: | |
| Title: | |
| Address: | |
| City/State/Zip Code | |
| Email Address: | |
| Phone: | |
| Fax No: | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: April 12, 2005

ISO TARIFF APPENDIX T

Small Utility Distribution Company Operating Agreement

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR

AND

[SMALL UTILITY DISTRIBUTION COMPANY]

SMALL UTILITY DISTRIBUTION COMPANY OPERATING AGREEMENT

Issued by: Charles F. Robinson, Vice President and General Counsel

Folsom, California 95630 (the "ISO").

Original Sheet No. 1090

SMALL UTILITY DISTRIBUTION COMPANY OPERATING AGREEMENT

| THIS betwe | OPERATING AGREEMENT is dated this day of, and is entered into, by and een: |
|---------------|---|
| (1) | [Full legal name of SUDC], having its registered and principal place of business located at [Address] (the "SUDC"); |
| | and |
| (2) | California Independent System Operator Corporation, a California non-profit public benefit |

corporation having its principal place of business located in such place in the State of California as the ISO Governing Board may from time to time designate, initially 151 Blue Ravine Road,

The SUDC and the ISO are hereinafter referred to individually as "Party" and collectively as "Parties".

Whereas:

- A. The purpose of this Operating Agreement is to establish the rights and obligations of the SUDC and the ISO with respect to the SUDC's Facilities interconnected with the ISO Controlled Grid and the SUDC's cooperation and coordination with the ISO regarding reliability and the operational control of the ISO Controlled Grid and the SUDC's Distribution System.
- B. The SUDC owns and operates a small Distribution System within the ISO Control Area subject to the authority of a Local Regulatory Authority.
- C. The SUDC wishes to receive and transmit Energy and/or Ancillary Services to and/or from the ISO Controlled Grid under the terms and conditions set forth in the ISO Tariff.
- D. The ISO has certain statutory obligations under California law to maintain the reliability of the ISO Controlled Grid.
- E. The Parties recognize that while a single SUDC has little or no ability to materially, adversely affect reliability of the ISO Controlled Grid or the ISO Control Area, the SUDC agrees to support and be part of the coordinated response to System Emergencies and to reliability concerns relating to the ISO Control Area as set forth in this Operating Agreement.
- F. This Operating Agreement obligates the SUDC to comply with the sections of the ISO Tariff, the ISO Operating Procedures and the ISO Specifications specified in this Operating Agreement.

NOW THEREFORE, in consideration of the mutual covenants set forth herein, **THE PARTIES AGREE** as follows:

ARTICLE I DEFINITIONS AND INTERPRETATION

1.1 Master Definitions Supplement. Unless defined in Section 1.2 of this Operating Agreement, all defined terms and expressions used in this Operating Agreement shall have the same meaning as those contained in the Master Definitions Supplement to the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **1.2 Special Definitions for this Operating Agreement**. In this Operating Agreement, the following words and expressions shall have the meanings set opposite them:
 - "ISO Specifications" means those standards pertaining to the areas of operation listed in Article IV of this Operating Agreement and listed in Schedule 6, approved by the ISO to establish detailed technical performance and reliability parameters at the ISO Controlled Grid and SUDC Interconnection, associated with the ISO Tariff, as those standards may be amended from time to time.
 - "ISO Operating Procedures" means those procedures pertaining to the areas of operation listed in Article IV of this Operating Agreement and listed in Schedule 9, created by the ISO to establish detailed operating procedures at the ISO Controlled Grid and SUDC Interconnection, associated with general provisions required in the ISO Tariff, as those standards may be amended from time to time.
 - **"SUDC Facilities"** shall have the meaning accorded to such term as provided in Section 3.2 of this Operating Agreement.
- **1.3 Rules of Interpretation.** The following rules of interpretation and conventions shall apply to this Operating Agreement:
 - (a) if there is any inconsistency between this Operating Agreement and the ISO Tariff, the ISO Tariff will prevail to the extent of the inconsistency;
 - (b) the singular shall include the plural and vice versa;
 - (c) the masculine shall include the feminine and neutral and vice versa;
 - (d) "includes" or "including" shall mean "including without limitation";
 - (e) references to a Section, Article or Schedule shall mean a Section, Article or a Schedule of this Operating Agreement, as the case may be, unless the context otherwise requires;
 - (f) a reference in this Operating Agreement to a given agreement, instrument or the ISO Tariff shall be a reference to that agreement, instrument or the ISO Tariff as modified, amended, supplemented or restated through the date as of which such reference is made;
 - (g) unless the context otherwise requires, references to any law shall be deemed references to such law as it may be amended, replaced or restated from time to time;
 - (h) unless the context otherwise requires, any reference to a "person" includes any individual, partnership, firm, company, corporation, joint venture, trust, association, organization or other entity, in each case whether or not having separate legal personality;
 - (i) unless the context otherwise requires, any reference to a Party includes a reference to its permitted successors and assigns;
 - (j) any reference to a day, week, month or year is to a calendar day, week, month or year; and the captions and headings in this Operating Agreement are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this Operating Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE II TERM AND TERMINATION

- 2.1 Effective Date. This Operating Agreement shall be effective as of the date it is accepted for filing and made effective by the FERC and shall remain in full force and effect until the earlier of the termination date, the termination of the Transmission Control Agreement or such other date as the Parties shall mutually agree. With respect to any such termination, the ISO must file a timely notice of termination with FERC, and this Operating Agreement shall terminate on the date FERC permits such a notice of termination to be effective.
- 2.2 Termination Date.
- **2.2.1 Termination by Default.** Either Party (the terminating Party) may terminate this Operating Agreement by giving written notice in the event that the other Party (the defaulting Party) commits any default under this Operating Agreement and/or the ISO Tariff which, if capable of being remedied, is not remedied within 30 days after the terminating Party has given the defaulting Party written notice of the default, unless excused by reason of Uncontrollable Forces under Article X of this Operating Agreement.
- 2.2.2 Failure To Meet SUDC Definition. Failure of a SUDC to satisfy the ISO Tariff definition of a SUDC shall be grounds for the ISO to terminate this Operating Agreement. In the event the ISO believes the SUDC no longer satisfies the ISO Tariff definition of a SUDC, the ISO shall provide written notification of the same to the SUDC and the SUDC shall have 60 days to respond. Following the 60-day response period and regardless of the position of the SUDC, if the ISO believes the SUDC no longer satisfies the ISO Tariff definition of a SUDC regardless of the response, the ISO may file a notice of termination with FERC in accordance with Section 2.2.3.
- **2.2.3 Filing.** With respect to any notice of termination given pursuant to this Section 2.2, the ISO must file a timely notice of termination with FERC. The filing of the notice of termination by the ISO will be considered timely if: (1) the request by either Party to file a notice of termination is made after the preconditions for termination have been met, and (2) the ISO files the notice of termination within 30 days of receipt of such request. This Operating Agreement shall terminate on the date FERC permits such a notice of termination to be effective.

ARTICLE III GENERAL TERMS AND CONDITIONS

- **3.1 SUDC Responsibilities.** The SUDC will be responsible to operate and maintain its SUDC Facilities in accordance with applicable reliability standards, statutes, and regulations and Good Utility Practice so as to avoid any material adverse impact on the reliability of the ISO Control Area and the ISO Controlled Grid.
- **3.2** Interconnection and SUDC Facilities. Schedule 1 sets forth the SUDC's Generating Units, if any, and those facilities that comprise the interconnection of the SUDC Distribution System and the ISO Controlled Grid. These facilities will be considered the "SUDC Facilities" and, except as otherwise expressly provided, the provisions of this Operating Agreement shall apply only to such SUDC Facilities.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 3.3 Non-SUDC Facilities. To assist the ISO in cataloging non-SUDC facilities located in the ISO Control Area and for information purposes only, Schedule 2 sets forth any non-SUDC Generating Units or other facilities that are interconnected to the SUDC Distribution System. Such non-SUDC facilities are not owned or operated by the SUDC.
- 3.4 Agreement Subject to ISO Tariff. Notwithstanding anything to the contrary herein, the Parties agree that they will comply with Section 31 of the ISO Tariff, and any other applicable provisions of the ISO Tariff specifically referenced in this Operating Agreement. This Operating Agreement shall be subject to such provisions of the ISO Tariff, which shall be deemed to be incorporated to the extent referenced herein, as the same may be changed or superseded from time to time pursuant to Sections 16.1 and 20.1.3 of the ISO Tariff. Nothing in this Operating Agreement shall affect in any way the authority of the ISO to unilaterally make application to FERC for a change in the ISO Tariff under Section 205 of the Federal Power Act, nor shall anything in this Operating Agreement affect the right of either Party to file a complaint under Section 206 of the Federal Power Act regarding the ISO Tariff.
- **3.5 Operation of ISO Controlled Grid.** The ISO shall operate the ISO Control Area and the ISO Controlled Grid in accordance with the ISO Tariff and the Transmission Control Agreement to which it is a party.
- 3.6 ISO Specifications and ISO Operating Procedures.
- 3.6.1 Compliance with ISO Specifications and ISO Operating Procedures. The SUDC will abide by and will perform all of the obligations under the ISO Specifications identified in Schedule 6 and ISO Operating Procedures identified in Schedule 9 in respect of all matters set forth therein as the same may be changed or superseded from time to time pursuant to the procedures set forth in Sections 16.1 and 20.1.3 of the ISO Tariff. In the event of any conflict or dispute over interpretation, those sections of the ISO Tariff identified herein shall, at all times, take precedence over such ISO Specifications and ISO Operating Procedures. The ISO shall not implement any reliability requirements, operating requirements or performance standards that would impose increased costs on the SUDC without giving due consideration to whether the benefits of such requirements or standards are sufficient to justify such increased costs. In any proceeding concerning the cost recovery by the SUDC of capital and operation and maintenance costs incurred to comply with ISO Specifications and ISO Operating Procedures, the ISO shall to the extent practicable, at the request of the SUDC, provide specific information in a form that may be readily understood by the general public regarding the nature of, and need for, the ISOimposed requirements or standards to enable the SUDC to use this information in public hearings in support of cost recovery through rates and tariffs.
- 3.6.2 Review of ISO Specifications and ISO Operating Procedures. The ISO shall periodically review with the SUDC the ISO Specifications identified in Schedule 6 and ISO Operating Procedures identified in Schedule 9 and shall modify such ISO Specifications and/or ISO Operating Procedure as provided in Section 3.6.1. If a new ISO Specification or ISO Operating Procedure applicable to the SUDC is adopted pursuant to Section 3.6.1, the ISO shall provide a revised version of Schedule 6 or Schedule 9 to the SUDC. Any changes to Schedule 6 or Schedule 9 will not constitute an amendment to this Operating Agreement.
- **3.6.3 Periods When Compliance is Required.** While awaiting dispute resolution or regulatory review, the SUDC shall not be required to comply with changes to the ISO Specifications and ISO Operating Procedures, except where compliance is necessary in order to prevent or remedy an imminent System Emergency.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 3.7 Utilization of Certified Scheduling Coordinator. The SUDC shall utilize an ISO-certified Scheduling Coordinator to schedule Energy and Ancillary Services to or from the ISO Controlled Grid. At the time when the SUDC retains such Scheduling Coordinator, the SUDC shall confirm that the Scheduling Coordinator has entered into a Scheduling Coordinator Agreement with the ISO that is currently in effect.
- **3.8 Single Point of Contact.** The ISO and the SUDC shall each provide a single point of contact for the exchange of operational procedures and information. Details of requirements relating to and the identity of the initial points of contact are set forth in Schedule 3.
- **3.9 SUDC Compliance.** In the event the ISO believes that the SUDC has failed to comply with any provision of the ISO Tariff created after the effective date applicable to the SUDC in accordance with this Operating Agreement, the ISO shall notify the SUDC of such alleged failure and, if requested, shall meet with the SUDC regarding such alleged failure to comply. If the Parties cannot reach agreement on the alleged failure to comply, then the ISO may, if applicable, invoke Section 2.2.1 of this Operating Agreement.

ARTICLE IV OPERATIONAL COORDINATION

- requirements with the Participating TO with which it is interconnected. The SUDC will provide the ISO with copy of any written information regarding Outages of the SUDC Facilities that could cause a material adverse impact on the reliability of the ISO Controlled Grid. To the extent the SUDC schedules maintenance of SUDC Facilities that has a reasonable potential to cause a material adverse impact to reliability of the ISO Controlled Grid, the SUDC shall notify the ISO of such maintenance when it becomes known, and that information will be updated quarterly or as changes occur to the proposed schedule. Consistent with the SUDC's normal record generation and retention practices, the SUDC will record the details for all such work and shall provide available records when it is known, quarterly, or upon written request by the ISO.
- **4.2 System Emergencies.** The responsibilities of the Parties in relation to System Emergencies are stated in Sections 31.4, 31.5 and the Dispatch Protocol of the ISO Tariff, the ISO Operating Procedures identified in Schedule 9, and in Schedule 4.
- 4.3 System Emergency Response. The SUDC will participate in Load Shedding by reducing Load on a voluntary basis when the ISO declares a Stage 1 System Emergency. The SUDC will use any available local communication infrastructure to request that its customers curtail their electricity usage. The SUDC will not be called separately in Stage 3 System Emergencies to manually shed Load. Load restoration of any voluntary Load reduction may not commence until such time as the ISO declares that a System Emergency no longer exists. The responsibilities of the Parties to direct and to accept direction for Load reduction or other emergency plans are stated in Sections 31.4 and 31.5 of the ISO Tariff, and the ISO Operating Procedures identified in Schedule 9 and ISO Specifications identified in Schedule 6.
- **4.4 System Disturbance Load Restoration.** The responsibilities of the Parties for restoring Load following a system disturbance are stated in Section 31.5.2 of the ISO Tariff, the ISO Operating Procedures identified in Schedule 9 and ISO Specifications identified in Schedule 6, and in Schedule 5.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **4.5 Interconnection Operation Standards.** The ISO and SUDC shall maintain stable established operating parameters and control power and reactive flow within standards stated in Schedule 6.
- 4.6 Records, Information and Reports. The Parties are required to maintain such records, to share information, and to make such reports as are stated in Section 31.1.2, 31.6 and 31.8 of the ISO Tariff, and the ISO Operating Procedures identified in Schedule 9 and the ISO Specifications identified in Schedule 6. In accordance with Schedule 7, the SUDC will cooperate with the ISO regarding its collection, study and transmittal of system data, information, reports, and forecasts, provided that the SUDC need only provide available information to the ISO. Upon the request of the ISO, the SUDC will cooperate with the ISO regarding any ISO review following a major Outage and provide any requested information that is available.
- **4.7 Critical Protective Systems.** The SUDC shall (in accordance with Section 11.2 of this Operating Agreement) notify the ISO as soon as is reasonably practicable of any condition that it becomes aware of that may compromise the ISO Controlled Grid Critical Protective Systems.
- **SUDC Distribution System.** The ISO shall (in accordance with Section 11.2 of this Operating Agreement) notify the SUDC as soon as is reasonably practicable of any condition which the ISO becomes aware that may compromise the operation and reliability of the SUDC Distribution System.

ARTICLE V ACCESS TO FACILITIES

- Access Rights. Pursuant to Section 31.9.1 of the ISO Tariff and Schedule 8 of this Operating Agreement, the ISO and the SUDC shall each have the right to install or to have installed equipment or other facilities, including metering equipment, on the electric utility property of the other necessary for the implementation of this Operating Agreement. The ISO's installation of equipment on the property of the SUDC shall comply with Local Regulatory Authority regulations, except where compliance with Local Regulatory Authority regulations would cause the ISO to violate the ISO Tariff, and with all relevant safety standards. In such case, the SUDC and ISO will work together to resolve the conflict between the Local Regulatory Authority regulations and the ISO Tariff.
- **Meter Testing.** The SUDC shall, at the request of the ISO and upon reasonable notice, provide access to its facilities necessary to permit the ISO or an ISO-approved meter inspector to perform such testing as necessary in accordance with Section 31.9.2 or 31.9.4 of the ISO Tariff and the procedures set forth in Schedule 8. For meters that are not owned by the SUDC, the ISO will obtain approval from the meter owner in advance of accessing SUDC's Facilities. Such approval shall be provided to the SUDC upon request.
- **5.3 Emergency Access Rights.** The ISO shall have a right to access the SUDC's equipment or other facilities during a System Emergency in accordance with Section 31.9.3 of the ISO Tariff. In a System Emergency, the SUDC shall have a right of access to ISO equipment on SUDC property and SUDC equipment on ISO property without notice.

ARTICLE VI COSTS

SUDC Operating and Maintenance Costs. The SUDC shall be responsible for all costs incurred in connection with procuring, installing, operating and maintaining its facilities identified in Schedule 1 for the purpose of meeting its obligations under this Operating Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: October 21, 2005 Effective: May 26, 2005

6.2 ISO Operating and Maintenance Costs. The ISO shall be responsible for the procurement, installation, operation and maintenance costs of ISO equipment set out in Article V of this Operating Agreement installed on SUDC property.

ARTICLE VII DISPUTE RESOLUTION

7.1 Alternative Dispute Resolution. The Parties shall make reasonable efforts to settle all disputes arising out of or in connection with this Operating Agreement. In the event any dispute is not settled, the Parties shall adhere to the ISO ADR Procedures set forth in Section 13 of the ISO Tariff, which is incorporated by reference, except that all reference in Section 13 of the ISO Tariff to Market Participants shall be read as a reference to the SUDC and references to the ISO Tariff shall be read as references to this Operating Agreement.

ARTICLE VIII REPRESENTATIONS AND WARRANTIES

- **8.1** Representations and Warranties. Each Party represents and warrants that its execution, delivery and performance of this Operating Agreement has been duly authorized by all necessary corporate and/or governmental actions, to the extent authorized by law.
- **8.2 Necessary Approvals.** Each Party represents that all necessary approvals, permits, licenses, easements, right of way or access to install, own and operate its facilities subject to this Operating Agreement have been obtained prior to the effective date of this Operating Agreement.

ARTICLE IX LIABILITY

9.1 Extent of Liability. The provisions of Section 14 of the ISO Tariff will apply to liability arising under this Operating Agreement, except that all references in Section 14 of the ISO Tariff to Market Participants shall be read as references to the SUDC and references to the ISO Tariff shall be read as references to this Operating Agreement.

ARTICLE X UNCONTROLLABLE FORCES

10.1 Uncontrollable Forces Tariff Provisions. Section 15 of the ISO Tariff shall be incorporated by reference into this Operating Agreement, except that all references in Section 15 of the ISO Tariff to Market Participants shall be read as a reference to the SUDC and references to the ISO Tariff shall be read as references to this Operating Agreement.

ARTICLE XI MISCELLANEOUS

11.1 Assignments. Either Party may assign its obligations under this Operating Agreement, with the other Party's prior written consent, in accordance with Section 17 of the ISO Tariff, which is incorporated by reference into this Operating Agreement. Such consent shall not be unreasonably withheld.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 11.2 Notices. Any notice, demand or request which may be given to or made upon either Party regarding this Operating Agreement shall be made in accordance with Section 20.1 of the ISO Tariff, which is incorporated by reference, except that all reference in Section 20.1 to Market Participants shall be read as a reference to the SUDC. A Party must update the information in Schedule 3 of this Operating Agreement as that information changes in accordance with Section 20.1 of the ISO Tariff. Such changes will not constitute an amendment to this Operating Agreement.
- **11.3 Waivers.** Any waiver at any time by either Party of its rights with respect to any default under this Operating Agreement, or with respect to any other matter arising in connection with this Operating Agreement, shall not constitute or be deemed a waiver with respect to any subsequent default or matter arising in connection with this Operating Agreement. Any delay short of the statutory period of limitations, in asserting or enforcing any right under this Operating Agreement, shall not constitute or be deemed a waiver of such right.
- 11.4 Governing Law and Forum. This Operating Agreement shall be deemed to be a contract made under and for all purposes shall be governed by and construed in accordance with the laws of the State of California except in its conflict of laws provisions. The Parties irrevocably consent that any legal action or proceeding arising under or in relation to this Operating Agreement to which the ISO ADR Procedures do not apply, shall be brought in any of the following forums, as appropriate: any court of the State of California, any federal court of the United States of America located in the State of California or, where subject to its jurisdiction, before the Federal Energy Regulatory Commission.

11.5 Consistency with Federal Laws and Regulations.

- (a) Nothing in this Operating Agreement shall compel any person or federal entity to: (1) violate federal statutes or regulations; or (2) in the case of a federal agency, to exceed its statutory authority, as defined by any applicable federal statutes, regulations, or orders lawfully promulgated thereunder. If any provision of this Operating Agreement is inconsistent with any obligation imposed on any person or federal entity by federal law or regulation to that extent, it shall be inapplicable to that person or federal entity. No person or federal entity shall incur any liability by failing to comply with this Operating Agreement that is inapplicable to it by reason of being inconsistent with any federal statutes, regulations, or orders lawfully promulgated thereunder; provided, however, that such person or federal entity shall use its best efforts to comply with the ISO Tariff to the extent that applicable federal laws, regulations, and orders lawfully promulgated thereunder permit it to do so.
- (b) If any provision of this Operating Agreement requiring any person or federal entity to give an indemnity or impose a sanction on any person is unenforceable against a federal entity, the ISO shall submit to the Secretary of Energy or other appropriate Departmental Secretary a report of any circumstances that would, but for this provision, have rendered a federal entity liable to indemnify any person or incur a sanction and may request the Secretary of Energy or other appropriate Departmental Secretary to take such steps as are necessary to give effect to any provisions of this Operating Agreement that are not enforceable against the federal entity.
- **11.6 Integration.** This Operating Agreement constitutes the full agreement of the Parties with respect to the subject matter hereto and supercedes all prior agreements, whether written or oral, with respect to such subject matter.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 11.7 Severability. If any term, covenant, or condition of this Operating Agreement or the application or effect of any such term, covenant, or condition is held invalid as to any person, entity, or circumstance, or is determined to be unjust, unreasonable, unlawful, imprudent, or otherwise not in the public interest by any court or government agency of competent jurisdiction, then such term, covenant, or condition shall remain in force and effect to the maximum extent permitted by law, and all other terms, covenants, and conditions of this Operating Agreement and their application shall not be affected thereby, but shall remain in force and effect and the Parties shall be relieved of their obligations only to the extent necessary to eliminate such regulatory or other determination unless a court or governmental agency of competent jurisdiction holds that such provisions are not separable from all other provisions of this Operating Agreement.
- **11.8 Penalties.** Any penalties to be levied under this Operating Agreement shall be established in accordance with the ISO Tariff and approved by the FERC. Nothing in this Operating Agreement, with the exception of the provisions relating to ADR, shall be construed as waiving the rights of the SUDC to oppose or protest any penalty proposed by the ISO to the FERC or the specific imposition by the ISO of any FERC-approved penalty on the SUDC.
- **11.9 Section Headings:** Section headings provided in this Operating Agreement are for ease of reading and are not meant to interpret the text in each Section.
- **11.10 Amendments.** This Operating Agreement and the Schedules attached hereto may be amended from time to time by the mutual agreement of the Parties in writing. Amendments that require FERC approval shall not take effect until FERC has accepted such amendments for filing and made them effective. If the amendment does not require FERC approval, the amendment will be filed with FERC for information.
- **11.11 Counterparts.** This Operating Agreement may be executed in one or more counterparts at different times, each of which shall be regarded as an original and all of which, taken together, shall constitute one and the same Operating Agreement.

IN WITNESS WHEREOF, the Parties hereto have caused this Operating Agreement to be duly executed on behalf of each by and through their authorized representatives as of the date hereinabove written.

California Independent System Operator Corporation

| By: Name: | | | _ |
|-----------------|--------------|------|---|
| Title: Date: | | | _ |
| Date. | | | - |
| [Full na | ame of SUDC] | | |
| | | | |
| Ву: | | | |
| Name: | | | _ |
| Title: | | | _ |
| Date: | | | _ |

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 1

SYSTEM INTERCONNECTION FACILITIES

[List to be provided in accordance with the SUDC Operating Agreement.]

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 2

Non-SUDC FACILITIES

[List to be provided in accordance with the SUDC Operating Agreement.]

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 3

OPERATIONAL CONTACTS

| <u>ISO</u> : | |
|--|---------------|
| Transmission Dispatcher | |
| (Folsom): | |
| Transmission Dispatcher (Alhambra): | |
| Generator Dispatcher: | |
| (Folsom-Primary) | |
| Generator Dispatcher: | |
| (Alhambra-Backup) Real Time Scheduler: | |
| (Folsom) | |
| Real Time Scheduler: | |
| (Alhambra) | |
| Pre Scheduler: | |
| Shift Manager: | |
| Control Room fax: | |
| Outage Coordination: | |
| Fax: | |
| Director of Grid Operations: | |
| WECC Reliability Coordinator: | |
| SUDC: | |
| Name of Operations | |
| Representative: | |
| Title: | |
| Address: | |
| City/State/Zip Code: | - |
| Email address: | |
| Phone: | |
| Fax: | |
| Name of Alternative | |
| Representative: | |
| Title: | |
| Email address: | |
| Phone: | |
| Fax: | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Effective: May 26, 2005

CONTACTS FOR NOTICES

| SUDC | |
|-------------------------------------|--|
| Name of Primary Representative: | |
| Title: | |
| Address: | |
| City/State/Zip Code: | |
| Email Address: | |
| Phone: | |
| Fax No: | |
| | |
| Name of Alternative Representative: | |
| Title: | |
| Address: | |
| City/State/Zip Code: | |
| Email Address: | |
| Phone: | |
| Fax No: | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 25, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1103

ISO

| Name of Primary Representative: | | - |
|-------------------------------------|-------------|---|
| Title: | | |
| Address: | | |
| City/State/Zip Code: | | |
| Email Address: | | - |
| Phone: | | - |
| Fax No: | | - |
| | | |
| | | |
| Name of Alternative Representative: | | - |
| Title: | | |
| Address: | | |
| City/State/Zip Code: | | |
| Email Address: | | - |
| Phone: | | - |
| Fax No: | | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: May 25, 2005

Effective: May 26, 2005

SCHEDULE 4

SYSTEM EMERGENCIES

The ISO will notify the SUDC's operational contact, as identified in Schedule 2, of the emergency, including information regarding the cause, nature, extent, and potential duration of the emergency. The SUDC contact will then take such actions as are appropriate for the emergency.

The SUDC will make requests for information from the ISO regarding emergencies through the ISO Operations Shift Manager, by the SUDC's operational contact, or the SUDC may coordinate public information with the ISO Communication Coordinator.

For transmission system caused outages the ISO Operations Shift Manager will notify the SUDC contact of any information related to the outage such as cause, nature, extent, potential duration and customers affected.

Available SUDC information and ISO Grid Control Center logs, ISO Electric Switching Orders and ISO Energy Management System temporal database will be used in the ISO's preparation of outage reviews. These documents are defined as the chronological record of the operation of the activities which occur with the portion of the electrical system assigned to that control center. The log shall contain all pertinent information, including orders received and transmitted, relay operations, messages, clearances, accidents, trouble reports, daily switching program, etc.

The SUDC will retain records in accordance with its record retention policy or practice, provided the records associated with this Operating Agreement are retained for a minimum of six years.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 5

SYSTEM DISTURBANCE LOAD RESTORATION

If the SUDC is required to shed load, the SUDC will follow the procedures set forth below in this Schedule 5 in promoting orderly, coordinated restoration of electric systems after a major system disturbance has occurred which resulted in load shedding by frequency relays in California.

- Immediately after load shedding has occurred in the SUDC, the SUDC will remain in contact with their respective Participating Transmission Owner (PTO) Area Control Center (ACC) until normal frequency has been restored throughout the ISO Control Area or the ISO Shift Manager has concluded that such full-time communications can be terminated. Emergency communications over the California ACC Hot-line will be under the direction of the ISO Shift Manager and the senior dispatcher present at the affected PTO ACC(s).
- 2. Manual load restoration will not normally be initiated until the California ACC Hot Line is attended. No load is to be manually restored unless directed by the ISO, either directly or through its assignee, provided that the procedure for the ISO's designation of any assignee is agreed to by the SUDC, after the frequency has recovered and there is indication that the frequency can be maintained. The SUDC will await direction from the ISO or its assignee, who will be in contact with the ISO Shift Manager. The ISO Shift Manager will determine whether adequate generation resources are available on line to support the load to be restored.
- 3. If the ISO cannot meet the WECC and NERC Control Area Disturbance Control Standard or the Control Performance Standard post disturbance, no manual load restoration will be permitted. If the frequency is such that automatic load restoration occurs under these conditions, if the SUDC has restored load automatically, it will manually shed an equivalent amount of load to offset the load which was automatically restored.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 6

INTERCONNECTION OPERATION STANDARDS

The ISO and SUDC shall jointly maintain stable operating parameters and control power and reactive flow in accordance with the capabilities of the SUDC, the ISO Tariff and the following interconnection operation standards.

SUDC Responsibilities

1. The SUDC shall operate its SUDC Facilities at each point of interconnection with the ISO Controlled Grid in such manner as to avoid any material adverse impact on the reliability of the ISO Controlled Grid. In accordance with this performance goal, the SUDC shall: i) operate its SUDC Facilities at each point of interconnection with the ISO Controlled Grid in accordance with Good Utility Practice with respect to normal ratings, emergency ratings, voltage limits, and balance of load between electrical phases; and ii) maintain load power factor at each point of interconnection with the ISO Controlled Grid as close as reasonably possible to unity power factor and consistent with Good Utility Practice.

ISO Responsibilities

- 1. The ISO shall operate the ISO Controlled Grid at each point of interconnection with the SUDC in accordance with the ISO Tariff and in such manner as to avoid any material adverse impact on the SUDC Facilities. In accordance with this performance goal, the ISO shall:
- 2. At the request of the SUDC, participate with the SUDC and Participating TO in the development of joint power quality performance standards and jointly maintain compliance with such standards.
- 3. Observe SUDC grid voltage limits specified in Attachment 1 including requirements for reduced voltage on ISO Controlled Grid facilities which apply during heavy fog (or other unusual operating conditions) as needed to minimize the risk of insulator flashover.
- 4. At the request of the SUDC, support SUDC investigation of power quality incidents, and provide related data to the SUDC in a timely manner.
- 5. Support installation of apparatus on the ISO Controlled Grid to improve power quality, and take all reasonable measures to investigate and mitigate power quality concerns caused by actions or events in neighboring systems or Control Areas.
- 6. Maintain, or cause to be maintained, load power factor at each SUDC Interconnection as close as reasonably possible to unity power factor and consistent with Good Utility Practice, pursuant to Section 2.5.3.4 of the ISO Tariff.

The Parties may adopt additional operations standards for the interconnection provided such standards are in writing and are mutually agreed to.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 6 ATTACHMENT 1

[To be determined.]

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 7

RECORDS, INFORMATION, REPORTS

The SUDC shall provide available information to the ISO relating to SUDC system operations reasonably related to system reliability of the ISO Controlled Grid. The Parties shall jointly develop any necessary forms and procedures for collection, study and transmittal of system data, information, reports and forecasts.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 8

RIGHTS OF ACCESS TO FACILITIES

- 1. **Equipment Installation.** In order to give effect to this Operating Agreement, a Party that requires the use of particular equipment (the equipment owner) may require installation of such equipment on property owned by the other Party (the property owner), provided that the equipment is necessary to meet the equipment owner's service obligations and that the equipment shall not have a negative impact on the reliability of the service provided, nor prevent the property owner from performing its own obligations or exercising its rights under this Operating Agreement.
- **2. Free Access.** The property owner shall grant to the equipment owner free of charge reasonable installation rights and rights of access to accommodate equipment inspection, maintenance, repair, upgrading, or removal for the purposes of this Operating Agreement, subject to the property owner's reasonable safety, operational, and future expansion needs.
- 3. Notice. The equipment owner shall provide reasonable notice to the property owner when requesting access for site assessment, equipment installation, or other relevant purposes. Such access shall not be provided unless the parties mutually agree to the date, time, and purpose of each access. Agreement on the terms of the access shall not be unreasonably withheld or delayed.
- 4. Removal of Installed Equipment. Following reasonable notice, the equipment owner shall be required, at its own expense, to remove or relocate equipment, at the request of the property owner, provided that the equipment owner shall not be required to do so if it would have a negative impact on the reliability of the service provided, or be prevented from performing its own obligations or exercising its rights under this Operating Agreement.
- **5. Costs.** The equipment owner shall repair at its own expense any property damage it causes in exercising its rights and shall reimburse the property owner for any other reasonable costs that it may be required to incur to accommodate the equipment owner's exercise of its rights under Section 1 or Section 4.
- **Rights to Assets.** The Parties shall not interfere with each other's assets, without prior written agreement.
- 7. Inspection of Facilities. In order to meet their respective obligations under this Operating Agreement, the ISO may view or inspect SUDC Facilities and the SUDC may view or inspect ISO Grid facilities. Provided that reasonable notice is given, a Party shall not unreasonably deny access to such facilities for viewing or inspection by the requesting Party.
- **8. Access During Emergencies.** Either Party shall have rights of access, without prior notice, to the other Party's equipment as necessary during times of a System Emergency.

Issued by: Charles F. Robinson, Vice President and General Counsel

SCHEDULE 9

SUDC OPERATING PROCEDURES

[To be determined.]

Issued by: Charles F. Robinson, Vice President and General Counsel

ISO TARIFF APPENDIX U

STANDARD LARGE GENERATOR INTERCONNECTION PROCEDURES (LGIP)

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 1112

STANDARD LARGE GENERATOR INTERCONNECTION PROCEDURES (LGIP)

Standard Large Generator Interconnection Procedures (LGIP)

Table of Contents

| LGIP 1 | OBJEC | CTIVES, DEFINITIONS, AND INTERPRETATION | 1117 |
|----------|---------|--|------|
| LGIP 1.1 | Object | ives | 1117 |
| LGIP 1.2 | Definit | ions | 1117 |
| LGIP 1 | .2.1 | Master Definitions Supplement | 1117 |
| LGIP 1 | .2.2 | Special Definitions for this LGIP | 1117 |
| LGIP 1 | .2.3 | Rules of Interpretation | 1118 |
| LGIP 2 | SCOPE | E AND APPLICATION | 1118 |
| LGIP 2.1 | Applic | ation of Standard Large Generator Interconnection Procedures 1118 | |
| LGIP 2.2 | Compa | arability | 1118 |
| LGIP 2.3 | Base C | Case Data | 1118 |
| LGIP 2.4 | No Арј | plicability to Transmission Service | 1118 |
| LGIP 3 | INTER | CONNECTION REQUESTS | 1119 |
| LGIP 3.1 | Genera | al | 1119 |
| LGIP 3.2 | Roles | and Responsibilities | 1119 |
| LGIP 3.3 | Interco | onnection Service | 1119 |
| LGIP 3 | .3.1 | The Product | 1119 |
| LGIP 3 | .3.2 | The Interconnection Studies | 1120 |
| LGIP 3 | .3.3 | Deliverability Assessment | 1120 |
| LGIP 3 | .3.3.1 | The Product | 1120 |
| LGIP 3 | .3.3.2 | The Assessment | 1120 |
| LGIP 3.4 | NETW | ORK UPGRADES | 1121 |
| LGIP 3 | .4.1 | Initial Funding | 1121 |
| LGIP 3 | .4.2 | [Section Intentionally Omitted] | 1121 |
| LGIP 3 | .4.3 | Repayment of Amounts Advanced for Network Upgrades | 1121 |
| LGIP 3 | .4.4 | Special Provisions for Affected Systems and Other Affected Participating TOs | 1121 |
| LGIP 3.5 | Valid I | nterconnection Request | 1122 |
| LGIP 3 | .5.1 | Initiating an Interconnection Request | 1122 |

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

| FIRST REPL | ACEMEN | T VOLUME NO. I | Original Sheet No. 1114 |
|------------|---------|--|-------------------------|
| LGIP | 3.5.2 | Acknowledgement of Interconnection Request | 1122 |
| LGIP | 3.5.3 | Deficiencies in Interconnection Request | 1122 |
| LGIP | 3.5.4 | Scoping Meeting | 1123 |
| LGIP 3.6 | Intern | et Posting | 1123 |
| LGIP 3.7 | Coord | lination with Affected Systems | 1124 |
| LGIP 3.8 | Withd | Irawal | 1124 |
| LGIP 4 | QUEL | IE POSITION | 1125 |
| LGIP 4.1 | Gene | ral | 1125 |
| LGIP 4.2 | Clust | ering | 1125 |
| LGIP 4.3 | Trans | ferability of Queue Position | 1126 |
| LGIP 4.4 | Modif | ications | 1126 |
| LGIP | 4.4.1 | [No Subheading Title] | 1126 |
| LGIP | 4.4.2 | [No Subheading Title] | 1127 |
| LGIP | 4.4.3 | [No Subheading Title] | 1127 |
| LGIP | 4.4.4 | [No Subheading Title] | 1127 |
| LGIP | 4.4.5 | [No Subheading Title] | 1127 |
| LGIP 5 | PRIO | EDURES FOR INTERCONNECTION REQUESTS SU R TO EFFECTIVE DATE OF STANDARD LARGE GENI RCONNECTION PROCEDURES | |
| LGIP 5.1 | Queu | e Position for Pending Requests | 1127 |
| LGIP | 5.1.1 | [No Subheading Title] | 1127 |
| LGIP | 5.1.1.1 | [No Subheading Title] | 1127 |
| LGIP | 5.1.1.2 | [No Subheading Title] | 1127 |
| LGIP | 5.1.1.3 | [No Subheading Title] | 1128 |
| LGIP | 5.1.2 | Transition Period | 1128 |
| LGIP 5.2 | New F | Participating TO | 1128 |
| LGIP 6 | INTER | RCONNECTION FEASIBILITY STUDY | 1128 |
| LGIP 6.1 | Interc | onnection Feasibility Study Agreement | 1128 |
| LGIP 6.2 | Scope | e of Interconnection Feasibility Study | 1129 |
| LGIP 6.3 | Interc | onnection Feasibility Study Procedures | 1130 |
| LGIP | 6.3.1 | Meeting with the Participating TO(s) and ISO | 1130 |
| LGIP 6.4 | Re-St | udy | 1130 |

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 1115

| LGIP 7 | INTERCONNECTION SYSTEM IMPACT STUDY | 1131 | |
|-----------|--|--------|------|
| LGIP 7.1 | Interconnection System Impact Study Agreement | | 1131 |
| LGIP 7.2 | Execution of Interconnection System Impact Study Agreement | | 1131 |
| LGIP 7.3 | Scope of Interconnection System Impact Study | | 1132 |
| LGIP 7.4 | Interconnection System Impact Study Procedures | | 1133 |
| LGIP 7.5 | Meeting with the Participating TO and ISO | | 1133 |
| LGIP 7.6 | Re-Study | | 1134 |
| LGIP 8 | INTERCONNECTION FACILITIES STUDY | | 1134 |
| LGIP 8.1 | Interconnection Facilities Study Agreement | | 1134 |
| LGIP 8. | 1.1 [No Subheading Title] | | 1134 |
| LGIP 8.2 | Scope of Interconnection Facilities Study | | 1135 |
| LGIP 8.3 | Interconnection Facilities Study Procedures | | 1135 |
| LGIP 8.4 | Meeting with Participating TO and ISO | 1136 | |
| LGIP 8.5 | Re-Study | | 1136 |
| LGIP 9 | ENGINEERING & PROCUREMENT ("E&P") AGREEMENT | | 1136 |
| LGIP 10 | OPTIONAL INTERCONNECTION STUDY | | 1137 |
| LGIP 10.1 | Optional Interconnection Study Agreement | | 1137 |
| LGIP 10.2 | Scope of Optional Interconnection Study | | 1138 |
| LGIP 10.3 | Optional Interconnection Study Procedures | | 1138 |
| LGIP 11 | STANDARD LARGE GENERATOR INTERCONNECTION AGREEMENT | (LGIA) | 1138 |
| LGIP 11.1 | Tender | | 1138 |
| LGIP 11.2 | Negotiation | | 1139 |
| LGIP 11.3 | Execution and Filing | | 1139 |
| LGIP 11.4 | Commencement of Interconnection Activities | | 1140 |
| LGIP 11.5 | Interconnection Customer to Meet Requirements of the Participating TO's Interconnection Handbook | | 1140 |
| LGIP 12 | CONSTRUCTION OF PARTICIPATING TO'S INTERCONNECTION FACILITIES AND NETWORK UPGRADES | | 1140 |
| LGIP 12.1 | Schedules | | 1140 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

Effective: July 1, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 1116

| LGIP 12.2 | Const | ruction Sequencing | | 1140 |
|--|------------|--|------|------|
| LO | SIP 12.2.1 | General | | 1140 |
| LG | SIP 12.2.2 | Advance Construction of Network Upgrades that are an Obligation of an Entity other than the Interconnection Customer | | 1140 |
| LG | SIP 12.2.3 | Advancing Construction of Network Upgrades that are Part of an Expansion Plan of the Participating TO | 1141 | |
| LO | SIP 12.2.4 | Amended Interconnection Study | | 1141 |
| LGIP 13 | MISCE | ELLANEOUS | | 1142 |
| LGIP 13.1 Confid | | lentiality | | 1142 |
| LO | SIP 13.1.1 | Scope | | 1142 |
| LO | SIP 13.1.2 | Release of Confidential Information | | 1143 |
| LO | SIP 13.1.3 | Rights | | 1143 |
| LO | SIP 13.1.4 | No Warranties | | 1143 |
| LO | SIP 13.1.5 | Standard of Care | | 1143 |
| LO | SIP 13.1.6 | Order of Disclosure | | 1143 |
| LGIP 13.1.7 | | Remedies | | 1144 |
| LO | SIP 13.1.8 | Disclosure to FERC, its Staff, or a State | | 1144 |
| LGIP 13.1.9 | | [No Subheading Title] | | 1144 |
| LGIP 13.1.10 | | [No Subheading Title] | | 1145 |
| LGIP 13.1.11 | | [No Subheading Title] | | 1145 |
| LGIP 13.2 | Delega | ation of Responsibility | | 1145 |
| LGIP 13.3 | Obliga | tion for Study Costs | | 1145 |
| LGIP 13.4 Third Parties Conducting Studies | | | 1145 | |
| LGIP 13.5 Disput | | tes | | 1146 |
| LG | SIP 13.5.1 | Submission | | 1146 |
| LGIP 13.5.2 | | External Arbitration Procedures | | 1147 |
| LGIP 13.5.3 | | Arbitration Decisions | | 1147 |
| LGIP 13.5.4 | | Costs | | 1147 |
| LGIP 13.6 Local I | | Furnishing Bonds | | 1148 |
| LG | SIP 13.6.1 | Participating TOs That Own Facilities Financed by Local Furnishing Bonds | | 1148 |
| LGIP 13.6.2 | | Alternative Procedures for Requesting Interconnection Service | | 1148 |
| LGIP Appendix 1 | | | | 1149 |

SECTION 1. OBJECTIVES, DEFINITIONS, AND INTERPRETATION.

1.1 Objectives.

The objective of this LGIP is to implement FERC's Order No. 2003 setting forth the requirements for Large Generating Facility interconnections to the ISO Controlled Grid.

1.2 Definitions.

1.2.1 Master Definitions Supplement.

Unless the context otherwise requires, any word or expression defined in the Master Definitions Supplement to the ISO Tariff shall have the same meaning where used in this LGIP. A reference to a Section or an Appendix is a reference to a Section or an Appendix of the ISO Tariff. References to LGIP are to this Protocol or to the stated paragraph of this Protocol.

1.2.2 Special Definitions for this LGIP.

In this LGIP, the following words and expressions shall have the meanings set opposite them:

"Confidential Information" shall mean any confidential, proprietary or trade secret information of a plan, specification, pattern, procedure, design, device, list, concept, policy or compilation relating to the present or planned business of a Party, which is designated as confidential by the Party supplying the information, whether conveyed orally, electronically, in writing, through inspection, or otherwise, subject to Section 13.1 of the LGIP.

"Dispute Resolution" shall mean the procedure set forth in this LGIP for resolution of a dispute between the Parties.

"Force Majeure" shall mean any act of God, labor disturbance, act of the public enemy, war, insurrection, riot, fire, storm or flood, explosion, breakage or accident to machinery or equipment, any order, regulation or restriction imposed by governmental, military or lawfully established civilian authorities, or any other cause beyond a Party's control. A Force Majeure event does not include acts of negligence or intentional wrongdoing by the Party claiming Force Majeure.

"Governmental Authority" shall mean any federal, state, local or other governmental, regulatory or administrative agency, court, commission, department, board, or other governmental subdivision, legislature, rulemaking board, tribunal, or other governmental authority having jurisdiction over the Parties, their respective facilities, or the respective services they provide, and exercising or entitled to exercise any administrative, executive, police, or taxing authority or power; provided, however, that such term does not include the Interconnection Customer, ISO, or Participating TO, or any Affiliate thereof.

"Party" or "Parties" shall mean the ISO, Participating TO(s), Interconnection Customer or the applicable combination of the above.

"Reasonable Efforts" shall mean, with respect to an action required to be attempted or taken by a Party under the Standard Large Generator Interconnection Procedures, efforts that are timely and consistent with Good Utility Practice and are otherwise substantially equivalent to those a Party would use to protect its own interests.

Issued by: Charles F. Robinson, Vice President and General Counsel

1.2.3 Rules of Interpretation.

- (a) Unless the context otherwise requires, if the provisions of this LGIP and the ISO Tariff conflict, the ISO Tariff will prevail to the extent of the inconsistency.
- (b) A reference in this LGIP to a given agreement, ISO Protocol or instrument shall be a reference to that agreement or instrument as modified, amended, supplemented or restated through the date as of which such reference is made.
- (c) The captions and headings in this LGIP are inserted solely to facilitate reference and shall have no bearing upon the interpretation of any of the terms and conditions of this LGIP.
- (d) This LGIP shall be effective as of the date specified by FERC.

Section 2. Scope and Application.

2.1 Application of Standard Large Generator Interconnection Procedures.

Sections 2 through 13 of this LGIP apply to processing an Interconnection Request pertaining to a Large Generating Facility.

2.2 Comparability.

The ISO and the applicable Participating TO shall receive, process and analyze Interconnection Requests in a timely manner as set forth in this LGIP. The ISO and the Participating TOs will use the same Reasonable Efforts in processing and analyzing Interconnection Requests from all Interconnection Customers, whether the Generating Facilities are owned by the Participating TO, its subsidiaries or Affiliates or others.

2.3 Base Case Data.

The applicable Participating TO or ISO shall provide base power flow, short circuit and stability databases, including all underlying assumptions, and contingency list upon request subject to applicable confidentiality provisions in LGIP Section 13.1. The applicable Participating TO or the ISO is permitted to require that the Interconnection Customer sign a confidentiality agreement before the release of commercially sensitive information or Critical Energy Infrastructure Information (as that term is defined by FERC) in the Base Case data. Such Base Cases shall include (i) generation projects and (ii) transmission projects, including merchant transmission projects that are proposed for the transmission system for which a transmission expansion plan has been submitted and approved by the applicable authority.

2.4 No Applicability to Transmission Service.

Nothing in this LGIP shall constitute a request for transmission service or confer upon an Interconnection Customer any right to receive transmission service.

Issued by: Charles F. Robinson, Vice President and General Counsel

Section 3. Interconnection Requests.

3.1 General.

Pursuant to ISO Tariff Section 5.7.1, an Interconnection Customer shall submit to the ISO an Interconnection Request in the form of Appendix 1 to this LGIP and a refundable deposit of \$10,000. The ISO will forward the deposit and a copy of the Interconnection Request to the applicable Participating TO within one (1) Business Day of receipt. The Participating TO shall apply the deposit toward the cost of an Interconnection Feasibility Study. The Interconnection Customer shall submit a separate Interconnection Request for each site and may submit multiple Interconnection Requests for a single site. The Interconnection Customer must submit a deposit with each Interconnection Request even when more than one request is submitted for a single site. An Interconnection Request to evaluate one site at two different voltage levels shall be treated as two Interconnection Requests.

At the Interconnection Customer's option, the Participating TO, the ISO and Interconnection Customer will identify alternative Point(s) of Interconnection and configurations at the Scoping Meeting to evaluate in this process and attempt to eliminate alternatives in a reasonable fashion given resources and information available. Interconnection Customer will select the definitive Point(s) of Interconnection to be studied no later than the execution of the Interconnection Feasibility Study Agreement.

3.2 Roles and Responsibilities.

- (a) For each Interconnection Request, the ISO will direct the applicable Participating TO to perform the required Interconnection Studies and any additional studies the ISO determines to be reasonably necessary. The ISO will coordinate with Affected System Operators in accordance with LGIP Section 3.7.
- (b) Any applicable Participating TO will complete or cause to be completed all studies directed by the ISO within the timelines provided in this LGIP. Any studies performed by the ISO or by a third party at the direction of the ISO shall also be completed within timelines provided in this LGIP.
- (c) Each Interconnection Customer shall pay the reasonable costs of all Interconnection Studies performed by or at the direction of the ISO or the applicable Participating TO, and any additional studies the ISO determines to be reasonably necessary in response to the Interconnection Request.

3.3 Interconnection Service.

3.3.1 The Product. Interconnection Service allows the Interconnection Customer to connect the Large Generating Facility to the ISO Controlled Grid and be eligible to deliver the Large Generating Facility's output using the available capacity of the ISO Controlled Grid. Interconnection Service does not in and of itself convey any right to deliver electricity to any specific customer or point of delivery.

Issued by: Charles F. Robinson, Vice President and General Counsel

3.3.2 The Interconnection Studies. The Interconnection Studies consist of, but are not limited to, short circuit/fault duty, steady state (thermal and voltage) and stability analyses. The Interconnection Studies will include short circuit/fault duty, steady state and stability analyses and will identify direct Interconnection Facilities and required Reliability Network Upgrades necessary to address short circuit, overload and stability issues associated with the requested Interconnection Service.

The Interconnection Studies will also identify necessary Delivery Network Upgrades to allow full output of the proposed Large Generating Facility under a variety of potential system conditions, and the maximum allowed output, under a variety of potential system conditions, of the interconnecting Large Generating Facility without the Delivery Network Upgrades.

3.3.3 Deliverability Assessment.

3.3.3.1 The Product. A Deliverability Assessment will be performed which shall determine the Interconnection Customer's Large Generating Facility's ability to deliver its energy to the ISO Controlled Grid under peak load conditions. The Deliverability Assessment will provide the Interconnection Customer with information as to the level of deliverability without Network Upgrades, and the Deliverability Assessment will provide the Interconnection Customer with information as to the required Network Upgrades to enable the Interconnection Customer's Large Generating Facility the ability to deliver the full output of the proposed Large Generating Facility to the ISO Controlled Grid based on specified study assumptions.

Thus, the Deliverability Assessment results will provide the Interconnection Customer two (2) data points on the scale of deliverability: 1) a deliverability level with no Network Upgrades, and 2) the required Network Upgrades to support 100% deliverability.

Deliverability of a new Large Generating Facility will be assessed on the same basis as all other existing resources interconnected to the ISO Controlled Grid.

3.3.3.2 The Assessment. The Deliverability Assessment will identify the facilities that are required to enable the Interconnection Customer's Large Generating Facility to meet the requirements for deliverability and as a general matter, that such Large Generating Facility's interconnection is also studied with the ISO Controlled Grid at peak load, under a variety of severely stressed conditions, to determine whether, with the Large Generating Facility at full output, the aggregate of generation in the local area can be delivered to the aggregate of load on the ISO Controlled Grid, consistent with the ISO's reliability criteria and procedures. This approach assumes that some portion of existing resources that are designated as deliverable is displaced by the output of the Interconnection Customer's Large Generating Facility. This Deliverability Assessment in and of itself does not convey any right to deliver electricity to any specific customer or point of delivery. The ISO Controlled Grid may also be studied under non-peak load conditions. However, upon request by the Interconnection Customer, the Deliverability Assessment must explain in writing to the Interconnection Customer why the study of non-peak load conditions is required for reliability purposes.

Issued by: Charles F. Robinson, Vice President and General Counsel

3.4 Network Upgrades.

3.4.1 Initial Funding

Unless the Participating TO elects to fund the capital for Reliability and Delivery Network Upgrades, they shall be solely funded by the Interconnection Customer.

3.4.2 [Section Intentionally Omitted]

3.4.3 Repayment of Amounts Advanced for Network Upgrades.

Upon the Commercial Operation Date, the Interconnection Customer shall be entitled to a repayment for the cost of Network Upgrades. Such amount shall be paid to the Interconnection Customer by the Participating TO on a dollar-for-dollar basis either through (1) direct payments made on a levelized basis over the five-year period commencing on the Commercial Operation Date; or (2) any alternative payment schedule that is mutually agreeable to the Interconnection Customer and Participating TO, provided that such amount is paid within five (5) years of the Commercial Operation Date. Any repayment shall include interest calculated in accordance with the methodology set forth in FERC's regulations at 18 C.F.R. §35.19a(a)(2)(iii) from the date of any payment for Network Upgrades through the date on which the Interconnection Customer receives a repayment of such payment. The Interconnection Customer may assign such repayment rights to any person.

Instead of direct payments, the Interconnection Customer may elect to receive Firm Transmission Rights (FTRs) in accordance with the ISO Tariff associated with the Network Upgrades that were funded by the Interconnection Customer, to the extent such FTRs or alternative rights are available under the ISO Tariff at the time of the election. Such FTRs would take effect upon the Commercial Operation Date of the Large Generating Facility in accordance with the LGIA.

3.4.4 Special Provisions for Affected Systems and Other Affected Participating TOs.

The Interconnection Customer shall enter into an agreement with the owner of the Affected System and/or other affected Participating TO(s), as applicable. The agreement shall specify the terms governing payments to be made by the Interconnection Customer to the owner of the Affected System and/or other affected Participating TO(s) as well as the repayment by the owner of the Affected System and/or other affected Participating TO(s). If the affected entity is another Participating TO, the initial form of agreement will be the LGIA, as appropriately modified.

Any repayment by the owner of the Affected System shall be in accordance with FERC Order No. 2003-B (109 FERC ¶ 61,287).

Issued by: Charles F. Robinson, Vice President and General Counsel

3.5 Valid Interconnection Request.

3.5.1 Initiating an Interconnection Request.

To initiate an Interconnection Request, the Interconnection Customer must submit all of the following: (i) a \$10,000 deposit, (ii) a completed application in the form of LGIP Appendix 1, and (iii) demonstration of Site Control or a posting of an additional deposit of \$10,000. Such deposits may be applied toward any Interconnection Studies pursuant to the Interconnection Request. If the Interconnection Customer demonstrates Site Control within the cure period specified in LGIP Section 3.5.3 after submitting its Interconnection Request, the additional deposit shall be refundable; otherwise, all such deposit(s), additional and initial. become non-refundable.

The expected In-Service Date of the new Large Generating Facility or increase in capacity of the existing Generating Facility shall be no more than the process window for the regional expansion planning period (or in the absence of a regional planning process, the process window for the ISO's expansion planning period) not to exceed seven years from the date the Interconnection Request is received by the ISO, unless the Interconnection Customer demonstrates that engineering, permitting and construction of the new Large Generating Facility or increase in capacity of the existing Generating Facility will take longer than the regional expansion planning period. The In-Service Date may succeed the date the Interconnection Request is received by the ISO by a period up to ten years, or longer where the Interconnection Customer, the applicable Participating TO and the ISO agree, such agreement not to be unreasonably withheld.

3.5.2 Acknowledgment of Interconnection Request.

The ISO shall acknowledge receipt of the Interconnection Request within six (6) Business Days of receipt of the request and attach a copy of the received Interconnection Request to the acknowledgement.

3.5.3 Deficiencies in Interconnection Request.

An Interconnection Request will not be considered to be a valid request until all items in LGIP Section 3.5.1 have been received by the ISO and are deemed complete by the applicable Participating TO and the ISO. If an Interconnection Request fails to meet the requirements set forth in LGIP Section 3.5.1, the ISO shall notify the Interconnection Customer within six (6) Business Days of receipt of the initial Interconnection Request of the reasons for such failure and that the Interconnection Request does not constitute a valid request. The Interconnection Customer shall provide the ISO the additional requested information needed to constitute a valid request within ten (10) Business Days after receipt of such notice. Failure by the Interconnection Customer to comply with this LGIP Section 3.5.3 shall be treated in accordance with LGIP Section 3.8.

Issued by: Charles F. Robinson, Vice President and General Counsel

3.5.4 Scoping Meeting.

Within ten (10) Business Days after receipt of a valid Interconnection Request, the applicable Participating TO, in coordination with the ISO, shall establish a date agreeable to the Interconnection Customer for the Scoping Meeting, and such date shall be no later than thirty (30) Calendar Days from receipt of the valid Interconnection Request, unless otherwise mutually agreed upon by the Parties. The ISO shall determine whether the Interconnection Request is at or near the boundary of an affected Participating TO(s) service territory or of any other Affected System(s) so as to potentially affect such third parties. If such a determination is made, the ISO shall invite the affected Participating TO(s) and/or Affected System Operator(s), in accordance with Section 3.7, to the Scoping Meeting by informing such third parties of the time and place of the scheduled Scoping Meeting as soon as practicable.

The purpose of the Scoping Meeting shall be to discuss alternative interconnection options, to exchange information including any transmission data that would reasonably be expected to impact such interconnection options, to analyze such information and to determine the potential feasible Points of Interconnection. The Participating TO, the ISO and the Interconnection Customer will bring to the meeting such technical data, including, but not limited to: (i) general facility loadings, (ii) general instability issues, (iii) general short circuit issues, (iv) general voltage issues, and (v) general reliability issues, as may be reasonably required to accomplish the purpose of the meeting. The Participating TO, the ISO and the Interconnection Customer will also bring to the meeting personnel and other resources as may be reasonably required to accomplish the purpose of the meeting in the time allocated for the meeting. On the basis of the meeting, the Interconnection Customer shall designate its Point of Interconnection, pursuant to LGIP Section 6.1, and one or more available alternative Point(s) of Interconnection. The duration of the meeting shall be sufficient to accomplish its purpose.

The Participating TO shall prepare minutes from the meeting, verified by the Interconnection Customer and the ISO, that will include, at a minimum, discussions of what the Participating TO and the ISO expect the results of the Interconnection Feasibility Study will be.

3.6 Internet Posting.

The ISO will maintain on the ISO Home Page a list of all Interconnection Requests. The list will identify, for each Interconnection Request: (i) the maximum summer and winter megawatt electrical output; (ii) the location by county and state; (iii) the station or transmission line or lines where the interconnection will be made; (iv) the projected In-Service Date; (v) the status of the Interconnection Request, including Queue Position; (vi) the availability of any studies related to the Interconnection Request; (vii) the date of the Interconnection Request; (viii) the type of Generating Facility to be constructed (combined cycle, base load or combustion turbine and fuel type); and (ix) for Interconnection Requests that have not resulted in a completed interconnection, an explanation as to why it was not completed.

Except in the case of an Affiliate, the list will not disclose the identity of the Interconnection Customer until the Interconnection Customer executes an LGIA or

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1124

requests that the Participating TO file an unexecuted LGIA with FERC. The ISO shall post on the ISO Home Page an advance notice whenever a Scoping Meeting will be held with an Affiliate of a Participating TO.

The ISO shall post to the ISO Home Page any deviations from the study timelines set forth herein. Interconnection Study reports and Optional Interconnection Study reports shall be posted to the ISO Home Page subsequent to the meeting among the Interconnection Customer, the Participating TO and the ISO to discuss the applicable study results. The ISO shall also post any known deviations in the Large Generating Facility's In-Service Date.

3.7 Coordination with Affected Systems.

The ISO will notify the Affected System Operators that are potentially affected by the project proposed by the Interconnection Customer. The ISO will coordinate the conduct of any studies required to determine the impact of the Interconnection Request on Affected Systems with Affected System Operators, to the extent possible, and, if possible, the Participating TO will include those results (if available) in its applicable Interconnection Study within the time frame specified in this LGIP. The ISO will include such Affected System Operators in all meetings held with the Interconnection Customer as required by this LGIP. The Interconnection Customer will cooperate with the ISO in all matters related to the conduct of studies and the determination of modifications to Affected Systems, including signing separate study agreements with Affected System owners and paying for necessary studies. An entity which may be an Affected System shall cooperate with the ISO in all matters related to the conduct of studies and the determination of modifications to Affected Systems.

3.8 Withdrawal.

The Interconnection Customer may withdraw its Interconnection Request at any time by written notice of such withdrawal to the ISO and the applicable Participating TO. In addition, if the Interconnection Customer fails to adhere to all requirements of this LGIP, except as provided in LGIP Section 13.5 (Disputes), the ISO shall deem the Interconnection Request to be withdrawn and shall provide written notice to the Interconnection Customer within five (5) Business Days of the deemed withdrawal and an explanation of the reasons for such deemed withdrawal. Upon receipt of such written notice, the Interconnection Customer shall have fifteen (15) Business Days in which to either respond with information or actions that cures the deficiency or to notify the Participating TO and the ISO of its intent to pursue Dispute Resolution.

Withdrawal shall result in the loss of the Interconnection Customer's Queue Position, if any. If an Interconnection Customer disputes the withdrawal and loss of its Queue Position, then during Dispute Resolution, the Interconnection Customer's Interconnection Request is eliminated from the queue until such time that the outcome of Dispute Resolution would restore its Queue Position. An Interconnection Customer that withdraws or is deemed to have withdrawn its Interconnection Request shall pay to the Participating TO all costs that the Participating TO prudently incurs or irrevocably has committed to be incurred with respect to that Interconnection Request prior to the Participating TO's receipt of notice described above. The Interconnection Customer must

Issued by: Charles F. Robinson, Vice President and General Counsel

pay all monies due to the Participating TO before it is allowed to obtain any Interconnection Study data or results.

The ISO shall update the ISO Home Page Queue Position posting. The Participating TO shall refund to the Interconnection Customer any portion of the Interconnection Customer's deposit or study payments that exceeds the costs that the Participating TO has incurred, including interest calculated in accordance with section 35.19a(a)(2) of FERC's regulations. In the event of such withdrawal, the Participating TO and ISO, subject to the confidentiality provisions of LGIP Section 13.1, shall provide, at the Interconnection Customer's request, all information that the Participating TO and ISO developed for any completed study conducted up to the date of withdrawal of the Interconnection Request.

Section 4. Queue Position.

4.1 General.

The ISO shall assign a Queue Position based upon the date and time of receipt of the valid Interconnection Request; provided that, if the sole reason an Interconnection Request is not valid is the lack of required information on the application form, and the Interconnection Customer provides such information in accordance with LGIP Section 3.5.3, then the ISO shall assign the Interconnection Customer a Queue Position based on the date the application form was originally filed. Moving a Point of Interconnection shall result in a lowering of Queue Position if it is deemed a Material Modification under LGIP Section 4.4.3.

The queue position of each Interconnection Request will be used to determine the order of performing the Interconnection Studies and determination of cost responsibility for the facilities necessary to accommodate the Interconnection Request. A higher Queue Position Interconnection Request is one that has been placed "earlier" in the ISO's queue in relation to another Interconnection Request that is lower queued. The cost of the common upgrades for clustered Interconnection Requests may be allocated without regard to queue position.

4.2 Clustering.

At the ISO's option and with concurrence of the applicable Participating TO, Interconnection Requests may be studied serially or in clusters for the purpose of the Interconnection System Impact Study.

Clustering shall be implemented on the basis of Queue Position. If the Participating TO and the ISO elect to study Interconnection Requests using Clustering, all Interconnection Requests received within a period not to exceed one hundred and eighty (180) Calendar Days, hereinafter referred to as the "Queue Cluster Window" shall be studied together without regard to the nature of the underlying Interconnection Service. The deadline for completing all Interconnection System Impact Studies for which an Interconnection System Impact Study Agreement has been executed during a Queue Cluster Window shall be in accordance with LGIP Section 7.4, for all Interconnection Requests assigned to the same Queue Cluster Window. The Participating TO and ISO may agree to study an Interconnection Request separately to the extent warranted by Good Utility Practice

Issued by: Charles F. Robinson, Vice President and General Counsel

based upon the electrical remoteness of the proposed Large Generating Facility.

Clustering Interconnection System Impact Studies shall be conducted in such a manner to ensure the efficient implementation of the applicable regional transmission expansion plan in light of the transmission system's capabilities at the time of each study.

The Queue Cluster Window shall have a fixed time interval based on fixed annual opening and closing dates. Any changes to the established Queue Cluster Window interval and opening or closing dates shall be announced with a posting on the ISO Home Page beginning at least one hundred and eighty (180) Calendar Days in advance of the change and continuing thereafter through the end date of the first Queue Cluster Window that is to be modified.

4.3 Transferability of Queue Position.

An Interconnection Customer may transfer its Queue Position to another entity only if such entity acquires the specific Generating Facility identified in the Interconnection Request and the Point of Interconnection does not change.

4.4 Modifications.

The Interconnection Customer shall submit to the ISO, in writing, modifications to any information provided in the Interconnection Request. The ISO will forward the Interconnection Customer's modification to the applicable Participating TO within one (1) Business Day of receipt. The Interconnection Customer shall retain its Queue Position if the modifications are in accordance with LGIP Sections 4.4.1, 4.4.2 or 4.4.5, or are determined not to be Material Modifications pursuant to LGIP Section 4.4.3.

Notwithstanding the above, during the course of the Interconnection Studies, either the Interconnection Customer, the Participating TO, or the ISO may identify changes to the planned interconnection that may improve the costs and benefits (including reliability) of the interconnection, and the ability of the proposed change to accommodate the Interconnection Request. To the extent the identified changes are acceptable to the Participating TO, the ISO, and Interconnection Customer, such acceptance not to be unreasonably withheld, the Participating TO and/or the ISO shall modify the Point of Interconnection and/or configuration in accordance with such changes and proceed with any re-studies necessary to do so in accordance with LGIP Section 6.4, LGIP Section 7.6 and LGIP Section 8.5 as applicable and the Interconnection Customer shall retain its Queue Position.

Prior to the return of the executed Interconnection System Impact Study Agreement to the Participating TO, modifications permitted under this Section shall include specifically: (a) a decrease of up to 60 percent of electrical output (MW) of the proposed project; (b) modifying the technical parameters associated with the Large Generating Facility technology or the Large Generating Facility step-up transformer impedance characteristics; and (c) modifying the interconnection configuration. For plant increases, the incremental increase in plant output will go to the end of the queue for the purposes of cost allocation and study analysis.

Issued by: Charles F. Robinson, Vice President and General Counsel

- Prior to the return of the executed Interconnection Facility Study Agreement to the Participating TO, the modifications permitted under this Section shall include specifically: (a) additional 15 percent decrease of electrical output (MW), and (b) Large Generating Facility technical parameters associated with modifications to Large Generating Facility technology and transformer impedances; provided, however, the incremental costs associated with those modifications are the responsibility of the requesting Interconnection Customer.
- 4.4.3 Prior to making any modification other than those specifically permitted by LGIP Sections 4.4.1, 4.4.2, and 4.4.5, the Interconnection Customer may first request that the Participating TO and the ISO evaluate whether such modification is a Material Modification. In response to the Interconnection Customer's request, the Participating TO and the ISO shall evaluate the proposed modifications prior to making them and inform the Interconnection Customer in writing of whether the modifications would constitute a Material Modification. Any change to the Point of Interconnection, except those deemed acceptable under Sections 4.4.1, 6.1, 7.2 or so allowed elsewhere, shall constitute a Material Modification. The Interconnection Customer may then withdraw the proposed modification or proceed with a new Interconnection Request for such modification.
- 4.4.4 Upon receipt of the Interconnection Customer's request for modification permitted under this LGIP Section 4.4, the Participating TO and/or ISO shall commence and perform any necessary additional studies as soon as practicable, but in no event shall the Participating TO and/or ISO commence such studies later than thirty (30) Calendar Days after receiving notice of the Interconnection Customer's request. Any additional studies resulting from such modification shall be done at the Interconnection Customer's cost.
- **4.4.5** Extensions of less than three (3) cumulative years in the Commercial Operation Date of the Large Generating Facility to which the Interconnection Request relates are not material and should be handled through construction sequencing.
- Section 5. Procedures for Interconnection Requests Submitted Prior to Effective Date of Standard Large Generator Interconnection Procedures.
- 5.1 Queue Position for Pending Requests.
- **5.1.1** Any Interconnection Customer assigned a queue position prior to the effective date of this LGIP shall retain that relative queue position.
- 5.1.1.1 If an Interconnection Study agreement has not been executed as of the effective date of this LGIP, then such Interconnection Study, and any subsequent Interconnection Studies, shall be processed in accordance with this LGIP.
- If an Interconnection Study agreement has been executed prior to the effective date of this LGIP, such Interconnection Study shall be completed in accordance with the terms of such agreement. With respect to any remaining studies for which an Interconnection Customer has not signed an Interconnection Study agreement prior to the effective date of the LGIP, the Participating TO must offer the Interconnection Customer the option of either continuing under the Participating TO's existing interconnection study process pursuant to ISO Tariff Appendix W or going forward with the completion of the necessary

Issued by: Charles F. Robinson, Vice President and General Counsel

Interconnection Studies (for which it does not have a signed Interconnection Studies agreement) in accordance with this LGIP.

5.1.1.3 If an agreement to interconnect a Generating Unit has been submitted to FERC for approval before the effective date of the LGIP, then the agreement would be grandfathered.

5.1.2 Transition Period.

To the extent necessary, the Participating TO and/or the ISO and Interconnection Customers with an outstanding request (i.e., an interconnection request or application for which an agreement to interconnect a Generating Unit has not been submitted to FERC for approval as of the effective date of this LGIP) shall transition to this LGIP within a reasonable period of time not to exceed sixty (60) Calendar Days. The use of the term "outstanding request" herein shall mean any interconnection request or application, on the effective date of this LGIP: (i) that has been submitted but not yet accepted by the ISO or the Participating TO; (ii) where the related interconnection agreement has not yet been submitted to FERC for approval in executed or unexecuted form, (iii) where the relevant interconnection study agreements have not yet been executed, or (iv) where any of the relevant interconnection studies are in process but not vet completed. Any Interconnection Customer with an outstanding request as of the effective date of this LGIP may request a reasonable extension of any deadline, otherwise applicable, if necessary to avoid undue hardship or prejudice to its Interconnection Request. A reasonable extension shall be granted by the Participating TO or ISO, as applicable, to the extent consistent with the intent and process provided for under this LGIP.

5.2 New Participating TO.

If the Participating TO transfers control of its portion of the ISO Controlled Grid to a successor Participating TO during the period when an Interconnection Request is pending, the original Participating TO shall transfer to the successor Participating TO any amount of the deposit or payment with interest thereon that exceeds the cost that it incurred to evaluate the request for interconnection. Any difference between such net deposit amount and the costs that the successor Participating TO incurs to evaluate the request for interconnection shall be paid by or refunded to the Interconnection Customer, as appropriate. The original Participating TO shall coordinate with the successor Participating TO and ISO to complete any Interconnection Study, as appropriate, that the original Participating TO has begun but has not completed. If the original Participating TO has tendered a draft LGIA to the Interconnection Customer but the Interconnection Customer has not either executed the LGIA or requested the filing of an unexecuted LGIA with FERC, unless otherwise provided, the Interconnection Customer must complete negotiations with the successor Participating TO and the ISO.

Section 6. Interconnection Feasibility Study.

6.1 Interconnection Feasibility Study Agreement.

Simultaneously with the acknowledgement of a valid Interconnection Request, the applicable Participating TO shall provide to the Interconnection Customer an Interconnection Feasibility Study Agreement. The Interconnection Feasibility Study

Issued by: Charles F. Robinson, Vice President and General Counsel

Agreement shall specify that the Interconnection Customer is responsible for the actual cost of the Interconnection Feasibility Study. Within five (5) Business Days following the Scoping Meeting, the Interconnection Customer shall specify for inclusion in the attachment to the Interconnection Feasibility Study Agreement the Point(s) of Interconnection and any reasonable alternative Point(s) of Interconnection. Within five (5) Business Days following the applicable Participating TO's receipt of such designation, the Participating TO in coordination with the ISO shall provide to the Interconnection Customer a signed Interconnection Feasibility Study Agreement, which shall include a good faith estimate of the cost for completing the Interconnection Feasibility Study. The Interconnection Customer shall execute and deliver to the Participating TO the Interconnection Feasibility Study Agreement along with an additional \$10,000 deposit no later than thirty (30) Calendar Days after its receipt.

On or before the return of the executed Interconnection Feasibility Study Agreement to the applicable Participating TO, the Interconnection Customer shall provide to the Participating TO and the ISO the technical data called for in LGIP Appendix 1, Attachment A.

If the Interconnection Feasibility Study uncovers any unexpected result(s) not contemplated during the Scoping Meeting, a substitute Point of Interconnection identified by the Interconnection Customer, the applicable Participating TO or ISO, and acceptable to the others, such acceptance not to be unreasonably withheld, will be substituted for the designated Point of Interconnection specified above without loss of Queue Position, and restudies shall be completed pursuant to LGIP Section 6.4 as applicable. If the Participating TO and the Interconnection Customer cannot agree that the results were unexpected, then the ISO will make a determination that the results were either expected or unexpected. For the purpose of this LGIP Section 6.1, if the Participating TO, ISO and Interconnection Customer cannot agree on the substituted Point of Interconnection, then the Interconnection Customer may direct that one of the alternatives as specified in the Interconnection Feasibility Study Agreement, as specified pursuant to LGIP Section 3.5.4, shall be the substitute.

If the Interconnection Customer, the applicable Participating TO and ISO agree to forgo the Interconnection Feasibility Study, the applicable Participating TO will tender an Interconnection System Impact Study Agreement pursuant to the procedures specified in Section 7 of this LGIP and apply the deposits made in accordance with LGIP Section 3.5.1, in addition to the deposit made in accordance with LGIP Section 7, towards the Interconnection System Impact Study.

6.2 Scope of Interconnection Feasibility Study.

The Interconnection Feasibility Study shall preliminarily evaluate the feasibility of the proposed interconnection to the applicable Participating TO's portion of the ISO Controlled Grid.

The Interconnection Feasibility Study will consider Base Cases as well as all generating facilities (and with respect to (iv), any identified Network Upgrades) that, on the date the Interconnection Feasibility Study is commenced: (i) are directly interconnected to the ISO Controlled Grid; (ii) are interconnected to Affected Systems and may have an impact on the Interconnection Request; (iii) have a pending request to interconnect to an Affected

Issued by: Charles F. Robinson, Vice President and General Counsel

System; (iv) have a pending higher queued Interconnection Request to interconnect to the ISO Controlled Grid; and (v) have no Queue Position but have executed an LGIA or requested that an unexecuted LGIA be filed with FERC. The Interconnection Feasibility Study will consist of a power flow and short circuit analysis on the applicable Participating TO's portion of the ISO Controlled Grid. The Interconnection Feasibility Study will provide a list of facilities on the applicable Participating TO's portion of the ISO Controlled Grid and a non-binding good faith estimate of cost responsibility and a non-binding good faith estimated time to construct. In addition, the Interconnection Feasibility Study will describe what results are expected in the Interconnection System Impact Study.

6.3 Interconnection Feasibility Study Procedures.

Prior to commencement of the Interconnection Feasibility Study, the ISO will determine the responsibilities for the ISO and applicable Participating TO to perform the study. The applicable Participating TO and/or ISO shall utilize existing studies to the extent practicable when performing the study. The applicable Participating TO and/or ISO shall use Reasonable Efforts to complete a draft Interconnection Feasibility Study no later than fortyfive (45) Calendar Days after the Participating TO receives the fully executed Interconnection Feasibility Study Agreement. The Participating TO and ISO shall share study results for review and comment, provide the study results to any other potentiallyimpacted Participating TO, and incorporate comments and issue a final Interconnection Feasibility Study to the Interconnection Customer within sixty (60) Calendar Days following receipt of the fully executed Interconnection Feasibility Study Agreement. At the request of the Interconnection Customer or at any time the Participating TO and/or ISO determines that the entity performing the study will not meet the required time frame for completing the Interconnection Feasibility Study, the Participating TO and/or ISO shall notify the Interconnection Customer as to the schedule status of the Interconnection Feasibility Study. If the Participating TO and/or ISO is unable to complete the Interconnection Feasibility Study within that time period, it shall notify the Interconnection Customer and provide an estimated completion date with an explanation of the reasons why additional time is required.

Upon request, the applicable Participating TO and/or ISO shall provide the Interconnection Customer supporting documentation, workpapers and relevant power flow and short circuit databases for the Interconnection Feasibility Study, subject to confidentiality arrangements consistent with LGIP Section 13.1.

6.3.1 Meeting with the Participating TO(s) and ISO.

Within ten (10) Business Days of providing an Interconnection Feasibility Study report to the Interconnection Customer, the applicable Participating TO, ISO, and the Interconnection Customer shall meet to discuss the results of the Interconnection Feasibility Study. Any other potentially-impacted Participating TO shall also be included in the meeting.

6.4 Re-Study.

If re-study of the Interconnection Feasibility Study is required due to a higher queued project dropping out of the queue, or a modification of a higher queued project subject to LGIP Section 4.4, or re-designation of the Point of Interconnection pursuant to LGIP

Issued by: Charles F. Robinson, Vice President and General Counsel

Section 6.1, or any other effective change in information which necessitates a re-study, the applicable Participating TO shall notify the Interconnection Customer and the ISO in writing along with providing a description of the expected results of the re-study. Upon receipt of such notice, the Interconnection Customer shall provide the applicable Participating TO within ten (10) Business Days either a written request that the Participating TO (i) terminate the study and withdraw the Interconnection Request; or (ii) continue the study. If the Interconnection Customer requests the applicable Participating TO to continue the study, the Interconnection Customer shall pay the Participating TO an additional \$10,000 deposit for the re-study along with providing written notice for the Participating TO to continue.

Such re-study shall take not longer than forty-five (45) Calendar Days from the date the applicable Participating TO receives the Interconnection Customer's written notice to continue the study and payment of the additional \$10,000 deposit. The applicable Participating TO and the ISO shall share study results for review, provide the study results for review and comment to any other potentially-impacted Participating TOs, incorporate comments, and issue a final study to the Interconnection Customer within sixty (60) Calendar Days from the date the Participating TO receives the Interconnection Customer's written notice to continue the study and payment of the additional \$10,000 deposit. If the applicable Participating TO and/or the ISO is unable to complete the Interconnection Feasibility Study within that time period, it shall notify the Interconnection Customer and the ISO and provide an estimated completion date with an explanation of the reasons why additional time is required. Any and all costs of the re-study shall be borne by the Interconnection Customer being re-studied.

Section 7. Interconnection System Impact Study.

7.1 Interconnection System Impact Study Agreement.

Simultaneously with the delivery of the Interconnection Feasibility Study to the Interconnection Customer, the applicable Participating TO shall provide to the Interconnection Customer an Interconnection System Impact Study Agreement. In addition, any other potentially-impacted Participating TO in coordination with the ISO shall determine if an Interconnection System Impact Study will be required on such other Participating TO's electrical system pursuant to a separate Interconnection System Impact Study Agreement. The Interconnection System Impact Study Agreement shall provide that the Interconnection Customer shall compensate the Participating TO for the actual cost of the Interconnection System Impact Study. Within three (3) Business Days following the Interconnection Feasibility Study results meeting, the Participating TO in coordination with the ISO shall provide to the Interconnection Customer a signed System Impact Study Agreement which shall include a non-binding good faith estimate of the cost and timeframe for completing the Interconnection System Impact Study.

7.2 Execution of Interconnection System Impact Study Agreement.

The Interconnection Customer shall execute the Interconnection System Impact Study Agreement and deliver the executed Interconnection System Impact Study Agreement to the Participating TO no later than thirty (30) Calendar Days after its receipt along with a \$50,000 deposit.

Issued by: Charles F. Robinson, Vice President and General Counsel

If the Interconnection Customer does not provide all such technical data when it delivers the Interconnection System Impact Study Agreement, the ISO shall notify the Interconnection Customer of the deficiency within five (5) Business Days of the receipt of the executed Interconnection System Impact Study Agreement and the Interconnection Customer shall cure the deficiency within ten (10) Business Days of receipt of the notice, provided, however, such deficiency does not include failure to deliver the executed Interconnection System Impact Study Agreement or deposit.

If the Interconnection System Impact Study uncovers any unexpected result(s) not contemplated during the Scoping Meeting and the Interconnection Feasibility Study, a substitute Point of Interconnection identified by either the Interconnection Customer, the ISO, or the Participating TO, and acceptable to the others, such acceptance not to be unreasonably withheld, will be substituted for the designated Point of Interconnection specified above without loss of Queue Position, and re-studies shall be completed pursuant to LGIP Section 7.6 as applicable. If the Participating TO and the Interconnection Customer cannot agree that the results were unexpected, then the ISO will make a determination that the results were either expected or unexpected. For the purpose of this LGIP Section 7.2, if the Participating TO, ISO and Interconnection Customer cannot agree on the substituted Point of Interconnection, then the Interconnection Customer may direct that one of the alternatives as specified in the Interconnection Feasibility Study Agreement, as specified pursuant to LGIP Section 3.5.4, shall be the substitute.

7.3 Scope of Interconnection System Impact Study.

The applicable Participating TOs' Interconnection System Impact Study, or Studies if applicable, shall evaluate the impact of the proposed interconnection on the reliability of the applicable Participating TO's electric system. The Interconnection System Impact Study will consider Base Cases as well as all generating facilities (and with respect to (iv) below, any identified Network Upgrades associated with such higher queued Interconnection Request) that, on the date the Interconnection System Impact Study is commenced: (i) are directly interconnected to the ISO Controlled Grid; (ii) are interconnected to Affected Systems and may have an impact on the Interconnection Request; (iii) have a pending request to interconnect to an Affected System; (iv) have a pending higher queued Interconnection Request to interconnect to the ISO Controlled Grid; and (v) have no Queue Position but have executed an LGIA or requested that an unexecuted LGIA be filed with FERC.

The Interconnection System Impact Study will consist of a short circuit analysis, a stability analysis, a power flow analysis and a Deliverability Assessment as described in LGIP Section 3.3.3. The Interconnection System Impact Study will state the assumptions upon which it is based; state the results of the analyses; and provide the requirements or potential impediments to providing the requested Interconnection Service, including a

Issued by: Charles F. Robinson, Vice President and General Counsel

preliminary indication of the cost and length of time that would be necessary to correct any problems identified in those analyses and implement the interconnection. The Interconnection System Impact Study will provide a list of facilities on the applicable Participating TO's portion of the ISO Controlled Grid that are required as a result of the Interconnection Request and a non-binding good faith estimate of cost responsibility and a non-binding good faith estimated time to construct.

7.4 Interconnection System Impact Study Procedures.

Prior to commencement of the Interconnection System Impact Study, the ISO will determine the responsibilities for the ISO and Participating TO to perform the study. The ISO shall coordinate the Interconnection System Impact Study with any Affected System that is affected by the Interconnection Request pursuant to LGIP Section 3.7 above. The Participating TO and/or ISO shall utilize existing studies to the extent practicable when performing the study. The Participating TO and/or ISO shall use Reasonable Efforts to complete a draft Interconnection System Impact Study within ninety (90) Calendar Days after the receipt of the Interconnection System Impact Study Agreement, study payment, and technical data. The Participating TO and/or ISO shall share results for review and comment, and incorporate comments and issue a final Interconnection System Impact Study Report to the Interconnection Customer within one hundred twenty (120) days after the receipt of the Interconnection System Impact Study Agreement, study payment, and technical data. If the Participating TO and/or ISO uses Clustering, the Participating TO and/or ISO shall use Reasonable Efforts to deliver a completed Interconnection System Impact Study within one hundred twenty (120) Calendar Days after the close of the Queue Cluster Window.

At the request of the Interconnection Customer or at any time the Participating TO and/or ISO determines that it will not meet the required time frame for completing the Interconnection System Impact Study, the Participating TO and/or ISO shall notify the Interconnection Customer as to the schedule status of the Interconnection System Impact Study. If the Participating TO and/or ISO is unable to complete the Interconnection System Impact Study within the time period, it shall notify the Interconnection Customer and provide an estimated completion date with an explanation of the reasons why additional time is required.

Upon request, the Participating TO and/or ISO shall provide the Interconnection Customer all supporting documentation, workpapers and relevant pre-Interconnection Request and post-Interconnection Request power flow, short circuit and stability databases for the Interconnection System Impact Study, subject to confidentiality arrangements consistent with LGIP Section 13.1.

7.5 Meeting with the Participating TO and ISO.

Within ten (10) Business Days of providing an Interconnection System Impact Study report to the Interconnection Customer, the Participating TO, the ISO and the Interconnection Customer shall meet to discuss the results of the Interconnection System Impact Study.

Issued by: Charles F. Robinson, Vice President and General Counsel

7.6 Re-Study.

If re-study of the Interconnection System Impact Study is required due to a higher queued project dropping out of the queue, a modification of a higher queued project subject to LGIP Section 4.4, or re-designation of the Point of Interconnection pursuant to LGIP Section 7.2, or any other effective change in information which necessitates a re-study, the Participating TO shall notify the Interconnection Customer and the ISO in writing along with providing a description of the expected results of the re-study. Upon receipt of such notice, the Interconnection Customer shall provide the ISO and the Participating TO within ten (10) Business Days either a written request that the Participating TO (i) terminate the study and withdraw the Interconnection Request; or (ii) continue the study. If the Interconnection Customer requests the Participating TO to continue the study, the Interconnection Customer shall pay the Participating TO an additional \$10,000 deposit for the re-study along with providing written notice for the Participating TO to continue.

Such re-study shall take no longer than sixty (60) Calendar Days from the date the Participating TO receives the Interconnection Customer's written notice to continue the study and payment of the additional \$10,000 deposit. The Participating TO and the ISO shall share study results for review and comment and incorporate comments and issue a final study to the Interconnection Customer within eighty (80) Calendar Days following receipt of the Interconnection Customer's written notice to continue the study and payment of the additional \$10,000 deposit. If the Participating TO and/or the ISO is unable to complete the Interconnection System Impact Study within that time period, it shall notify the Interconnection Customer and provide an estimated completion date with an explanation of the reasons why additional time is required. Any and all costs of re-study shall be borne by the Interconnection Customer being re-studied.

Section 8. Interconnection Facilities Study.

8.1 Interconnection Facilities Study Agreement.

Simultaneously with the delivery of the Interconnection System Impact Study to the Interconnection Customer, the Participating TO shall provide to the Interconnection Customer an Interconnection Facilities Study Agreement. The Interconnection Facilities Study Agreement shall provide that the Interconnection Customer shall compensate the Participating TO for the actual cost of the Interconnection Facilities Study. Within three (3) Business Days following the Interconnection System Impact Study results meeting, the Participating TO in coordination with the ISO shall provide to the Interconnection Customer a signed Interconnection Facilities Study Agreement which shall include a non-binding good faith estimate of the cost and timeframe for completing the Interconnection Facilities Study. The Interconnection Customer shall execute the Interconnection Facilities Study Agreement to the Participating TO within thirty (30) Calendar Days after its receipt, together with the required technical data and the greater of \$100,000 or the Interconnection Customer's portion of the estimated monthly cost of conducting the Interconnection Facilities Study.

8.1.1 For studies where the estimated cost exceeds \$100,000, the Participating TO may invoice the Interconnection Customer on a monthly basis for the work to be conducted on the Interconnection Facilities Study for the remaining balance of the estimated

Issued by: Charles F. Robinson, Vice President and General Counsel

Interconnection Facilities Study cost. The Interconnection Customer shall pay invoiced amounts within thirty (30) Calendar Days of receipt of invoice. The Participating TO shall continue to hold the amounts on deposit until settlement of the final invoice.

8.2 Scope of Interconnection Facilities Study.

The Interconnection Facilities Study shall specify and estimate the cost of the equipment, engineering, procurement and construction work needed on the Participating TO's electric system to implement the conclusions of the Interconnection System Impact Study in accordance with Good Utility Practice to physically and electrically connect the Interconnection Customer's Interconnection Facilities to the ISO Controlled Grid. The Interconnection Facilities Study shall also identify the electrical switching configuration of the connection equipment, including, without limitation: the transformer, switchgear, meters, and other station equipment; the nature and estimated cost of any Participating TO's Interconnection Facilities and Network Upgrades necessary to accomplish the interconnection; and an estimate of the time required to complete the construction and installation of such facilities.

8.3 Interconnection Facilities Study Procedures.

The ISO shall coordinate the Interconnection Facilities Study with any Affected System pursuant to LGIP Section 3.5 above. The Participating TO and/or ISO shall utilize existing studies to the extent practicable in performing the Interconnection Facilities Study. The Participating TO and/or ISO shall use Reasonable Efforts to complete the study and issue a draft Interconnection Facilities Study report to the Interconnection Customer. Prior to issuing draft study results to the Interconnection Customer, the Participating TO and ISO shall share results for review and incorporate comments within the following number of days after receipt of an executed Interconnection Facilities Study Agreement: one hundred twenty (120) Calendar Days, with no more than a \pm 0 percent cost estimate contained in the report; or two hundred ten (210) Calendar Days, if the Interconnection Customer requests a \pm 1 percent cost estimate.

At the request of the Interconnection Customer or at any time the Participating TO and/or ISO determines that it will not meet the required time frame for completing the Interconnection Facilities Study, the Participating TO and/or ISO shall notify the Interconnection Customer as to the schedule status of the Interconnection Facilities Study. If the Participating TO and/or ISO is unable to complete the Interconnection Facilities Study and issue a draft Interconnection Facilities Study report within the time required, it shall notify the Interconnection Customer and provide an estimated completion date and an explanation of the reasons why additional time is required.

The Interconnection Customer shall, within thirty (30) Calendar Days after receipt of the draft report, either (i) provide written comments to the Participating TO and ISO, which the Participating TO and/or ISO shall include in the final report, or (ii) provide a statement to the Participating TO and ISO that it will not provide comments. The Participating TO and/or ISO shall issue the final Interconnection Facilities Study report within fifteen (15) Business Days of receiving the Interconnection Customer's comments or promptly upon receiving the Interconnection Customer's statement that it will not provide comments. The Participating TO and/or ISO may reasonably extend such fifteen-day period upon notice to the Interconnection Customer if the Interconnection Customer's comments

Issued by: Charles F. Robinson, Vice President and General Counsel

require the Participating TO and/or ISO to perform additional analyses or make other significant modifications prior to the issuance of the final Interconnection Facilities Report. Upon request, the Participating TO and/or ISO shall provide the Interconnection Customer supporting documentation, workpapers, and databases or data developed in the preparation of the Interconnection Facilities Study, subject to confidentiality arrangements consistent with LGIP Section 13.1.

8.4 Meeting with Participating TO and ISO.

Within ten (10) Business Days of providing a draft Interconnection Facilities Study report to the Interconnection Customer, the Participating TO, the ISO and the Interconnection Customer shall meet to discuss the results of the Interconnection Facilities Study. Within ten (10) Business Days of this meeting the Interconnection Customer shall make the election of which Delivery Network Upgrades identified in the Interconnection Facilities Study are to be installed. Any operating constraints on the Interconnection Customer's Generating Facility arising out of the Interconnection Customer's election not to install the Delivery Network Upgrades shall be as set forth in Article 9 and Appendix C of the LGIA.

8.5 Re-Study.

If re-study of the Interconnection Facilities Study is required due to a higher queued project dropping out of the queue or a modification of a higher queued project pursuant to LGIP Section 4.4. or any other effective change in information which necessitates a re-study, the Participating TO shall so notify the Interconnection Customer and the ISO in writing. Upon receipt of such notice, the Interconnection Customer shall provide the Participating TO within ten (10) Business Days a written request that the Participating TO either (i) terminate the study and withdraw the Interconnection Request; or (ii) continue the study. If the Interconnection Customer requests the Participating TO to continue the study, the Interconnection Customer shall pay the Participating TO an additional \$10,000 deposit for the re-study along with providing written notice for the Participating TO to continue. Such re-study shall take no longer than sixty (60) Calendar Days from the date the Participating TO receives the Interconnection Customer's written notice to continue the study and payment of the additional \$10,000 deposit. The Participating TO and ISO shall share study results for review and comment and incorporate comments and issue a final study to the Interconnection Customer within eighty (80) Calendar Days following receipt of the Interconnection Customer's written notice to continue the study and payment of the additional \$10,000 deposit. If the Participating TO and/or the ISO is unable to complete the Interconnection Facilities Study within that time period, it shall notify the Interconnection Customer and provide an estimated completion date with an explanation of the reasons why additional time is required. Any and all costs of re-study shall be borne by the Interconnection Customer being re-studied.

Section 9. Engineering & Procurement ("E&P") Agreement.

Prior to executing an LGIA, an Interconnection Customer may, in order to advance the implementation of its interconnection, request and the Participating TO shall offer the Interconnection Customer, an E&P Agreement that authorizes the Participating TO to begin engineering and procurement of long lead-time items necessary for the establishment of the interconnection. However, the Participating TO shall not be

Issued by: Charles F. Robinson, Vice President and General Counsel

obligated to offer an E&P Agreement if the Interconnection Customer is in Dispute Resolution as a result of an allegation that the Interconnection Customer has failed to meet any milestones or comply with any prerequisites specified in other parts of the LGIP. The E&P Agreement is an optional procedure and it will not alter the Interconnection Customer's Queue Position or In-Service Date. The E&P Agreement shall provide for the Interconnection Customer to pay the cost of all activities authorized by the Interconnection Customer and to make advance payments or provide other satisfactory security for such costs.

The Interconnection Customer shall pay the cost of such authorized activities and any cancellation costs for equipment that is already ordered for its interconnection, which cannot be mitigated as hereafter described, whether or not such items or equipment later become unnecessary. If the Interconnection Customer withdraws its application for interconnection or either Party terminates the E&P Agreement, to the extent the equipment ordered can be canceled under reasonable terms, the Interconnection Customer shall be obligated to pay the associated cancellation costs. To the extent that the equipment cannot be reasonably canceled, the Participating TO may elect: (i) to take title to the equipment, in which event the Participating TO shall refund the Interconnection Customer any amounts paid by Interconnection Customer for such equipment and shall pay the cost of delivery of such equipment, or (ii) to transfer title to and deliver such equipment to the Interconnection Customer, in which event the Interconnection Customer shall pay any unpaid balance and cost of delivery of such equipment.

Section 10. Optional Interconnection Study.

10.1 Optional Interconnection Study Agreement.

On or after the date when the Interconnection Customer receives Interconnection System Impact Study results, the Interconnection Customer may request, and the Participating TO or ISO shall perform, a reasonable number of Optional Interconnection Studies. The request shall describe the assumptions that the Interconnection Customer wishes the Participating TO or ISO to study within the scope described in LGIP Section 10.2. Within five (5) Business Days after receipt of a request for an Optional Interconnection Study, the Participating TO or ISO shall provide to the Interconnection Customer an Optional Interconnection Study Agreement.

The Optional Interconnection Study Agreement shall: (i) specify the technical data that the Interconnection Customer must provide for each phase of the Optional Interconnection Study, (ii) specify the Interconnection Customer's assumptions as to which Interconnection Requests with higher Queue Positions will be excluded from the Optional Interconnection Study case and assumptions as to the type of interconnection service for Interconnection Requests remaining in the Optional Interconnection Study case, and (iii) the Participating TO's or ISO's estimate of the cost of the Optional Interconnection Study. To the extent known by the Participating TO or ISO, such estimate shall include any costs expected to be incurred by any Affected System whose participation is necessary to complete the Optional Interconnection Study. Notwithstanding the above, the Participating TO or ISO shall not be required as a result of an Optional Interconnection Study request to conduct any additional Interconnection Studies with respect to any other Interconnection Request.

Issued by: Charles F. Robinson, Vice President and General Counsel

The Interconnection Customer shall execute the Optional Interconnection Study Agreement within ten (10) Business Days of receipt and deliver the Optional Interconnection Study Agreement, the technical data and a \$10,000 deposit to the Participating TO or ISO as applicable.

10.2 Scope of Optional Interconnection Study.

The Optional Interconnection Study will consist of a sensitivity analysis based on the assumptions specified by the Interconnection Customer in the Optional Interconnection Study Agreement. The Optional Interconnection Study will also identify the Participating TO's Interconnection Facilities and the Network Upgrades, and the estimated cost thereof, that may be required to provide transmission service or Interconnection Service based upon the results of the Optional Interconnection Study. The Optional Interconnection Study shall be performed solely for informational purposes. The Participating TO or ISO shall use Reasonable Efforts to coordinate the study with any Affected Systems that may be affected by the types of Interconnection Services that are being studied. The Participating TO or ISO shall utilize existing studies to the extent practicable in conducting the Optional Interconnection Study.

10.3 Optional Interconnection Study Procedures.

The Participating TO or ISO shall use Reasonable Efforts to complete the Optional Interconnection Study within a mutually agreed upon time period specified within the Optional Interconnection Study Agreement. If the Participating TO or ISO is unable to complete the Optional Interconnection Study within such time period, it shall notify the Interconnection Customer and provide an estimated completion date and an explanation of the reasons why additional time is required. Any difference between the study payment and the actual cost of the study shall be paid to the Participating TO or ISO, as applicable, or refunded to the Interconnection Customer, as appropriate. Upon request, the Participating TO or ISO shall provide the Interconnection Customer supporting documentation and workpapers, and databases or data developed in the preparation of the Optional Interconnection Study, subject to confidentiality arrangements consistent with LGIP Section 13.1.

Section 11. Standard Large Generator Interconnection Agreement (LGIA).

11.1 Tender.

Within thirty (30) Calendar Days after the Participating TO and the ISO receive the Interconnection Customer's written comments, or notification of no comments, to the draft Interconnection Facilities Study report, the Participating TO shall tender a draft LGIA, together with draft appendices. The draft LGIA shall be in the form of the FERC-approved standard form LGIA. The Interconnection Customer shall provide written comments, or notification of no comments, to the draft appendices to the Participating TO and the ISO within (30) Calendar Days of receipt.

Issued by: Charles F. Robinson, Vice President and General Counsel

11.2 Negotiation.

Notwithstanding LGIP Section 11.1, at the request of the Interconnection Customer, the Participating TO, and ISO as necessary, shall begin negotiations with the Interconnection Customer concerning the appendices to the LGIA at any time after the Interconnection Customer executes the Interconnection Facilities Study Agreement. The Participating TO and ISO, as necessary, and the Interconnection Customer shall negotiate concerning any disputed provisions of the appendices to the draft LGIA for not more than sixty (60) Calendar Days after tender of the final Interconnection Facilities Study report. If the Interconnection Customer determines that negotiations are at an impasse, it may request termination of the negotiations at any time after tender of the draft LGIA pursuant to LGIP Section 11.1 and request submission of the unexecuted LGIA with FERC or initiate Dispute Resolution procedures pursuant to LGIP Section 13.5. If the Interconnection Customer requests termination of the negotiations, but within ninety (90) Calendar Days after issuance of the final Interconnection Facilities Study report fails to request either the filing of the unexecuted LGIA or initiate Dispute Resolution, it shall be deemed to have withdrawn its Interconnection Request. Unless otherwise agreed by the Parties, if the Interconnection Customer has not executed and returned the LGIA, requested filing of an unexecuted LGIA, or initiated Dispute Resolution procedures pursuant to LGIP Section 13.5 within ninety (90) Calendar Days after issuance of the final Interconnection Facilities Study report, it shall be deemed to have withdrawn its Interconnection Request. The Participating TO and ISO shall provide to the Interconnection Customer a final LGIA within fifteen (15) Business Days after the completion of the negotiation process.

11.3 Execution and Filing.

At the time that the Interconnection Customer either returns the executed LGIA or requests the filing of an unexecuted LGIA as specified below, the Interconnection Customer shall provide the Participating TO (A) reasonable evidence of continued Site Control or (B) posting of \$250,000, non-refundable additional security, which shall be applied toward future construction costs. At the same time, the Interconnection Customer also shall provide reasonable evidence that one or more of the following milestones in the development of the Large Generating Facility, at the Interconnection Customer election, has been achieved: (i) the execution of a contract for the supply or transportation of fuel to the Large Generating Facility; (ii) the execution of a contract for the supply of cooling water to the Large Generating Facility; (iii) execution of a contract for the engineering for, procurement of major equipment for, or construction of, the Large Generating Facility; (iv) execution of a contract for the sale of electric energy or capacity from the Large Generating Facility; or (v) application for an air, water, or land use permit.

The Interconnection Customer shall either: (i) execute four originals of the tendered LGIA and return one to the Participating TO and two to the ISO; or (ii) request in writing that the Participating TO and ISO file with FERC an LGIA in unexecuted form. As soon as practicable, but not later than ten (10) Business Days after receiving either the executed originals of the tendered LGIA (if it does not conform with a FERC-approved standard form of interconnection agreement) or the request to file an unexecuted LGIA, the Participating TO and ISO shall file the LGIA with FERC, as necessary, together with an explanation of any matters as to which the Interconnection Customer and the Participating TO or ISO disagree and support for the costs that the Participating TO proposes to charge to the Interconnection Customer under the LGIA. An unexecuted LGIA should

Issued by: Charles F. Robinson, Vice President and General Counsel

contain terms and conditions deemed appropriate by the Participating TO and ISO for the Interconnection Request. If the Parties agree to proceed with design, procurement, and construction of facilities and upgrades under the agreed-upon terms of the unexecuted LGIA, they may proceed pending FERC action.

11.4 Commencement of Interconnection Activities.

If the Interconnection Customer executes the final LGIA, the Participating TO, ISO and the Interconnection Customer shall perform their respective obligations in accordance with the terms of the LGIA, subject to modification by FERC. Upon submission of an unexecuted LGIA, the Interconnection Customer, Participating TO and ISO may proceed to comply with the unexecuted LGIA, pending FERC action.

11.5 Interconnection Customer to Meet Requirements of the Participating TO's Interconnection Handbook.

The Interconnection Customer's Interconnection Facilities shall be designed, constructed, operated and maintained in accordance with the Participating TO's Interconnection Handbook.

Section 12. Construction of Participating TO's Interconnection Facilities and Network Upgrades.

12.1 Schedule.

The Participating TO and the Interconnection Customer shall negotiate in good faith concerning a schedule for the construction of the Participating TO's Interconnection Facilities and the Network Upgrades.

12.2 Construction Sequencing.

12.2.1 General.

In general, the in-service date in the LGIA of an Interconnection Customer seeking interconnection to the ISO Controlled Grid will determine the sequence of construction of Network Upgrades.

12.2.2 Advance Construction of Network Upgrades that are an Obligation of an Entity other than the Interconnection Customer.

An Interconnection Customer with an LGIA, in order to maintain its In-Service Date, may request that the Participating TO advance to the extent necessary the completion of Network Upgrades that: (i) were assumed in the Interconnection Studies for such Interconnection Customer, (ii) are necessary to support such In-Service Date, and (iii) would otherwise not be completed, pursuant to a contractual obligation of an entity other than the Interconnection Customer that is seeking interconnection to the Participating TO's portion of the ISO Controlled Grid, in time to support such In-Service Date. Upon such request, the Participating TO will use Reasonable Efforts to advance the construction of such Network Upgrades to accommodate such request; provided that the

Issued by: Charles F. Robinson, Vice President and General Counsel

Interconnection Customer commits to pay the Participating TO: (i) any associated expediting costs and (ii) the cost of such Network Upgrades.

The Participating TO will refund to the Interconnection Customer both the expediting costs and the cost of Network Upgrades, in accordance with Article 11.4 of the LGIA. Consequently, the entity with a contractual obligation to construct such Network Upgrades shall be obligated to pay only that portion of the costs of the Network Upgrades that the Participating TO has not refunded to the Interconnection Customer. Payment by that entity shall be due on the date that it would have been due had there been no request for advance construction. The Participating TO shall forward to the Interconnection Customer the amount paid by the entity with a contractual obligation to construct the Network Upgrades as payment in full for the outstanding balance owed to the Interconnection Customer. The Participating TO then shall refund to that entity the amount that it paid for the Network Upgrades, in accordance with Article 11.4 of the LGIA.

12.2.3 Advancing Construction of Network Upgrades that are Part of an Expansion Plan of the Participating TO.

An Interconnection Customer with an LGIA, in order to maintain its in-service date as specified in the LGIA, may request that the Participating TO advance to the extent necessary the completion of Network Upgrades that: (i) are necessary to support such inservice date and (ii) would otherwise not be completed, pursuant to an expansion plan of the Participating TO, in time to support such in-service date. Upon such request, the Participating TO will use Reasonable Efforts to advance the construction of such Network Upgrades to accommodate such request; provided that the Interconnection Customer commits to pay the Participating TO any associated expediting costs. The Interconnection Customer shall be entitled to refunds, if any, in accordance with this LGIP and the LGIA, for any expediting costs paid.

12.2.4 Amended Interconnection Study.

An Interconnection Study will be amended, as needed, to determine the facilities necessary to support the requested in-service date as specified in the LGIA. This amended study will include those transmission facilities, Large Generating Facilities and any other generating facilities that are expected to be in service on or before the requested in-service date. If an amendment to an Interconnection Study is required, the Participating TO shall notify the Interconnection Customer and the ISO in writing. Upon receipt of such notice, the Interconnection Customer shall provide the ISO and the Participating TO within ten (10) Business Days a written request that the Participating TO either (i) terminate the amended study and withdraw the Interconnection Customer's Interconnection Request or (ii) continue with the amended study. If the Interconnection Customer requests the Participating TO to continue with the amended study, the Interconnection Customer shall pay the Participating TO an additional \$10,000 deposit for the amended study along with providing written notice for the Participating TO to continue. Such amended study shall take no longer than sixty (60) Calendar Days from the date the Participating TO receives the Interconnection Customer's written notice to continue the study and payment of the additional \$10,000 deposit. The Participating TO and ISO shall share study results for review and comment, and incorporate comments and issue a final study to the Interconnection Customer within eighty (80) Calendar Days from the date of the Interconnection Customer's written notice to continue the study and payment

Issued by: Charles F. Robinson, Vice President and General Counsel

of the additional \$10,000 deposit. If the Participating TO is unable to complete the amended Interconnection Study within that time period, it shall notify the Interconnection Customer and provide an estimated completion date with an explanation of the reasons why additional time is required. Any and all costs of the amended study shall be borne by the Interconnection Customer being re-studied.

Section 13. Miscellaneous.

13.1 Confidentiality.

Confidential Information shall include, without limitation, all information relating to a Party's technology, research and development, business affairs, and pricing, and any information supplied by any of the Parties to the other Parties prior to the execution of an LGIA.

Information is Confidential Information only if it is clearly designated or marked in writing as confidential on the face of the document, or, if the information is conveyed orally or by inspection, if the Party providing the information orally informs the Parties receiving the information that the information is confidential.

If requested by any Party, the other Parties shall provide in writing, the basis for asserting that the information referred to in this Section warrants confidential treatment, and the requesting Party may disclose such writing to the appropriate Governmental Authority. Each Party shall be responsible for the costs associated with affording confidential treatment to its information.

The confidentiality provisions of this LGIP are limited to information provided pursuant to this LGIP.

13.1.1 Scope.

Confidential Information shall not include information that the receiving Party can demonstrate: (1) is generally available to the public other than as a result of a disclosure by the receiving Party; (2) was in the lawful possession of the receiving Party on a non-confidential basis before receiving it from the disclosing Party; (3) was supplied to the receiving Party without restriction by a third party, who, to the knowledge of the receiving Party after due inquiry, was under no obligation to the disclosing Party to keep such information confidential; (4) was independently developed by the receiving Party without reference to Confidential Information of the disclosing Party; (5) is, or becomes, publicly known, through no wrongful act or omission of the receiving Party or breach of the LGIA; or (6) is required, in accordance with LGIP Section 13.1.6, Order of Disclosure, to be disclosed by any Governmental Authority or is otherwise required to be disclosed by law or subpoena, or is necessary in any legal proceeding establishing rights and obligations under the LGIP. Information designated as Confidential Information will no longer be deemed confidential if the Party that designated the information as confidential notifies the other Parties that it no longer is confidential.

Issued by: Charles F. Robinson, Vice President and General Counsel

13.1.2 Release of Confidential Information.

No Party shall release or disclose Confidential Information to any other person, except to its employees, consultants, Affiliates (limited by FERC's Standards of Conduct requirements set forth in Part 358 of FERC's Regulations, 18 C.F.R. 358), or to parties who may be or considering providing financing to or equity participation with the Interconnection Customer, or to potential purchasers or assignees of the Interconnection Customer, on a need-to-know basis in connection with these procedures, unless such person has first been advised of the confidentiality provisions of this LGIP Section 13.1 and has agreed to comply with such provisions. Notwithstanding the foregoing, a Party providing Confidential Information to any person shall remain primarily responsible for any release of Confidential Information in contravention of this LGIP Section 13.1.

13.1.3 Rights.

Each Party retains all rights, title, and interest in the Confidential Information that each Party discloses to the other Parties. The disclosure by each Party to the other Parties of Confidential Information shall not be deemed a waiver by a Party or any other person or entity of the right to protect the Confidential Information from public disclosure.

13.1.4 No Warranties.

By providing Confidential Information, no Party makes any warranties or representations as to its accuracy or completeness. In addition, by supplying Confidential Information, no Party obligates itself to provide any particular information or Confidential Information to the other Parties nor to enter into any further agreements or proceed with any other relationship or joint venture.

13.1.5 Standard of Care.

Each Party shall use at least the same standard of care to protect Confidential Information it receives as it uses to protect its own Confidential Information from unauthorized disclosure, publication or dissemination. Each Party may use Confidential Information solely to fulfill its obligations to the other Parties under these procedures or its regulatory requirements.

13.1.6 Order of Disclosure.

If a court or a Government Authority or entity with the right, power, and apparent authority to do so requests or requires any Party, by subpoena, oral deposition, interrogatories, requests for production of documents, administrative order, or otherwise, to disclose Confidential Information, that Party shall provide the other Parties with prompt notice of such request(s) or requirement(s) so that the other Parties may seek an appropriate protective order or waive compliance with the terms of the LGIP. Notwithstanding the absence of a protective order or waiver, the Party may disclose such Confidential Information which, in the opinion of its counsel, the Party is legally compelled to disclose. Each Party will use Reasonable Efforts to obtain reliable assurance that confidential treatment will be accorded any Confidential Information so furnished.

Issued by: Charles F. Robinson, Vice President and General Counsel

13.1.7 Remedies.

Monetary damages are inadequate to compensate a Party for another Party's breach of its obligations under this LGIP Section 13.1. Each Party accordingly agrees that the other Parties shall be entitled to equitable relief, by way of injunction or otherwise, if the first Party breaches or threatens to breach its obligations under this LGIP Section 13.1, which equitable relief shall be granted without bond or proof of damages, and the receiving Party shall not plead in defense that there would be an adequate remedy at law. Such remedy shall not be deemed an exclusive remedy for the breach of this LGIP Section 13.1, but shall be in addition to all other remedies available at law or in equity. Further, the covenants contained herein are necessary for the protection of legitimate business interests and are reasonable in scope. No Party, however, shall be liable for indirect, incidental, or consequential or punitive damages of any nature or kind resulting from or arising in connection with this LGIP Section 13.1.

13.1.8 Disclosure to FERC, its Staff, or a State.

Notwithstanding anything in this Section 13.1 to the contrary, and pursuant to 18 C.F.R. section 1b.20, if FERC or its staff, during the course of an investigation or otherwise, requests information from one of the Parties that is otherwise required to be maintained in confidence pursuant to the LGIP, the Party shall provide the requested information to FERC or its staff, within the time provided for in the request for information. In providing the information to FERC or its staff, the Party must, consistent with 18 C.F.R. section 388.112, request that the information be treated as confidential and non-public by FERC and its staff and that the information be withheld from public disclosure. Parties are prohibited from notifying the other Parties prior to the release of the Confidential Information to FERC or its staff. The Party shall notify the other applicable Parties when it is notified by FERC or its staff that a request to release Confidential Information has been received by FERC, at which time any of the Parties may respond before such information would be made public, pursuant to 18 C.F.R. section 388.112. Requests from a state regulatory body conducting a confidential investigation shall be treated in a similar manner, consistent with applicable state rules and regulations.

13.1.9 Subject to the exception in LGIP Section 13.1.8, any Confidential Information shall not be disclosed by the other Parties to any person not employed or retained by the other Parties, except to the extent disclosure is (i) required by law; (ii) reasonably deemed by the disclosing Party to be required to be disclosed in connection with a dispute between or among the Parties, or the defense of litigation or dispute; (iii) otherwise permitted by consent of the other Parties, such consent not to be unreasonably withheld; or (iv) necessary to fulfill its obligations under this LGIP or as a transmission service provider or a Control Area operator including disclosing the Confidential Information to an RTO or ISO or to a subregional, regional or national reliability organization or planning group. The Party asserting confidentiality shall notify the other Parties in writing of the information it claims is confidential. Prior to any disclosures of another Party's Confidential Information under this subparagraph, or if any third party or Governmental Authority makes any request or demand for any of the information described in this subparagraph, the disclosing Party agrees to promptly notify the other Party in writing and agrees to assert confidentiality and cooperate with the other Party in seeking to protect the Confidential Information from public disclosure by confidentiality agreement, protective order or other reasonable measures.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **13.1.10** This provision shall not apply to any information that was or is hereafter in the public domain (except as a result of a breach of this provision).
- 13.1.11 The Participating TO or ISO shall, at the Interconnection Customer's election, destroy, in a confidential manner, or return the Confidential Information provided at the time of Confidential Information is no longer needed.

13.2 Delegation of Responsibility.

The Participating TO and ISO may use the services of subcontractors as deemed appropriate to perform their obligations under this LGIP. The Participating TO or ISO shall remain primarily liable to the Interconnection Customer for the performance of its respective subcontractors and compliance with its obligations of this LGIP. The subcontractor shall keep all information provided confidential and shall use such information solely for the performance of such obligation for which it was provided and no other purpose.

13.3 Obligation for Study Costs.

The Participating TO or ISO shall charge and the Interconnection Customer shall pay the actual costs of the Interconnection Studies. Any difference between the study deposit and the actual cost of the applicable Interconnection Study shall be paid by or refunded to the Interconnection Customer. Any invoices for Interconnection Studies shall include a detailed and itemized accounting of the cost of each Interconnection Study. The Interconnection Customer shall pay any such undisputed costs within thirty (30) Calendar Days of receipt of an invoice therefor. The Participating TO or ISO shall not be obligated to perform or continue to perform any studies unless the Interconnection Customer has paid all undisputed amounts in compliance herewith.

13.4 Third Parties Conducting Studies.

If (i) at the time of the signing of an Interconnection Study agreement there is disagreement as to the estimated time to complete an Interconnection Study, (ii) the Interconnection Customer receives notice pursuant to LGIP Sections 6.3, 7.4 or 8.3 that the Participating TO or ISO will not complete an Interconnection Study within the applicable timeframe for such Interconnection Study, or (iii) the Interconnection Customer receives neither the Interconnection Study nor a notice under LGIP Sections 6.3, 7.4 or 8.3 within the applicable timeframe for such Interconnection Study, then the Interconnection Customer may require the Participating TO or ISO to utilize a third party consultant reasonably acceptable to the Interconnection Customer and the Participating TO or ISO to perform such Interconnection Study under the direction of the Participating TO or ISO. At other times, the Participating TO or ISO may also utilize a third party consultant to perform such Interconnection Study, either in response to a general request of the Interconnection Customer, or on its own volition.

Issued by: Charles F. Robinson, Vice President and General Counsel

In all cases, use of a third party consultant shall be in accord with Article 26 of the LGIA (Subcontractors) and limited to situations where the Participating TO and ISO determine that doing so will help maintain or accelerate the study process for the Interconnection Customer's pending Interconnection Request and not interfere with the Participating TO's and ISO's progress on Interconnection Studies for other pending Interconnection Requests. In cases where the Interconnection Customer requests use of a third party consultant to perform such Interconnection Study, the Interconnection Customer and the Participating TO or ISO shall negotiate all of the pertinent terms and conditions, including reimbursement arrangements and the estimated study completion date and study review deadline. The Participating TO or ISO shall convey all workpapers, data bases, study results and all other supporting documentation prepared to date with respect to the Interconnection Request as soon as soon as practicable upon the Interconnection Customer's request subject to the confidentiality provision in LGIP Section 13.1. In any case, such third party contract may be entered into with either the Interconnection Customer or the Participating TO or ISO at the Participating TO's or ISO's discretion. In the case of (iii) the Interconnection Customer maintains its right to submit a claim to Dispute Resolution to recover the costs of such third party study. Such third party consultant shall be required to comply with this LGIP, Article 26 of the LGIA (Subcontractors), the ISO Tariff, and the relevant Participating TO's TO Tariff as would apply if the Participating TO or ISO were to conduct the Interconnection Study and shall use the information provided to it solely for purposes of performing such services and for no other purposes. The Participating TO or ISO shall cooperate with such third party consultant and the Interconnection Customer to complete and issue the Interconnection Study in the shortest reasonable time.

13.5 Disputes.

All disputes arising out of or in connection with this LGIP whereby relief is sought by or from the ISO shall be settled in accordance with the ISO ADR Procedures. Disputes arising out of or in connection with this LGIP not subject to the ISO ADR Procedures shall be resolved as follows:

13.5.1 Submission.

In the event either Party has a dispute, or asserts a claim, that arises out of or in connection with the LGIA, the LGIP, or their performance, such Party (the "disputing Party") shall provide the other Party with written notice of the dispute or claim ("Notice of Dispute"). Such dispute or claim shall be referred to a designated senior representative of each Party for resolution on an informal basis as promptly as practicable after receipt of the Notice of Dispute by the other Party. In the event the designated representatives are unable to resolve the claim or dispute through unassisted or assisted negotiations within thirty (30) Calendar Days of the other Party's receipt of the Notice of Dispute, such claim or dispute may, upon mutual agreement of the Parties, be submitted to arbitration and resolved in accordance with the arbitration procedures set forth below. In the event the Parties do not agree to submit such claim or dispute to arbitration, each Party may exercise whatever rights and remedies it may have in equity or at law consistent with the terms of the LGIA and LGIP.

Issued by: Charles F. Robinson, Vice President and General Counsel

13.5.2 External Arbitration Procedures.

Any arbitration initiated under these procedures shall be conducted before a single neutral arbitrator appointed by the Parties. If the Parties fail to agree upon a single arbitrator within ten (10) Calendar Days of the submission of the dispute to arbitration, each Party shall choose one arbitrator who shall sit on a three-member arbitration panel. The two arbitrators so chosen shall within twenty (20) Calendar Days select a third arbitrator to chair the arbitration panel. In either case, the arbitrators shall be knowledgeable in electric utility matters, including electric transmission and bulk power issues, and shall not have any current or past substantial business or financial relationships with any party to the arbitration (except prior arbitration). The arbitrator(s) shall provide each of the Parties an opportunity to be heard and, except as otherwise provided herein, shall conduct the arbitration in accordance with the Commercial Arbitration Rules of the American Arbitration Association ("Arbitration Rules") and any applicable FERC regulations or RTO rules; provided, however, in the event of a conflict between the Arbitration Rules and the terms of this LGIP Section 13, the terms of this LGIP Section 13 shall prevail.

13.5.3 Arbitration Decisions.

Unless otherwise agreed by the Parties, the arbitrator(s) shall render a decision within ninety (90) Calendar Days of appointment and shall notify the Parties in writing of such decision and the reasons therefor. The arbitrator(s) shall be authorized only to interpret and apply the provisions of the LGIA and LGIP and shall have no power to modify or change any provision of the LGIA and LGIP in any manner. The decision of the arbitrator(s) shall be final and binding upon the Parties, and judgment on the award may be entered in any court having jurisdiction. The decision of the arbitrator(s) may be appealed solely on the grounds that the conduct of the arbitrator(s), or the decision itself, violated the standards set forth in the Federal Arbitration Act or the Administrative Dispute Resolution Act. The final decision of the arbitrator must also be filed with FERC if it affects jurisdictional rates, terms and conditions of service, Interconnection Facilities, or Network Upgrades.

13.5.4 Costs.

Each Party shall be responsible for its own costs incurred during the arbitration process and for the following costs, if applicable: (1) the cost of the arbitrator chosen by the Party to sit on the three member panel and one half of the cost of the third arbitrator chosen; or (2) one half the cost of the single arbitrator jointly chosen by the Parties.

Issued by: Charles F. Robinson, Vice President and General Counsel

13.6 Local Furnishing Bonds.

13.6.1 Participating TOs That Own Facilities Financed by Local Furnishing Bonds.

This provision is applicable only to a Participating TO that has financed facilities for the local furnishing of electric energy with Local Furnishing Bonds. Notwithstanding any other provisions of this LGIP, the Participating TO and the ISO shall not be required to provide Interconnection Service to the Interconnection Customer pursuant to this LGIP and the LGIA if the provision of such Interconnection Service would jeopardize the tax-exempt status of any Local Furnishing Bond(s) issued for the benefit of the Participating TO.

13.6.2 Alternative Procedures for Requesting Interconnection Service.

If the Participating TO determines that the provision of Interconnection Service requested by the Interconnection Customer would jeopardize the tax-exempt status of any Local Furnishing Bond(s) issued for the benefit of the Participating TO, it shall advise the Interconnection Customer and the ISO within (30) Calendar Days of receipt of the Interconnection Request.

The Interconnection Customer thereafter may renew its request for the same interconnection Service by tendering an application under Section 211 of the Federal Power Act, in which case the Participating TO, within ten (10) Calendar Days of receiving a copy of the Section 211 application, will waive its rights to a request for service under Section 213(a) of the Federal Power Act and to the issuance of a proposed order under Section 212(c) of the Federal Power Act, and the ISO and Participating TO shall provide the requested Interconnection Service pursuant to the terms and conditions set forth in this LGIP and the LGIA.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 1149

APPENDIX 1 TO LGIP

APPENDIX 1 INTERCONNECTION REQUEST

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

Effective: July 1, 2005

Original Sheet No. 1150

APPENDIX 1 to LGIP INTERCONNECTION REQUEST

The undersigned Interconnection Customer submits this request to interconnect its Large

Provide three copies of this completed form pursuant to Section 7 below.

1.

| | Generating Facility with the ISO Controlled Grid pursuant to the ISO Tariff. | | | | |
|--------|--|--|--|--|--|
| 2. | This Int | rerconnection Request is for (check one): A proposed new Large Generating Facility. An increase in the generating capacity or a Material Modification of an existing Generating Facility. | | | |
| 4. | The Interconnection Customer provides the following information: | | | | |
| | a. | Address or location, including the county, of the proposed new Large Generating Facility site or, in the case of an existing Generating Facility, the name and specific location, including the county, of the existing Generating Facility; | | | |
| | b. | Maximum megawatt electrical output of the proposed new Large Generating Facility or the amount of megawatt increase in the generating capacity of an existing Generating Facility; | | | |
| equipm | c. ent conf | Type of project (i.e., gas turbine, hydro, wind, etc.) and general description of the iguration; | | | |
| month, | d. and yea | Proposed In-Service Date, Trial Operation date and Commercial Operation Date by day, r and term of service; | | | |
| | e. | Name, address, telephone number, and e-mail address of the Interconnection Customer's contact person; | | | |
| | f. | Approximate location of the proposed Point of Interconnection; and | | | |
| | g. | Interconnection Customer Data (set forth in Attachment A) | | | |
| 5. | Applica | ble deposit amount as specified in the LGIP. | | | |
| 6. | Evidence of Site Control as specified in the LGIP and name(s), address(es) and contact information of site owner(s) (check one): | | | | |
| | | Is attached to this Interconnection Request Will be provided at a later date in accordance with this LGIP | | | |

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. I

Original Sheet No. 1151

| _ | This Interconnection | The second second to | the second contract of the second | !I! (I I I |
|---|----------------------|----------------------|-----------------------------------|----------------|
| | | | | |
| | | | | |
| | | | | |

New Resource Interconnection California ISO P.O. Box 639014 Folsom, CA 95763-9014

Overnight address: 151 Blue Ravine Road, Folsom, CA 95630

8. Representative of the Interconnection Customer to contact:

[To be completed by the Interconnection Customer]

9. This Interconnection Request is submitted by:

Name of the Interconnection Customer:

By (signature):

Name (type or print):

Title:

Date:

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1152

Attachment A To Appendix 1 Interconnection Request

LARGE GENERATING FACILITY DATA

Provide three copies of this completed form pursuant to Section 7 of Appendix 1.

- 1. Provide two original prints and one reproducible copy (no larger than 36" x 24") of the following:
 - A. Site drawing to scale, showing generator location and point of interconnection with the ISO Controlled Grid.
 - B. Single-line diagram showing applicable equipment such as generating units, step-up transformers, auxiliary transformers, switches/disconnects of the proposed interconnection, including the required protection devices and circuit breakers. For wind generator farms, the one line diagram should include the distribution lines connecting the various groups of generating units, the generator capacitor banks, the step up transformers, the distribution lines, and the substation transformers and capacitor banks at the point of interconnection with the utility.

| 2. | Gene | Generating Facility Information | | | | |
|----|-----------------|---|---|--|--|--|
| | A) | Total Generating Facility rated output (kW): | | | | |
| | B) | Generating Facility auxiliary load (kW): | | | | |
| | C) | Project net capacity (kW): | | | | |
| | D) | Standby load when Generating Facility is off-line (kW): | | | | |
| | E) | Number of Generating Units: | | | | |
| | , | (Please repeat the following items for each generator) | | | | |
| | F) | Individual generator rated output (kW for each unit): | | | | |
| | G) | Manufacturer: | | | | |
| | H) | Year Manufactured: | | | | |
| | l) [′] | Nominal Terminal Voltage: | | | | |
| | Ĵ) | Rated Power Factor (%): | | | | |
| | K) | Type (Induction, Synchronous, D.C. with Inverter): | | | | |
| | L) | Phase (3 phase or single phase): | | | | |
| | M) | Connection (Delta, Grounded WYE, Ungrounded WYE, impedance grounded): | | | | |
| | N) | Generator Voltage Regulation Range: | | | | |
| | 0) | Generator Power Factor Regulation Range: | | | | |
| | P) | For combined cycle plants, specify the plant output for an outage of the steam turbine of | r | | | |

Issued by: Charles F. Robinson, Vice President and General Counsel

an outage of a single combustion turbine:

Original Sheet No. 1153

| 3. | | | Generator – General Information: t the following for each generator) |
|----|--|--|--|
| | A. B. C. E. F. G. H. I. | Rated Rated D. Mome Inertia SCR (voltag Please Rated Please gap lir | Generator speed (rpm): MVA: Generator Power Factor: Generator Efficiency at Rated Load (%): Int of Inertia (including prime mover): Time Constant (on machine base) H: Short-Circuit Ratio - the ratio of the field current required for rated open-circuit e to the field current required for rated short-circuit current): Eattach generator reactive capability curves. Hydrogen Cooling Pressure in psig (Steam Units only): Eattach a plot of generator terminal voltage versus field current that shows the air ne, the open-circuit saturation curve, and the saturation curve at full load and rated factor. |
| 4. | | | stem Information t the following for each generator) |
| | A. | systen | te the Manufacturer and Type of excitation used for the generator. For exciter type, please choose from 1 to 8 below or be the specific excitation system. |
| | | 1) | Rotating DC commutator exciter with continuously acting regulator. The regulator power source is independent of the generator terminal voltage and current. |
| | | 2) | Rotating DC commentator exciter with continuously acting regulator. The regulator power source is bus fed from the generator terminal voltage. |
| | | 3) | Rotating DC commutator exciter with non-continuously acting regulator (i.e., regulator adjustments are made in discrete increments). |
| | | 4) | Rotating AC Alternator Exciter with non-controlled (diode) rectifiers. The regulator power source is independent of the generator terminal voltage and current (not bus-fed). |
| | | 5) | Rotating AC Alternator Exciter with controlled (thyristor) rectifiers. The regulator power source is fed from the exciter output voltage. |
| | | 6) | Rotating AC Alternator Exciter with controlled (thyristor) rectifiers. |
| | | 7) | Static Exciter with controlled (thyristor) rectifiers. The regulator power source is bus-fed from the generator terminal voltage. |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

8)

Original Sheet No. 1154

| | | bus-fed from a combination of generator terminal voltage and current (compound-source controlled rectifiers system. |
|----|----------------|---|
| | В. | Attach a copy of the block diagram of the excitation system from its instruction manual. The diagram should show the input, output, and all feedback loops of the excitation system. |
| | C. | Excitation system response ratio (ASA): |
| | D. | Full load rated exciter output voltage: |
| | Ē. | Maximum exciter output voltage (ceiling voltage): |
| | F. | Other comments regarding the excitation system? |
| 5. | (Plea unles | er System Stabilizer Information. se repeat the following for each generator. All new generators are required to install PSS is an exemption has been obtained from WECC. Such an exemption can be obtained for units to not have suitable excitation systems.) Manufacturer: Is the PSS digital or analog? |
| | C. | Note the input signal source for the PSS? |
| | 0. | Bus frequency Shaft speed Bus Voltage Other (specify source) |
| | D. | Please attach a copy of a block diagram of the PSS from the PSS Instruction Manual and the correspondence between dial settings and the time constants or PSS gain. |
| | E: | Other comments regarding the PSS? |
| | | |

Static Exciter with controlled (thyristor) rectifiers. The regulator power source is

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

| 6. | Turbine-Governor Information (Please repeat the following for each generator) | | | | | |
|----|---|---|---|--|--|--|
| | | comple for both. | | for steam, gas or combined-cycle turbines, Part B for hydro turbines, and | | |
| | A. | Steam, gas or combined-cycle turbines: | | | | |
| | | 1.) 2.) | If steam both hig | of unit (Steam, Gas, or Combined-cycle): or combined-cycle, does the turbine system have a reheat process (i.e., h and low pressure turbines)? | | |
| | | 3.) | the perc | with reheat process, or if combined-cycle, indicate in the space provided, ent of full load power produced by each turbine: ow pressure turbine or gas turbine: ligh pressure turbine or steam turbine: % | | |
| | B. | Hydro turbines: | | | | |
| | | 1.) 2.) 3.) 4.) 5.) 6.) 7.) | Average Typical I gate, to Is the wa Water flo Average | efficiency at rated load:% of penstock:ft e cross-sectional area of the penstock:ft2 maximum head (vertical distance from the bottom of the penstock, at the the water level):ft atter supply run-of-the-river or reservoir: ow rate at the typical maximum head:ft3/sec e energy rate:kW-hrs/acre-ft ed yearly energy production:kW-hrs | | |
| | C. | , | | ection for each machine, independent of the turbine type. | | |
| | | 1.) 2.) 3.) 4.) | Minimun Governo a: b: | manufacturer: MW n turbine power output: MW or information: Droop setting (speed regulation): Is the governor mechanical-hydraulic or electro-hydraulic (Electro-hydraulic governors have an electronic speed sensor and transducer.)? | | |
| | | | C: | Other comments regarding the turbine governor system? | | |
| | | | | | | |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

7. Synchronous Generator and Associated Equipment – Dynamic Models:

For each generator, governor, exciter and power system stabilizer, select the appropriate dynamic model from the General Electric PSLF Program Manual and provide the required input data. The manual is available on the GE website at www.gepower.com. Select the following links within the website: 1) Our Businesses, 2) GE Power Systems, 3) Energy Consulting, 4) GE PSLF Software, 5) GE PSLF User's Manual.

There are links within the GE PSLF User's Manual to detailed descriptions of specific models, a definition of each parameter, a list of the output channels, explanatory notes, and a control system block diagram. The block diagrams are also available on the Ca-ISO website.

If you require assistance in developing the models, we suggest you contact General Electric. Accurate models are important to obtain accurate study results. Costs associated with any changes in facility requirements that are due to differences between model data provided by the generation developer and the actual generator test data, may be the responsibility of the generation developer.

| 8. | nduction Generator Data: | | | | |
|----|--|--|--|--|--|
| | A. Rated Generator Power Factor at rated load: B. Moment of Inertia (including prime mover): Do you wish reclose blocking? Yes, No Note: Sufficient capacitance may be on the line now, or in the future, and the generator may self-excite unexpectedly. | | | | |
| 9. | Generator Short Circuit Data | | | | |
| | For each generator, provide the following reactances expressed in p.u. on the generator base: | | | | |
| | X"1 – positive sequence subtransient reactance: X"2 – negative sequence subtransient reactance: X"0 – zero sequence subtransient reactance: | | | | |
| | Generator Grounding: | | | | |
| | A Solidly grounded B Grounded through an impedance | | | | |
| | Impedance value in p.u on generator base. R:p.u. X:p.u. C Ungrounded | | | | |

Issued by: Charles F. Robinson, Vice President and General Counsel

10. Step-Up Transformer Data

For each step-up transformer, fill out the data form provided in Table 1.

11. Line Data

There is no need to provide data for new lines that are to be planned by the Participating TO. However, for transmission lines that are to be planned by the generation developer, please provide the following information:

| Line Length (miles): | | | | |
|--|--|--|-----------|---------------|
| Line termination Points: _ | | | | |
| Line termination Points: _ Conductor Type: If bundled. Number per p | Size: | _ | | |
| If bundled. Number per p | phase:, | Bundle spacing: _ | in. | |
| Friase Corniquiation, vei | rticai. , i | nonzoniai. | | |
| Phase Spacing (ft): A-B: | , B-C: | , C-A: | | |
| Distance of lowest condu | ctor to Ground: | ft | | |
| Ground Wire Type: | Size: | Distance to G | round: | ft |
| Attach Tower Configuration | | | | |
| Summer line ratings in ar | mperes (normal | and emergency) _ | | |
| Resistance (R): | p.u | l.** | | |
| Reactance: (X): | p.u | I** | | |
| Resistance (R): Reactance: (X): Line Charging (B/2): ** On 100-MVA and nom | p.u | l** | | |
| ** On 100-MVA and nom | inal line voltage | (kV) Base | | |
| Wind Generators | | | | |
| willia Gellerators | | | | |
| Number of generators to | be interconnecte | ed pursuant to this | Interconn | ection Reques |
| Number of generators to Elevation: | | · | | • |
| Elevation: | 8 | Single Phase _ | | • |
| · · | 8 | Single Phase _ | | • |
| Elevation: | 8 | Single Phase _ | Thre | • |
| Elevation: | odel name, num | Single Phase _ ber, and version: | Thre | • |
| Elevation: | odel name, num | Single Phase _ ber, and version: | Thre | • |
| Elevation: Inverter manufacturer, manu | odel name, num | Single Phase _ ber, and version: | Thre | • |
| Elevation: Inverter manufacturer, manu | odel name, num | Single Phase _ ber, and version: | Thre | • |
| Elevation: Inverter manufacturer, manu | odel name, num | Single Phase _ ber, and version: | Thre | • |
| Elevation: Inverter manufacturer, meanufacturer manufacturer, meanufacturer, meanufacturer | odel name, num | Single Phase ber, and version: tive equipment or s | Thre | • |
| Elevation: Inverter manufacturer, meaning the set point in the set | odel name, num ts for the protect | Single Phase ber, and version: tive equipment or s | Thre | • |
| Elevation: Inverter manufacturer, meaning the set point in the set | odel name, num ts for the protect tor (If Applicable onstant): | Single Phase ber, and version: tive equipment or s | Thre | • |
| Elevation: Inverter manufacturer, meaning the set point in the set | odel name, num ts for the protect | Single Phase ber, and version: tive equipment or s | Thre | • |
| Elevation: Inverter manufacturer, man | odel name, num ts for the protect tor (If Applicable onstant): | Single Phase ber, and version: tive equipment or s | Thre | • |
| Elevation: Inverter manufacturer, man | odel name, num ts for the protect tor (If Applicable onstant): | Single Phase ber, and version: tive equipment or s | Thre | • |
| Elevation: Inverter manufacturer, man | odel name, num | Single Phase ber, and version: tive equipment or s | Thre | • |

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1158

| Short Circuit Reactance: _ | |
|------------------------------|----------------------|
| Exciting Current: | |
| Temperature Rise: | |
| Frame Size: | <u></u> |
| Design Letter: | |
| Reactive Power Required In V | ars (No Load): |
| Reactive Power Required In V | /ars (Full Load): |
| Total Rotating Inertia, H: | Per Unit on KVA Base |

Note: A completed General Electric Company Power Systems Load Flow (PSLF) data sheet must be supplied with the Interconnection Request. If other data sheets are more appropriate to the proposed device then they shall be provided and discussed at Scoping Meeting.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1159

TABLE 1

TRANSFORMER DATA

| UNIT | | | |
|---|-----------|-----------|-----------|
| NUMBER OF TRAN | | | |
| RATED KVA Connection (Delta, Wye, Gnd.) | H Winding | X Winding | Y Winding |
| 55 C Rise 65 C Rise | | | |
| RATED VOLTAGE | | | |
| BIL | | | |
| AVAILABLE TAPS (planned or existing) | | | |
| LOAD TAP CHANGER? | | | |
| TAP SETTINGS | | | |
| COOLING TYPE: OA OA/FA | OA/FA/FA | OA/FOA | _ |
| IMPEDANCE | H-X | H-Y | X-Y |
| Percent | | | |
| MVA Base | | | |
| Tested Taps | | | |
| WINDING RESISTANCE | Н | X | Υ |
| Ohms | | | |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005 Effective: July 1, 2005

Original Sheet No. 1160

| CURRE | NT TRANSFORMER RATIOS | | | |
|-------|--------------------------|-------------------|------------------------------|--|
| Н | X | _ Y | N | |
| | PERCENT EXCITING CURRENT | Γ 100 % Voltage; | 110% Voltage | |
| | Supply copy of nameplate | and manufacture's | s test report when available | |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

INTERCONNECTION FEASIBILITY STUDY AGREEMENT

| , a Customer") and Operator Corporation or "ISO"). The Interco | MENT is made and entered into thisday of, 20by and between organized and existing under the laws of the State of, ("Interconnection [insert name of the Participating TO or "the California Independent System] a existing under the laws of the State of California, ("Participating nnection Customer and the ["Participating TO" or "ISO"] each arty," or collectively as the "Parties." | TO" may |
|---|---|------------------|
| | RECITALS | |
| generating capacity a | ne Interconnection Customer is proposing to develop a Large Generating Facility Idition to an existing Generating Facility consistent with the Interconnection Requipments on Customer dated; and | |
| WHEREAS, t with the ISO Controlle | ne Interconnection Customer desires to interconnect the Large Generating Facilit d Grid; and | ty |
| | ne Interconnection Customer has requested the["Participating TO terconnection Feasibility Study to assess the feasibility of interconnecting the rating Facility. | " or |
| NOW, THER | EFORE, in consideration of and subject to the mutual covenants contained hereings: | 1 the |
| mear Interd | used in this Agreement, with initial capitalization, the terms specified shall have ings indicated in the ISO's FERC-approved Standard Large Generation onnection Procedures ("LGIP") or the Master Definitions Supplement, Appendix to Tariff, as applicable. | |
| or "IS | nterconnection Customer elects and the["Participating O"] shall cause to be performed an Interconnection Feasibility Study consistent won 6.0 of the LGIP in accordance with the ISO Tariff. | |
| | cope of the Interconnection Feasibility Study shall be subject to the assumptions n Attachment A to this Agreement. | set |
| by the the re or "IS Intero Utility in acc | Interconnection Feasibility Study shall be based on the technical information provide Interconnection Customer in the Interconnection Request, as may be modified a sult of the Scoping Meeting. The ["Participating O"] reserves the right to request additional technical information from the onnection Customer as may reasonably become necessary consistent with Goo Practice during the course of the Interconnection Feasibility Study and as design cordance with Section 3.5.4 of the LGIP. If, after the designation of the Point of onnection pursuant to Section 3.5.4 of the LGIP, the Interconnection Customer | as g TO" d |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

Original Sheet No. 1162

modifies its Interconnection Request pursuant to Section 4.4, the time to complete the Interconnection Feasibility Study may be extended.

- 5.0 The Interconnection Feasibility Study report shall provide the following information:
 - preliminary identification of any circuit breaker short circuit capability limits exceeded on the Participating TO's electric system as a result of the interconnection:
 - preliminary identification of any thermal overload or voltage limit violations on the Participating TO's electric system resulting from the interconnection;
 - preliminary description and non-binding estimated cost of the Participating TO's facilities required to interconnect the Large Generating Facility to the Participating TO's electric system and to address the identified short circuit and power flow issues; and
 - expected results in the Interconnection System Impact Study.
- 6.0 In addition to the deposit(s) paid by the Interconnection Customer pursuant to Section 3.5.1 of the LGIP, the Interconnection Customer shall provide a deposit of \$10,000 for the performance of the Interconnection Feasibility Study. Following the issuance of the Interconnection Feasibility Study to the Interconnection Customer the ["Participating TO" or "ISO"] shall charge and the Interconnection Customer shall pay the actual costs of the Interconnection Feasibility Study, inclusive of any re-studies and amendments to the Interconnection Feasibility Study, pursuant to Section 9 of this Agreement. Any difference between the deposits made toward the Interconnection Feasibility Study. amendments and re-studies to the Interconnection Feasibility Study, and the actual cost of the study shall be paid by or refunded to the Interconnection Customer, as appropriate in accordance with Section 13.3 of the LGIP. 7.0 Pursuant to Section 3.7 of the LGIP, the ISO will coordinate the conduct of any studies required to determine the impact of the Interconnection Request on Affected Systems. _["Participating TO" or "ISO"] may provide a copy of the Interconnection Feasibility Study results to an Affected System Operator and the Western Electricity Coordinating Council. Requests for review and input from Affected System Operators or the Western Electricity Coordinating Council may arrive at any time prior to interconnection, and a revision of the Interconnection Feasibility Study or re-study may be required in such event. 8.0 Substantial portions of technical data and assumptions used to perform the Interconnection Feasibility Study, such as system conditions, existing and planned generation, and unit

modeling, may change after the ["Participating TO" or "ISO"] provides the Interconnection Feasibility Study results to the Interconnection Customer. Study results will reflect available data at the time the ["Participating TO" or "ISO"] provides the Interconnection Feasibility Study to the Interconnection

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1163

| | Customer. The ["Participating TO" or "ISO"] shall not be responsible for any additional costs, including, without limitation, costs of new or additional facilities, system upgrades, or schedule changes, that may be incurred by the Interconnection Customer as a result of changes in such data and assumptions. |
|------|---|
| 9.0 | In the event that a re-study or amendment of the Interconnection Feasibility Study is required, the["Interconnecting Participating TO" or "ISO"] shall provide notification of the need for such re-study or amendment, and the Interconnection Customer shall provide direction as to whether to proceed with the re-study or amendment and any associated deposit payment pursuant to Section 6.4 or Section 12.2.4 of the LGIP, as applicable. |
| 10.0 | The Participating TO shall maintain records and accounts of all costs incurred in performing the Interconnection Feasibility Study, inclusive of any re-studies or amendments thereto, in sufficient detail to allow verification of all costs incurred, including associated overheads. The Interconnection Customer shall have the right, upon reasonable notice, within a reasonable time following receipt of the final cost report associated with this Interconnection Feasibility Study at the Participating TO's offices and at its own expense, to audit the Participating TO's records as necessary and as appropriate in order to verify costs incurred by the Participating TO. Any audit requested by the Interconnection Customer shall be completed, and written notice of any audit dispute provided to the Participating TO, within one hundred eighty (180) Calendar Days following receipt by the Interconnection Customer of the Participating TO's notification of the final costs of the Interconnection Feasibility Study, inclusive of any re-study or amendment thereto. |
| 11.0 | In accordance with Section 3.8 of the LGIP, the Interconnection Customer may withdraw its Interconnection Request at any time by written notice to the ISO. Upon receipt of such notice, this Agreement shall terminate. |
| 12.0 | Pursuant to Section 6.1 of the LGIP, this Agreement shall become effective upon the date the fully executed Agreement and deposit specified in Section 6 of this Agreement are received by the ["Participating TO" or "ISO"]. If the ["Participating TO" or "ISO"] does not receive the fully executed Agreement and payment pursuant to Section 6.1 of the LGIP, then the Interconnection Request will be deemed withdrawn upon the Interconnection Customer's receipt of written notice by the ISO pursuant to Section 3.8 of the LGIP. |
| 13.0 | Miscellaneous. |
| 13.1 | Dispute Resolution. Any dispute, or assertion of a claim, arising out of or in connection with this Interconnection Feasibility Study Agreement, shall be resolved in accordance with Section 13.5 of the LGIP |
| 13.2 | Confidentiality. Confidential Information shall be treated in accordance with Section 13.1 of the LGIP. |
| 13.3 | Binding Effect. This Interconnection Feasibility Study Agreement and the rights and obligations hereof, shall be binding upon and shall inure to the benefit of the successors |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

and assigns of the Parties hereto.

- 13.4 Conflicts. In the event of a conflict between the body of this Interconnection Feasibility Study Agreement and any attachment, appendices or exhibits hereto, the terms and provisions of the body of this Interconnection Feasibility Study Agreement shall prevail and be deemed the final intent of the Parties.
- Rules of Interpretation. This Interconnection Feasibility Study Agreement, unless a clear 13.5 contrary intention appears, shall be construed and interpreted as follows: (1) the singular number includes the plural number and vice versa; (2) reference to any person includes such person's successors and assigns but, in the case of a Party, only if such successors and assigns are permitted by this Interconnection Feasibility Study Agreement, and reference to a person in a particular capacity excludes such person in any other capacity or individually; (3) reference to any agreement (including this Section, or other provision hereof or thereof); (4) reference to any applicable laws and regulations means such applicable laws and regulations as amended, modified, codified, or reenacted, in whole or in part, and in effect from time to time, including, if applicable, rules and regulations promulgated thereunder; (5) unless expressly stated otherwise, reference to any Article, Section or Appendix means such Article or Section of this Interconnection Feasibility Study Agreement or such Appendix to this Interconnection Feasibility Study Agreement, or such Section to the LGIP or such Appendix to the LGIP, as the case may be; (6) "hereunder", "hereof", "herein", "hereto" and words of similar import shall be deemed references to this Interconnection Feasibility Study Agreement as a whole and not to any particular Article (7) "including" (and with correlative meaning "include") means including without limiting the generality of any description preceding such term; and (8) relative to the determination of any period of time, "from" means "from and including", "to" means "to but excluding" and "through" means "through and including".
- 13.6 Entire Agreement. This Interconnection Feasibility Study Agreement, including all Appendices and Schedules attached hereto, constitutes the entire agreement between the Parties with reference to the subject matter hereof, and supersedes all prior and contemporaneous understandings or agreements, oral or written, between the Parties with respect to the subject matter of this Interconnection Feasibility Study Agreement. There are no other agreements, representations, warranties, or covenants which constitute any part of the consideration for, or any condition to, any Party's compliance with its obligations under this Interconnection Feasibility Study Agreement.
- 13.7 No Third Party Beneficiaries. This Interconnection Feasibility Study Agreement is not intended to and does not create rights, remedies, or benefits of any character whatsoever in favor of any persons, corporations, associations, or entities other than the Parties, and the obligations herein assumed are solely for the use and benefit of the Parties, their successors in interest and, where permitted, their assigns.
- 13.8 Waiver. The failure of a Party to this Interconnection Feasibility Study Agreement to insist, on any occasion, upon strict performance of any provision of this Interconnection Feasibility Study Agreement will not be considered a waiver of any obligation, right, or duty of, or imposed upon, such Party.

Any waiver at any time by either Party of its rights with respect to this Interconnection Feasibility Study Agreement shall not be deemed a continuing waiver or a waiver with

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1165

respect to any other failure to comply with any other obligation, right, duty of this Interconnection Feasibility Study Agreement. Termination or default of this Interconnection Feasibility Study Agreement for any reason by the Interconnection Customer shall not constitute a waiver of the Interconnection Customer's legal rights to obtain an interconnection from the Participating TO. Any waiver of this Interconnection Feasibility Study Agreement shall, if requested, be provided in writing.

Any waivers at any time by any Party of its rights with respect to any default under this Interconnection Feasibility Study Agreement, or with respect to any other matter arising in connection with this Interconnection Feasibility Study Agreement, shall not constitute or be deemed a waiver with respect to any subsequent default or other matter arising in connection with this Interconnection Feasibility Study Agreement. Any delay, short of the statutory period of limitations, in asserting or enforcing any right under this Interconnection Feasibility Study Agreement shall not constitute or be deemed a waiver of such right.

- 13.9 Headings. The descriptive headings of the various Articles and Sections of this Interconnection Feasibility Study Agreement have been inserted for convenience of reference only and are of no significance in the interpretation or construction of this Interconnection Feasibility Study Agreement.
- 13.10 Multiple Counterparts. This Interconnection Feasibility Study Agreement may be executed in two or more counterparts, each of which is deemed an original but all constitute one and the same instrument.
- 13.11 Amendment. The Parties may by mutual agreement amend this Interconnection Feasibility Study Agreement by a written instrument duly executed by both of the Parties.
- 13.12 Modification by the Parties. The Parties may by mutual agreement amend the Appendices to this Interconnection Feasibility Study Agreement by a written instrument duly executed by both of the Parties. Such amendment shall become effective and a part of this Interconnection Feasibility Study Agreement upon satisfaction of all applicable laws and regulations.
- 13.13 Reservation of Rights. The ______ ["Participating TO" or "ISO"] shall have the right to make a unilateral filing with FERC to modify this Interconnection Feasibility Study Agreement with respect to any rates, terms and conditions, charges, classifications of service, rule or regulation under section 205 or any other applicable provision of the Federal Power Act and FERC's rules and regulations thereunder, and Interconnection Customer shall have the right to make a unilateral filing with FERC to modify this Interconnection Feasibility Study Agreement pursuant to section 206 or any other applicable provision of the Federal Power Act and FERC's rules and regulations thereunder; provided that each Party shall have the right to protest any such filing by another Party and to participate fully in any proceeding before FERC in which such modifications may be considered. Nothing in this Interconnection Feasibility Study Agreement shall limit the rights of the Parties or of FERC under sections 205 or 206 of the Federal Power Act and FERC's rules and regulations thereunder, except to the extent that the Parties otherwise mutually agree as provided herein.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1166

- 13.14 No Partnership. This Interconnection Feasibility Study Agreement shall not be interpreted or construed to create an association, joint venture, agency relationship, or partnership between the Parties or to impose any partnership obligation or partnership liability upon any Party. No Party shall have any right, power or authority to enter into any agreement or undertaking for, or act on behalf of, or to act as or be an agent or representative of, or to otherwise bind, another Party.
- 13.15 Assignment. This Interconnection Feasibility Study Agreement may be assigned by a Party only with the written consent of the other Party; provided that a Party may assign this Interconnection Feasibility Study Agreement without the consent of the other Party to any Affiliate of the assigning Party with an equal or greater credit rating and with the legal authority and operational ability to satisfy the obligations of the assigning Party under this Interconnection Feasibility Study Agreement; and provided further that the Interconnection Customer shall have the right to assign this Interconnection Feasibility Study Agreement, without the consent of the other Party, for collateral security purposes to aid in providing financing for the Large Generating Unit, provided that the Interconnection Customer will require any secured party, trustee or mortgagee to notify the other Party of any such assignment. Any financing arrangement entered into by the Interconnection Customer pursuant to this Article will provide that prior to or upon the exercise of the secured party's, trustee's or mortgagee's assignment rights pursuant to said arrangement, the secured creditor, the trustee or mortgagee will notify the other Party of the date and particulars of any such exercise of assignment right(s). Any attempted assignment that violates this Article is void and ineffective. Any assignment under this Interconnection Feasibility Study Agreement shall not relieve a Party of its obligations, nor shall a Party's obligations be enlarged, in whole or in part, by reason thereof. Where required, consent to assignment will not be unreasonably withheld, conditioned or delayed.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1167

IN WITNESS WHEREOF, the Parties have caused this Agreement to be duly executed by their duly authorized officers or agents on the day and year first above written.

| [Insert name of the Participating TO or "C | alifornia Independent System Operator Corporation"] |
|---|---|
| Ву: | |
| Title: | |
| Date: | |
| | |
| | |
| [Insert name of the Interconnection Custon | mer] |
| [Insert name of the Interconnection Custon By: | mer] |
| | mer] |
| Ву: | mer] |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

Original Sheet No. 1168

Attachment A to Interconnection Feasibility Study Agreement

ASSUMPTIONS USED IN CONDUCTING THE INTERCONNECTION FEASIBILITY STUDY

Designation of Point of Interconnection and configuration to be studied.

Designation of alternative Point(s) of Interconnection and configuration.

[Above assumptions to be completed by the Interconnection Customer and other assumptions to be provided by the Interconnection Customer and the ["Participating TO" or "ISO"]

The Interconnection Feasibility Study will be based upon the information set forth in the

Interconnection Request and agreed upon in the Scoping Meeting held on_____:

Issued by: Charles F. Robinson, Vice President and General Counsel

INTERCONNECTION SYSTEM IMPACT STUDY AGREEMENT

| _, a Customer,") ar Operator Corp | AGREEMENT is made and entered into thisday of, 20by and between organized and existing under the laws of the State of, ("Interconnection and [insert name of the Participating TO or "the California Independent System oration"] a existing under the laws of the State of California , (""Participating The Interconnection Customer and the ["Participating TO" or any be referred to as a "Party," or collectively as the "Parties." |
|--|--|
| | RECITALS |
| generating cap | REAS , the Interconnection Customer is proposing to develop a Large Generating Facility or pacity addition to an existing Generating Facility consistent with the Interconnection Request the Interconnection Customer dated; and |
| | REAS , the Interconnection Customer desires to interconnect the Large Generating Facility ontrolled Grid; and |
| WHEF Interconnection Interconnection | REAS, the ["Participating TO" or "ISO"] has completed an n Feasibility Study (the "Feasibility Study") and provided the results of said study to the n Customer ¹ ; and |
| ["Participating" | REAS, the Interconnection Customer has requested the TO" or "ISO"] to perform an Interconnection System Impact Study to assess the impact of g the Large Generating Facility; |
| NOW, Parties agree a | THEREFORE, in consideration of and subject to the mutual covenants contained herein the as follows: |
| 1.0 | When used in this Agreement, with initial capitalization, the terms specified shall have the meanings indicated in the ISO's FERC-approved Standard Large Generation Interconnection Procedures ("LGIP") or the Master Definitions Supplement, Appendix A to the ISO Tariff, as applicable. |
| 2.0 | The Interconnection Customer elects and the ["Participating TO" or "ISO"] shall cause to be performed an Interconnection System Impact Study consistent with Section 7 of the LGIP in accordance with the ISO Tariff. |
| 3.0 | The scope of the Interconnection System Impact Study shall be subject to the assumptions set forth in Attachment A to this Agreement. |
| 4.0 | The Interconnection System Impact Study will be based upon the results of the Interconnection Feasibility Study and the technical information provided by the |
| ¹ This Interconnection | recital to be omitted if the Interconnection Customer has elected to forego the n Feasibility Study. |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

Original Sheet No. 1170

| Interconnection Customer in the Interconnection Request, subject to any modifications in accordance with Section 4.4 of the LGIP. The ["Participating TO" or "ISO"] reserves the right to request additional technical information from the Interconnection Customer as may reasonably become necessary consistent with Good Utility Practice during the course of the Interconnection System Impact Study. If the Interconnection Customer modifies its designated Point of Interconnection, Interconnection Request, or the technical information provided therein is modified, the time to complete the Interconnection System Impact Study may be extended. |
|---|
| The Interconnection System Impact Study report shall provide the following information: |

- 5.0
 - identification of any circuit breaker short circuit capability limits exceeded on the Participating TO's electric system as a result of the interconnection;
 - identification of any thermal overload or voltage limit violations on the Participating TO's electric system resulting from the interconnection;
 - identification of any instability or inadequately damped response to system disturbances on the Participating TO's electric system resulting from the interconnection:
 - a description and non-binding, good faith estimated cost of facilities on the Participating TO's electric system required to interconnect the Large Generating Facility to the Participating TO's portion of the ISO Controlled Grid and to address the identified short circuit, instability, and power flow issues on the Participating TO's portion of the ISO Controlled Grid; and
 - if the Participating TO is an interconnecting Participating TO for the Large Generating Facility, a Deliverability Assessment on the ISO Controlled Grid pursuant to Section 3.3 of the LGIP.

| 6.0 | The Interconnection Customer shall provide a deposit of \$50,000 for the performance of the Interconnection System Impact Study. The ["Participating TO" or "ISO"]'s good faith estimate for the time of completion of the Interconnection System Impact Study is [insert date]. | |
|-----|--|--|
| | Following the issuance of the Interconnection System Impact Study, the | |

Any difference between the deposit made toward the Interconnection System Impact Study, amendments and re-studies to the Interconnection System Impact Study, and the actual cost of the study shall be paid by or refunded to the Interconnection Customer, as appropriate in accordance with Section 13.3 of the LGIP.

7.0 Pursuant to Section 3.7 of the LGIP, the ISO will coordinate the conduct of any studies required to determine the impact of the Interconnection Request on Affected Systems.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1171

| | The ["Participating TO" or "ISO"] may provide a copy of the Interconnection System Impact Study results to an Affected System Operator and the Western Electricity Coordinating Council. Requests for review and input from Affected System Operators or the Western Electricity Coordinating Council may arrive at any time prior to interconnection, and a revision of the Interconnection System Impact Study or restudy may be required in such event. |
|------|--|
| 8.0 | Substantial portions of technical data and assumptions used to perform the Interconnection System Impact Study, such as system conditions, existing and planned generation, and unit modeling, may change after the ["Participating TO" or "ISO"] provides the Interconnection System Impact Study results to the Interconnection Customer. Study results will reflect available data at the time the ["Participating TO" or "ISO"] provides the Interconnection System Impact Study to the Interconnection Customer. The ["Participating TO" or "ISO"] shall not be responsible for any additional costs, including, without limitation, costs of new or additional facilities, system upgrades, or schedule changes, that may be incurred by the Interconnection Customer as a result of changes in such data and assumptions. |
| 9.0 | In the event that a re-study or amendment of the Interconnection System Impact Study is required, the ["Participating TO" or "ISO"] shall provide notification of the need for such re-study or amendment, and the Interconnection Customer shall provide direction as to whether to proceed with the re-study or amendment and any associated deposit payment pursuant to Section 7.6 or Section 12.2.4 of the LGIP, as applicable. |
| 10.0 | The Participating TO shall maintain records and accounts of all costs incurred in performing the Interconnection System Impact Study, inclusive of any re-studies or amendments thereto, in sufficient detail to allow verification of all costs incurred, including associated overheads. The Interconnection Customer shall have the right, upon reasonable notice, within a reasonable time at the Participating TO's offices and at its own expense, to audit the Participating TO's records as necessary and as appropriate in order to verify costs incurred by the Participating TO. Any audit requested by the Interconnection Customer shall be completed, and written notice of any audit dispute provided to the Participating TO representative, within one hundred eighty (180) Calendar Days following receipt by the Interconnection Customer of the Participating TO's notification of the final costs of the Interconnection System Impact Study, inclusive of any re-study or amendment thereto. |
| 11.0 | In accordance with Section 3.8 of the LGIP, the Interconnection Customer may withdraw its Interconnection Request at any time by written notice to the ISO. Upon receipt of such notice, this Agreement shall terminate. |
| 12.0 | Pursuant to Section 7.2 of the LGIP, this Agreement shall become effective upon the date the fully executed Agreement and deposit specified in Section 6 of this Agreement are received by the ["Participating TO" or "ISO"]. If the ["Participating TO" or "ISO"] does not receive the fully executed Agreement and payment pursuant to Section 7.2 of the LGIP, then the Interconnection Request will be deemed withdrawn upon the Interconnection Customer's receipt of written notice by the ISO pursuant to Section 3.8 of the LGIP. |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005 Effective: July 1, 2005

- 13.0 Miscellaneous.
- 13.1 Dispute Resolution. Any dispute, or assertion of a claim, arising out of or in connection with this Interconnection System Impact Study Agreement, shall be resolved in accordance with Section 13.5 of the LGIP.
- 13.2 Confidentiality. Confidential Information shall be treated in accordance with Section 13.1 of the LGIP.
- 13.3 Binding Effect. This Interconnection System Impact Study Agreement and the rights and obligations hereof, shall be binding upon and shall inure to the benefit of the successors and assigns of the Parties hereto.
- 13.4 Conflicts. In the event of a conflict between the body of this Interconnection System Impact Study Agreement and any attachment, appendices or exhibits hereto, the terms and provisions of the body of this Interconnection System Impact Study Agreement shall prevail and be deemed the final intent of the Parties.
- 13.5 Rules of Interpretation. This Interconnection System Impact Study Agreement, unless a clear contrary intention appears, shall be construed and interpreted as follows: (1) the singular number includes the plural number and vice versa; (2) reference to any person includes such person's successors and assigns but, in the case of a Party, only if such successors and assigns are permitted by this Interconnection System Impact Study Agreement, and reference to a person in a particular capacity excludes such person in any other capacity or individually; (3) reference to any agreement (including this Interconnection System Impact Study Agreement), document, instrument or tariff means such agreement, document, instrument, or tariff as amended or modified and in effect from time to time in accordance with the terms thereof and, if applicable, the terms hereof; (4) reference to any applicable laws and regulations means such applicable laws and regulations as amended, modified, codified, or reenacted, in whole or in part, and in effect from time to time, including, if applicable, rules and regulations promulgated thereunder; (5) unless expressly stated otherwise, reference to any Article, Section or Appendix means such Article or Section of this Interconnection System Impact Study Agreement or such Appendix to this Interconnection System Impact Study Agreement, or such Section to the LGIP or such Appendix to the LGIP, as the case may be; (6) "hereunder", "hereof", "herein", "hereto" and words of similar import shall be deemed references to this Interconnection System Impact Study Agreement as a whole and not to any particular Article, Section, or other provision hereof or thereof; (7) "including" (and with correlative meaning "include") means including without limiting the generality of any description preceding such term; and (8) relative to the determination of any period of time, "from" means "from and including", "to" means "to but excluding" and "through" means "through and including".
- 13.6 Entire Agreement. This Interconnection System Impact Study Agreement, including all Appendices and Schedules attached hereto, constitutes the entire agreement between the Parties with reference to the subject matter hereof, and supersedes all prior and contemporaneous understandings or agreements, oral or written, between the Parties with respect to the subject matter of this Interconnection System Impact Study Agreement.

Issued by: Charles F. Robinson, Vice President and General Counsel

There are no other agreements, representations, warranties, or covenants which constitute any part of the consideration for, or any condition to, any Party's compliance with its obligations under this Interconnection System Impact Study Agreement.

- 13.7 No Third Party Beneficiaries. This Interconnection System Impact Study Agreement is not intended to and does not create rights, remedies, or benefits of any character whatsoever in favor of any persons, corporations, associations, or entities other than the Parties, and the obligations herein assumed are solely for the use and benefit of the Parties, their successors in interest and, where permitted, their assigns.
- 13.8 Waiver. The failure of a Party to this Interconnection System Impact Study Agreement to insist, on any occasion, upon strict performance of any provision of this Interconnection System Impact Study Agreement will not be considered a waiver of any obligation, right, or duty of, or imposed upon, such Party.

Any waiver at any time by either Party of its rights with respect to this Interconnection System Impact Study Agreement shall not be deemed a continuing waiver or a waiver with respect to any other failure to comply with any other obligation, right, duty of this Interconnection System Impact Study Agreement. Termination or default of this Interconnection System Impact Study Agreement for any reason by the Interconnection Customer shall not constitute a waiver of the Interconnection Customer's legal rights to obtain an interconnection from the Participating TO. Any waiver of this Interconnection System Impact Study Agreement shall, if requested, be provided in writing.

Any waivers at any time by any Party of its rights with respect to any default under this Interconnection System Impact Study Agreement, or with respect to any other matter arising in connection with this Interconnection System Impact Study Agreement, shall not constitute or be deemed a waiver with respect to any subsequent default or other matter arising in connection with this Interconnection System Impact Study Agreement. Any delay, short of the statutory period of limitations, in asserting or enforcing any right under this Interconnection System Impact Study Agreement shall not constitute or be deemed a waiver of such right.

- 13.9 Headings. The descriptive headings of the various Articles and Sections of this Interconnection System Impact Study Agreement have been inserted for convenience of reference only and are of no significance in the interpretation or construction of this Interconnection System Impact Study Agreement.
- 13.10 Multiple Counterparts. This Interconnection System Impact Study Agreement may be executed in two or more counterparts, each of which is deemed an original but all constitute one and the same instrument.
- 13.11 Amendment. The Parties may by mutual agreement amend this Interconnection System Impact Study Agreement by a written instrument duly executed by both of the Parties.
- 13.12 Modification by the Parties. The Parties may by mutual agreement amend the Appendices to this Interconnection System Impact Study Agreement by a written instrument duly executed by both of the Parties. Such amendment shall become effective and a part of

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1174

this Interconnection System Impact Study Agreement upon satisfaction of all applicable laws and regulations.

- ["Participating TO" or "ISO"] shall have the right 13.13 Reservation of Rights. The to make a unilateral filing with FERC to modify this Interconnection System Impact Study Agreement with respect to any rates, terms and conditions, charges, classifications of service, rule or regulation under section 205 or any other applicable provision of the Federal Power Act and FERC's rules and regulations thereunder, and Interconnection Customer shall have the right to make a unilateral filing with FERC to modify this Interconnection System Impact Study Agreement pursuant to section 206 or any other applicable provision of the Federal Power Act and FERC's rules and regulations thereunder; provided that each Party shall have the right to protest any such filing by another Party and to participate fully in any proceeding before FERC in which such modifications may be considered. Nothing in this Interconnection System Impact Study Agreement shall limit the rights of the Parties or of FERC under sections 205 or 206 of the Federal Power Act and FERC's rules and regulations thereunder, except to the extent that the Parties otherwise mutually agree as provided herein.
- 13.14 No Partnership. This Interconnection System Impact Study Agreement shall not be interpreted or construed to create an association, joint venture, agency relationship, or partnership between the Parties or to impose any partnership obligation or partnership liability upon any Party. No Party shall have any right, power or authority to enter into any agreement or undertaking for, or act on behalf of, or to act as or be an agent or representative of, or to otherwise bind, another Party.
- 13.15 Assignment. This Interconnection System Impact Study Agreement may be assigned by a Party only with the written consent of the other Party; provided that a Party may assign this Interconnection System Impact Study Agreement without the consent of the other Party to any Affiliate of the assigning Party with an equal or greater credit rating and with the legal authority and operational ability to satisfy the obligations of the assigning Party under this Interconnection System Impact Study Agreement; and provided further that the Interconnection Customer shall have the right to assign this Interconnection System Impact Study Agreement, without the consent of the other Party, for collateral security purposes to aid in providing financing for the Large Generating Unit, provided that the Interconnection Customer will require any secured party, trustee or mortgagee to notify the other Party of any such assignment. Any financing arrangement entered into by the Interconnection Customer pursuant to this Article will provide that prior to or upon the exercise of the secured party's, trustee's or mortgagee's assignment rights pursuant to said arrangement, the secured creditor, the trustee or mortgagee will notify the other Party of the date and particulars of any such exercise of assignment right(s). Any attempted assignment that violates this Article is void and ineffective. Any assignment under this Interconnection System Impact Study Agreement shall not relieve a Party of its obligations, nor shall a Party's obligations be enlarged, in whole or in part, by reason thereof. Where required, consent to assignment will not be unreasonably withheld, conditioned or delayed.

IN WITNESS THEREOF, the Parties have caused this Agreement to be duly executed by their duly authorized officers or agents on the day and year first above written.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1175

| [Insert | name of the Participating TO or "California Independent System Operator Corporation"] |
|---------|---|
| Ву: | |
| Title: | |
| Date: | |
| [Insert | name of the Interconnection Customer] |
| Ву: | |
| Title: | |
| | |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

Original Sheet No. 1176

Attachment A

Interconnection System Impact Study Agreement

ASSUMPTIONS USED IN CONDUCTING THE INTERCONNECTION SYSTEM IMPACT STUDY

The Interconnection System Impact Study will be based upon the results of the Interconnection Feasibility Study, subject to any modifications in accordance with Section 4.4 of the LGIP, and the following assumptions:

Designation of Point of Interconnection and configuration to be studied.

Designation of alternative Point(s) of Interconnection and configuration.

[Above assumptions to be completed by the Interconnection Customer and other assumptions to be provided by the Interconnection Customer and the ["Participating TO" or "ISO"]

Issued by: Charles F. Robinson, Vice President and General Counsel

INTERCONNECTION FACILITIES STUDY AGREEMENT

| THIS A | GREEMENT is made and entered into thisday of, 20_by and between organized and existing under the laws of the State of, ("Interconnection |
|--|---|
| Customer,") and Corporation"], | d <u>[insert name of the Participating TO or "the California Independent System Operator</u> aexisting under the laws of the State of California , ("Participating TO" or |
| | terconnection Customer and the ["Participating TO" or "ISO"] each to as a "Party," or collectively as the "Parties." |
| | RECITALS |
| generating capa | EAS , the Interconnection Customer is proposing to develop a Large Generating Facility or acity addition to an existing Generating Facility consistent with the Interconnection Request e Interconnection Customer dated; and |
| WHER | EAS , the Interconnection Customer desires to interconnect the Large Generating Facility ontrolled Grid; |
| Interconnection | EAS, the ["Participating TO" or "ISO"] has completed an System Impact Study (the "System Impact Study") and provided the results of said study to tion Customer; and |
| TO" or "ISO"] equipment, eng system to imple | EAS , the Interconnection Customer has requested the["Participating to perform an Interconnection Facilities Study to specify and estimate the cost of the ineering, procurement and construction work needed on the Participating TO's electric ment the conclusions of the Interconnection System Impact Study in accordance with Good o physically and electrically connect the Large Generating Facility to the ISO Controlled |
| NOW, Parties agreed | THEREFORE , in consideration of and subject to the mutual covenants contained herein the as follows: |
| 1.0 | When used in this Agreement, with initial capitalization, the terms specified shall have the meanings indicated in the ISO's FERC-approved Standard Large Generation Interconnection Procedures ("LGIP") or the Master Definitions Supplement, Appendix A to the ISO Tariff, as applicable. |
| 2.0 | The Interconnection Customer elects and the ["Participating TO" or "ISO"] shall cause an Interconnection Facilities Study consistent with Section 8 of the LGIP to be performed in accordance with the ISO Tariff. |
| 3.0 | The scope of the Interconnection Facilities Study shall be subject to the assumptions set forth in Attachment A and the data provided in Attachment B to this Agreement. |
| 4.0 | The Interconnection Facilities Study report (i) shall provide a description, estimated cost of (consistent with Attachment A), and schedule for required facilities within the Participating TO's electric system to interconnect the Large Generating Facility to the ISO Controlled |
| Issued by: Cha Issued on: Aug | rles F. Robinson, Vice President and General Counsel ust 30, 2005 Effective: July 1, 2005 |

Original Sheet No. 1178

Grid and (ii) shall address the short circuit, instability, and power flow issues identified in the Interconnection System Impact Study.

| 5.0 | The Interconnection Customer shall provide a deposit of the greater of \$100,000 or the Interconnection Customer's portion of the estimated monthly cost for the performance of the Interconnection Facilities Study. The time for completion of the Interconnection Facilities Study is specified in Attachment A. |
|-----|--|
| | For studies where the estimated cost exceed \$100,000, the ["Participating TO" or "ISO"] may invoice Interconnection Customer on a monthly basis for the work to be conducted on the Interconnection Facilities Study for the remaining balance of the estimated Interconnection Facilities Study cost. The Interconnection Customer shall pay invoiced amounts within thirty (30) Calendar Days of receipt of invoice. The ["Participating TO" or "ISO"] shall continue to hold the amounts on deposit until settlement of the final invoice. |
| | Following the issuance of the Interconnection Facilities Study, the |
| | Any difference between the deposit made toward the Interconnection Facilities Study and the actual cost of the study, inclusive of any re-studies and amendments thereto, shall be paid by or refunded to the Interconnection Customer, as appropriate in accordance with Section 13.3 of the LGIP. |
| 6.0 | The Interconnection Facilities Study will be based upon the results of the Interconnection System Impact Study and the technical information provided by the Interconnection Customer in the Interconnection Request, subject to any modifications in accordance with Section 4.4 of the LGIP. The ["Participating TO" or "ISO"] reserves the right to request additional technical information from the Interconnection Customer as may reasonably become necessary consistent with Good Utility Practice during the course of the Interconnection Facilities Study. |
| | If the Interconnection Customer modifies its Interconnection Request or the technical information provided therein is modified, the time to complete the Interconnection Facilities Study may be extended. |
| 7.0 | Pursuant to Section 3.7 of the LGIP, the ISO will coordinate the conduct of any studies required to determine the impact of the Interconnection Request on Affected Systems. The ["Participating TO" or "ISO"] may provide a copy of the Interconnection Facilities Study results to an Affected System Operator and the Western Electricity Coordinating Council. Requests for review and input from Affected System Operators or the Western Electricity Coordinating Council may arrive at any time prior to interconnection, and a revision of the Interconnection Facilities Study or re-study may be required in such event. |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

Original Sheet No. 1179

| 8.0 | Substantial portions of technical data and assumptions used to perform the Interconnection Facilities Study, such as system conditions, existing and planned generation, and unit modeling, may change after the ["Participating TO" or "ISO"] provides the Interconnection Facilities Study results to the Interconnection Customer. Study results will reflect available data at the time the ["Participating TO" or "ISO"] provides the Interconnection Facilities Study to the Interconnection Customer. The ["Participating TO" or "ISO"] shall not be responsible for any additional costs, including, without limitation, costs of new or additional facilities, system upgrades, or schedule changes, that may be incurred by the Interconnection Customer as a result of changes in such data and assumptions. |
|------|---|
| 9.0 | In the event that a re-study or amendment of the Interconnection Facilities Study is required, the ["Participating TO" or "ISO"] shall provide notification of the need for such re-study or amendment, and the Interconnection Customer shall provide direction as to whether to proceed with the re-study or amendment and any associated deposit payment pursuant to Section 8.5 or Section 12.2.4 of the LGIP, as applicable. |
| 10.0 | The Participating TO shall maintain records and accounts of all costs incurred in performing the Interconnection Facilities Study, inclusive of any re-studies or amendments thereto, in sufficient detail to allow verification of all costs incurred, including associated overhead. The Interconnection Customer shall have the right, upon reasonable notice, within a reasonable time at the Participating TO offices and at its own expense, to audit the Participating TO's records as necessary and as appropriate in order to verify costs incurred by the Participating TO. Any audit requested by the Interconnection Customer shall be completed, and written notice of any audit dispute provided to the Participating TO within one hundred eighty (180) Calendar Days following receipt by the Interconnection Custome of the Participating TO's notification of the final costs of the Interconnection Facilities Study inclusive of any re-study or amendment thereto. |
| 11.0 | In accordance with Section 3.8 of the LGIP, the Interconnection Customer may withdraw its Interconnection Request at any time by written notice to the ISO. Upon receipt of such notice, this Agreement shall terminate. |
| 12.0 | Pursuant to Section 8.1 of the LGIP, this Agreement shall become effective upon the date the fully executed Agreement and deposit specified in Section 6 of this Agreement are received by the ["Participating TO" or "ISO"]. If the ["Participating TO" or "ISO"] does not receive the fully executed Agreement and payment pursuant to Section 8.1 of the LGIP, then the Interconnection Request will be deemed withdrawn upon the Interconnection Customer's receipt of written notice by the ISO pursuant to Section 3.8 of the LGIP. |
| 13.0 | Miscellaneous. |
| 13.1 | Dispute Resolution. Any dispute, or assertion of a claim, arising out of or in connection with this Interconnection Facilities Study Agreement, shall be resolved in accordance with Section 13.5 of the LGIP. |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

- 13.2 Confidentiality. Confidential Information shall be treated in accordance with Section 13.1 of the LGIP.
- 13.3 Binding Effect. This Interconnection Facilities Study Agreement and the rights and obligations hereof, shall be binding upon and shall inure to the benefit of the successors and assigns of the Parties hereto.
- 13.4 Conflicts. In the event of a conflict between the body of this Interconnection Facilities Study Agreement and any attachment, appendices or exhibits hereto, the terms and provisions of the body of this Interconnection Facilities Study Agreement shall prevail and be deemed the final intent of the Parties.
- 13.5 Rules of Interpretation. This Interconnection Facilities Study Agreement, unless a clear contrary intention appears, shall be construed and interpreted as follows: (1) the singular number includes the plural number and vice versa; (2) reference to any person includes such person's successors and assigns but, in the case of a Party, only if such successors and assigns are permitted by this Interconnection Facilities Study Agreement, and reference to a person in a particular capacity excludes such person in any other capacity or individually; (3) reference to any agreement (including this Interconnection Facilities Study Agreement), document, instrument or tariff means such agreement, document, instrument, or tariff as amended or modified and in effect from time to time in accordance with the terms thereof and, if applicable, the terms hereof; (4) reference to any applicable laws and regulations means such applicable laws and regulations as amended, modified, codified, or reenacted, in whole or in part, and in effect from time to time, including, if applicable, rules and regulations promulgated thereunder; (5) unless expressly stated otherwise, reference to any Article, Section or Appendix means such Article or Section of this Interconnection Facilities Study Agreement or such Appendix to this Interconnection Facilities Study Agreement, or such Section to the LGIP or such Appendix to the LGIP, as the case may be; (6) "hereunder", "hereof", "herein", "hereto" and words of similar import shall be deemed references to this Interconnection Facilities Study Agreement as a whole and not to any particular Article. Section, or other provision hereof or thereof; (7) "including" (and with correlative meaning "include") means including without limiting the generality of any description preceding such term; and (8) relative to the determination of any period of time, "from" means "from and including", "to" means "to but excluding" and "through" means "through and including".
- 13.6 Entire Agreement. This Interconnection Facilities Study Agreement, including all Appendices and Schedules attached hereto, constitutes the entire agreement between the Parties with reference to the subject matter hereof, and supersedes all prior and contemporaneous understandings or agreements, oral or written, between the Parties with respect to the subject matter of this Interconnection Facilities Study Agreement. There are no other agreements, representations, warranties, or covenants which constitute any part of the consideration for, or any condition to, any Party's compliance with its obligations under this Interconnection Facilities Study Agreement.
- 13.7 No Third Party Beneficiaries. This Interconnection Facilities Study Agreement is not intended to and does not create rights, remedies, or benefits of any character whatsoever in favor of any persons, corporations, associations, or entities other than the Parties, and

Issued by: Charles F. Robinson, Vice President and General Counsel

the obligations herein assumed are solely for the use and benefit of the Parties, their successors in interest and, where permitted, their assigns.

13.8 Waiver. The failure of a Party to this Interconnection Facilities Study Agreement to insist, on any occasion, upon strict performance of any provision of this Interconnection Facilities Study Agreement will not be considered a waiver of any obligation, right, or duty of, or imposed upon, such Party.

Any waiver at any time by either Party of its rights with respect to this Interconnection Facilities Study Agreement shall not be deemed a continuing waiver or a waiver with respect to any other failure to comply with any other obligation, right, duty of this Interconnection Facilities Study Agreement. Termination or default of this Interconnection Facilities Study Agreement for any reason by the Interconnection Customer shall not constitute a waiver of the Interconnection Customer's legal rights to obtain an interconnection from the Participating TO. Any waiver of this Interconnection Facilities Study Agreement shall, if requested, be provided in writing.

Any waivers at any time by any Party of its rights with respect to any default under this Interconnection Facilities Study Agreement, or with respect to any other matter arising in connection with this Interconnection Facilities Study Agreement, shall not constitute or be deemed a waiver with respect to any subsequent default or other matter arising in connection with this Interconnection Facilities Study Agreement. Any delay, short of the statutory period of limitations, in asserting or enforcing any right under this Interconnection Facilities Study Agreement shall not constitute or be deemed a waiver of such right.

- 13.9 Headings. The descriptive headings of the various Articles and Sections of this Interconnection Facilities Study Agreement have been inserted for convenience of reference only and are of no significance in the interpretation or construction of this Interconnection Facilities Study Agreement.
- 13.10 Multiple Counterparts. This Interconnection Facilities Study Agreement may be executed in two or more counterparts, each of which is deemed an original but all constitute one and the same instrument.
- 13.11 Amendment. The Parties may by mutual agreement amend this Interconnection Facilities Study Agreement by a written instrument duly executed by both of the Parties.
- 13.12 Modification by the Parties. The Parties may by mutual agreement amend the Appendices to this Interconnection Facilities Study Agreement by a written instrument duly executed by both of the Parties. Such amendment shall become effective and a part of this Interconnection Facilities Study Agreement upon satisfaction of all applicable laws and regulations.
- 13.13 Reservation of Rights. The ______ ["Participating TO" or "ISO"] shall have the right to make a unilateral filing with FERC to modify this Interconnection Facilities Study Agreement with respect to any rates, terms and conditions, charges, classifications of service, rule or regulation under section 205 or any other applicable provision of the Federal Power Act and FERC's rules and regulations thereunder, and Interconnection Customer shall have the right to make a unilateral filing with FERC to modify this

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1182

Interconnection Facilities Study Agreement pursuant to section 206 or any other applicable provision of the Federal Power Act and FERC's rules and regulations thereunder; provided that each Party shall have the right to protest any such filing by another Party and to participate fully in any proceeding before FERC in which such modifications may be considered. Nothing in this Interconnection Facilities Study Agreement shall limit the rights of the Parties or of FERC under sections 205 or 206 of the Federal Power Act and FERC's rules and regulations thereunder, except to the extent that the Parties otherwise mutually agree as provided herein.

- 13.14 No Partnership. This Interconnection Facilities Study Agreement shall not be interpreted or construed to create an association, joint venture, agency relationship, or partnership between the Parties or to impose any partnership obligation or partnership liability upon any Party. No Party shall have any right, power or authority to enter into any agreement or undertaking for, or act on behalf of, or to act as or be an agent or representative of, or to otherwise bind, another Party.
- Assignment. This Interconnection Facilities Study Agreement may be assigned by a Party only with the written consent of the other Party; provided that a Party may assign this Interconnection Facilities Study Agreement without the consent of the other Party to any Affiliate of the assigning Party with an equal or greater credit rating and with the legal authority and operational ability to satisfy the obligations of the assigning Party under this Interconnection Facilities Study Agreement; and provided further that the Interconnection Customer shall have the right to assign this Interconnection Facilities Study Agreement, without the consent of the other Party, for collateral security purposes to aid in providing financing for the Large Generating Unit, provided that the Interconnection Customer will require any secured party, trustee or mortgagee to notify the other Party of any such assignment. Any financing arrangement entered into by the Interconnection Customer pursuant to this Article will provide that prior to or upon the exercise of the secured party's, trustee's or mortgagee's assignment rights pursuant to said arrangement, the secured creditor, the trustee or mortgagee will notify the other Party of the date and particulars of any such exercise of assignment right(s). Any attempted assignment that violates this Article is void and ineffective. Any assignment under this Interconnection Facilities Study Agreement shall not relieve a Party of its obligations, nor shall a Party's obligations be enlarged, in whole or in part, by reason thereof. Where required, consent to assignment will not be unreasonably withheld, conditioned or delayed.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1183

IN WITNESS WHEREOF, the Parties have caused this Agreement to be duly executed by their duly authorized officers or agents on the day and year first above written.

| [Insert i | name of the Participating TO or "California Independent System Operator Corporation"] |
|-----------|---|
| Ву: | |
| Title: | |
| Date: | |
| | |
| [Insert i | name of the Interconnection Customer] |
| Ву: | |
| | |
| Title: | |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

Original Sheet No. 1184

Attachment A

Interconnection Facilities Study Agreement

INTERCONNECTION CUSTOMER SCHEDULE ELECTION FOR CONDUCTING THE INTERCONNECTION FACILITIES STUDY

The _____["Participating TO" or "ISO"] shall use Reasonable Efforts to complete the study and issue a draft Interconnection Facilities Study report to the Interconnection Customer. Prior to issuing draft study results to the Interconnection Customer, the Participating TO and ISO shall share results for review and incorporate comments within the following number of days after of receipt of an executed copy of this Interconnection Facilities Study Agreement:

- one hundred twenty (120) Calendar Days with no more than a +/- 20 percent cost estimate contained in the report, or
- two hundred ten (210) Calendar Days with no more than a +/- 10 percent cost estimate contained in the report.

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1185

Attachment B

Interconnection Facilities Study Agreement

DATA FORM TO BE PROVIDED BY THE INTERCONNECTION CUSTOMER WITH THE INTERCONNECTION FACILITIES STUDY AGREEMENT

Provide two copies of this completed form and other required plans and diagrams in accordance with Section 8.1 of the LGIP.

| Provide location plan and one-line diagram of the plant and station facilities. For staged projects, please indicate future generation, transmission circuits, etc. |
|--|
| One set of metering is required for each generation connection to the new bus or existing Transmission Provider station. Number of generation connections: |
| On the one line indicate the generation capacity attached at each metering location. (Maximum load on CT/PT) |
| On the one line indicate the location of auxiliary power. (Minimum load on CT/PT) |
| Will an alternate source of auxiliary power be available during CT/PT maintenance?Yes No_ |
| Will a transfer bus on the generation side of the metering require that each meter set be designed for the total plant generation?YesNo (Please indicate on one line). |
| What type of control system or PLC will be located at the Interconnection Customer's Large Generating Facility? |
| |
| What protocol does the control system or PLC use? |
| |
| |

Please provide a 7.5-minute quadrangle of the site. Sketch the plant, station, transmission line, and property line.

Physical dimensions of the proposed interconnection station:

Issued by: Charles F. Robinson, Vice President and General Counsel

Original Sheet No. 1186

| Bus length from generation to interconnection station: | |
|---|-------------------------------|
| Line length from interconnection station to the Particip | ating TO's transmission line. |
| Tower number observed in the field. (Painted on towe | r leg)* |
| Number of third party easements required for transmis | ssion lines*: |
| * To be completed in coordination with the Participatin | g TO or ISO. |
| Is the Large Generating Facility in the Participating TC | s's service area? |
| YesNo Local provider: | |
| Please provide proposed schedule dates: | |
| Begin Construction | Date: |
| Generator step-up transformer Date receives back feed power | ∋: |
| Generation Testing | Date: |
| Commercial Operation Date: | |
| Level of Deliverability: Choose one of the following: | |
| Deliverability with no Network Upgrades | |
| 100% Deliverability | |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

Effective: July 1, 2005

OPTIONAL INTERCONNECTION STUDY AGREEMENT

| _, a | THIS A | GREEMENT is made and entered into thisday of, 20_by and between organized and existing under the laws of the State of, ("Interconnection |
|---------------|------------------------------|--|
| Custom Indepe | ner,") and ndent S | [insert name of the Participating TO or "the California ystem Operator Corporation"] aexisting under the laws of the State of ticipating TO" or "ISO"). The Interconnection Customer and the["Participating TO" or "ISO"] each may be referred to as a "Party," or |
| collectiv | ely as th | ne "Parties." |
| | | RECITALS |
| | ing capa | EAS , the Interconnection Customer is proposing to develop a Large Generating Facility or acity addition to an existing Generating Facility consistent with the Interconnection Request Interconnection Customer dated; |
| Control | WHERI led Grid; | EAS , the Interconnection Customer is proposing to establish an interconnection with the ISC and |
| and | WHERI | EAS , the Interconnection Customer has submitted to the ISO an Interconnection Request; |
| System | | EAS , on or after the date when the Interconnection Customer receives the Interconnection Study results, the Interconnection Customer has further requested that["Participating TO" or "ISO"] prepare an Optional Interconnection Study; |
| Parties | | THEREFORE, in consideration of and subject to the mutual covenants contained herein the s follows: |
| | 1.0 | When used in this Agreement, with initial capitalization, the terms specified shall have the meanings indicated in the ISO's FERC-approved Standard Large Generation Interconnection Procedures ("LGIP") or the Master Definitions Supplement, Appendix A to the ISO Tariff, as applicable. |
| | 2.0 | The Interconnection Customer elects and the ["Participating TO" or "ISO"] shall cause an Optional Interconnection Study consistent with Section 10 of the LGIP to be performed in accordance with the ISO Tariff. |
| | 3.0 | The scope of the Optional Interconnection Study shall be subject to the assumptions set forth in Attachment A to this Agreement. |
| | 4.0 | The Optional Interconnection Study shall be performed solely for informational purposes. |
| | 5.0 | The Optional Interconnection Study report shall provide a sensitivity analysis based on the assumptions specified by the Interconnection Customer in Attachment A to this Agreemen The Optional Interconnection Study will identify the Participating TO's Interconnection Facilities and the Network Upgrades, and the estimated cost thereof, that may be required |
| | | rles F. Robinson, Vice President and General Counsel ust 30, 2005 Effective: July 1, 20 |

Original Sheet No. 1188

to provide transmission service or interconnection service based upon the assumptions specified by the Interconnection Customer in Attachment A. 6.0 The Interconnection Customer shall provide a deposit of \$10,000 for the performance of the Optional Interconnection Study. The _____ ["Participating TO" or "ISO"]'s good faith estimate for the time of completion of the Optional Interconnection Study is [insert date]. Following the issuance of the Optional Interconnection Study, the ["Participating TO" or "ISO"] shall charge and the Interconnection Customer shall pay the actual costs of the Optional Interconnection Study. Any difference between the initial payment and the actual cost of the study shall be paid by or refunded to the Interconnection Customer, as appropriate. 7.0 Substantial portions of technical data and assumptions used to perform the Optional Interconnection Study, such as system conditions, existing and planned generation, and ["Participating TO" or "ISO"] unit modeling, may change after the provides the Optional Interconnection Study results to the Interconnection Customer. Study results will reflect available data at the time the ["Participating TO" or "ISO"] provides the Optional Interconnection Study to the ["Participating TO" or "ISO"] Interconnection Customer. The shall not be responsible for any additional costs, including without limitation, costs of new or additional facilities, system upgrades, or schedule changes, that may be incurred by the Interconnection Customer as a result of changes in such data and assumptions. 8.0 The Participating TO shall maintain records and accounts of all costs incurred in performing the Optional Interconnection Study in sufficient detail to allow verification of all costs incurred, including associated overheads. The Interconnection Customer shall have the right, upon reasonable notice, within a reasonable time at the Participating TO offices and at its own expense, to audit the Participating TO's records as necessary and as appropriate in order to verify costs incurred by the Participating TO. Any audit requested by the Interconnection Customer shall be completed, and written notice of any audit dispute provided to the Participating TO representative, within one hundred eighty (180) Calendar Days following receipt by the Interconnection Customer of the Participating TO's notification of the final costs of the Optional Interconnection Study. 9.0 Pursuant to Section 10.1 of the LGIP, this Agreement shall become effective upon the date the fully executed Agreement and deposit specified in Section 6 of this Agreement are received by the ["Participating TO" or "ISO"]. If the ["Participating TO" or "ISO"] does not receive the fully executed Agreement and payment pursuant to Section 10.1 of the LGIP, then the offer reflected in this Agreement will expire and this Agreement will be of no effect. 10.0 Miscellaneous. 10.1 Dispute Resolution. Any dispute, or assertion of a claim, arising out of or in connection with this Optional Interconnection Study Agreement, shall be resolved in accordance with Section 13.5 of the LGIP

Issued by: Charles F. Robinson, Vice President and General Counsel

- 10.2 Confidentiality. Confidential Information shall be treated in accordance with Section 13.1 of the LGIP.
- 10.3 Binding Effect. This Optional Interconnection Study Agreement and the rights and obligations hereof, shall be binding upon and shall inure to the benefit of the successors and assigns of the Parties hereto.
- 10.4 Conflicts. In the event of a conflict between the body of this Optional Interconnection Study Agreement and any attachment, appendices or exhibits hereto, the terms and provisions of the body of this Optional Interconnection Study Agreement shall prevail and be deemed the final intent of the Parties.
- 10.5 Rules of Interpretation. This Optional Interconnection Study Agreement, unless a clear contrary intention appears, shall be construed and interpreted as follows: (1) the singular number includes the plural number and vice versa; (2) reference to any person includes such person's successors and assigns but, in the case of a Party, only if such successors and assigns are permitted by this Optional Interconnection Study Agreement, and reference to a person in a particular capacity excludes such person in any other capacity or individually: (3) reference to any agreement (including this Optional Interconnection Study Agreement), document, instrument or tariff means such agreement, document, instrument, or tariff as amended or modified and in effect from time to time in accordance with the terms thereof and, if applicable, the terms hereof; (4) reference to any applicable laws and regulations means such applicable laws and regulations as amended, modified, codified, or reenacted, in whole or in part, and in effect from time to time, including, if applicable, rules and regulations promulgated thereunder; (5) unless expressly stated otherwise, reference to any Article, Section or Appendix means such Article or Section of this Optional Interconnection Study Agreement or such Appendix to this Optional Interconnection Study Agreement, or such Section to the LGIP or such Appendix to the LGIP, as the case may be; (6) "hereunder", "hereof", "herein", "hereto" and words of similar import shall be deemed references to this Optional Interconnection Study Agreement as a whole and not to any particular Article, Section, or other provision hereof or thereof; (7) "including" (and with correlative meaning "include") means including without limiting the generality of any description preceding such term; and (8) relative to the determination of any period of time, "from" means "from and including", "to" means "to but excluding" and "through" means "through and including".
- 10.6 Entire Agreement. This Optional Interconnection Study Agreement, including all Appendices and Schedules attached hereto, constitutes the entire agreement between the Parties with reference to the subject matter hereof, and supersedes all prior and contemporaneous understandings or agreements, oral or written, between the Parties with respect to the subject matter of this Optional Interconnection Study Agreement. There are no other agreements, representations, warranties, or covenants which constitute any part of the consideration for, or any condition to, any Party's compliance with its obligations under this Optional Interconnection Study Agreement.
- 10.7 No Third Party Beneficiaries. This Optional Interconnection Study Agreement is not intended to and does not create rights, remedies, or benefits of any character whatsoever in favor of any persons, corporations, associations, or entities other than the Parties, and

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1190

the obligations herein assumed are solely for the use and benefit of the Parties, their successors in interest and, where permitted, their assigns.

10.8 Waiver. The failure of a Party to this Optional Interconnection Study Agreement to insist, on any occasion, upon strict performance of any provision of this Optional Interconnection Study Agreement will not be considered a waiver of any obligation, right, or duty of, or imposed upon, such Party.

Any waiver at any time by either Party of its rights with respect to this Optional Interconnection Study Agreement shall not be deemed a continuing waiver or a waiver with respect to any other failure to comply with any other obligation, right, duty of this Optional Interconnection Study Agreement. Termination or default of this Optional Interconnection Study Agreement for any reason by the Interconnection Customer shall not constitute a waiver of the Interconnection Customer's legal rights to obtain an interconnection from the other Party. Any waiver of this Optional Interconnection Study Agreement shall, if requested, be provided in writing.

Any waivers at any time by any Party of its rights with respect to any default under this Optional Interconnection Study Agreement, or with respect to any other matter arising in connection with this Optional Interconnection Study Agreement, shall not constitute or be deemed a waiver with respect to any subsequent default or other matter arising in connection with this Optional Interconnection Study Agreement. Any delay, short of the statutory period of limitations, in asserting or enforcing any right under this Optional Interconnection Study Agreement shall not constitute or be deemed a waiver of such right.

- 10.9 Headings. The descriptive headings of the various Articles and Sections of this Optional Interconnection Study Agreement have been inserted for convenience of reference only and are of no significance in the interpretation or construction of this Optional Interconnection Study Agreement.
- 10.10 Multiple Counterparts. This Optional Interconnection Study Agreement may be executed in two or more counterparts, each of which is deemed an original but all constitute one and the same instrument.
- 10.11 Amendment. The Parties may by mutual agreement amend this Optional Interconnection Study Agreement by a written instrument duly executed by both of the Parties.
- 10.12 Modification by the Parties. The Parties may by mutual agreement amend the Appendices to this Optional Interconnection Study Agreement by a written instrument duly executed by both of the Parties. Such amendment shall become effective and a part of this Optional Interconnection Study Agreement upon satisfaction of all applicable laws and regulations.
- 10.13 Reservation of Rights. The ______ ["Participating TO" or "ISO"] shall have the right to make a unilateral filing with FERC to modify this Optional Interconnection Study Agreement with respect to any rates, terms and conditions, charges, classifications of service, rule or regulation under section 205 or any other applicable provision of the Federal Power Act and FERC's rules and regulations thereunder, and Interconnection Customer shall have the right to make a unilateral filing with FERC to modify this Optional Interconnection Study Agreement pursuant to section 206 or any other applicable provision

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1191

of the Federal Power Act and FERC's rules and regulations thereunder; provided that each Party shall have the right to protest any such filing by another Party and to participate fully in any proceeding before FERC in which such modifications may be considered. Nothing in this Optional Interconnection Study Agreement shall limit the rights of the Parties or of FERC under sections 205 or 206 of the Federal Power Act and FERC's rules and regulations thereunder, except to the extent that the Parties otherwise mutually agree as provided herein.

- 10.14 No Partnership. This Optional Interconnection Study Agreement shall not be interpreted or construed to create an association, joint venture, agency relationship, or partnership between the Parties or to impose any partnership obligation or partnership liability upon any Party. No Party shall have any right, power or authority to enter into any agreement or undertaking for, or act on behalf of, or to act as or be an agent or representative of, or to otherwise bind, another Party.
- 10.15 Assignment. This Optional Interconnection Study Agreement may be assigned by a Party only with the written consent of the other Party; provided that a Party may assign this Optional Interconnection Study Agreement without the consent of the other Party to any Affiliate of the assigning Party with an equal or greater credit rating and with the legal authority and operational ability to satisfy the obligations of the assigning Party under this Optional Interconnection Study Agreement; and provided further that the Interconnection Customer shall have the right to assign this Optional Interconnection Study Agreement, without the consent of the other Party, for collateral security purposes to aid in providing financing for the Large Generating Unit, provided that the Interconnection Customer will require any secured party, trustee or mortgagee to notify the other Party of any such assignment. Any financing arrangement entered into by the Interconnection Customer pursuant to this Article will provide that prior to or upon the exercise of the secured party's, trustee's or mortgagee's assignment rights pursuant to said arrangement, the secured creditor, the trustee or mortgagee will notify the other Party of the date and particulars of any such exercise of assignment right(s). Any attempted assignment that violates this Article is void and ineffective. Any assignment under this Optional Interconnection Study Agreement shall not relieve a Party of its obligations, nor shall a Party's obligations be enlarged, in whole or in part, by reason thereof. Where required, consent to assignment will not be unreasonably withheld, conditioned or delayed.

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1192

IN WITNESS WHEREOF, the Parties have caused this Agreement to be duly executed by their duly authorized officers or agents on the day and year first above written.

| [Insert name of the Participating TO or "California Independent System Operator Corporation"] |
|--|
| Ву: |
| Title: |
| Date: |
| |
| |
| [Insert name of the Interconnection Customer] |
| [Insert name of the Interconnection Customer] |
| |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

Effective: July 1, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1193

Attachment A **Optional Interconnection Study Agreement**

ASSUMPTIONS USED IN CONDUCTING THE OPTIONAL INTERCONNECTION STUDY

[To be completed by the Interconnection Customer consistent with Section 10 of the LGIP.]

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

Effective: July 1, 2005

ISO TARIFF APPENDIX V

STANDARD LARGE GENERATOR INTERCONNECTION AGREEMENT

Issued by: Charles F. Robinson, Vice President and General Counsel

STANDARD LARGE GENERATOR INTERCONNECTION AGREEMENT (LGIA) [INTERCONNECTION CUSTOMER] [PARTICIPATING TO]

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

Issued by: Charles F. Robinson, Vice President and General Counsel

Effective: July 1, 2005

TABLE OF CONTENTS

| ARTICLE 1. | DEFINITIONS | 1203 |
|------------|--|------|
| ARTICLE 2. | EFFECTIVE DATE, TERM AND TERMINATION | 1208 |
| 2.1 | Effective Date | 1208 |
| 2.2 | Term of Agreement | 1208 |
| 2.3 | Termination Procedures | 1209 |
| | 2.3.1 Written Notice | 1209 |
| | 2.3.2 Default | 1209 |
| | 2.3.3 Suspension of Work | 1209 |
| | 2.3.4 | 1209 |
| 2.4 | Termination Costs | 1209 |
| | 2.4.1 | 1209 |
| | 2.4.2 | 1209 |
| | 2.4.3 | 1209 |
| 2.5 | Disconnection | |
| 2.6 | Survival | 1210 |
| ARTICLE 3. | REGULATORY FILINGS AND ISO TARIFF COMPLIANCE | 1210 |
| 3.1 | Filing | |
| 3.2 | Agreement Subject to ISO Tariff | |
| 3.3 | Relationship Between this LGIA and the ISO Tariff | |
| 3.4 | Relationship Between this LGIA and the QF PGA | |
| ARTICLE 4. | SCOPE OF SERVICE | 1210 |
| 4.1 | Interconnection Service | |
| 4.2 | Provision of Service | |
| 4.3 | Performance Standards | |
| 4.4 | No Transmission Service | |
| 4.5 | Interconnection Customer Provided Services | |
| ARTICLE 5. | INTERCONNECTION FACILITIES ENGINEERING, PROCUREMENT, AND | |
| CONSTRUC | | 1211 |
| 5.1 | Options | |
| | 5.1.1 Standard Option | |
| | 5.1.2 Alternate Option | |
| | 5.1.3 Option to Build | |
| | 5.1.4 Negotiated Option | |
| 5.2 | General Conditions Applicable to Option to Build | |
| 5.3 | Liquidated Damages | |
| 5.4 | Power System Stabilizers | |
| 5.5 | Equipment Procurement | |
| | 5.5.1 | |
| | 5.5.2 | |
| | 5.5.3 | |
| 5.6 | Construction Commencement | |
| | 5.6.1 | |
| | 5.6.2 | |
| | 5.6.3 | |
| | 5.6.4 | |
| 5.7 | Work Progress | |
| 5.8 | Information Exchange | |
| 5.9 | Limited Operation | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 30, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Effective: July 1, 2005

| | 5.10 | | nnection Customer's Interconnection Facilities | | 216 |
|------------|--------|-----------|---|-------|------|
| | | 5.10.1 | Large Generating Facility and Interconnection Customer's Interconnection | | |
| | | | Facilities Specifications | 1 | 216 |
| | | 5.10.2 | Participating TO's and ISO's Review | 1 | 217 |
| | | 5.10.3 | Interconnection Customer's Interconnection Facilities Construction | 1 | 217 |
| | | 5.10.4 | Interconnection Customer to Meet Requirements of the Participating TO's | | |
| | | | Interconnection Handbook | 1 | 217 |
| | 5.11 | Particip | pating TO's Interconnection Facilities Construction | 1 | 217 |
| | 5.12 | Access | Rights | 1 | 218 |
| | 5.13 | | of Other Property Owners | | |
| | 5.14 | |) | | |
| | 5.15 | | onstruction of Base Case Facilities | | |
| | 5.16 | | nsion | | |
| | 5.17 | | | | |
| | | | Interconnection Customer Payments Not Taxable | | |
| | | | Representations And Covenants | | |
| | | 5.17.3 | Indemnification for the Cost Consequences of Current Tax Liability Impose | ed Up | on |
| | | | the Participating TO | | |
| | | 5.17.4 | Tax Gross-Up Amount | | |
| | | | Private Letter Ruling or Change or Clarification of Law | | |
| | | 5.17.6 | | | |
| | | | Contests | | |
| | | | Refund | | |
| | | | Taxes Other Than Income Taxes | | |
| | 5.18 | Tax Sta | | | |
| | 5.19 | | ation | | |
| | 0.10 | | General | | |
| | | | Standards | | |
| | | | Modification Costs | | |
| | | 0.10.0 | | | |
| ARTIC | LEG TI | ESTING | AND INSPECTION | 1 | 224 |
| , | 6.1 | | mmercial Operation Date Testing and Modifications | | |
| | 6.2 | | ommercial Operation Date Testing and Modifications | | |
| | 6.3 | | Observe Testing | | |
| | 6.4 | | o Inspect | | |
| | 0.4 | ragnitio | , inspect | ٠ ١ | 220 |
| ARTIC | IF7 M | FTFRIN | G | 1 | 225 |
| A. () () | 7.1 | | il | | |
| | 7.2 | | Meters | | |
| | 7.3 | | pating TO Retail Metering | | |
| | 1.5 | i aiticip | ating 10 Netali Metering | ٠ ١ | 223 |
| ADTIC | TES C | ОММПЫ | ICATIONS | 1 | 226 |
| AITIC | 8.1 | | nnection Customer Obligations | | |
| | 8.2 | | e Terminal Unit | | |
| | 8.3 | | nexation | | |
| | 0.3 | NO AIII | iexalion | 1 | 220 |
| ADTIC | NEO O | DEDATI | ONS | 1 | 226 |
| AKIIC | | | | | |
| | 9.1 | | Aron Notification | | |
| | 9.2 | | Area Notification | | |
| | 9.3 | | d Participating TO Obligations | | |
| | 9.4 | | nnection Customer Obligations | | |
| | 9.5 | | p and Synchronization | | |
| | 9.6 | | re Power | | |
| | | 9.6.1 | Power Factor Design Criteria | | |
| | | 9.6.2 | Voltage Schedules | 1 | 1228 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1198

Effective: July 1, 2005

| | 9.6.2.1 Governors and Regulators | 1228 |
|---|---|---------------------|
| | 9.6.3 Payment for Reactive Power | |
| 9.7 | Outages and Interruptions | |
| • | 9.7.1 Outages | |
| | 9.7.1.1 Outage Authority and Coordination | |
| | 9.7.1.2 Outage Schedules | |
| | 9.7.1.3 Outage Restoration | |
| | | |
| | 9.7.2 Interruption of Service | |
| | 9.7.2.1 | |
| | 9.7.2.2 | |
| | 9.7.2.3 | |
| | 9.7.2.4 | 1230 |
| | 9.7.2.5 | |
| | 9.7.3 Under-Frequency and Over-Frequency Conditions | 1230 |
| | 9.7.4 System Protection and Other Control Requirements | 1231 |
| | 9.7.4.1 System Protection Facilities | |
| | 9.7.4.2 | |
| | 9.7.4.3 | |
| | 9.7.4.4 | |
| | 9.7.4.5 | |
| | 9.7.4.6 | |
| | 9.7.5 Requirements for Protection | |
| | | |
| 0.0 | 9.7.6 Power Quality | |
| 9.8 | Switching and Tagging Rules | |
| 9.9 | Use of Interconnection Facilities by Third Parties | |
| | 9.9.1 Purpose of Interconnection Facilities | |
| | 9.9.2 Third Party Users | |
| 9.10 | Disturbance Analysis Data Exchange | 1233 |
| | | |
| ARTICLE 10. | MAINTENANCE | 1233 |
| 10.1 | Participating TO Obligations | 1233 |
| 10.2 | Interconnection Customer Obligations | 1233 |
| 10.3 | Coordination | 1233 |
| 10.4 | Secondary Systems | |
| 10.5 | Operating and Maintenance Expenses | |
| 10.0 | oporating and maintenance Expenses | |
| ARTICLE 11. | PERFORMANCE OBLIGATION | 1234 |
| 11.1 | Interconnection Customer's Interconnection Facilities | |
| 11.2 | Participating TO's Interconnection Facilities | |
| 11.3 | Network Upgrades and Distribution Upgrades | |
| 11.4 | Transmission Credits | |
| 11.4 | | |
| | 11.4.1 Repayment of Amounts Advanced for Network Upgrades | |
| | 11.4.2 Special Provisions for Affected Systems | |
| | 11.4.3 | |
| 11.5 | Provision of Security | |
| | 11.5.1 | |
| | 11.5.2 | |
| | 11.5.3 | |
| 11.6 | Interconnection Customer Compensation | 1235 |
| | 11.6.1 Interconnection Customer Compensation for Actions During Emerg | gency Condition1236 |
| ARTICI F 12 | INVOICE | 1236 |
| 12.1 | General | |
| 12.1 | Final Invoice | |
| 12.2 | | |
| 12.3 | Payment | 1230 |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1199

Effective: July 1, 2005

| 12.4 | Disputes | 1236 |
|--------------|--|-----------------|
| ADTIOL E 40 | EMEDOENOISO | 4007 |
| | EMERGENCIES | |
| 13.1 | [Reserved] | |
| 13.2 | Obligations | |
| 13.3 | Notice | |
| 13.4 | Immediate Action | |
| 13.5 | ISO and Participating TO Authority | |
| | 13.5.1 General | 1237 |
| | 13.5.2 Reduction and Disconnection | 1238 |
| 13.6 | Interconnection Customer Authority | 1238 |
| 13.7 | Limited Liability | |
| | , | |
| ARTICLE 14. | REGULATORY REQUIREMENTS AND GOVERNING LAWS | 1238 |
| 14.1 | Regulatory Requirements | 1238 |
| 14.2 | Governing Law | |
| | 14.2.1 | |
| | 14.2.2 | |
| | 14.2.3 | |
| | 17. 2. | 1200 |
| ARTICI E 15 | NOTICES | 1230 |
| 15.1 | General | |
| 15.2 | Billings and Payments | |
| _ | Alternative Forms of Notice | |
| 15.3 15.4 | | |
| 15.4 | Operations and Maintenance Notice | 1239 |
| ADTICI E 16 | FORCE MAJEURE | 1220 |
| 16.1 | Force Majeure | |
| 10.1 | • | |
| | 16.1.1 | |
| | 16.1.2 | 1239 |
| ARTICI F 17 | DEFAULT | 1240 |
| 17.1 | Default | |
| 17.1 | 17.1.1 General | |
| | | |
| | 17.1.2 Right to Terminate | 1240 |
| ARTICI E 18 | INDEMNITY, CONSEQUENTIAL DAMAGES, | |
| AKTIOLL 10. | AND INSURANCE | 1240 |
| 18.1 | Indemnity | |
| 10.1 | 18.1.1 Indemnified Party | |
| | 18.1.2 Indemnifying Party | |
| | | |
| 40.0 | 18.1.3 Indemnity Procedures | |
| 18.2 | Consequential Damages | |
| 18.3 | Insurance | |
| | 18.3.1 | ······ |
| | 18.3.2 | |
| | 18.3.3 | |
| | 18.3.4 | |
| | 18.3.5 | |
| | 18.3.6 | 1242 |
| | 18.3.7 | 1242 |
| | 18.3.8 | 1242 |
| | 18.3.9 | |
| | 18.3.10 | |
| | 18.3.11 | |
| | | · · · · · - · - |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 30, 2005

Effective: July 1, 2005

| ARTICLE 19. | ASSIGNMENT | 1243 |
|--------------|--|-------|
| 19.1 | Assignment | 1243 |
| _ | | |
| | SEVERABILITY | |
| 20.1 | Severability | 1243 |
| ADTICLE 04 | COMPARADILITY | 4040 |
| | COMPARABILITY | |
| 21.1 | Comparability | 1243 |
| ARTICI E 22 | CONFIDENTIALITY | 12/13 |
| 22.1 | Confidentiality | |
| 22.1 | 22.1.1 Term | |
| | 22.1.2 Scope | |
| | 22.1.3 Release of Confidential Information | |
| | 22.1.4 Rights | |
| | 22.1.5 No Warranties | |
| | 22.1.6 Standard of Care | |
| | 22.1.7 Order of Disclosure | |
| | 22.1.8 Termination of Agreement | |
| | 22.1.9 Remedies | |
| | 22.1.10 Disclosure to FERC, its Staff, or a State | |
| | 22.1.11 | |
| | | |
| | ENVIRONMENTAL RELEASES | |
| 23.1. | | 1246 |
| | | |
| | INFORMATION REQUIREMENTS | |
| 24.1 | Information Acquisition | |
| 24.2 | Information Submission by Participating TO | |
| 24.3 | Updated Information Submission by Interconnection Customer | |
| 24.4 | Information Supplementation | 1247 |
| ADTICLE 25 | INFORMATION ACCESS AND AUDIT RIGHTS | 1047 |
| 25.1 | Information Access and Audit Rights | |
| 25.1 25.2 | Reporting of Non-Force Majeure Events | |
| 25.3 | Audit Rights | |
| 25.5 | 25.3.1 | |
| | 25.3.2 | |
| 25.4 | Audit Rights Periods | |
| 20 | 25.4.1 Audit Rights Period for Construction-Related | |
| | Accounts and Records | 1248 |
| | 25.4.2 Audit Rights Period for All Other | |
| | Accounts and Records | 1248 |
| 25.5 | Audit Results | |
| | 25.5.1 | |
| | | |
| ARTICLE 26. | SUBCONTRACTORS | 1249 |
| 26.1 | General | |
| 26.2 | Responsibility of Principal | |
| 26.3 | No Limitation by Insurance | 1249 |
| | | |
| | DISPUTES | |
| 27.1 | Submission | 1249 |
| 27.2 | External Arbitration Procedures | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Issued on: August 30, 2005

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF

| FIRST REPLACEMEN | IT VOLUME NO. II | Original Sheet No. 1201 |
|---|--|-------------------------|
| | ation Decisions | |
| 28.1 Gene 28.1.1 28.1.2 28.1.3 | SENTATIONS, WARRANTIES AND COVENANTS ral Good Standing Authority No Conflict Consent and Approval | |
| ARTICLE 29. [RESER | RVED] | 1251 |
| 30.1 Bindir 30.2 Confli 30.3 Rules 30.4 Entire 30.5 No Tr 30.6 Waive 30.7 Headi 30.8 Multip 30.9 Amer 30.10 Modif 30.11 Resei 30.12 No Pa 30.13 Joint a | LANEOUS ag Effect cts of Interpretation Agreement ird Party Beneficiaries er angs le Counterparts dment cation by the Parties vation of Rights artnership and Several Obligations | |
| Appendix A | Interconnection Facilities, Network Upgrades and Distribut | |
| Appendix B | Milestones | |
| Appendix C | Interconnection Details | |
| Appendix D | Security Arrangements Details | |
| Appendix E | Commercial Operation Date | |
| Appendix F | Addresses for Delivery of Notices and Billings | |
| Appendix G | Reliability Management System Agreement | |
| Appendix H | Requirements of Generators Relying on Newer Technolog | ies |

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005 Effective: July 1, 2005

STANDARD LARGE GENERATOR INTERCONNECTION AGREEMENT

[INTERCONNECTION CUSTOMER]

[PARTICIPATING TO]

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION

| THIS STANDARD LARGE GENERATOR INTERCONNECTION AGREEMENT ("LGIA") is made |
|---|
| and entered into this day of 20, by and among, a |
| and entered into this day of 20, by and among, a, a |
| RECITALS |
| WHEREAS, ISO exercises Operational Control over the ISO Controlled Grid; and |
| WHEREAS, the Participating TO owns, operates, and maintains the Participating TO's Transmission System; and |
| WHEREAS, Interconnection Customer intends to own, lease and/or control and operate the Generating Facility identified as a Large Generating Facility in Appendix C to this LGIA; and |
| WHEREAS, Interconnection Customer, Participating TO, and ISO have agreed to enter into this LGIA for the purpose of interconnecting the Large Generating Facility with the Participating TO's Transmission System; |
| NOW, THEREFORE, in consideration of and subject to the mutual covenants contained herein, it is agreed: |
| When used in this LGIA, terms with initial capitalization that are not defined in Article 1 shall have the meanings specified in the Article in which they are used. |

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE 1. DEFINITIONS

Adverse System Impact shall mean the negative effects due to technical or operational limits on conductors or equipment being exceeded that may compromise the safety and reliability of the electric system.

Affected System shall mean an electric system other than the ISO Controlled Grid that may be affected by the proposed interconnection, including the Participating TO's electric system that is not part of the ISO Controlled Grid.

Affiliate shall mean, with respect to a corporation, partnership or other entity, each such other corporation, partnership or other entity that directly or indirectly, through one or more intermediaries, controls, is controlled by, or is under common control with, such corporation, partnership or other entity.

Applicable Laws and Regulations shall mean all duly promulgated applicable federal, state and local laws, regulations, rules, ordinances, codes, decrees, judgments, directives, or judicial or administrative orders, permits and other duly authorized actions of any Governmental Authority.

Applicable Reliability Council shall mean the Western Electricity Coordinating Council or its successor.

Applicable Reliability Standards shall mean the requirements and guidelines of NERC, the Applicable Reliability Council, and the Control Area of the Participating TO's Transmission System to which the Generating Facility is directly interconnected.

Base Case shall mean the base case power flow, short circuit, and stability data bases used for the Interconnection Studies.

Breach shall mean the failure of a Party to perform or observe any material term or condition of this LGIA.

Breaching Party shall mean a Party that is in Breach of this LGIA.

Business Day shall mean Monday through Friday, excluding federal holidays and the day after Thanksgiving Day.

Calendar Day shall mean any day including Saturday, Sunday or a federal holiday.

Commercial Operation shall mean the status of an Electric Generating Unit at a Generating Facility that has commenced generating electricity for sale, excluding electricity generated during Trial Operation.

Commercial Operation Date of an Electric Generating Unit shall mean the date on which the Electric Generating Unit at the Generating Facility commences Commercial Operation as agreed to by the applicable Participating TO and the Interconnection Customer pursuant to Appendix E to this LGIA.

Confidential Information shall mean any confidential, proprietary or trade secret information of a plan, specification, pattern, procedure, design, device, list, concept, policy or compilation relating to the present or planned business of a Party, which is designated as confidential by the Party supplying the information, whether conveyed orally, electronically, in writing, through inspection, or otherwise, subject to Article 22.1.2.

Issued by: Charles F. Robinson, Vice President and General Counsel

Control Area shall mean an electrical system or systems bounded by interconnection metering and telemetry, capable of controlling generation to maintain its interchange schedule with other Control Areas and contributing to frequency regulation of the interconnection. A Control Area must be certified by the Applicable Reliability Council.

Default shall mean the failure of a Breaching Party to cure its Breach in accordance with Article 17 of this LGIA.

Distribution System shall mean those non-ISO-controlled transmission and distribution facilities owned by the Participating TO.

Distribution Upgrades shall mean the additions, modifications, and upgrades to the Participating TO's Distribution System. Distribution Upgrades do not include Interconnection Facilities.

Effective Date shall mean the date on which this LGIA becomes effective upon execution by the Parties subject to acceptance by FERC, or if filed unexecuted, upon the date specified by FERC.

Electric Generating Unit shall mean an individual electric generator and its associated plant and apparatus whose electrical output is capable of being separately identified and metered.

Emergency Condition shall mean a condition or situation: (1) that in the judgment of the Party making the claim is imminently likely to endanger life or property; or (2) that, in the case of the ISO, is imminently likely (as determined in a non-discriminatory manner) to cause a material adverse effect on the security of, or damage to, the ISO Controlled Grid or the electric systems of others to which the ISO Controlled Grid is directly connected; (3) that, in the case of the Participating TO, is imminently likely (as determined in a non-discriminatory manner) to cause a material adverse effect on the security of, or damage to, the Participating TO's Transmission System, Participating TO's Interconnection Facilities, Distribution System, or the electric systems of others to which the Participating TO's electric system is directly connected; or (4) that, in the case of the Interconnection Customer, is imminently likely (as determined in a non-discriminatory manner) to cause a material adverse effect on the security of, or damage to, the Generating Facility or Interconnection Customer's Interconnection Facilities. System restoration and black start shall be considered Emergency Conditions; provided, that Interconnection Customer is not obligated by this LGIA to possess black start capability.

Environmental Law shall mean Applicable Laws or Regulations relating to pollution or protection of the environment or natural resources.

Federal Power Act shall mean the Federal Power Act, as amended, 16 U.S.C. §§ 791a et seq.

FERC shall mean the Federal Energy Regulatory Commission or its successor.

Force Majeure shall mean any act of God, labor disturbance, act of the public enemy, war, insurrection, riot, fire, storm or flood, explosion, breakage or accident to machinery or equipment, any order, regulation or restriction imposed by governmental, military or lawfully established civilian authorities, or any other cause beyond a Party's control. A Force Majeure event does not include acts of negligence or intentional wrongdoing by the Party claiming Force Majeure.

Generating Facility shall mean the Interconnection Customer's Electric Generating Unit(s) used for the production of electricity identified in the Interconnection Customer's Interconnection Request, but shall not include the Interconnection Customer's Interconnection Facilities.

Generating Facility Capacity shall mean the capacity of the Generating Facility and the aggregate capacity of the Generating Facility where it includes multiple energy production devices.

Issued by: Charles F. Robinson, Vice President and General Counsel

Good Utility Practice shall mean any of the practices, methods and acts engaged in or approved by a significant portion of the electric utility industry during the relevant time period, or any of the practices, methods and acts which, in the exercise of reasonable judgment in light of the facts known at the time the decision was made, could have been expected to accomplish the desired result at a reasonable cost consistent with good business practices, reliability, safety and expedition. Good Utility Practice is not intended to be any one of a number of the optimum practices, methods, or acts to the exclusion of all others, but rather to be acceptable practices, methods, or acts generally accepted in the region.

Governmental Authority shall mean any federal, state, local or other governmental, regulatory or administrative agency, court, commission, department, board, or other governmental subdivision, legislature, rulemaking board, tribunal, or other governmental authority having jurisdiction over the Parties, their respective facilities, or the respective services they provide, and exercising or entitled to exercise any administrative, executive, police, or taxing authority or power; provided, however, that such term does not include the Interconnection Customer, ISO, Participating TO, or any Affiliate thereof.

Hazardous Substances shall mean any chemicals, materials or substances defined as or included in the definition of "hazardous substances," "hazardous wastes," "hazardous materials," "hazardous constituents," "restricted hazardous materials," "extremely hazardous substances," "toxic substances," "radioactive substances," "contaminants," "pollutants," "toxic pollutants" or words of similar meaning and regulatory effect under any applicable Environmental Law, or any other chemical, material or substance, exposure to which is prohibited, limited or regulated by any applicable Environmental Law.

Initial Synchronization Date shall mean the date upon which an Electric Generating Unit is initially synchronized and upon which Trial Operation begins.

In-Service Date shall mean the date upon which the Interconnection Customer reasonably expects it will be ready to begin use of the Participating TO's Interconnection Facilities to obtain back feed power.

Interconnection Customer's Interconnection Facilities shall mean all facilities and equipment, as identified in Appendix A of this LGIA, that are located between the Generating Facility and the Point of Change of Ownership, including any modification, addition, or upgrades to such facilities and equipment necessary to physically and electrically interconnect the Generating Facility to the Participating TO's Transmission System. Interconnection Customer's Interconnection Facilities are sole use facilities.

Interconnection Facilities shall mean the Participating TO's Interconnection Facilities and the Interconnection Customer's Interconnection Facilities. Collectively, Interconnection Facilities include all facilities and equipment between the Generating Facility and the Point of Interconnection, including any modification, additions or upgrades that are necessary to physically and electrically interconnect the Generating Facility to the Participating TO's Transmission System. Interconnection Facilities are sole use facilities and shall not include Distribution Upgrades, Stand Alone Network Upgrades or Network Upgrades.

Interconnection Facilities Study shall mean the study conducted by the Participating TO, the ISO, or a third party consultant for the Interconnection Customer to determine a list of facilities (including the Participating TO's Interconnection Facilities, Network Upgrades, and Distribution Upgrades), the cost of those facilities, and the time required to interconnect the Generating Facility with the Participating TO's Transmission System.

Interconnection Facilities Study Agreement shall mean the agreement between the Interconnection Customer and the Participating TO or the ISO for conducting the Interconnection Facilities Study.

Issued by: Charles F. Robinson, Vice President and General Counsel

Interconnection Feasibility Study shall mean the preliminary evaluation conducted by the Participating TO, ISO, or a third party consultant for the Interconnection Customer of the system impact and cost of interconnecting the Generating Facility to the Participating TO's Transmission System, and, if reasonably practicable, an informational assessment, as needed, of other affected owners' portions of the ISO Controlled Grid.

Interconnection Handbook shall mean a handbook, developed by the Participating TO and posted on the Participating TO's web site or otherwise made available by the Participating TO, describing technical and operational requirements for wholesale generators and loads connected to the Participating TO's portion of the ISO Controlled Grid, as such handbook may be modified or superseded from time to time. Participating TO's standards contained in the Interconnection Handbook shall be deemed consistent with Good Utility Practice and Applicable Reliability Standards. In the event of a conflict between the terms of this LGIA and the terms of the Participating TO's Interconnection Handbook, the terms in this LGIA shall apply.

Interconnection Request shall mean a request, in the form of Appendix 1 to the Standard Large Generator Interconnection Procedures, in accordance with the ISO Tariff.

Interconnection Service shall mean the service provided by the Participating TO and ISO associated with interconnecting the Interconnection Customer's Generating Facility to the Participating TO's Transmission System and enabling the ISO Controlled Grid to receive electric energy and capacity from the Generating Facility at the Point of Interconnection, pursuant to the terms of this LGIA, the Participating TO's Transmission Owner Tariff, and the ISO Tariff.

Interconnection Study shall mean any of the following studies: the Interconnection Feasibility Study, the Interconnection System Impact Study, and the Interconnection Facilities Study performed by the Participating TO, the ISO, or a third party consultant for the Interconnection Customer pursuant to the Standard Large Generator Interconnection Procedures.

Interconnection System Impact Study shall mean the engineering study conducted by the Participating TO, ISO, or a third party consultant for the Interconnection Customer that evaluates the impact of the proposed interconnection on the safety and reliability of the Participating TO's Transmission System and, if applicable, an Affected System. The study shall identify and detail the system impacts that would result if the Generating Facility were interconnected without project modifications or system modifications, focusing on the Adverse System Impacts identified in the Interconnection Feasibility Study, or to study potential impacts, including but not limited to those identified in the Scoping Meeting as described in the Standard Large Generator Interconnection Procedures.

IRS shall mean the Internal Revenue Service.

ISO Controlled Grid shall mean the system of transmission lines and associated facilities of the parties to the Transmission Control Agreement that have been placed under the ISO's Operational Control.

ISO Tariff shall mean the ISO's tariff, as filed with FERC, and as amended or supplemented from time to time, or any successor tariff.

Large Generating Facility shall mean a Generating Facility having a Generating Facility Capacity of more than 20 MW.

Loss shall mean any and all damages, losses, and claims, including claims and actions relating to injury to or death of any person or damage to property, demand, suits, recoveries, costs and expenses, court costs, attorney fees, and all other obligations by or to third parties.

Issued by: Charles F. Robinson, Vice President and General Counsel

Material Modification shall mean those modifications that have a material impact on the cost or timing of any Interconnection Request or any other valid interconnection request with a later queue priority date.

Metering Equipment shall mean all metering equipment installed or to be installed for measuring the output of the Generating Facility pursuant to this LGIA at the metering points, including but not limited to instrument transformers, MWh-meters, data acquisition equipment, transducers, remote terminal unit, communications equipment, phone lines, and fiber optics.

NERC shall mean the North American Electric Reliability Council or its successor organization.

Network Upgrades shall be Participating TO's Delivery Network Upgrades and Participating TO's Reliability Network Upgrades.

Operational Control shall mean the rights of the ISO under the Transmission Control Agreement and the ISO Tariff to direct the parties to the Transmission Control Agreement how to operate their transmission lines and facilities and other electric plant affecting the reliability of those lines and facilities for the purpose of affording comparable non-discriminatory transmission access and meeting applicable reliability criteria.

Participating TO's Delivery Network Upgrades shall mean the additions, modifications, and upgrades to the Participating TO's Transmission System at or beyond the Point of Interconnection, other than Reliability Network Upgrades, identified in the Interconnection Studies, as identified in Appendix A, to relieve constraints on the ISO Controlled Grid.

Participating TO's Interconnection Facilities shall mean all facilities and equipment owned, controlled or operated by the Participating TO from the Point of Change of Ownership to the Point of Interconnection as identified in Appendix A to this LGIA, including any modifications, additions or upgrades to such facilities and equipment. Participating TO's Interconnection Facilities are sole use facilities and shall not include Distribution Upgrades, Stand Alone Network Upgrades or Network Upgrades.

Participating TO's Reliability Network Upgrades shall mean the additions, modifications, and upgrades to the Participating TO's Transmission System at or beyond the Point of Interconnection, identified in the Interconnection Studies, as identified in Appendix A, necessary to interconnect the Large Generating Facility safely and reliably to the Participating TO's Transmission System, which would not have been necessary but for the interconnection of the Large Generating Facility, including additions, modifications, and upgrades necessary to remedy short circuit or stability problems resulting from the interconnection of the Large Generating Facility to the Participating TO's Transmission System. Participating TO's Reliability Network Upgrades also include, consistent with Applicable Reliability Council practice, the Participating TO's facilities necessary to mitigate any adverse impact the Large Generating Facility's interconnection may have on a path's Applicable Reliability Council rating.

Participating TO's Transmission System shall mean the facilities owned and operated by the Participating TO and that have been placed under the ISO's Operational Control, which facilities form part of the ISO Controlled Grid.

Party or Parties shall mean the Participating TO, ISO, Interconnection Customer or the applicable combination of the above.

Point of Change of Ownership shall mean the point, as set forth in Appendix A to this LGIA, where the Interconnection Customer's Interconnection Facilities connect to the Participating TO's Interconnection Facilities.

Issued by: Charles F. Robinson, Vice President and General Counsel

Point of Interconnection shall mean the point, as set forth in Appendix A to this LGIA, where the Interconnection Facilities connect to the Participating TO's Transmission System.

Qualifying Facility shall mean a qualifying cogeneration facility or qualifying small power production facility, as defined in the Code of Federal Regulations, Title 18, Part 292 (18 C.F.R. §292).

QF PGA shall mean a Qualifying Facility Participating Generator Agreement specifying the special provisions for the operating relationship between a Qualifying Facility and the ISO, a pro forma version of which is set forth in Appendix K of the ISO Tariff.

Reasonable Efforts shall mean, with respect to an action required to be attempted or taken by a Party under this LGIA, efforts that are timely and consistent with Good Utility Practice and are otherwise substantially equivalent to those a Party would use to protect its own interests.

Scoping Meeting shall mean the meeting among representatives of the Interconnection Customer, the Participating TO(s), other Affected Systems, and the ISO conducted for the purpose of discussing alternative interconnection options, to exchange information including any transmission data and earlier study evaluations that would be reasonably expected to impact such interconnection options, to analyze such information, and to determine the potential feasible Points of Interconnection.

Stand Alone Network Upgrades shall mean Network Upgrades that the Interconnection Customer may construct without affecting day-to-day operations of the ISO Controlled Grid or Affected Systems during their construction. The Participating TO, the ISO, and the Interconnection Customer must agree as to what constitutes Stand Alone Network Upgrades and identify them in Appendix A to this LGIA.

Standard Large Generator Interconnection Procedures (LGIP) shall mean the ISO protocol that sets forth the interconnection procedures applicable to an Interconnection Request pertaining to a Large Generating Facility that is included in the ISO Tariff.

System Protection Facilities shall mean the equipment, including necessary protection signal communications equipment, that protects (1) the Participating TO's Transmission System, Participating TO's Interconnection Facilities, ISO Controlled Grid, and Affected Systems from faults or other electrical disturbances occurring at the Generating Facility and (2) the Generating Facility from faults or other electrical system disturbances occurring on the ISO Controlled Grid, Participating TO's Interconnection Facilities, and Affected Systems or on other delivery systems or other generating systems to which the ISO Controlled Grid is directly connected.

Transmission Control Agreement shall mean ISO FERC Electric Tariff No. 7.

Trial Operation shall mean the period during which the Interconnection Customer is engaged in on-site test operations and commissioning of an Electric Generating Unit prior to Commercial Operation.

ARTICLE 2. EFFECTIVE DATE, TERM AND TERMINATION

- **2.1 Effective Date**. This LGIA shall become effective upon execution by the Parties subject to acceptance by FERC (if applicable), or if filed unexecuted, upon the date specified by FERC. The ISO and Participating TO shall promptly file this LGIA with FERC upon execution in accordance with Article 3.1, if required.
- 2.2 Term of Agreement. Subject to the provisions of Article 2.3, this LGIA shall remain in effect for a period of ____ years from the Effective Date (Term Specified in Individual Agreements to be ten (10) years or such other longer period as the Interconnection Customer may request) and shall be automatically renewed for each successive one-year period thereafter.

Issued by: Charles F. Robinson, Vice President and General Counsel

2.3 Termination Procedures.

- **2.3.1 Written Notice**. This LGIA may be terminated by the Interconnection Customer after giving the ISO and the Participating TO ninety (90) Calendar Days advance written notice, or by the ISO and the Participating TO notifying FERC after the Generating Facility permanently ceases Commercial Operation.
- **2.3.2 Default**. A Party may terminate this LGIA in accordance with Article 17.
- **2.3.3 Suspension of Work**. This LGIA may be deemed terminated in accordance with Article 5.16.
- **2.3.4** Notwithstanding Articles 2.3.1, 2.3.2, and 2.3.3, no termination shall become effective until the Parties have complied with all Applicable Laws and Regulations applicable to such termination, including the filing with FERC of a notice of termination of this LGIA, which notice has been accepted for filing by FERC.
- 2.4 Termination Costs. If this LGIA terminates pursuant to Article 2.3 above, the Interconnection Customer shall pay all costs incurred or irrevocably committed to be incurred in association with the Interconnection Customer's interconnection (including any cancellation costs relating to orders or contracts for Interconnection Facilities and equipment) and other expenses, including any Network Upgrades and Distribution Upgrades for which the Participating TO or ISO has incurred expenses or has irrevocably committed to incur expenses and has not been reimbursed by the Interconnection Customer, as of the date of the other Parties' receipt of the notice of termination, subject to the limitations set forth in this Article 2.4. Nothing in this Article 2.4 shall limit the Parties' rights under Article 17.
 - 2.4.1 Notwithstanding the foregoing, in the event of termination by a Party, all Parties shall use commercially Reasonable Efforts to mitigate the costs, damages and charges arising as a consequence of termination. With respect to any portion of the Participating TO's Interconnection Facilities that have not yet been constructed or installed, the Participating TO shall to the extent possible and with the Interconnection Customer's authorization cancel any pending orders of, or return, any materials or equipment for, or contracts for construction of, such facilities; provided that in the event the Interconnection Customer elects not to authorize such cancellation, the Interconnection Customer shall assume all payment obligations with respect to such materials, equipment, and contracts, and the Participating TO shall deliver such material and equipment, and, if necessary, assign such contracts, to the Interconnection Customer as soon as practicable, at the Interconnection Customer's expense. To the extent that the Interconnection Customer has already paid the Participating TO for any or all such costs of materials or equipment not taken by the Interconnection Customer, the Participating TO shall promptly refund such amounts to the Interconnection Customer, less any costs, including penalties, incurred by the Participating TO to cancel any pending orders of or return such materials, equipment, or contracts.
 - 2.4.2 The Participating TO may, at its option, retain any portion of such materials, equipment, or facilities that the Interconnection Customer chooses not to accept delivery of, in which case the Participating TO shall be responsible for all costs associated with procuring such materials, equipment, or facilities.
 - 2.4.3 With respect to any portion of the Interconnection Facilities, and any other facilities already installed or constructed pursuant to the terms of this LGIA, Interconnection Customer shall be responsible for all costs associated with the removal, relocation or other disposition or retirement of such materials, equipment, or facilities.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **2.5 Disconnection**. Upon termination of this LGIA, the Parties will take all appropriate steps to disconnect the Large Generating Facility from the Participating TO's Transmission System. All costs required to effectuate such disconnection shall be borne by the terminating Party, unless such termination resulted from the non-terminating Party's Default of this LGIA or such non-terminating Party otherwise is responsible for these costs under this LGIA.
- 2.6 Survival. This LGIA shall continue in effect after termination to the extent necessary to provide for final billings and payments and for costs incurred hereunder, including billings and payments pursuant to this LGIA; to permit the determination and enforcement of liability and indemnification obligations arising from acts or events that occurred while this LGIA was in effect; and to permit each Party to have access to the lands of the other Parties pursuant to this LGIA or other applicable agreements, to disconnect, remove or salvage its own facilities and equipment.

ARTICLE 3. REGULATORY FILINGS AND ISO TARIFF COMPLIANCE

- **3.1 Filing**. The Participating TO and the ISO shall file this LGIA (and any amendment hereto) with the appropriate Governmental Authority(ies), if required. The Interconnection Customer may request that any information so provided be subject to the confidentiality provisions of Article 22. If the Interconnection Customer has executed this LGIA, or any amendment thereto, the Interconnection Customer shall reasonably cooperate with the Participating TO and ISO with respect to such filing and to provide any information reasonably requested by the Participating TO or ISO needed to comply with applicable regulatory requirements.
- **Agreement Subject to ISO Tariff**. The Interconnection Customer will comply with all applicable provisions of the ISO Tariff, including the LGIP.
- 3.3 Relationship Between this LGIA and the ISO Tariff. With regard to rights and obligations between the Participating TO and the Interconnection Customer, if and to the extent a matter is specifically addressed by a provision of this LGIA (including any appendices, schedules or other attachments to this LGIA), the provisions of this LGIA shall govern. If and to the extent a provision of this LGIA is inconsistent with the ISO Tariff and dictates rights and obligations between the ISO and the Participating TO or the ISO and the Interconnection Customer, the ISO Tariff shall govern.
- **Relationship Between this LGIA and the QF PGA.** With regard to the rights and obligations of a Qualifying Facility that has entered into a QF PGA with the ISO and has entered into this LGIA, if and to the extent a matter is specifically addressed by a provision of the QF PGA that is inconsistent with this LGIA, the terms of the QF PGA shall govern.

ARTICLE 4. SCOPE OF SERVICE

4.1 Interconnection Service. Interconnection Service allows the Interconnection Customer to connect the Large Generating Facility to the Participating TO's Transmission System and be eligible to deliver the Large Generating Facility's output using the available capacity of the ISO Controlled Grid. To the extent the Interconnection Customer wants to receive Interconnection Service, the Participating TO shall construct facilities identified in Appendices A and C that the Participating TO is responsible to construct.

Issued by: Charles F. Robinson, Vice President and General Counsel

Interconnection Service does not necessarily provide the Interconnection Customer with the capability to physically deliver the output of its Large Generating Facility to any particular load on the ISO Controlled Grid without incurring congestion costs. In the event of transmission constraints on the ISO Controlled Grid, the Interconnection Customer's Large Generating Facility shall be subject to the applicable congestion management procedures in the ISO Tariff in the same manner as all other resources.

- **4.2 Provision of Service**. The Participating TO and the ISO shall provide Interconnection Service for the Large Generating Facility.
- **4.3 Performance Standards**. Each Party shall perform all of its obligations under this LGIA in accordance with Applicable Laws and Regulations, Applicable Reliability Standards, and Good Utility Practice, and to the extent a Party is required or prevented or limited in taking any action by such regulations and standards, such Party shall not be deemed to be in Breach of this LGIA for its compliance therewith. If such Party is the ISO or Participating TO, then that Party shall amend the LGIA and submit the amendment to FERC for approval.
- **4.4 No Transmission Service**. The execution of this LGIA does not constitute a request for, nor the provision of, any transmission service under the ISO Tariff, and does not convey any right to deliver electricity to any specific customer or point of delivery.
- **4.5** Interconnection Customer Provided Services. The services provided by Interconnection Customer under this LGIA are set forth in Article 9.6 and Article 13.5.1. Interconnection Customer shall be paid for such services in accordance with Article 11.6.

ARTICLE 5. INTERCONNECTION FACILITIES ENGINEERING, PROCUREMENT, AND CONSTRUCTION

Interconnection Facilities, Network Upgrades, and Distribution Upgrades shall be studied, designed, and constructed pursuant to Good Utility Practice. Such studies, design and construction shall be based on the assumed accuracy and completeness of all technical information received by the Participating TO and the ISO from the Interconnection Customer associated with interconnecting the Large Generating Facility.

- **5.1 Options**. Unless otherwise mutually agreed among the Parties, the Interconnection Customer shall select the In-Service Date, Initial Synchronization Date, and Commercial Operation Date; and either Standard Option or Alternate Option set forth below for completion of the Participating TO's Interconnection Facilities and Network Upgrades as set forth in Appendix A, Interconnection Facilities, Network Upgrades, and Distribution Upgrades, and such dates and selected option shall be set forth in Appendix B, Milestones.
 - 5.1.1 Standard Option. The Participating TO shall design, procure, and construct the Participating TO's Interconnection Facilities, Network Upgrades, and Distribution Upgrades, using Reasonable Efforts to complete the Participating TO's Interconnection Facilities, Network Upgrades, and Distribution Upgrades by the dates set forth in Appendix B, Milestones. The Participating TO shall not be required to undertake any action which is inconsistent with its standard safety practices, its material and equipment specifications, its design criteria and construction procedures, its labor agreements, and Applicable Laws and Regulations. In the event the Participating TO reasonably expects that it will not be able to complete the Participating TO's Interconnection Facilities, Network Upgrades, and Distribution Upgrades by the specified dates, the Participating TO shall promptly provide written notice to the Interconnection Customer and the ISO and shall undertake Reasonable Efforts to meet the earliest dates thereafter.

Issued by: Charles F. Robinson, Vice President and General Counsel

5.1.2 Alternate Option. If the dates designated by the Interconnection Customer are acceptable to the Participating TO, the Participating TO shall so notify the Interconnection Customer within thirty (30) Calendar Days, and shall assume responsibility for the design, procurement and construction of the Participating TO's Interconnection Facilities by the designated dates.

If the Participating TO subsequently fails to complete the Participating TO's Interconnection Facilities by the In-Service Date, to the extent necessary to provide back feed power; or fails to complete Network Upgrades by the Initial Synchronization Date to the extent necessary to allow for Trial Operation at full power output, unless other arrangements are made by the Parties for such Trial Operation; or fails to complete the Network Upgrades by the Commercial Operation Date, as such dates are reflected in Appendix B, Milestones; the Participating TO shall pay the Interconnection Customer liquidated damages in accordance with Article 5.3, Liquidated Damages, provided, however, the dates designated by the Interconnection Customer shall be extended day for day for each day that the ISO refuses to grant clearances to install equipment.

- 5.1.3 Option to Build. If the dates designated by the Interconnection Customer are not acceptable to the Participating TO, the Participating TO shall so notify the Interconnection Customer within thirty (30) Calendar Days, and unless the Parties agree otherwise, the Interconnection Customer shall have the option to assume responsibility for the design, procurement and construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades. If the Interconnection Customer elects to exercise its option to assume responsibility for the design, procurement and construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades, it shall so notify the Participating TO within thirty (30) Calendar Days of receipt of the Participating TO's notification that the designated dates are not acceptable to the Participating TO. The Participating TO, ISO, and Interconnection Customer must agree as to what constitutes Stand Alone Network Upgrades and identify such Stand Alone Network Upgrades in Appendix A to this LGIA. Except for Stand Alone Network Upgrades, the Interconnection Customer shall have no right to construct Network Upgrades under this option.
- 5.1.4 Negotiated Option. If the Interconnection Customer elects not to exercise its option under Article 5.1.3, Option to Build, the Interconnection Customer shall so notify the Participating TO within thirty (30) Calendar Days of receipt of the Participating TO's notification that the designated dates are not acceptable to the Participating TO, and the Parties shall in good faith attempt to negotiate terms and conditions (including revision of the specified dates and liquidated damages, the provision of incentives or the procurement and construction of a portion of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades by the Interconnection Customer) pursuant to which the Participating TO is responsible for the design, procurement and construction of the Participating TO's Interconnection Facilities and Network Upgrades. If the Parties are unable to reach agreement on such terms and conditions, the Participating TO shall assume responsibility for the design, procurement and construction of the Participating TO's Interconnection Facilities and Network Upgrades pursuant to Article 5.1.1, Standard Option.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **5.2 General Conditions Applicable to Option to Build.** If the Interconnection Customer assumes responsibility for the design, procurement and construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades,
 - (1) the Interconnection Customer shall engineer, procure equipment, and construct the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades (or portions thereof) using Good Utility Practice and using standards and specifications provided in advance by the Participating TO;
 - (2) The Interconnection Customer's engineering, procurement and construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades shall comply with all requirements of law to which the Participating TO would be subject in the engineering, procurement or construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades;
 - (3) the Participating TO shall review, and the Interconnection Customer shall obtain the Participating TO's approval of, the engineering design, equipment acceptance tests, and the construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades, which approval shall not be unreasonably withheld, and the ISO may, at its option, review the engineering design, equipment acceptance tests, and the construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades;
 - (4) prior to commencement of construction, the Interconnection Customer shall provide to the Participating TO, with a copy to the ISO for informational purposes, a schedule for construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades, and shall promptly respond to requests for information from the Participating TO:
 - (5) at any time during construction, the Participating TO shall have the right to gain unrestricted access to the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades and to conduct inspections of the same;
 - (6) at any time during construction, should any phase of the engineering, equipment procurement, or construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades not meet the standards and specifications provided by the Participating TO, the Interconnection Customer shall be obligated to remedy deficiencies in that portion of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades;
 - (7) the Interconnection Customer shall indemnify the ISO and Participating TO for claims arising from the Interconnection Customer's construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades under the terms and procedures applicable to Article 18.1 Indemnity;
 - (8) The Interconnection Customer shall transfer control of the Participating TO's Interconnection Facilities to the Participating TO and shall transfer Operational Control of Stand Alone Network Upgrades to the ISO;

Issued by: Charles F. Robinson, Vice President and General Counsel

- (9) Unless the Parties otherwise agree, the Interconnection Customer shall transfer ownership of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades to the Participating TO. As soon as reasonably practicable, but within twelve months after completion of the construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades, the Interconnection Customer shall provide an invoice of the final cost of the construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades to the Participating TO, which invoice shall set forth such costs in sufficient detail to enable the Participating TO to reflect the proper costs of such facilities in its transmission rate base and to identify the investment upon which refunds will be provided;
- (10) the Participating TO shall accept for operation and maintenance the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades to the extent engineered, procured, and constructed in accordance with this Article 5.2; and
- (11) The Interconnection Customer's engineering, procurement and construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades shall comply with all requirements of the "Option to Build" conditions set forth in Appendix C. Interconnection Customer shall deliver to the Participating TO "as-built" drawings, information, and any other documents that are reasonably required by the Participating TO to assure that the Interconnection Facilities and Stand-Alone Network Upgrades are built to the standards and specifications required by the Participating TO.
- 5.3 Liquidated Damages. The actual damages to the Interconnection Customer, in the event the Participating TO's Interconnection Facilities or Network Upgrades are not completed by the dates designated by the Interconnection Customer and accepted by the Participating TO pursuant to subparagraphs 5.1.2 or 5.1.4, above, may include Interconnection Customer's fixed operation and maintenance costs and lost opportunity costs. Such actual damages are uncertain and impossible to determine at this time. Because of such uncertainty, any liquidated damages paid by the Participating TO to the Interconnection Customer in the event that the Participating TO does not complete any portion of the Participating TO's Interconnection Facilities or Network Upgrades by the applicable dates, shall be an amount equal to ½ of 1 percent per day of the actual cost of the Participating TO's Interconnection Facilities and Network Upgrades, in the aggregate, for which the Participating TO has assumed responsibility to design, procure and construct.

However, in no event shall the total liquidated damages exceed 20 percent of the actual cost of the Participating TO's Interconnection Facilities and Network Upgrades for which the Participating TO has assumed responsibility to design, procure, and construct. The foregoing payments will be made by the Participating TO to the Interconnection Customer as just compensation for the damages caused to the Interconnection Customer, which actual damages are uncertain and impossible to determine at this time, and as reasonable liquidated damages, but not as a penalty or a method to secure performance of this LGIA. Liquidated damages, when the Parties agree to them, are the exclusive remedy for the Participating TO's failure to meet its schedule.

Issued by: Charles F. Robinson, Vice President and General Counsel

No liquidated damages shall be paid to the Interconnection Customer if: (1) the Interconnection Customer is not ready to commence use of the Participating TO's Interconnection Facilities or Network Upgrades to take the delivery of power for the Electric Generating Unit's Trial Operation or to export power from the Electric Generating Unit on the specified dates, unless the Interconnection Customer would have been able to commence use of the Participating TO's Interconnection Facilities or Network Upgrades to take the delivery of power for Electric Generating Unit's Trial Operation or to export power from the Electric Generating Unit, but for the Participating TO's delay; (2) the Participating TO's failure to meet the specified dates is the result of the action or inaction of the Interconnection Customer or any other interconnection customer who has entered into an interconnection agreement with the ISO and/or Participating TO, action or inaction by the ISO, or any cause beyond the Participating TO's reasonable control or reasonable ability to cure; (3) the Interconnection Customer has assumed responsibility for the design, procurement and construction of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades; or (4) the Parties have otherwise agreed.

In no event shall the ISO have any responsibility or liability to the Interconnection Customer for liquidated damages pursuant to the provisions of this Article 5.3.

- Power System Stabilizers. The Interconnection Customer shall procure, install, maintain and operate Power System Stabilizers in accordance with the guidelines and procedures established by the Applicable Reliability Council and in accordance with the provisions of Section 5.4.1 of the ISO Tariff. The ISO reserves the right to establish reasonable minimum acceptable settings for any installed Power System Stabilizers, subject to the design and operating limitations of the Large Generating Facility. If the Large Generating Facility's Power System Stabilizers are removed from service or not capable of automatic operation, the Interconnection Customer shall immediately notify the ISO and the Participating TO and restore the Power System Stabilizers to operation as soon as possible and in accordance with the Reliability Management System Agreement in Appendix G. The ISO shall have the right to order the reduction in output or disconnection of the Large Generating Facility if the reliability of the ISO Controlled Grid would be adversely affected as a result of improperly tuned Power System Stabilizers. The requirements of this Article 5.4 shall not apply to wind generators of the induction type.
- 5.5 Equipment Procurement. If responsibility for construction of the Participating TO's Interconnection Facilities or Network Upgrades is to be borne by the Participating TO, then the Participating TO shall commence design of the Participating TO's Interconnection Facilities or Network Upgrades and procure necessary equipment as soon as practicable after all of the following conditions are satisfied, unless the Parties otherwise agree in writing:
 - **5.5.1** The Participating TO has completed the Interconnection Facilities Study pursuant to the Interconnection Facilities Study Agreement;
 - **5.5.2** The Participating TO has received written authorization to proceed with design and procurement from the Interconnection Customer by the date specified in Appendix B, Milestones; and
 - **5.5.3** The Interconnection Customer has provided security to the Participating TO in accordance with Article 11.5 by the dates specified in Appendix B, Milestones.
- **Construction Commencement**. The Participating TO shall commence construction of the Participating TO's Interconnection Facilities and Network Upgrades for which it is responsible as soon as practicable after the following additional conditions are satisfied:
 - **5.6.1** Approval of the appropriate Governmental Authority has been obtained for any facilities requiring regulatory approval;

Issued by: Charles F. Robinson, Vice President and General Counsel

- 5.6.2 Necessary real property rights and rights-of-way have been obtained, to the extent required for the construction of a discrete aspect of the Participating TO's Interconnection Facilities and Network Upgrades;
- **5.6.3** The Participating TO has received written authorization to proceed with construction from the Interconnection Customer by the date specified in Appendix B, Milestones; and
- 5.6.4 The Interconnection Customer has provided payment and security to the Participating TO in accordance with Article 11.5 by the dates specified in Appendix B, Milestones.
- **5.7 Work Progress**. The Parties will keep each other advised periodically as to the progress of their respective design, procurement and construction efforts. Any Party may, at any time, request a progress report from another Party. If, at any time, the Interconnection Customer determines that the completion of the Participating TO's Interconnection Facilities will not be required until after the specified in-service date, the Interconnection Customer will provide written notice to the Participating TO and ISO of such later date upon which the completion of the Participating TO's Interconnection Facilities will be required.
- 5.8 Information Exchange. As soon as reasonably practicable after the Effective Date, the Parties shall exchange information regarding the design and compatibility of the Interconnection Customer's Interconnection Facilities and Participating TO's Interconnection Facilities and compatibility of the Interconnection Facilities with the Participating TO's Transmission System, and shall work diligently and in good faith to make any necessary design changes.
- 5.9 Limited Operation. If any of the Participating TO's Interconnection Facilities or Network Upgrades are not reasonably expected to be completed prior to the Commercial Operation Date of the Electric Generating Unit, the Participating TO and/or ISO, as applicable, shall, upon the request and at the expense of the Interconnection Customer, perform operating studies on a timely basis to determine the extent to which the Electric Generating Unit and the Interconnection Customer's Interconnection Facilities may operate prior to the completion of the Participating TO's Interconnection Facilities or Network Upgrades consistent with Applicable Laws and Regulations, Applicable Reliability Standards, Good Utility Practice, and this LGIA. The Participating TO and ISO shall permit Interconnection Customer to operate the Electric Generating Unit and the Interconnection Customer's Interconnection Facilities in accordance with the results of such studies.
- **5.10 Interconnection Customer's Interconnection Facilities**. The Interconnection Customer shall, at its expense, design, procure, construct, own and install the Interconnection Customer's Interconnection Facilities, as set forth in Appendix A.
 - 5.10.1 Large Generating Facility and Interconnection Customer's Interconnection Facilities Specifications. The Interconnection Customer shall submit initial specifications for the Interconnection Customer's Interconnection Facilities and Large Generating Facility, including System Protection Facilities, to the Participating TO and the ISO at least one hundred eighty (180) Calendar Days prior to the Initial Synchronization Date; and final specifications for review and comment at least ninety (90) Calendar Days prior to the Initial Synchronization Date. The Participating TO and the ISO shall review such specifications pursuant to this LGIA and the LGIP to ensure that the Interconnection Customer's Interconnection Facilities and Large Generating Facility are compatible with the technical specifications, operational control, safety requirements, and any other applicable requirements of the Participating TO and the ISO and comment on such specifications within thirty (30) Calendar Days of the Interconnection Customer's submission. All specifications provided hereunder shall be deemed confidential.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 5.10.2 Participating TO's and ISO's Review. The Participating TO's and the ISO's review of the Interconnection Customer's final specifications shall not be construed as confirming, endorsing, or providing a warranty as to the design, fitness, safety, durability or reliability of the Large Generating Facility, or the Interconnection Customer's Interconnection Facilities. Interconnection Customer shall make such changes to the Interconnection Customer's Interconnection Facilities as may reasonably be required by the Participating TO or the ISO, in accordance with Good Utility Practice, to ensure that the Interconnection Customer's Interconnection Facilities are compatible with the technical specifications, Operational Control, and safety requirements of the Participating TO or the ISO.
- Interconnection Customer's Interconnection Facilities Construction. The Interconnection Customer's Interconnection Facilities shall be designed and constructed in accordance with Good Utility Practice. Within one hundred twenty (120) Calendar Days after the Commercial Operation Date, unless the Participating TO and Interconnection Customer agree on another mutually acceptable deadline, the Interconnection Customer shall deliver to the Participating TO and ISO "as-built" drawings, information and documents for the Interconnection Customer's Interconnection Facilities and the Electric Generating Unit(s), such as: a one-line diagram, a site plan showing the Large Generating Facility and the Interconnection Customer's Interconnection Facilities, plan and elevation drawings showing the layout of the Interconnection Customer's Interconnection Facilities, a relay functional diagram, relaying AC and DC schematic wiring diagrams and relay settings for all facilities associated with the Interconnection Customer's step-up transformers, the facilities connecting the Large Generating Facility to the step-up transformers and the Interconnection Customer's Interconnection Facilities, and the impedances (determined by factory tests) for the associated step-up transformers and the Electric Generating Units. The Interconnection Customer shall provide the Participating TO and the ISO specifications for the excitation system, automatic voltage regulator. Large Generating Facility control and protection settings, transformer tap settings, and communications, if applicable. Any deviations from the relay settings, machine specifications, and other specifications originally submitted by the Interconnection Customer shall be assessed by the Participating TO and the ISO pursuant to the appropriate provisions of this LGIA and the LGIP.
- **5.10.4** Interconnection Customer to Meet Requirements of the Participating TO's Interconnection Handbook. The Interconnection Customer shall comply with the Participating TO's Interconnection Handbook.
- 5.11 Participating TO's Interconnection Facilities Construction. The Participating TO's Interconnection Facilities shall be designed and constructed in accordance with Good Utility Practice. Upon request, within one hundred twenty (120) Calendar Days after the Commercial Operation Date, unless the Participating TO and Interconnection Customer agree on another mutually acceptable deadline, the Participating TO shall deliver to the Interconnection Customer and the ISO the following "as-built" drawings, information and documents for the Participating TO's Interconnection Facilities [include appropriate drawings and relay diagrams].

The Participating TO will obtain control for operating and maintenance purposes of the Participating TO's Interconnection Facilities and Stand Alone Network Upgrades upon completion of such facilities. Pursuant to Article 5.2, the ISO will obtain Operational Control of the Stand Alone Network Upgrades prior to the Commercial Operation Date.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **Access Rights**. Upon reasonable notice and supervision by a Party, and subject to any required or necessary regulatory approvals, a Party ("Granting Party") shall furnish *at no cost* to the other Party ("Access Party") any rights of use, licenses, rights of way and easements with respect to lands owned or controlled by the Granting Party, its agents (if allowed under the applicable agency agreement), or any Affiliate, that are necessary to enable the Access Party to obtain ingress and egress to construct, operate, maintain, repair, test (or witness testing), inspect, replace or remove facilities and equipment to: (i) interconnect the Large Generating Facility with the Participating TO's Transmission System; (ii) operate and maintain the Large Generating Facility, the Interconnection Facilities and the Participating TO's Transmission System; and (iii) disconnect or remove the Access Party's facilities and equipment upon termination of this LGIA. In exercising such licenses, rights of way and easements, the Access Party shall not unreasonably disrupt or interfere with normal operation of the Granting Party's business and shall adhere to the safety rules and procedures established in advance, as may be changed from time to time, by the Granting Party and provided to the Access Party.
- 5.13 Lands of Other Property Owners. If any part of the Participating TO's Interconnection Facilities and/or Network Upgrades are to be installed on property owned by persons other than the Interconnection Customer or Participating TO, the Participating TO shall at the Interconnection Customer's expense use efforts, similar in nature and extent to those that it typically undertakes on its own behalf or on behalf of its Affiliates, including use of its eminent domain authority, and to the extent consistent with state law, to procure from such persons any rights of use, licenses, rights of way and easements that are necessary to construct, operate, maintain, test, inspect, replace or remove the Participating TO's Interconnection Facilities and/or Network Upgrades upon such property.
- **5.14 Permits.** Participating TO and Interconnection Customer shall cooperate with each other in good faith in obtaining all permits, licenses and authorization that are necessary to accomplish the interconnection in compliance with Applicable Laws and Regulations. With respect to this paragraph, the Participating TO shall provide permitting assistance to the Interconnection Customer comparable to that provided to the Participating TO's own, or an Affiliate's generation.
- 5.15 Early Construction of Base Case Facilities. The Interconnection Customer may request the Participating TO to construct, and the Participating TO shall construct, using Reasonable Efforts to accommodate Interconnection Customer's In-Service Date, all or any portion of any Network Upgrades required for Interconnection Customer to be interconnected to the Participating TO's Transmission System which are included in the Base Case of the Interconnection Studies for the Interconnection Customer, and which also are required to be constructed for another interconnection customer, but where such construction is not scheduled to be completed in time to achieve Interconnection Customer's In-Service Date.
- 5.16 Suspension. The Interconnection Customer reserves the right, upon written notice to the Participating TO and the ISO, to suspend at any time all work associated with the construction and installation of the Participating TO's Interconnection Facilities, Network Upgrades, and/or Distribution Upgrades required under this LGIA with the condition that the Participating TO's electrical system and the ISO Controlled Grid shall be left in a safe and reliable condition in accordance with Good Utility Practice and the Participating TO's safety and reliability criteria and the ISO's Applicable Reliability Standards. In such event, the Interconnection Customer shall be responsible for all reasonable and necessary costs which the Participating TO (i) has incurred pursuant to this LGIA prior to the suspension and (ii) incurs in suspending such work, including any costs incurred to perform such work as may be necessary to ensure the safety of persons and property and the integrity of the Participating TO's electric system during such suspension and, if applicable, any costs incurred in connection with the cancellation or suspension of material, equipment and labor contracts which the Participating TO cannot reasonably avoid; provided, however, that prior to canceling or suspending any such material, equipment or labor contract, the Participating TO shall obtain Interconnection Customer's authorization to do so.

Issued by: Charles F. Robinson, Vice President and General Counsel

The Participating TO shall invoice the Interconnection Customer for such costs pursuant to Article 12 and shall use due diligence to minimize its costs. In the event Interconnection Customer suspends work required under this LGIA pursuant to this Article 5.16, and has not requested the Participating TO to recommence the work or has not itself recommenced work required under this LGIA on or before the expiration of three (3) years following commencement of such suspension, this LGIA shall be deemed terminated. The three-year period shall begin on the date the suspension is requested, or the date of the written notice to the Participating TO and the ISO, if no effective date is specified.

5.17 Taxes.

- 5.17.1 Interconnection Customer Payments Not Taxable. The Parties intend that all payments or property transfers made by the Interconnection Customer to the Participating TO for the installation of the Participating TO's Interconnection Facilities and the Network Upgrades shall be non-taxable, either as contributions to capital, or as a refundable advance, in accordance with the Internal Revenue Code and any applicable state income tax laws and shall not be taxable as contributions in aid of construction or otherwise under the Internal Revenue Code and any applicable state income tax laws.
- 5.17.2 Representations And Covenants. In accordance with IRS Notice 2001-82 and IRS Notice 88-129, the Interconnection Customer represents and covenants that (i) ownership of the electricity generated at the Large Generating Facility will pass to another party prior to the transmission of the electricity on the ISO Controlled Grid, (ii) for income tax purposes, the amount of any payments and the cost of any property transferred to the Participating TO for the Participating TO's Interconnection Facilities will be capitalized by the Interconnection Customer as an intangible asset and recovered using the straight-line method over a useful life of twenty (20) years, and (iii) any portion of the Participating TO's Interconnection Facilities that is a "dual-use intertie," within the meaning of IRS Notice 88-129, is reasonably expected to carry only a de minimis amount of electricity in the direction of the Large Generating Facility. For this purpose, "de minimis amount" means no more than 5 percent of the total power flows in both directions, calculated in accordance with the "5 percent test" set forth in IRS Notice 88-129. This is not intended to be an exclusive list of the relevant conditions that must be met to conform to IRS requirements for non-taxable treatment.

At the Participating TO's request, the Interconnection Customer shall provide the Participating TO with a report from an independent engineer confirming its representation in clause (iii), above. The Participating TO represents and covenants that the cost of the Participating TO's Interconnection Facilities paid for by the Interconnection Customer without the possibility of refund or credit will have no net effect on the base upon which rates are determined.

5.17.3 Indemnification for the Cost Consequence of Current Tax Liability Imposed Upon the Participating TO. Notwithstanding Article 5.17.1, the Interconnection Customer shall protect, indemnify and hold harmless the Participating TO from the cost consequences of any current tax liability imposed against the Participating TO as the result of payments or property transfers made by the Interconnection Customer to the Participating TO under this LGIA for Interconnection Facilities, as well as any interest and penalties, other than interest and penalties attributable to any delay caused by the Participating TO.

Issued by: Charles F. Robinson, Vice President and General Counsel

The Participating TO shall not include a gross-up for the cost consequences of any current tax liability in the amounts it charges the Interconnection Customer under this LGIA unless (i) the Participating TO has determined, in good faith, that the payments or property transfers made by the Interconnection Customer to the Participating TO should be reported as income subject to taxation or (ii) any Governmental Authority directs the Participating TO to report payments or property as income subject to taxation; provided, however, that the Participating TO may require the Interconnection Customer to provide security for Interconnection Facilities, in a form reasonably acceptable to the Participating TO (such as a parental guarantee or a letter of credit), in an amount equal to the cost consequences of any current tax liability under this Article 5.17. The Interconnection Customer shall reimburse the Participating TO for such costs on a fully grossed-up basis, in accordance with Article 5.17.4, within thirty (30) Calendar Days of receiving written notification from the Participating TO of the amount due, including detail about how the amount was calculated.

The indemnification obligation shall terminate at the earlier of (1) the expiration of the ten year testing period and the applicable statute of limitation, as it may be extended by the Participating TO upon request of the IRS, to keep these years open for audit or adjustment, or (2) the occurrence of a subsequent taxable event and the payment of any related indemnification obligations as contemplated by this Article 5.17.

5.17.4 Tax Gross-Up Amount. The Interconnection Customer's liability for the cost consequences of any current tax liability under this Article 5.17 shall be calculated on a fully grossed-up basis. Except as may otherwise be agreed to by the parties, this means that the Interconnection Customer will pay the Participating TO, in addition to the amount paid for the Interconnection Facilities and Network Upgrades, an amount equal to (1) the current taxes imposed on the Participating TO ("Current Taxes") on the excess of (a) the gross income realized by the Participating TO as a result of payments or property transfers made by the Interconnection Customer to the Participating TO under this LGIA (without regard to any payments under this Article 5.17) (the "Gross Income Amount") over (b) the present value of future tax deductions for depreciation that will be available as a result of such payments or property transfers (the "Present Value Depreciation Amount"), plus (2) an additional amount sufficient to permit the Participating TO to receive and retain, after the payment of all Current Taxes, an amount equal to the net amount described in clause (1).

For this purpose, (i) Current Taxes shall be computed based on the Participating TO's composite federal and state tax rates at the time the payments or property transfers are received and the Participating TO will be treated as being subject to tax at the highest marginal rates in effect at that time (the "Current Tax Rate"), and (ii) the Present Value Depreciation Amount shall be computed by discounting the Participating TO's anticipated tax depreciation deductions as a result of such payments or property transfers by the Participating TO's current weighted average cost of capital. Thus, the formula for calculating the Interconnection Customer's liability to the Participating TO pursuant to this Article 5.17.4 can be expressed as follows: (Current Tax Rate x (Gross Income Amount – Present Value of Tax Depreciation))/(1-Current Tax Rate). Interconnection Customer's estimated tax liability in the event taxes are imposed shall be stated in Appendix A, Interconnection Facilities, Network Upgrades and Distribution Upgrades.

Issued by: Charles F. Robinson, Vice President and General Counsel

5.17.5 Private Letter Ruling or Change or Clarification of Law. At the Interconnection Customer's request and expense, the Participating TO shall file with the IRS a request for a private letter ruling as to whether any property transferred or sums paid, or to be paid, by the Interconnection Customer to the Participating TO under this LGIA are subject to federal income taxation. The Interconnection Customer will prepare the initial draft of the request for a private letter ruling, and will certify under penalties of perjury that all facts represented in such request are true and accurate to the best of the Interconnection Customer's knowledge. The Participating TO and Interconnection Customer shall cooperate in good faith with respect to the submission of such request, provided, however, the Interconnection Customer and the Participating TO explicitly acknowledge (and nothing herein is intended to alter) Participating TO's obligation under law to certify that the facts presented in the ruling request are true, correct and complete.

The Participating TO shall keep the Interconnection Customer fully informed of the status of such request for a private letter ruling and shall execute either a privacy act waiver or a limited power of attorney, in a form acceptable to the IRS, that authorizes the Interconnection Customer to participate in all discussions with the IRS regarding such request for a private letter ruling. The Participating TO shall allow the Interconnection Customer to attend all meetings with IRS officials about the request and shall permit the Interconnection Customer to prepare the initial drafts of any follow-up letters in connection with the request.

- 5.17.6 Subsequent Taxable Events. If, within 10 years from the date on which the relevant Participating TO's Interconnection Facilities are placed in service, (i) the Interconnection Customer Breaches the covenants contained in Article 5.17.2, (ii) a "disqualification event" occurs within the meaning of IRS Notice 88-129, or (iii) this LGIA terminates and the Participating TO retains ownership of the Interconnection Facilities and Network Upgrades, the Interconnection Customer shall pay a tax gross-up for the cost consequences of any current tax liability imposed on the Participating TO, calculated using the methodology described in Article 5.17.4 and in accordance with IRS Notice 90-60.
- 5.17.7 Contests. In the event any Governmental Authority determines that the Participating TO's receipt of payments or property constitutes income that is subject to taxation, the Participating TO shall notify the Interconnection Customer, in writing, within thirty (30) Calendar Days of receiving notification of such determination by a Governmental Authority. Upon the timely written request by the Interconnection Customer and at the Interconnection Customer's sole expense, the Participating TO may appeal, protest, seek abatement of, or otherwise oppose such determination. Upon the Interconnection Customer's written request and sole expense, the Participating TO may file a claim for refund with respect to any taxes paid under this Article 5.17, whether or not it has received such a determination. The Participating TO reserve the right to make all decisions with regard to the prosecution of such appeal, protest, abatement or other contest, including the selection of counsel and compromise or settlement of the claim, but the Participating TO shall keep the Interconnection Customer informed, shall consider in good faith suggestions from the Interconnection Customer about the conduct of the contest, and shall reasonably permit the Interconnection Customer or an Interconnection Customer representative to attend contest proceedings.

Issued by: Charles F. Robinson, Vice President and General Counsel

The Interconnection Customer shall pay to the Participating TO on a periodic basis, as invoiced by the Participating TO, the Participating TO's documented reasonable costs of prosecuting such appeal, protest, abatement or other contest, including any costs associated with obtaining the opinion of independent tax counsel described in this Article 5.17.7. The Participating TO may abandon any contest if the Interconnection Customer fails to provide payment to the Participating TO within thirty (30) Calendar Days of receiving such invoice.

At any time during the contest, the Participating TO may agree to a settlement either with the Interconnection Customer's consent or, if such consent is refused, after obtaining written advice from independent nationally-recognized tax counsel, selected by the Participating TO, but reasonably acceptable to the Interconnection Customer, that the proposed settlement represents a reasonable settlement given the hazards of litigation. The Interconnection Customer's obligation shall be based on the amount of the settlement agreed to by the Interconnection Customer, or if a higher amount, so much of the settlement that is supported by the written advice from nationally-recognized tax counsel selected under the terms of the preceding paragraph. The settlement amount shall be calculated on a fully grossed-up basis to cover any related cost consequences of the current tax liability. The Participating TO may also settle any tax controversy without receiving the Interconnection Customer's consent or any such written advice; however, any such settlement will relieve the Interconnection Customer from any obligation to indemnify the Participating TO for the tax at issue in the contest (unless the failure to obtain written advice is attributable to the Interconnection Customer's unreasonable refusal to the appointment of independent tax counsel).

- 5.17.8 Refund. In the event that (a) a private letter ruling is issued to the Participating TO which holds that any amount paid or the value of any property transferred by the Interconnection Customer to the Participating TO under the terms of this LGIA is not subject to federal income taxation, (b) any legislative change or administrative announcement, notice, ruling or other determination makes it reasonably clear to the Participating TO in good faith that any amount paid or the value of any property transferred by the Interconnection Customer to the Participating TO under the terms of this LGIA is not taxable to the Participating TO, (c) any abatement, appeal, protest, or other contest results in a determination that any payments or transfers made by the Interconnection Customer to the Participating TO are not subject to federal income tax, or (d) if the Participating TO receives a refund from any taxing authority for any overpayment of tax attributable to any payment or property transfer made by the Interconnection Customer to the Participating TO pursuant to this LGIA, the Participating TO shall promptly refund to the Interconnection Customer the following:
 - (i) any payment made by Interconnection Customer under this Article 5.17 for taxes that is attributable to the amount determined to be non-taxable, together with interest thereon.
 - (ii) interest on any amounts paid by the Interconnection Customer to the Participating TO for such taxes which the Participating TO did not submit to the taxing authority, calculated in accordance with the methodology set forth in FERC's regulations at 18 C.F.R. §35.19a(a)(2)(iii) from the date payment was made by the Interconnection Customer to the date the Participating TO refunds such payment to the Interconnection Customer, and

Issued by: Charles F. Robinson, Vice President and General Counsel

(iii) with respect to any such taxes paid by the Participating TO, any refund or credit the Participating TO receives or to which it may be entitled from any Governmental Authority, interest (or that portion thereof attributable to the payment described in clause (i), above) owed to the Participating TO for such overpayment of taxes (including any reduction in interest otherwise payable by the Participating TO to any Governmental Authority resulting from an offset or credit); provided, however, that the Participating TO will remit such amount promptly to the Interconnection Customer only after and to the extent that the Participating TO has received a tax refund, credit or offset from any Governmental Authority for any applicable overpayment of income tax related to the Participating TO's Interconnection Facilities.

The intent of this provision is to leave the Parties, to the extent practicable, in the event that no taxes are due with respect to any payment for Interconnection Facilities and Network Upgrades hereunder, in the same position they would have been in had no such tax payments been made.

- **5.17.9** Taxes Other Than Income Taxes. Upon the timely request by the Interconnection Customer, and at the Interconnection Customer's sole expense, the ISO or Participating TO may appeal, protest, seek abatement of, or otherwise contest any tax (other than federal or state income tax) asserted or assessed against the ISO or Participating TO for which the Interconnection Customer may be required to reimburse the ISO or Participating TO under the terms of this LGIA. The Interconnection Customer shall pay to the Participating TO on a periodic basis, as invoiced by the Participating TO, the Participating TO's documented reasonable costs of prosecuting such appeal, protest, abatement, or other contest. The Interconnection Customer, the ISO, and the Participating TO shall cooperate in good faith with respect to any such contest. Unless the payment of such taxes is a prerequisite to an appeal or abatement or cannot be deferred, no amount shall be payable by the Interconnection Customer to the ISO or Participating TO for such taxes until they are assessed by a final, non-appealable order by any court or agency of competent jurisdiction. In the event that a tax payment is withheld and ultimately due and payable after appeal, the Interconnection Customer will be responsible for all taxes, interest and penalties, other than penalties attributable to any delay caused by the Participating TO.
- **5.18 Tax Status**. Each Party shall cooperate with the others to maintain the other Parties' tax status. Nothing in this LGIA is intended to adversely affect the ISO's or any Participating TO's tax exempt status with respect to the issuance of bonds including, but not limited to, Local Furnishing Bonds.

5.19 Modification.

5.19.1 General. The Interconnection Customer or the Participating TO may undertake modifications to its facilities, subject to the provisions of this LGIA and the ISO Tariff. If a Party plans to undertake a modification that reasonably may be expected to affect the other Parties' facilities, that Party shall provide to the other Parties sufficient information regarding such modification so that the other Parties may evaluate the potential impact of such modification prior to commencement of the work. Such information shall be deemed to be confidential hereunder and shall include information concerning the timing of such modifications and whether such modifications are expected to interrupt the flow of electricity from the Large Generating Facility. The Party desiring to perform such work shall provide the relevant drawings, plans, and specifications to the other Parties at least ninety (90) Calendar Days in advance of the commencement of the work or such shorter period upon which the Parties may agree, which agreement shall not unreasonably be withheld, conditioned or delayed.

Issued by: Charles F. Robinson, Vice President and General Counsel

In the case of Large Generating Facility modifications that do not require the Interconnection Customer to submit an Interconnection Request, the ISO or Participating TO shall provide, within thirty (30) Calendar Days (or such other time as the Parties may agree), an estimate of any additional modifications to the ISO Controlled Grid, Participating TO's Interconnection Facilities, Network Upgrades or Distribution Upgrades necessitated by such Interconnection Customer modification and a good faith estimate of the costs thereof. The Participating TO and the ISO shall determine if a Large Generating Facility modification is a Material Modification in accordance with the LGIP.

- **5.19.2 Standards.** Any additions, modifications, or replacements made to a Party's facilities shall be designed, constructed and operated in accordance with this LGIA and Good Utility Practice.
- 5.19.3 Modification Costs. The Interconnection Customer shall not be directly assigned the costs of any additions, modifications, or replacements that the Participating TO makes to the Participating TO's Interconnection Facilities or the Participating TO's Transmission System to facilitate the interconnection of a third party to the Participating TO's Interconnection Facilities or the Participating TO's Transmission System, or to provide transmission service to a third party under the ISO Tariff. The Interconnection Customer shall be responsible for the costs of any additions, modifications, or replacements to the Interconnection Facilities that may be necessary to maintain or upgrade such Interconnection Facilities consistent with Applicable Laws and Regulations, Applicable Reliability Standards or Good Utility Practice.

ARTICLE 6. TESTING AND INSPECTION

- Pre-Commercial Operation Date Testing and Modifications. Prior to the Commercial Operation Date, the Participating TO shall test the Participating TO's Interconnection Facilities, Network Upgrades, and Distribution Upgrades and the Interconnection Customer shall test the Large Generating Facility and the Interconnection Customer's Interconnection Facilities to ensure their safe and reliable operation. Similar testing may be required after initial operation. Each Party shall make any modifications to its facilities that are found to be necessary as a result of such testing. The Interconnection Customer shall bear the cost of all such testing and modifications. The Interconnection Customer shall not commence initial parallel operation of an Electric Generating Unit with the Participating TO's Transmission System until the Participating TO provides prior written approval, which approval shall not be unreasonably withheld, for operation of such Electric Generating Unit. The Interconnection Customer shall generate test energy at the Large Generating Facility only if it has arranged for the delivery of such test energy.
- 6.2 Post-Commercial Operation Date Testing and Modifications. Each Party shall at its own expense perform routine inspection and testing of its facilities and equipment in accordance with Good Utility Practice as may be necessary to ensure the continued interconnection of the Large Generating Facility with the Participating TO's Transmission System in a safe and reliable manner. Each Party shall have the right, upon advance written notice, to require reasonable additional testing of the other Party's facilities, at the requesting Party's expense, as may be in accordance with Good Utility Practice.
- **Right to Observe Testing**. Each Party shall notify the other Parties at least fourteen (14) days in advance of its performance of tests of its Interconnection Facilities or Generating Facility. The other Parties have the right, at their own expense, to observe such testing.

Issued by: Charles F. Robinson, Vice President and General Counsel

6.4 Right to Inspect. Each Party shall have the right, but shall have no obligation to: (i) observe another Party's tests and/or inspection of any of its System Protection Facilities and other protective equipment, including Power System Stabilizers; (ii) review the settings of another Party's System Protection Facilities and other protective equipment; and (iii) review another Party's maintenance records relative to the Interconnection Facilities, the System Protection Facilities and other protective equipment. A Party may exercise these rights from time to time as it deems necessary upon reasonable notice to the other Party. The exercise or non-exercise by a Party of any such rights shall not be construed as an endorsement or confirmation of any element or condition of the Interconnection Facilities or the System Protection Facilities or other protective equipment or the operation thereof, or as a warranty as to the fitness, safety, desirability, or reliability of same. Any information that a Party obtains through the exercise of any of its rights under this Article 6.4 shall be deemed to be Confidential Information and treated pursuant to Article 22 of this LGIA.

ARTICLE 7. METERING

- 7.1 General. Each Party shall comply with the Applicable Reliability Council requirements. The Interconnection Customer and ISO shall comply with the provisions of the ISO Tariff regarding metering, including Section 10 and the Metering Protocol of the ISO Tariff. Unless otherwise agreed by the Participating TO and the Interconnection Customer, the Participating TO may install additional Metering Equipment at the Point of Interconnection prior to any operation of any Electric Generating Unit and shall own, operate, test and maintain such Metering Equipment. Power flows to and from the Large Generating Facility shall be measured at or, at the ISO's or Participating TO's option for its respective Metering Equipment, compensated to, the Point of Interconnection. The ISO shall provide metering quantities to the Interconnection Customer upon request in accordance with the ISO Tariff by directly polling the ISO's meter data acquisition system. The Interconnection Customer shall bear all reasonable documented costs associated with the purchase, installation, operation, testing and maintenance of the Metering Equipment.
- 7.2 Check Meters. The Interconnection Customer, at its option and expense, may install and operate, on its premises and on its side of the Point of Interconnection, one or more check meters to check the ISO-polled meters or the Participating TO's meters. Such check meters shall be for check purposes only and shall not be used for the measurement of power flows for purposes of this LGIA, except in the case that no other means are available on a temporary basis at the option of the ISO or the Participating TO. The check meters shall be subject at all reasonable times to inspection and examination by the ISO or Participating TO or their designees. The installation, operation and maintenance thereof shall be performed entirely by the Interconnection Customer in accordance with Good Utility Practice.
- **7.3 Participating TO Retail Metering**. The Participating TO may install retail revenue quality meters and associated equipment, pursuant to the Participating TO's applicable retail tariffs.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE 8. COMMUNICATIONS

- 8.1 Interconnection Customer Obligations. The Interconnection Customer shall maintain satisfactory operating communications with the ISO in accordance with the provisions of the ISO Tariff and with the Participating TO's dispatcher or representative designated by the Participating TO. The Interconnection Customer shall provide standard voice line, dedicated voice line and facsimile communications at its Large Generating Facility control room or central dispatch facility through use of either the public telephone system, or a voice communications system that does not rely on the public telephone system. The Interconnection Customer shall also provide the dedicated data circuit(s) necessary to provide Interconnection Customer data to the ISO and Participating TO as set forth in Appendix D, Security Arrangements Details. The data circuit(s) shall extend from the Large Generating Facility to the location(s) specified by the ISO and Participating TO. Any required maintenance of such communications equipment shall be performed by the Interconnection Customer. Operational communications shall be activated and maintained under, but not be limited to, the following events: system paralleling or separation, scheduled and unscheduled shutdowns, equipment clearances, and hourly and daily load data.
- **8.2 Remote Terminal Unit**. Prior to the Initial Synchronization Date of each Electric Generating Unit, a Remote Terminal Unit, or equivalent data collection and transfer equipment acceptable to the Parties, shall be installed by the Interconnection Customer, or by the Participating TO at the Interconnection Customer's expense, to gather accumulated and instantaneous data to be telemetered to the location(s) designated by the ISO and by the Participating TO through use of a dedicated point-to-point data circuit(s) as indicated in Article 8.1.

Telemetry to the ISO shall be provided in accordance with the ISO's technical standards for direct telemetry. For telemetry to the Participating TO, the communication protocol for the data circuit(s) shall be specified by the Participating TO. Instantaneous bi-directional real power and reactive power flow and any other required information must be telemetered directly to the location(s) specified by the Participating TO.

Each Party will promptly advise the other Parties if it detects or otherwise learns of any metering, telemetry or communications equipment errors or malfunctions that require the attention and/or correction by another Party. The Party owning such equipment shall correct such error or malfunction as soon as reasonably feasible.

8.3 No Annexation. Any and all equipment placed on the premises of a Party shall be and remain the property of the Party providing such equipment regardless of the mode and manner of annexation or attachment to real property, unless otherwise mutually agreed by the Parties.

ARTICLE 9. OPERATIONS

9.1 General. Each Party shall comply with the Applicable Reliability Council requirements, and the Interconnection Customer shall execute the Reliability Management System Agreement of the Applicable Reliability Council attached hereto as Appendix G. Each Party shall provide to the other Party all information that may reasonably be required by the other Party to comply with Applicable Laws and Regulations and Applicable Reliability Standards.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 9.2 Control Area Notification. At least three months before Initial Synchronization Date, the Interconnection Customer shall notify the ISO and Participating TO in writing of the Control Area in which the Large Generating Facility intends to be located. If the Interconnection Customer intends to locate the Large Generating Facility in a Control Area other than the Control Area within whose electrically metered boundaries the Large Generating Facility is located, and if permitted to do so by the relevant transmission tariffs, all necessary arrangements, including but not limited to those set forth in Article 7 and Article 8 of this LGIA, and remote Control Area generator interchange agreements, if applicable, and the appropriate measures under such agreements, shall be executed and implemented prior to the placement of the Large Generating Facility in the other Control Area.
- 9.3 ISO and Participating TO Obligations. The ISO and Participating TO shall cause the Participating TO's Transmission System to be operated and controlled in a safe and reliable manner and in accordance with this LGIA. The Participating TO at the Interconnection Customer's expense shall cause the Participating TO's Interconnection Facilities to be operated, maintained and controlled in a safe and reliable manner and in accordance with this LGIA. The ISO and Participating TO may provide operating instructions to the Interconnection Customer consistent with this LGIA and Participating TO and ISO operating protocols and procedures as they may change from time to time. The Participating TO and ISO will consider changes to their operating protocols and procedures proposed by the Interconnection Customer.
- 9.4 Interconnection Customer Obligations. The Interconnection Customer shall at its own expense operate, maintain and control the Large Generating Facility and the Interconnection Customer's Interconnection Facilities in a safe and reliable manner and in accordance with this LGIA. The Interconnection Customer shall operate the Large Generating Facility and the Interconnection Customer's Interconnection Facilities in accordance with all applicable requirements of the Control Area of which it is part, including such requirements as set forth in Appendix C, Interconnection Details, of this LGIA. Appendix C, Interconnection Details, will be modified to reflect changes to the requirements as they may change from time to time. A Party may request that another Party provide copies of the requirements set forth in Appendix C, Interconnection Details, of this LGIA. The Interconnection Customer shall not commence Commercial Operation of an Electric Generating Unit with the Participating TO's Transmission System until the Participating TO provides prior written approval, which approval shall not be unreasonably withheld, for operation of such Electric Generating Unit.
- **9.5 Start-Up and Synchronization.** Consistent with the Parties' mutually acceptable procedures, the Interconnection Customer is responsible for the proper synchronization of each Electric Generating Unit to the ISO Controlled Grid.

9.6 Reactive Power.

9.6.1 Power Factor Design Criteria. The Interconnection Customer shall design the Large Generating Facility to maintain a composite power delivery at continuous rated power output at the terminals of the Electric Generating Unit at a power factor within the range of 0.95 leading to 0.90 lagging, unless the ISO has established different requirements that apply to all generators in the Control Area on a comparable basis. Wind generators of the induction type must maintain unity power factor at the Point of Interconnection.

Issued by: Charles F. Robinson, Vice President and General Counsel

- Voltage Schedules. Once the Interconnection Customer has synchronized an Electric 9.6.2 Generating Unit with the ISO Controlled Grid, the ISO or Participating TO shall require the Interconnection Customer to maintain a voltage schedule by operating the Electric Generating Unit to produce or absorb reactive power within the design limitations of the Electric Generating Unit set forth in Article 9.6.1 (Power Factor Design Criteria). ISO's voltage schedules shall treat all sources of reactive power in the Control Area in an equitable and not unduly discriminatory manner. The Participating TO shall exercise Reasonable Efforts to provide the Interconnection Customer with such schedules at least one (1) day in advance, and the ISO or Participating TO may make changes to such schedules as necessary to maintain the reliability of the ISO Controlled Grid or the Participating TO's electric system. The Interconnection Customer shall operate the Electric Generating Unit to maintain the specified output voltage or power factor within the design limitations of the Electric Generating Unit set forth in Article 9.6.1 (Power Factor Design Criteria), and as may be required by the ISO to operate the Electric Generating Unit at a specific voltage schedule within the design limitations set forth in Article 9.6.1. If the Interconnection Customer is unable to maintain the specified voltage or power factor, it shall promptly notify the ISO and the Participating TO.
 - **9.6.2.1 Governors and Regulators**. Whenever an Electric Generating Unit is operated in parallel with the ISO Controlled Grid and the speed governors (if installed on the Electric Generating Unit pursuant to Good Utility Practice) and voltage regulators are capable of operation, the Interconnection Customer shall operate the Electric Generating Unit with its speed governors and voltage regulators in automatic operation. If the Electric Generating Unit's speed governors and voltage regulators are not capable of such automatic operation, the Interconnection Customer shall immediately notify the ISO and the Participating TO and ensure that the Electric Generating Unit operates as specified in Article 9.6.2 through manual operation and that such Electric Generating Unit's reactive power production or absorption (measured in MVARs) are within the design capability of the Electric Generating Unit(s) and steady state stability limits. The Interconnection Customer shall restore the speed governors and voltage regulators to automatic operation as soon as possible and in accordance with the Reliability Management System Agreement in Appendix G. If the Large Generating Facility's speed governors and voltage regulators are improperly tuned or malfunctioning, the ISO shall have the right to order the reduction in output or disconnection of the Large Generating Facility if the reliability of the ISO Controlled Grid would be adversely affected. The Interconnection Customer shall not cause its Large Generating Facility to disconnect automatically or instantaneously from the ISO Controlled Grid or trip any Electric Generating Unit comprising the Large Generating Facility for an under or over frequency condition unless the abnormal frequency condition persists for a time period beyond the limits set forth in ANSI/IEEE Standard C37.106, or such other standard as applied to other generators in the Control Area on a comparable basis.
- 9.6.3 Payment for Reactive Power. ISO is required to pay the Interconnection Customer for reactive power that Interconnection Customer provides or absorbs from an Electric Generating Unit when the ISO requests the Interconnection Customer to operate its Electric Generating Unit outside the range specified in Article 9.6.1, provided that if the ISO pays other generators for reactive power service within the specified range, it must also pay the Interconnection Customer. Payments shall be pursuant to Article 11.6 or such other agreement to which the ISO and Interconnection Customer have otherwise agreed.

Issued by: Charles F. Robinson, Vice President and General Counsel

9.7 Outages and Interruptions.

9.7.1 Outages.

- 9.7.1.1 Outage Authority and Coordination. Each Party may in accordance with Good Utility Practice in coordination with the other Parties remove from service any of its respective Interconnection Facilities or Network Upgrades that may impact another Party's facilities as necessary to perform maintenance or testing or to install or replace equipment. Absent an Emergency Condition, the Party scheduling a removal of such facility(ies) from service will use Reasonable Efforts to schedule such removal on a date and time mutually acceptable to all Parties. In all circumstances any Party planning to remove such facility(ies) from service shall use Reasonable Efforts to minimize the effect on the other Parties of such removal.
- 9.7.1.2 Outage Schedules. The ISO shall post scheduled outages of ISO Controlled Grid facilities in accordance with the provisions of the ISO Tariff. The Interconnection Customer shall submit its planned maintenance schedules for the Large Generating Facility to the ISO in accordance with the ISO Tariff. The Interconnection Customer shall update its planned maintenance schedules in accordance with the ISO Tariff. The ISO may request the Interconnection Customer to reschedule its maintenance as necessary to maintain the reliability of the ISO Controlled Grid in accordance with the ISO Tariff. Such planned maintenance schedules and updates and changes to such schedules shall be provided by the Interconnection Customer to the Participating TO concurrently with their submittal to the ISO. The ISO shall compensate the Interconnection Customer for any additional direct costs that the Interconnection Customer incurs as a result of having to reschedule maintenance in accordance with the ISO Tariff. The Interconnection Customer will not be eligible to receive compensation, if during the twelve (12) months prior to the date of the scheduled maintenance, the Interconnection Customer had modified its schedule of maintenance activities.
- 9.7.1.3 Outage Restoration. If an outage on a Party's Interconnection Facilities or Network Upgrades adversely affects another Party's operations or facilities, the Party that owns or controls the facility that is out of service shall use Reasonable Efforts to promptly restore such facility(ies) to a normal operating condition consistent with the nature of the outage. The Party that owns or controls the facility that is out of service shall provide the other Parties, to the extent such information is known, information on the nature of the Emergency Condition, if the outage is caused by an Emergency Condition, an estimated time of restoration, and any corrective actions required. Initial verbal notice shall be followed up as soon as practicable with written notice explaining the nature of the outage, if requested by a Party, which may be provided by e-mail or facsimile.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 9.7.2 Interruption of Service. If required by Good Utility Practice to do so, the ISO or the Participating TO may require the Interconnection Customer to interrupt or reduce deliveries of electricity if such delivery of electricity could adversely affect the ISO's or the Participating TO's ability to perform such activities as are necessary to safely and reliably operate and maintain the Participating TO's electric system or the ISO Controlled Grid. The following provisions shall apply to any interruption or reduction permitted under this Article 9.7.2:
 - **9.7.2.1** The interruption or reduction shall continue only for so long as reasonably necessary under Good Utility Practice;
 - **9.7.2.2** Any such interruption or reduction shall be made on an equitable, non-discriminatory basis with respect to all generating facilities directly connected to the ISO Controlled Grid, subject to any conditions specified in this LGIA;
 - 9.7.2.3 When the interruption or reduction must be made under circumstances which do not allow for advance notice, the ISO or Participating TO, as applicable, shall notify the Interconnection Customer by telephone as soon as practicable of the reasons for the curtailment, interruption, or reduction, and, if known, its expected duration. Telephone notification shall be followed by written notification, if requested by the Interconnection Customer, as soon as practicable;
 - 9.7.2.4 Except during the existence of an Emergency Condition, the ISO or Participating TO shall notify the Interconnection Customer in advance regarding the timing of such interruption or reduction and further notify the Interconnection Customer of the expected duration. The ISO or Participating TO shall coordinate with the Interconnection Customer using Good Utility Practice to schedule the interruption or reduction during periods of least impact to the Interconnection Customer, the ISO, and the Participating TO;
 - **9.7.2.5** The Parties shall cooperate and coordinate with each other to the extent necessary in order to restore the Large Generating Facility, Interconnection Facilities, the Participating TO's Transmission System, and the ISO Controlled Grid to their normal operating state, consistent with system conditions and Good Utility Practice.
- 9.7.3 Under-Frequency and Over Frequency Conditions. The ISO Controlled Grid is designed to automatically activate a load-shed program as required by the Applicable Reliability Council in the event of an under-frequency system disturbance. The Interconnection Customer shall implement under-frequency and over-frequency protection set points for the Large Generating Facility as required by the Applicable Reliability Council to ensure "ride through" capability. Large Generating Facility response to frequency deviations of pre-determined magnitudes, both under-frequency and over-frequency deviations, shall be studied and coordinated with the Participating TO and ISO in accordance with Good Utility Practice. The term "ride through" as used herein shall mean the ability of a Generating Facility to stay connected to and synchronized with the ISO Controlled Grid during system disturbances within a range of under-frequency and over-frequency conditions, in accordance with Good Utility Practice.

Issued by: Charles F. Robinson, Vice President and General Counsel

9.7.4 System Protection and Other Control Requirements.

- 9.7.4.1 System Protection Facilities. The Interconnection Customer shall, at its expense, install, operate and maintain System Protection Facilities as a part of the Large Generating Facility or the Interconnection Customer's Interconnection Facilities. The Participating TO shall install at the Interconnection Customer's expense any System Protection Facilities that may be required on the Participating TO's Interconnection Facilities or the Participating TO's Transmission System as a result of the interconnection of the Large Generating Facility and the Interconnection Customer's Interconnection Facilities.
- 9.7.4.2 The Participating TO's and Interconnection Customer's protection facilities shall be designed and coordinated with other systems in accordance with Applicable Reliability Council criteria and Good Utility Practice.
- **9.7.4.3** The Participating TO and Interconnection Customer shall each be responsible for protection of its facilities consistent with Good Utility Practice.
- 9.7.4.4 The Participating TO's and Interconnection Customer's protective relay design shall incorporate the necessary test switches to perform the tests required in Article 6. The required test switches will be placed such that they allow operation of lockout relays while preventing breaker failure schemes from operating and causing unnecessary breaker operations and/or the tripping of the Interconnection Customer's Electric Generating Units.
- **9.7.4.5** The Participating TO and Interconnection Customer will test, operate and maintain System Protection Facilities in accordance with Good Utility Practice and, if applicable, the requirements of the Participating TO's Interconnection Handbook.
- 9.7.4.6 Prior to the in-service date, and again prior to the Commercial Operation Date, the Participating TO and Interconnection Customer or their agents shall perform a complete calibration test and functional trip test of the System Protection Facilities. At intervals suggested by Good Utility Practice, the standards and procedures of the Participating TO, including, if applicable, the requirements of the Participating TO's Interconnection Handbook, and following any apparent malfunction of the System Protection Facilities, each Party shall perform both calibration and functional trip tests of its System Protection Facilities. These tests do not require the tripping of any in-service generation unit. These tests do, however, require that all protective relays and lockout contacts be activated.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 9.7.5 Requirements for Protection. In compliance with Good Utility Practice and, if applicable, the requirements of the Participating TO's Interconnection Handbook, the Interconnection Customer shall provide, install, own, and maintain relays, circuit breakers and all other devices necessary to remove any fault contribution of the Large Generating Facility to any short circuit occurring on the Participating TO's Transmission System not otherwise isolated by the Participating TO's equipment, such that the removal of the fault contribution shall be coordinated with the protective requirements of the Participating TO's Transmission System. Such protective equipment shall include, without limitation, a disconnecting device with fault current-interrupting capability located between the Large Generating Facility and the Participating TO's Transmission System at a site selected upon mutual agreement (not to be unreasonably withheld, conditioned or delayed) of the Parties. The Interconnection Customer shall be responsible for protection of the Large Generating Facility and the Interconnection Customer's other equipment from such conditions as negative sequence currents, over- or under-frequency, sudden load rejection, over- or under-voltage, and generator loss-of-field. The Interconnection Customer shall be solely responsible to disconnect the Large Generating Facility and the Interconnection Customer's other equipment if conditions on the ISO Controlled Grid could adversely affect the Large Generating Facility.
- 9.7.6 Power Quality. Neither the Participating TO's nor the Interconnection Customer's facilities shall cause excessive voltage flicker nor introduce excessive distortion to the sinusoidal voltage or current waves as defined by ANSI Standard C84.1-1989, in accordance with IEEE Standard 519, any applicable superseding electric industry standard, or any alternative Applicable Reliability Council standard. In the event of a conflict between ANSI Standard C84.1-1989, any applicable superseding electric industry standard, or any alternative Applicable Reliability Council standard, the alternative Applicable Reliability Council standard shall control.
- 9.8 Switching and Tagging Rules. Each Party shall provide the other Parties a copy of its switching and tagging rules that are applicable to the other Parties' activities. Such switching and tagging rules shall be developed on a non-discriminatory basis. The Parties shall comply with applicable switching and tagging rules, as amended from time to time, in obtaining clearances for work or for switching operations on equipment.
- 9.9 Use of Interconnection Facilities by Third Parties.
 - **9.9.1 Purpose of Interconnection Facilities**. Except as may be required by Applicable Laws and Regulations, or as otherwise agreed to among the Parties, the Interconnection Facilities shall be constructed for the sole purpose of interconnecting the Large Generating Facility to the Participating TO's Transmission System and shall be used for no other purpose.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 9.9.2 Third Party Users. If required by Applicable Laws and Regulations or if the Parties mutually agree, such agreement not to be unreasonably withheld, to allow one or more third parties to use the Participating TO's Interconnection Facilities, or any part thereof, the Interconnection Customer will be entitled to compensation for the capital expenses it incurred in connection with the Interconnection Facilities based upon the pro rata use of the Interconnection Facilities by the Participating TO, all third party users, and the Interconnection Customer, in accordance with Applicable Laws and Regulations or upon some other mutually-agreed upon methodology. In addition, cost responsibility for ongoing costs, including operation and maintenance costs associated with the Interconnection Facilities, will be allocated between the Interconnection Customer and any third party users based upon the pro rata use of the Interconnection Facilities by the Participating TO, all third party users, and the Interconnection Customer, in accordance with Applicable Laws and Regulations or upon some other mutually agreed upon methodology. If the issue of such compensation or allocation cannot be resolved through such negotiations, it shall be submitted to FERC for resolution.
- 9.10 Disturbance Analysis Data Exchange. The Parties will cooperate with one another in the analysis of disturbances to either the Large Generating Facility or the ISO Controlled Grid by gathering and providing access to any information relating to any disturbance, including information from oscillography, protective relay targets, breaker operations and sequence of events records, and any disturbance information required by Good Utility Practice.

ARTICLE 10. MAINTENANCE

- **10.1 Participating TO Obligations.** The Participating TO shall maintain the Participating TO's Transmission System and the Participating TO's Interconnection Facilities in a safe and reliable manner and in accordance with this LGIA.
- **10.2** Interconnection Customer Obligations. The Interconnection Customer shall maintain the Large Generating Facility and the Interconnection Customer's Interconnection Facilities in a safe and reliable manner and in accordance with this LGIA.
- **10.3 Coordination**. The Parties shall confer regularly to coordinate the planning, scheduling and performance of preventive and corrective maintenance on the Large Generating Facility and the Interconnection Facilities.
- 10.4 Secondary Systems. The Participating TO and Interconnection Customer shall cooperate with the other Parties in the inspection, maintenance, and testing of control or power circuits that operate below 600 volts, AC or DC, including, but not limited to, any hardware, control or protective devices, cables, conductors, electric raceways, secondary equipment panels, transducers, batteries, chargers, and voltage and current transformers that directly affect the operation of a Party's facilities and equipment which may reasonably be expected to impact the other Parties. Each Party shall provide advance notice to the other Parties before undertaking any work on such circuits, especially on electrical circuits involving circuit breaker trip and close contacts, current transformers, or potential transformers.
- 10.5 Operating and Maintenance Expenses. Subject to the provisions herein addressing the use of facilities by others, and except for operations and maintenance expenses associated with modifications made for providing interconnection or transmission service to a third party and such third party pays for such expenses, the Interconnection Customer shall be responsible for all reasonable expenses including overheads, associated with: (1) owning, operating, maintaining, repairing, and replacing the Interconnection Customer's Interconnection Facilities; and (2) operation, maintenance, repair and replacement of the Participating TO's Interconnection Facilities.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE 11. PERFORMANCE OBLIGATION

- **11.1 Interconnection Customer's Interconnection Facilities**. The Interconnection Customer shall design, procure, construct, install, own and/or control the Interconnection Customer's Interconnection Facilities described in Appendix A at its sole expense.
- **11.2 Participating TO's Interconnection Facilities**. The Participating TO shall design, procure, construct, install, own and/or control the Participating TO's Interconnection Facilities described in Appendix A at the sole expense of the Interconnection Customer. Unless the Participating TO elects to fund the capital for the Participating TO's Interconnection Facilities, they shall be solely funded by the Interconnection Customer.
- 11.3 Network Upgrades and Distribution Upgrades. The Participating TO shall design, procure, construct, install, and own the Network Upgrades and Distribution Upgrades described in Appendix A. The Interconnection Customer shall be responsible for all costs related to Distribution Upgrades. Unless the Participating TO elects to fund the capital for the Distribution Upgrades and Network Upgrades, they shall be solely funded by the Interconnection Customer.
- 11.4 Transmission Credits. No later than thirty (30) days prior to the Commercial Operation Date, the Interconnection Customer may make a one-time election by written notice to the ISO and the Participating TO to receive Firm Transmission Rights as defined in and as available under the ISO Tariff at the time of the election in accordance with the ISO Tariff, in lieu of a refund of the cost of Network Upgrades in accordance with Article 11.4.1.
 - Repayment of Amounts Advanced for Network Upgrades. Upon the Commercial Operation Date, the Interconnection Customer shall be entitled to a repayment, equal to the total amount paid to the Participating TO for the cost of Network Upgrades. Such amount shall include any tax gross-up or other tax-related payments associated with Network Upgrades not refunded to the Interconnection Customer pursuant to Article 5.17.8 or otherwise, and shall be paid to the Interconnection Customer by the Participating TO on a dollar-for-dollar basis either through (1) direct payments made on a levelized basis over the five-year period commencing on the Commercial Operation Date; or (2) any alternative payment schedule that is mutually agreeable to the Interconnection Customer and Participating TO, provided that such amount is paid within five (5) years from the Commercial Operation Date. Notwithstanding the foregoing, if this LGIA terminates within five (5) years from the Commercial Operation Date, the Participating TO's obligation to pay refunds to the Interconnection Customer shall cease as of the date of termination. Any repayment shall include interest calculated in accordance with the methodology set forth in FERC's regulations at 18 C.F.R. §35.19a(a)(2)(iii) from the date of any payment for Network Upgrades through the date on which the Interconnection Customer receives a repayment of such payment. Interest shall continue to accrue on the repayment obligation so long as this LGIA is in effect. The Interconnection Customer may assign such repayment rights to any person.

If the Large Generating Facility fails to achieve commercial operation, but it or another Generating Facility is later constructed and makes use of the Network Upgrades, the Participating TO shall at that time reimburse Interconnection Customer for the amounts advanced for the Network Upgrades. Before any such reimbursement can occur, the Interconnection Customer, or the entity that ultimately constructs the Generating Facility, if different, is responsible for identifying the entity to which reimbursement must be made.

Issued by: Charles F. Robinson, Vice President and General Counsel

- 11.4.2 Special Provisions for Affected Systems. The Interconnection Customer shall enter into an agreement with the owner of the Affected System and/or other affected owners of portions of the ISO Controlled Grid, as applicable, in accordance with the LGIP. Such agreement shall specify the terms governing payments to be made by the Interconnection Customer to the owner of the Affected System and/or other affected owners of portions of the ISO Controlled Grid as well as the repayment by the owner of the Affected System and/or other affected owners of portions of the ISO Controlled Grid. In no event shall the Participating TO be responsible for the repayment for any facilities that are not part of the Participating TO's Transmission System.
- 11.4.3 Notwithstanding any other provision of this LGIA, nothing herein shall be construed as relinquishing or foreclosing any rights, including but not limited to firm transmission rights, capacity rights, transmission congestion rights, or transmission credits, that the Interconnection Customer shall be entitled to, now or in the future under any other agreement or tariff as a result of, or otherwise associated with, the transmission capacity, if any, created by the Network Upgrades, including the right to obtain cash reimbursements or transmission credits for transmission service that is not associated with the Large Generating Facility.
- Provision of Security. At least thirty (30) Calendar Days prior to the commencement of the procurement, installation, or construction of a discrete portion of a Participating TO's Interconnection Facilities, Network Upgrades, or Distribution Upgrades, the Interconnection Customer shall provide the Participating TO, at the Interconnection Customer's option, a guarantee, a surety bond, letter of credit or other form of security that is reasonably acceptable to the Participating TO and is consistent with the Uniform Commercial Code of the jurisdiction identified in Article 14.2.1. Such security for payment shall be in an amount sufficient to cover the costs for constructing, procuring and installing the applicable portion of the Participating TO's Interconnection Facilities, Network Upgrades, or Distribution Upgrades. Such security shall be reduced on a dollar-for-dollar basis for payments made to the Participating TO for these purposes.

In addition:

- 11.5.1 The guarantee must be made by an entity that meets the creditworthiness requirements of the Participating TO, and contain terms and conditions that guarantee payment of any amount that may be due from the Interconnection Customer, up to an agreed-to maximum amount.
- **11.5.2** The letter of credit must be issued by a financial institution reasonably acceptable to the Participating TO and must specify a reasonable expiration date.
- **11.5.3** The surety bond must be issued by an insurer reasonably acceptable to the Participating TO and must specify a reasonable expiration date.
- 11.6 Interconnection Customer Compensation. If the ISO requests or directs the Interconnection Customer to provide a service pursuant to Articles 9.6.3 (Payment for Reactive Power) or 13.5.1 of this LGIA, the ISO shall compensate the Interconnection Customer in accordance with the ISO Tariff.

Issued by: Charles F. Robinson, Vice President and General Counsel

11.6.1 Interconnection Customer Compensation for Actions During Emergency Condition.

The ISO shall compensate the Interconnection Customer in accordance with the ISO Tariff for its provision of real and reactive power and other Emergency Condition services that the Interconnection Customer provides to support the ISO Controlled Grid during an Emergency Condition in accordance with Article 11.6.

ARTICLE 12. INVOICE

- 12.1 General. The Participating TO shall submit to the Interconnection Customer, on a monthly basis, invoices of amounts due pursuant to this LGIA for the preceding month. Each invoice shall state the month to which the invoice applies and fully describe the services and equipment provided. The Parties may discharge mutual debts and payment obligations due and owing to each other on the same date through netting, in which case all amounts a Party owes to the other Party under this LGIA, including interest payments or credits, shall be netted so that only the net amount remaining due shall be paid by the owing Party. Notwithstanding the foregoing, any invoices between the ISO and another Party shall be submitted and paid in accordance with the ISO Tariff.
- 12.2 Final Invoice. As soon as reasonably practicable, but within twelve months after completion of the construction of the Participating TO's Interconnection Facilities, Network Upgrades, and Distribution Upgrades, the Participating TO shall provide an invoice of the final cost of the construction of the Participating TO's Interconnection Facilities, Network Upgrades, and Distribution Upgrades, and shall set forth such costs in sufficient detail to enable the Interconnection Customer to compare the actual costs with the estimates and to ascertain deviations, if any, from the cost estimates. The Participating TO shall refund to the Interconnection Customer any amount by which the actual payment by the Interconnection Customer for estimated costs exceeds the actual costs of construction within thirty (30) Calendar Days of the issuance of such final construction invoice; or, in the event the actual costs of construction exceed the Interconnection Customer's actual payment for estimated costs, then the Interconnection Customer shall pay to the Participating TO any amount by which the actual costs of construction exceed the actual payment by the Interconnection Customer for estimated costs within thirty (30) Calendar Days of the issuance of such final construction invoice.
- 12.3 Payment. Invoices shall be rendered to the Interconnection Customer at the address specified in Appendix F. The Interconnection Customer shall pay, or Participating TO shall refund, the amounts due within thirty (30) Calendar Days of the Interconnection Customer's receipt of the invoice. All payments shall be made in immediately available funds payable to the Interconnection Customer or Participating TO, or by wire transfer to a bank named and account designated by the invoicing Interconnection Customer or Participating TO. Payment of invoices by any Party will not constitute a waiver of any rights or claims any Party may have under this LGIA.
- **12.4 Disputes**. In the event of a billing dispute between the Interconnection Customer and the Participating TO, the Participating TO and the ISO shall continue to provide Interconnection Service under this LGIA as long as the Interconnection Customer: (i) continues to make all payments not in dispute; and (ii) pays to the Participating TO or into an independent escrow account the portion of the invoice in dispute, pending resolution of such dispute. If the Interconnection Customer fails to meet these two requirements for continuation of service, then the Participating TO may provide notice to the Interconnection Customer of a Default pursuant to Article 17. Within thirty (30) Calendar Days after the resolution of the dispute, the Party that owes money to the other Party shall pay the amount due with interest calculated in accordance with the methodology set forth in FERC's Regulations at 18 C.F.R. § 35.19a(a)(2)(iii). Notwithstanding the foregoing, any billing dispute between the ISO and another Party shall be resolved in accordance with the provisions of Article 27 of this LGIA.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE 13. EMERGENCIES

13.1 [Reserved]

- **13.2 Obligations**. Each Party shall comply with the Emergency Condition procedures of the ISO, NERC, the Applicable Reliability Council, Applicable Laws and Regulations, and any emergency procedures set forth in this LGIA.
- Notice. The Participating TO or the ISO shall notify the Interconnection Customer promptly when it becomes aware of an Emergency Condition that affects the Participating TO's Interconnection Facilities or Distribution System or the ISO Controlled Grid, respectively, that may reasonably be expected to affect the Interconnection Customer's operation of the Large Generating Facility or the Interconnection Customer's Interconnection Facilities. The Interconnection Customer shall notify the Participating TO and the ISO promptly when it becomes aware of an Emergency Condition that affects the Large Generating Facility or the Interconnection Customer's Interconnection Facilities that may reasonably be expected to affect the ISO Controlled Grid or the Participating TO's Interconnection Facilities. To the extent information is known, the notification shall describe the Emergency Condition, the extent of the damage or deficiency, the expected effect on the operation of the Interconnection Customer's or Participating TO's facilities and operations, its anticipated duration and the corrective action taken and/or to be taken. The initial notice shall be followed as soon as practicable with written notice, if requested by a Party, which may be provided by electronic mail or facsimile, or in the case of the ISO may be publicly posted on the ISO's internet web site.
- **13.4 Immediate Action**. Unless, in the Interconnection Customer's reasonable judgment, immediate action is required, the Interconnection Customer shall obtain the consent of the ISO and the Participating TO, such consent to not be unreasonably withheld, prior to performing any manual switching operations at the Large Generating Facility or the Interconnection Customer's Interconnection Facilities in response to an Emergency Condition declared by the Participating TO or ISO or in response to any other emergency condition.

13.5 ISO and Participating TO Authority.

13.5.1 General. The ISO and Participating TO may take whatever actions or inactions, including issuance of dispatch instructions, with regard to the ISO Controlled Grid or the Participating TO's Interconnection Facilities or Distribution System they deem necessary during an Emergency Condition in order to (i) preserve public health and safety, (ii) preserve the reliability of the ISO Controlled Grid or the Participating TO's Interconnection Facilities or Distribution System, and (iii) limit or prevent damage, and (iv) expedite restoration of service.

The Participating TO and the ISO shall use Reasonable Efforts to minimize the effect of such actions or inactions on the Large Generating Facility or the Interconnection Customer's Interconnection Facilities. The Participating TO or the ISO may, on the basis of technical considerations, require the Large Generating Facility to mitigate an Emergency Condition by taking actions necessary and limited in scope to remedy the Emergency Condition, including, but not limited to, directing the Interconnection Customer to shutdown, start-up, increase or decrease the real or reactive power output of the Large Generating Facility; implementing a reduction or disconnection pursuant to Article 13.5.2; directing the Interconnection Customer to assist with black start (if available) or restoration efforts; or altering the outage schedules of the Large Generating Facility and the Interconnection Customer's Interconnection Facilities. Interconnection Customer shall comply with all of the ISO's and Participating TO's operating instructions concerning Large Generating Facility real power and reactive power output within the manufacturer's design limitations of the Large Generating Facility's equipment that is in service and physically available for operation at the time, in compliance with Applicable Laws and Regulations.

Issued by: Charles F. Robinson, Vice President and General Counsel

- Interconnection Service or disconnect the Large Generating Facility or the Interconnection Customer's Interconnection Facilities when such reduction or disconnection is necessary under Good Utility Practice due to Emergency Conditions. These rights are separate and distinct from any right of curtailment of the ISO pursuant to the ISO Tariff. When the ISO or Participating TO can schedule the reduction or disconnection in advance, the ISO or Participating TO shall notify the Interconnection Customer of the reasons, timing and expected duration of the reduction or disconnection. The ISO or Participating TO shall coordinate with the Interconnection Customer using Good Utility Practice to schedule the reduction or disconnection during periods of least impact to the Interconnection Customer and the ISO and Participating TO. Any reduction or disconnection shall continue only for so long as reasonably necessary under Good Utility Practice. The Parties shall cooperate with each other to restore the Large Generating Facility, the Interconnection Facilities, and the ISO Controlled Grid to their normal operating state as soon as practicable consistent with Good Utility Practice.
- 13.6 Interconnection Customer Authority. Consistent with Good Utility Practice, this LGIA, and the ISO Tariff, the Interconnection Customer may take actions or inactions with regard to the Large Generating Facility or the Interconnection Customer's Interconnection Facilities during an Emergency Condition in order to (i) preserve public health and safety, (ii) preserve the reliability of the Large Generating Facility or the Interconnection Customer's Interconnection Facilities, (iii) limit or prevent damage, and (iv) expedite restoration of service. Interconnection Customer shall use Reasonable Efforts to minimize the effect of such actions or inactions on the ISO Controlled Grid and the Participating TO's Interconnection Facilities. The ISO and Participating TO shall use Reasonable Efforts to assist Interconnection Customer in such actions.
- **13.7 Limited Liability**. Except as otherwise provided in Article 11.6.1 of this LGIA, no Party shall be liable to any other Party for any action it takes in responding to an Emergency Condition so long as such action is made in good faith and is consistent with Good Utility Practice.

ARTICLE 14. REGULATORY REQUIREMENTS AND GOVERNING LAW

14.1 Regulatory Requirements. Each Party's obligations under this LGIA shall be subject to its receipt of any required approval or certificate from one or more Governmental Authorities in the form and substance satisfactory to the applying Party, or the Party making any required filings with, or providing notice to, such Governmental Authorities, and the expiration of any time period associated therewith. Each Party shall in good faith seek and use its Reasonable Efforts to obtain such other approvals. Nothing in this LGIA shall require the Interconnection Customer to take any action that could result in its inability to obtain, or its loss of, status or exemption under the Federal Power Act or the Public Utility Holding Company Act of 1935, as amended, or the Public Utility Regulatory Policies Act of 1978.

14.2 Governing Law.

- **14.2.1** The validity, interpretation and performance of this LGIA and each of its provisions shall be governed by the laws of the state where the Point of Interconnection is located, without regard to its conflicts of law principles.
- **14.2.2** This LGIA is subject to all Applicable Laws and Regulations.
- **14.2.3** Each Party expressly reserves the right to seek changes in, appeal, or otherwise contest any laws, orders, rules, or regulations of a Governmental Authority.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE 15. NOTICES

15.1 General. Unless otherwise provided in this LGIA, any notice, demand or request required or permitted to be given by a Party to another and any instrument required or permitted to be tendered or delivered by a Party in writing to another shall be effective when delivered and may be so given, tendered or delivered, by recognized national courier, or by depositing the same with the United States Postal Service with postage prepaid, for delivery by certified or registered mail, addressed to the Party, or personally delivered to the Party, at the address set out in Appendix F, Addresses for Delivery of Notices and Billings.

A Party must update the information in Appendix F as information changes. A Party may change the notice information in this LGIA by giving five (5) Business Days written notice prior to the effective date of the change. Such changes shall not constitute an amendment to this LGIA.

- **15.2 Billings and Payments**. Billings and payments shall be sent to the addresses set out in Appendix F.
- **15.3 Alternative Forms of Notice**. Any notice or request required or permitted to be given by a Party to another and not required by this LGIA to be given in writing may be so given by telephone, facsimile or e-mail to the telephone numbers and e-mail addresses set out in Appendix F.
- **Operations and Maintenance Notice**. Each Party shall notify the other Parties in writing of the identity of the person(s) that it designates as the point(s) of contact with respect to the implementation of Articles 9 and 10.

ARTICLE 16. FORCE MAJEURE

16.1 Force Majeure.

- **16.1.1** Economic hardship is not considered a Force Majeure event.
- 16.1.2 No Party shall be considered to be in Default with respect to any obligation hereunder, (including obligations under Article 4), other than the obligation to pay money when due, if prevented from fulfilling such obligation by Force Majeure. A Party unable to fulfill any obligation hereunder (other than an obligation to pay money when due) by reason of Force Majeure shall give notice and the full particulars of such Force Majeure to the other Party in writing or by telephone as soon as reasonably possible after the occurrence of the cause relied upon. Telephone notices given pursuant to this Article shall be confirmed in writing as soon as reasonably possible and shall specifically state full particulars of the Force Majeure, the time and date when the Force Majeure occurred and when the Force Majeure is reasonably expected to cease. The Party affected shall exercise due diligence to remove such disability with reasonable dispatch, but shall not be required to accede or agree to any provision not satisfactory to it in order to settle and terminate a strike or other labor disturbance.

ARTICLE 17. DEFAULT

17.1 Default

17.1.1 General. No Default shall exist where such failure to discharge an obligation (other than the payment of money) is the result of Force Majeure as defined in this LGIA or the result of an act or omission of the other Party. Upon a Breach, the affected non-Breaching

Issued by: Charles F. Robinson, Vice President and General Counsel

Party(ies) shall give written notice of such Breach to the Breaching Party. Except as provided in Article 17.1.2, the Breaching Party shall have thirty (30) Calendar Days from receipt of the Default notice within which to cure such Breach; provided however, if such Breach is not capable of cure within thirty (30) Calendar Days, the Breaching Party shall commence such cure within thirty (30) Calendar Days after notice and continuously and diligently complete such cure within ninety (90) Calendar Days from receipt of the Default notice; and, if cured within such time, the Breach specified in such notice shall cease to exist.

17.1.2 Right to Terminate. If a Breach is not cured as provided in this Article, or if a Breach is not capable of being cured within the period provided for herein, the affected non-Breaching Party(ies) shall have the right to declare a Default and terminate this LGIA by written notice at any time until cure occurs, and be relieved of any further obligation hereunder and, whether or not such Party(ies) terminates this LGIA, to recover from the Breaching Party all amounts due hereunder, plus all other damages and remedies to which it is entitled at law or in equity. The provisions of this Article will survive termination of this LGIA.

ARTICLE 18. INDEMNITY, CONSEQUENTIAL DAMAGES AND INSURANCE

- **18.1 Indemnity**. Each Party shall at all times indemnify, defend, and hold the other Parties harmless from, any and all Losses arising out of or resulting from another Party's action or inactions of its obligations under this LGIA on behalf of the indemnifying Party, except in cases of gross negligence or intentional wrongdoing by the Indemnified Party.
 - **18.1.1 Indemnified Party**. If an Indemnified Party is entitled to indemnification under this Article 18 as a result of a claim by a third party, and the Indemnifying Party fails, after notice and reasonable opportunity to proceed under Article 18.1, to assume the defense of such claim, such Indemnified Party may at the expense of the Indemnifying Party contest, settle or consent to the entry of any judgment with respect to, or pay in full, such claim.
 - **18.1.2** Indemnifying Party. If an Indemnifying Party is obligated to indemnify and hold any Indemnified Party harmless under this Article 18, the amount owing to the Indemnified Party shall be the amount of such Indemnified Party's actual Loss, net of any insurance or other recovery.
 - **18.1.3** Indemnity Procedures. Promptly after receipt by an Indemnified Party of any claim or notice of the commencement of any action or administrative or legal proceeding or investigation as to which the indemnity provided for in Article 18.1 may apply, the Indemnified Party shall notify the Indemnifying Party of such fact. Any failure of or delay in such notification shall not affect a Party's indemnification obligation unless such failure or delay is materially prejudicial to the indemnifying Party.

The Indemnifying Party shall have the right to assume the defense thereof with counsel designated by such Indemnifying Party and reasonably satisfactory to the Indemnified Party. If the defendants in any such action include one or more Indemnified Parties and the Indemnifying Party and if the Indemnified Party reasonably concludes that there may be legal defenses available to it and/or other Indemnified Parties which are different from or additional to those available to the Indemnifying Party, the Indemnified Party shall have the right to select separate counsel to assert such legal defenses and to otherwise participate in the defense of such action on its own behalf. In such instances, the Indemnifying Party shall only be required to pay the fees and expenses of one additional attorney to represent an Indemnified Party or Indemnified Parties having such differing or additional legal defenses.

Issued by: Charles F. Robinson, Vice President and General Counsel

The Indemnified Party shall be entitled, at its expense, to participate in any such action, suit or proceeding, the defense of which has been assumed by the Indemnifying Party. Notwithstanding the foregoing, the Indemnifying Party (i) shall not be entitled to assume and control the defense of any such action, suit or proceedings if and to the extent that, in the opinion of the Indemnified Party and its counsel, such action, suit or proceeding involves the potential imposition of criminal liability on the Indemnified Party, or there exists a conflict or adversity of interest between the Indemnified Party and the Indemnifying Party, in such event the Indemnifying Party shall pay the reasonable expenses of the Indemnified Party, and (ii) shall not settle or consent to the entry of any judgment in any action, suit or proceeding without the consent of the Indemnified Party, which shall not be unreasonably withheld, conditioned or delayed.

- 18.2 Consequential Damages. Other than the liquidated damages heretofore described in Article 5.3, in no event shall any Party be liable under any provision of this LGIA for any losses, damages, costs or expenses for any special, indirect, incidental, consequential, or punitive damages, including but not limited to loss of profit or revenue, loss of the use of equipment, cost of capital, cost of temporary equipment or services, whether based in whole or in part in contract, in tort, including negligence, strict liability, or any other theory of liability; provided, however, that damages for which a Party may be liable to another Party under another agreement will not be considered to be special, indirect, incidental, or consequential damages hereunder.
- **18.3 Insurance**. Each Party shall, at its own expense, maintain in force throughout the period of this LGIA, and until released by the other Parties, the following minimum insurance coverages, with insurers rated no less than A- (with a minimum size rating of VII) by Bests' Insurance Guide and Key Ratings and authorized to do business in the state where the Point of Interconnection is located, except in the case of the ISO, the State of California:
 - 18.3.1 Employer's Liability and Workers' Compensation Insurance providing statutory benefits in accordance with the laws and regulations of the state in which the Point of Interconnection is located, except in the case of the ISO, the State of California.
 - 18.3.2 Commercial General Liability Insurance including premises and operations, personal injury, broad form property damage, broad form blanket contractual liability coverage (including coverage for the contractual indemnification) products and completed operations coverage, coverage for explosion, collapse and underground hazards, independent contractors coverage, coverage for pollution to the extent normally available and punitive damages to the extent normally available and a cross liability endorsement, with minimum limits of One Million Dollars (\$1,000,000) per occurrence/One Million Dollars (\$1,000,000) aggregate combined single limit for personal injury, bodily injury, including death and property damage.
 - 18.3.3 Business Automobile Liability Insurance for coverage of owned and non-owned and hired vehicles, trailers or semi-trailers designed for travel on public roads, with a minimum, combined single limit of One Million Dollars (\$1,000,000) per occurrence for bodily injury, including death, and property damage.
 - 18.3.4 Excess Public Liability Insurance over and above the Employer's Liability Commercial General Liability and Business Automobile Liability Insurance coverage, with a minimum combined single limit of Twenty Million Dollars (\$20,000,000) per occurrence/Twenty Million Dollars (\$20,000,000) aggregate.
 - 18.3.5 The Commercial General Liability Insurance, Business Automobile Insurance and Excess Public Liability Insurance policies shall name the other Parties, their parents, associated and Affiliate companies and their respective directors, officers, agents, servants and employees ("Other Party Group") as additional insured. All policies shall

Issued by: Charles F. Robinson, Vice President and General Counsel

contain provisions whereby the insurers waive all rights of subrogation in accordance with the provisions of this LGIA against the Other Party Group and provide thirty (30) Calendar Days advance written notice to the Other Party Group prior to anniversary date of cancellation or any material change in coverage or condition.

- The Commercial General Liability Insurance, Business Automobile Liability Insurance and Excess Public Liability Insurance policies shall contain provisions that specify that the policies are primary and shall apply to such extent without consideration for other policies separately carried and shall state that each insured is provided coverage as though a separate policy had been issued to each, except the insurer's liability shall not be increased beyond the amount for which the insurer would have been liable had only one insured been covered. Each Party shall be responsible for its respective deductibles or retentions.
- 18.3.7 The Commercial General Liability Insurance, Business Automobile Liability Insurance and Excess Public Liability Insurance policies, if written on a Claims First Made Basis, shall be maintained in full force and effect for two (2) years after termination of this LGIA, which coverage may be in the form of tail coverage or extended reporting period coverage if agreed by the Parties.
- 18.3.8 The requirements contained herein as to the types and limits of all insurance to be maintained by the Parties are not intended to and shall not in any manner, limit or qualify the liabilities and obligations assumed by the Parties under this LGIA.
- 18.3.9 Within ten (10) Calendar Days following execution of this LGIA, and as soon as practicable after the end of each fiscal year or at the renewal of the insurance policy and in any event within ninety (90) Calendar Days thereafter, each Party shall provide certification of all insurance required in this LGIA, executed by each insurer or by an authorized representative of each insurer.
- Notwithstanding the foregoing, each Party may self-insure to meet the minimum insurance requirements of Articles 18.3.2 through 18.3.8 to the extent it maintains a self-insurance program; provided that, such Party's senior unsecured debt or issuer rating is BBB-, or better, as rated by Standard & Poor's and that its self-insurance program meets the minimum insurance requirements of Articles 18.3.2 through 18.3.8. For any period of time that a Party's senior unsecured debt rating and issuer rating are both unrated by Standard & Poor's or are both rated at less than BBB- by Standard & Poor's, such Party shall comply with the insurance requirements applicable to it under Articles 18.3.2 through 18.3.9. In the event that a Party is permitted to self-insure pursuant to this Article 18.3.10, it shall notify the other Parties that it meets the requirements to self-insure and that its self-insurance program meets the minimum insurance requirements in a manner consistent with that specified in Article 18.3.9.
- 18.3.11 The Parties agree to report to each other in writing as soon as practical all accidents or occurrences resulting in injuries to any person, including death, and any property damage arising out of this LGIA.

ARTICLE 19. ASSIGNMENT

19.1 Assignment. This LGIA may be assigned by a Party only with the written consent of the other Parties; provided that a Party may assign this LGIA without the consent of the other Parties to any Affiliate of the assigning Party with an equal or greater credit rating and with the legal authority and operational ability to satisfy the obligations of the assigning Party under this LGIA; and provided further that the Interconnection Customer shall have the right to assign this LGIA, without the

Issued by: Charles F. Robinson, Vice President and General Counsel

consent of the ISO or Participating TO, for collateral security purposes to aid in providing financing for the Large Generating Facility, provided that the Interconnection Customer will promptly notify the ISO and Participating TO of any such assignment. Any financing arrangement entered into by the Interconnection Customer pursuant to this Article will provide that prior to or upon the exercise of the secured party's, trustee's or mortgagee's assignment rights pursuant to said arrangement, the secured creditor, the trustee or mortgagee will notify the ISO and Participating TO of the date and particulars of any such exercise of assignment right(s), including providing the ISO and Participating TO with proof that it meets the requirements of Articles 11.5 and 18.3. Any attempted assignment that violates this Article is void and ineffective. Any assignment under this LGIA shall not relieve a Party of its obligations, nor shall a Party's obligations be enlarged, in whole or in part, by reason thereof. Where required, consent to assignment will not be unreasonably withheld, conditioned or delayed.

ARTICLE 20. SEVERABILITY

20.1 Severability. If any provision in this LGIA is finally determined to be invalid, void or unenforceable by any court or other Governmental Authority having jurisdiction, such determination shall not invalidate, void or make unenforceable any other provision, agreement or covenant of this LGIA; provided that if the Interconnection Customer (or any third party, but only if such third party is not acting at the direction of the Participating TO or ISO) seeks and obtains such a final determination with respect to any provision of the Alternate Option (Article 5.1.2), or the Negotiated Option (Article 5.1.4), then none of the provisions of Article 5.1.2 or 5.1.4 shall thereafter have any force or effect and the Parties' rights and obligations shall be governed solely by the Standard Option (Article 5.1.1).

ARTICLE 21. COMPARABILITY

21.1 Comparability. The Parties will comply with all applicable comparability and code of conduct laws, rules and regulations, as amended from time to time.

ARTICLE 22. CONFIDENTIALITY

22.1 Confidentiality. Confidential Information shall include, without limitation, all information relating to a Party's technology, research and development, business affairs, and pricing, and any information supplied by any of the Parties to the other Parties prior to the execution of this LGIA.

Information is Confidential Information only if it is clearly designated or marked in writing as confidential on the face of the document, or, if the information is conveyed orally or by inspection, if the Party providing the information orally informs the Parties receiving the information that the information is confidential.

If requested by any Party, the other Parties shall provide in writing, the basis for asserting that the information referred to in this Article 22 warrants confidential treatment, and the requesting Party may disclose such writing to the appropriate Governmental Authority. Each Party shall be responsible for the costs associated with affording confidential treatment to its information.

- **22.1.1 Term**. During the term of this LGIA, and for a period of three (3) years after the expiration or termination of this LGIA, except as otherwise provided in this Article 22, each Party shall hold in confidence and shall not disclose to any person Confidential Information.
- **22.1.2 Scope**. Confidential Information shall not include information that the receiving Party can demonstrate: (1) is generally available to the public other than as a result of a disclosure

Issued by: Charles F. Robinson, Vice President and General Counsel

by the receiving Party; (2) was in the lawful possession of the receiving Party on a non-confidential basis before receiving it from the disclosing Party; (3) was supplied to the receiving Party without restriction by a third party, who, to the knowledge of the receiving Party after due inquiry, was under no obligation to the disclosing Party to keep such information confidential; (4) was independently developed by the receiving Party without reference to Confidential Information of the disclosing Party; (5) is, or becomes, publicly known, through no wrongful act or omission of the receiving Party or Breach of this LGIA; or (6) is required, in accordance with Article 22.1.7 of this LGIA, Order of Disclosure, to be disclosed by any Governmental Authority or is otherwise required to be disclosed by law or subpoena, or is necessary in any legal proceeding establishing rights and obligations under this LGIA. Information designated as Confidential Information will no longer be deemed confidential if the Party that designated the information as confidential notifies the other Parties that it no longer is confidential.

- 22.1.3 Release of Confidential Information. No Party shall release or disclose Confidential Information to any other person, except to its employees, consultants, Affiliates (limited by the Standards of Conduct requirements set forth in Part 358 of FERC's Regulations, 18 C.F.R. 358), subcontractors, or to parties who may be or considering providing financing to or equity participation with the Interconnection Customer, or to potential purchasers or assignees of the Interconnection Customer, on a need-to-know basis in connection with this LGIA, unless such person has first been advised of the confidentiality provisions of this Article 22 and has agreed to comply with such provisions. Notwithstanding the foregoing, a Party providing Confidential Information to any person shall remain primarily responsible for any release of Confidential Information in contravention of this Article 22.
- **22.1.4 Rights**. Each Party retains all rights, title, and interest in the Confidential Information that each Party discloses to the other Parties. The disclosure by each Party to the other Parties of Confidential Information shall not be deemed a waiver by a Party or any other person or entity of the right to protect the Confidential Information from public disclosure.
- 22.1.5 No Warranties. The mere fact that a Party has provided Confidential Information does not constitute a warranty or representation as to its accuracy or completeness. In addition, by supplying Confidential Information, no Party obligates itself to provide any particular information or Confidential Information to the other Parties nor to enter into any further agreements or proceed with any other relationship or joint venture.
- **22.1.6 Standard of Care**. Each Party shall use at least the same standard of care to protect Confidential Information it receives as it uses to protect its own Confidential Information from unauthorized disclosure, publication or dissemination. Each Party may use Confidential Information solely to fulfill its obligations to the other Parties under this LGIA or its regulatory requirements.
- 22.1.7 Order of Disclosure. If a court or a Government Authority or entity with the right, power, and apparent authority to do so requests or requires any Party, by subpoena, oral deposition, interrogatories, requests for production of documents, administrative order, or otherwise, to disclose Confidential Information, that Party shall provide the other Parties with prompt notice of such request(s) or requirement(s) so that the other Parties may seek an appropriate protective order or waive compliance with the terms of this LGIA. Notwithstanding the absence of a protective order or waiver, the Party may disclose such Confidential Information which, in the opinion of its counsel, the Party is legally compelled to disclose. Each Party will use Reasonable Efforts to obtain reliable assurance that confidential treatment will be accorded any Confidential Information so furnished.
- **22.1.8 Termination of Agreement**. Upon termination of this LGIA for any reason, each Party shall, within ten (10) Calendar Days of receipt of a written request from another Party, use

Issued by: Charles F. Robinson, Vice President and General Counsel

Reasonable Efforts to destroy, erase, or delete (with such destruction, erasure, and deletion certified in writing to the other Party) or return to the other Party, without retaining copies thereof, any and all written or electronic Confidential Information received from the other Party.

- 22.1.9 Remedies. The Parties agree that monetary damages would be inadequate to compensate a Party for another Party's Breach of its obligations under this Article 22. Each Party accordingly agrees that the other Parties shall be entitled to equitable relief, by way of injunction or otherwise, if the first Party Breaches or threatens to Breach its obligations under this Article 22, which equitable relief shall be granted without bond or proof of damages, and the receiving Party shall not plead in defense that there would be an adequate remedy at law. Such remedy shall not be deemed an exclusive remedy for the Breach of this Article 22, but shall be in addition to all other remedies available at law or in equity. The Parties further acknowledge and agree that the covenants contained herein are necessary for the protection of legitimate business interests and are reasonable in scope. No Party, however, shall be liable for indirect, incidental, or consequential or punitive damages of any nature or kind resulting from or arising in connection with this Article 22.
- 22.1.10 Disclosure to FERC, its Staff, or a State. Notwithstanding anything in this Article 22 to the contrary, and pursuant to 18 C.F.R. section 1b.20, if FERC or its staff, during the course of an investigation or otherwise, requests information from one of the Parties that is otherwise required to be maintained in confidence pursuant to this LGIA, the Party shall provide the requested information to FERC or its staff, within the time provided for in the request for information. In providing the information to FERC or its staff, the Party must, consistent with 18 C.F.R. section 388.112, request that the information be treated as confidential and non-public by FERC and its staff and that the information be withheld from public disclosure. Parties are prohibited from notifying the other Parties to this LGIA prior to the release of the Confidential Information to FERC or its staff. The Party shall notify the other Parties to the LGIA when it is notified by FERC or its staff that a request to release Confidential Information has been received by FERC, at which time any of the Parties may respond before such information would be made public, pursuant to 18 C.F.R. section 388.112. Requests from a state regulatory body conducting a confidential investigation shall be treated in a similar manner if consistent with the applicable state rules and regulations.
- 22.1.11 Subject to the exception in Article 22.1.10, Confidential Information shall not be disclosed by the other Parties to any person not employed or retained by the other Parties, except to the extent disclosure is (i) required by law; (ii) reasonably deemed by the disclosing Party to be required to be disclosed in connection with a dispute between or among the Parties, or the defense of litigation or dispute; (iii) otherwise permitted by consent of the other Parties, such consent not to be unreasonably withheld; or (iv) necessary to fulfill its obligations under this LGIA or as a transmission service provider or a Control Area operator including disclosing the Confidential Information to an RTO or ISO or to a regional or national reliability organization. The Party asserting confidentiality shall notify the other Parties in writing of the information it claims is confidential. Prior to any disclosures of another Party's Confidential Information under this subparagraph, or if any third party or Governmental Authority makes any request or demand for any of the information described in this subparagraph, the disclosing Party agrees to promptly notify the other Party in writing and agrees to assert confidentiality and cooperate with the other Party in seeking to protect the Confidential Information from public disclosure by confidentiality agreement, protective order or other reasonable measures.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE 23. ENVIRONMENTAL RELEASES

23.1 Each Party shall notify the other Parties, first orally and then in writing, of the release of any Hazardous Substances, any asbestos or lead abatement activities, or any type of remediation activities related to the Large Generating Facility or the Interconnection Facilities, each of which may reasonably be expected to affect the other Parties. The notifying Party shall: (i) provide the notice as soon as practicable, provided such Party makes a good faith effort to provide the notice no later than twenty-four hours after such Party becomes aware of the occurrence; and (ii) promptly furnish to the other Parties copies of any publicly available reports filed with any Governmental Authorities addressing such events.

ARTICLE 24. INFORMATION REQUIREMENTS

- **24.1 Information Acquisition**. The Participating TO and the Interconnection Customer shall submit specific information regarding the electrical characteristics of their respective facilities to each other as described below and in accordance with Applicable Reliability Standards.
- 24.2 Information Submission by Participating TO. The initial information submission by the Participating TO shall occur no later than one hundred eighty (180) Calendar Days prior to Trial Operation and shall include the Participating TO's Transmission System information necessary to allow the Interconnection Customer to select equipment and meet any system protection and stability requirements, unless otherwise agreed to by the Participating TO and the Interconnection Customer. On a monthly basis the Participating TO shall provide the Interconnection Customer and the ISO a status report on the construction and installation of the Participating TO's Interconnection Facilities and Network Upgrades, including, but not limited to, the following information: (1) progress to date; (2) a description of the activities since the last report; (3) a description of the action items for the next period; and (4) the delivery status of equipment ordered.
- 24.3 Updated Information Submission by Interconnection Customer. The updated information submission by the Interconnection Customer, including manufacturer information, shall occur no later than one hundred eighty (180) Calendar Days prior to the Trial Operation. The Interconnection Customer shall submit a completed copy of the Electric Generating Unit data requirements contained in Appendix 1 to the LGIP. It shall also include any additional information provided to the Participating TO and the ISO for the Interconnection Studies. Information in this submission shall be the most current Electric Generating Unit design or expected performance data. Information submitted for stability models shall be compatible with the Participating TO and ISO standard models. If there is no compatible model, the Interconnection Customer will work with a consultant mutually agreed to by the Parties to develop and supply a standard model and associated information.

If the Interconnection Customer's data is materially different from what was originally provided to the Participating TO and the ISO for the Interconnection Studies, then the Participating TO and the ISO will conduct appropriate studies pursuant to the LGIP to determine the impact on the Participating TO's Transmission System and affected portions of the ISO Controlled Grid based on the actual data submitted pursuant to this Article 24.3. The Interconnection Customer shall not begin Trial Operation until such studies are completed and all other requirements of this LGIA are satisfied.

24.4 Information Supplementation. Prior to the Trial Operation date, the Parties shall supplement their information submissions described above in this Article 24 with any and all "as-built" Electric Generating Unit information or "as-tested" performance information that differs from the initial submissions or, alternatively, written confirmation that no such differences exist. The Interconnection Customer shall conduct tests on the Electric Generating Unit as required by Good

Issued by: Charles F. Robinson, Vice President and General Counsel

Utility Practice such as an open circuit "step voltage" test on the Electric Generating Unit to verify proper operation of the Electric Generating Unit's automatic voltage regulator.

Unless otherwise agreed, the test conditions shall include: (1) Electric Generating Unit at synchronous speed; (2) automatic voltage regulator on and in voltage control mode; and (3) a five percent (5 percent) change in Electric Generating Unit terminal voltage initiated by a change in the voltage regulators reference voltage. The Interconnection Customer shall provide validated test recordings showing the responses of Electric Generating Unit terminal and field voltages. In the event that direct recordings of these voltages is impractical, recordings of other voltages or currents that mirror the response of the Electric Generating Unit's terminal or field voltage are acceptable if information necessary to translate these alternate quantities to actual Electric Generating Unit terminal or field voltages is provided. Electric Generating Unit testing shall be conducted and results provided to the Participating TO and the ISO for each individual Electric Generating Unit in a station.

Subsequent to the Commercial Operation Date, the Interconnection Customer shall provide the Participating TO and the ISO any information changes due to equipment replacement, repair, or adjustment. The Participating TO shall provide the Interconnection Customer any information changes due to equipment replacement, repair or adjustment in the directly connected substation or any adjacent Participating TO-owned substation that may affect the Interconnection Customer's Interconnection Facilities equipment ratings, protection or operating requirements. The Parties shall provide such information pursuant to Article 5.19.

ARTICLE 25. INFORMATION ACCESS AND AUDIT RIGHTS

- 25.1 Information Access. Each Party (the "disclosing Party") shall make available to the other Party information that is in the possession of the disclosing Party and is necessary in order for the other Party to: (i) verify the costs incurred by the disclosing Party for which the other Party is responsible under this LGIA; and (ii) carry out its obligations and responsibilities under this LGIA. The Parties shall not use such information for purposes other than those set forth in this Article 25.1 and to enforce their rights under this LGIA. Nothing in this Article 25 shall obligate the ISO to make available to a Party any third party information in its possession or control if making such third party information available would violate an ISO Tariff restriction on the use or disclosure of such third party information.
- 25.2 Reporting of Non-Force Majeure Events. Each Party (the "notifying Party") shall notify the other Parties when the notifying Party becomes aware of its inability to comply with the provisions of this LGIA for a reason other than a Force Majeure event. The Parties agree to cooperate with each other and provide necessary information regarding such inability to comply, including the date, duration, reason for the inability to comply, and corrective actions taken or planned to be taken with respect to such inability to comply. Notwithstanding the foregoing, notification, cooperation or information provided under this Article shall not entitle the Party receiving such notification to allege a cause for anticipatory breach of this LGIA.
- **25.3 Audit Rights**. Subject to the requirements of confidentiality under Article 22 of this LGIA, the Parties' audit rights shall include audits of a Party's costs pertaining to such Party's performance or satisfaction of obligations owed to the other Party under this LGIA, calculation of invoiced amounts, the ISO's efforts to allocate responsibility for the provision of reactive support to the ISO Controlled Grid, the ISO's efforts to allocate responsibility for interruption or reduction of generation on the ISO Controlled Grid, and each such Party's actions in an Emergency Condition.
 - **25.3.1** The Interconnection Customer and the Participating TO shall each have the right, during normal business hours, and upon prior reasonable notice to the other Party, to audit at its own expense the other Party's accounts and records pertaining to either such Party's

Issued by: Charles F. Robinson, Vice President and General Counsel

performance or either such Party's satisfaction of obligations owed to the other Party under this LGIA. Subject to Article 25.3.2, any audit authorized by this Article shall be performed at the offices where such accounts and records are maintained and shall be limited to those portions of such accounts and records that relate to each such Party's performance and satisfaction of obligations under this LGIA. Each such Party shall keep such accounts and records for a period equivalent to the audit rights periods described in Article 25.4.

25.3.2 Notwithstanding anything to the contrary in Article 25.3, each Party's rights to audit the ISO's accounts and records shall be as set forth in Article 12 of the ISO Tariff.

25.4 Audit Rights Periods.

- 25.4.1 Audit Rights Period for Construction-Related Accounts and Records. Accounts and records related to the design, engineering, procurement, and construction of Participating TO's Interconnection Facilities, Network Upgrades, and Distribution Upgrades constructed by the Participating TO shall be subject to audit for a period of twenty-four months following the Participating TO's issuance of a final invoice in accordance with Article 12.2. Accounts and records related to the design, engineering, procurement, and construction of Participating TO's Interconnection Facilities and/or Stand Alone Network Upgrades constructed by the Interconnection Customer shall be subject to audit and verification by the Participating TO and the ISO for a period of twenty-four months following the Interconnection Customer's issuance of a final invoice in accordance with Article 5.2(8).
- 25.4.2 Audit Rights Period for All Other Accounts and Records. Accounts and records related to a Party's performance or satisfaction of all obligations under this LGIA other than those described in Article 25.4.1 shall be subject to audit as follows: (i) for an audit relating to cost obligations, the applicable audit rights period shall be twenty-four months after the auditing Party's receipt of an invoice giving rise to such cost obligations; and (ii) for an audit relating to all other obligations, the applicable audit rights period shall be twenty-four months after the event for which the audit is sought; provided that each Party's rights to audit the ISO's accounts and records shall be as set forth in Article 12 of the ISO Tariff.
- **25.5 Audit Results**. If an audit by the Interconnection Customer or the Participating TO determines that an overpayment or an underpayment has occurred with respect to the other Party, a notice of such overpayment or underpayment shall be given to the other Party together with those records from the audit which support such determination. The Party that is owed payment shall render an invoice to the other Party and such invoice shall be paid pursuant to Article 12 hereof.
 - **25.5.1** Notwithstanding anything to the contrary in Article 25.5, the Interconnection Customer's and Participating TO's rights to audit the ISO's accounts and records shall be as set forth in Article 12 of the ISO Tariff, and the ISO's process for remedying an overpayment or underpayment shall be as set forth in the ISO Tariff.

ARTICLE 26. SUBCONTRACTORS

- **26.1 General**. Nothing in this LGIA shall prevent a Party from utilizing the services of any subcontractor as it deems appropriate to perform its obligations under this LGIA; provided, however, that each Party shall require its subcontractors to comply with all applicable terms and conditions of this LGIA in providing such services and each Party shall remain primarily liable to the other Party for the performance of such subcontractor.
- **Responsibility of Principal**. The creation of any subcontract relationship shall not relieve the hiring Party of any of its obligations under this LGIA. The hiring Party shall be fully responsible to the other Party for the acts or omissions of any subcontractor the hiring Party hires as if no

Issued by: Charles F. Robinson, Vice President and General Counsel

subcontract had been made; provided, however, that in no event shall the ISO or Participating TO be liable for the actions or inactions of the Interconnection Customer or its subcontractors with respect to obligations of the Interconnection Customer under Article 5 of this LGIA. Any applicable obligation imposed by this LGIA upon the hiring Party shall be equally binding upon, and shall be construed as having application to, any subcontractor of such Party.

26.3 No Limitation by Insurance. The obligations under this Article 26 will not be limited in any way by any limitation of subcontractor's insurance.

ARTICLE 27. DISPUTES

All disputes arising out of or in connection with this LGIA whereby relief is sought by or from the ISO shall be settled in accordance with the provisions of Article 13 of the ISO Tariff, except that references to the ISO Tariff in such Article 13 of the ISO Tariff shall be read as references to this LGIA. Disputes arising out of or in connection with this LGIA not subject to provisions of Article 13 of the ISO Tariff shall be resolved as follows:

- 27.1 Submission. In the event either Party has a dispute, or asserts a claim, that arises out of or in connection with this LGIA or its performance, such Party (the "disputing Party") shall provide the other Party with written notice of the dispute or claim ("Notice of Dispute"). Such dispute or claim shall be referred to a designated senior representative of each Party for resolution on an informal basis as promptly as practicable after receipt of the Notice of Dispute by the other Party. In the event the designated representatives are unable to resolve the claim or dispute through unassisted or assisted negotiations within thirty (30) Calendar Days of the other Party's receipt of the Notice of Dispute, such claim or dispute may, upon mutual agreement of the Parties, be submitted to arbitration and resolved in accordance with the arbitration procedures set forth below. In the event the Parties do not agree to submit such claim or dispute to arbitration, each Party may exercise whatever rights and remedies it may have in equity or at law consistent with the terms of this LGIA.
- 27.2 External Arbitration Procedures. Any arbitration initiated under this LGIA shall be conducted before a single neutral arbitrator appointed by the Parties. If the Parties fail to agree upon a single arbitrator within ten (10) Calendar Days of the submission of the dispute to arbitration, each Party shall choose one arbitrator who shall sit on a three-member arbitration panel. The two arbitrators so chosen shall within twenty (20) Calendar Days select a third arbitrator to chair the arbitration panel. In either case, the arbitrators shall be knowledgeable in electric utility matters, including electric transmission and bulk power issues, and shall not have any current or past substantial business or financial relationships with any party to the arbitration (except prior arbitration). The arbitrator(s) shall provide each of the Parties an opportunity to be heard and, except as otherwise provided herein, shall conduct the arbitration in accordance with the Commercial Arbitration Rules of the American Arbitration Association ("Arbitration Rules") and any applicable FERC regulations; provided, however, in the event of a conflict between the Arbitration Rules and the terms of this Article 27, the terms of this Article 27 shall prevail.
- 27.3 Arbitration Decisions. Unless otherwise agreed by the Parties, the arbitrator(s) shall render a decision within ninety (90) Calendar Days of appointment and shall notify the Parties in writing of such decision and the reasons therefor. The arbitrator(s) shall be authorized only to interpret and apply the provisions of this LGIA and shall have no power to modify or change any provision of this Agreement in any manner. The decision of the arbitrator(s) shall be final and binding upon the Parties, and judgment on the award may be entered in any court having jurisdiction. The decision of the arbitrator(s) may be appealed solely on the grounds that the conduct of the arbitrator(s), or the decision itself, violated the standards set forth in the Federal Arbitration Act or the Administrative Dispute Resolution Act. The final decision of the arbitrator must also be filed with FERC if it affects jurisdictional rates, terms and conditions of service, Interconnection Facilities, or Network Upgrades.

Issued by: Charles F. Robinson, Vice President and General Counsel

27.4 Costs. Each Party shall be responsible for its own costs incurred during the arbitration process and for the following costs, if applicable: (1) the cost of the arbitrator chosen by the Party to sit on the three member panel and one half of the cost of the third arbitrator chosen; or (2) one half the cost of the single arbitrator jointly chosen by the Parties.

ARTICLE 28. REPRESENTATIONS, WARRANTIES AND COVENANTS

- **28.1 General**. Each Party makes the following representations, warranties and covenants:
 - **28.1.1 Good Standing**. Such Party is duly organized, validly existing and in good standing under the laws of the state in which it is organized, formed, or incorporated, as applicable; that it is qualified to do business in the state or states in which the Large Generating Facility, Interconnection Facilities and Network Upgrades owned by such Party, as applicable, are located; and that it has the corporate power and authority to own its properties, to carry on its business as now being conducted and to enter into this LGIA and carry out the transactions contemplated hereby and perform and carry out all covenants and obligations on its part to be performed under and pursuant to this LGIA.
 - **28.1.2 Authority**. Such Party has the right, power and authority to enter into this LGIA, to become a Party hereto and to perform its obligations hereunder. This LGIA is a legal, valid and binding obligation of such Party, enforceable against such Party in accordance with its terms, except as the enforceability thereof may be limited by applicable bankruptcy, insolvency, reorganization or other similar laws affecting creditors' rights generally and by general equitable principles (regardless of whether enforceability is sought in a proceeding in equity or at law).
 - **28.1.3 No Conflict**. The execution, delivery and performance of this LGIA does not violate or conflict with the organizational or formation documents, or bylaws or operating agreement, of such Party, or any judgment, license, permit, order, material agreement or instrument applicable to or binding upon such Party or any of its assets.
 - **28.1.4 Consent and Approval**. Such Party has sought or obtained, or, in accordance with this LGIA will seek or obtain, each consent, approval, authorization, order, or acceptance by any Governmental Authority in connection with the execution, delivery and performance of this LGIA, and it will provide to any Governmental Authority notice of any actions under this LGIA that are required by Applicable Laws and Regulations.

Issued by: Charles F. Robinson, Vice President and General Counsel

ARTICLE 29. [RESERVED]

ARTICLE 30. MISCELLANEOUS

- **30.1 Binding Effect**. This LGIA and the rights and obligations hereof, shall be binding upon and shall inure to the benefit of the successors and assigns of the Parties hereto.
- **30.2 Conflicts**. In the event of a conflict between the body of this LGIA and any attachment, appendices or exhibits hereto, the terms and provisions of the body of this LGIA shall prevail and be deemed the final intent of the Parties.
- Rules of Interpretation. This LGIA, unless a clear contrary intention appears, shall be construed 30.3 and interpreted as follows: (1) the singular number includes the plural number and vice versa; (2) reference to any person includes such person's successors and assigns but, in the case of a Party, only if such successors and assigns are permitted by this LGIA, and reference to a person in a particular capacity excludes such person in any other capacity or individually; (3) reference to any agreement (including this LGIA), document, instrument or tariff means such agreement, document, instrument, or tariff as amended or modified and in effect from time to time in accordance with the terms thereof and, if applicable, the terms hereof; (4) reference to any Applicable Laws and Regulations means such Applicable Laws and Regulations as amended, modified, codified, or reenacted, in whole or in part, and in effect from time to time, including, if applicable, rules and regulations promulgated thereunder; (5) unless expressly stated otherwise, reference to any Article, Section or Appendix means such Article of this LGIA or such Appendix to this LGIA, or such Section to the LGIP or such Appendix to the LGIP, as the case may be; (6) "hereunder", "hereof", "herein", "hereto" and words of similar import shall be deemed references to this LGIA as a whole and not to any particular Article or other provision hereof or thereof: (7) "including" (and with correlative meaning "include") means including without limiting the generality of any description preceding such term; and (8) relative to the determination of any period of time, "from" means "from and including", "to" means "to but excluding" and "through" means "through and including".
- **30.4 Entire Agreement.** This LGIA, including all Appendices and Schedules attached hereto, constitutes the entire agreement among the Parties with reference to the subject matter hereof, and supersedes all prior and contemporaneous understandings or agreements, oral or written, between or among the Parties with respect to the subject matter of this LGIA. There are no other agreements, representations, warranties, or covenants which constitute any part of the consideration for, or any condition to, any Party's compliance with its obligations under this LGIA.
- **30.5 No Third Party Beneficiaries.** This LGIA is not intended to and does not create rights, remedies, or benefits of any character whatsoever in favor of any persons, corporations, associations, or entities other than the Parties, and the obligations herein assumed are solely for the use and benefit of the Parties, their successors in interest and, where permitted, their assigns.
- **30.6 Waiver**. The failure of a Party to this LGIA to insist, on any occasion, upon strict performance of any provision of this LGIA will not be considered a waiver of any obligation, right, or duty of, or imposed upon, such Party.

Any waiver at any time by either Party of its rights with respect to this LGIA shall not be deemed a continuing waiver or a waiver with respect to any other failure to comply with any other obligation, right, duty of this LGIA. Termination or Default of this LGIA for any reason by the Interconnection Customer shall not constitute a waiver of the Interconnection Customer's legal rights to obtain an interconnection from the Participating TO. Any waiver of this LGIA shall, if requested, be provided in writing.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **30.7 Headings**. The descriptive headings of the various Articles of this LGIA have been inserted for convenience of reference only and are of no significance in the interpretation or construction of this LGIA.
- **30.8 Multiple Counterparts.** This LGIA may be executed in two or more counterparts, each of which is deemed an original but all constitute one and the same instrument.
- **30.9** Amendment. The Parties may by mutual agreement amend this LGIA by a written instrument duly executed by all of the Parties. Such amendment shall become effective and a part of this LGIA upon satisfaction of all Applicable Laws and Regulations.
- **30.10 Modification by the Parties**. The Parties may by mutual agreement amend the Appendices to this LGIA by a written instrument duly executed by all of the Parties. Such amendment shall become effective and a part of this LGIA upon satisfaction of all Applicable Laws and Regulations.
- **Reservation of Rights**. The ISO and Participating TO shall each have the right to make a unilateral filing with FERC to modify this LGIA pursuant to section 205 or any other applicable provision of the Federal Power Act and FERC's rules and regulations thereunder with respect to the following Articles of this LGIA and with respect to any rates, terms and conditions, charges, classifications of service, rule or regulation covered by these Articles:

Recitals, 1, 2.1, 2.2, 2.3, 2.4, 2.6, 3.1, 3.3, 4.1, 4.2, 4.4, 4.5, 5 preamble, 5.4, 5.7, 5.8, 5.9, 5.12, 5.13, 5.18, 5.19.1, 7.1, 7.2, 8, 9.1, 9.2, 9.3, 9.5, 9.6, 9.7, 9.8, 9.10, 10.3, 11.4, 12.1, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24.3, 24.4, 25.1, 25.2, 25.3 (excluding subparts), 25.4.2, 26, 28, 29, 30, Appendix D, Appendix F, Appendix G, and any other Article not reserved exclusively to the Participating TO or the ISO below.

The Participating TO shall have the exclusive right to make a unilateral filing with FERC to modify this LGIA pursuant to section 205 or any other applicable provision of the Federal Power Act and FERC's rules and regulations thereunder with respect to the following Articles of this LGIA and with respect to any rates, terms and conditions, charges, classifications of service, rule or regulation covered by these Articles:

2.5, 5.1, 5.2, 5.3, 5.5, 5.6, 5.10, 5.11, 5.14, 5.15, 5.16, 5.17, 5.19 (excluding 5.19.1), 6, 7.3, 9.4, 9.9, 10.1, 10.2, 10.4, 10.5, 11.1, 11.2, 11.3, 11.5, 12.2, 12.3, 12.4, 24.1, 24.2, 25.3.1, 25.4.1, 25.5 (excluding 25.5.1), 27 (excluding preamble), Appendix A, Appendix B, Appendix C, and Appendix E.

The ISO shall have the exclusive right to make a unilateral filing with FERC to modify this LGIA pursuant to section 205 or any other applicable provision of the Federal Power Act and FERC's rules and regulations thereunder with respect to the following Articles of this LGIA and with respect to any rates, terms and conditions, charges, classifications of service, rule or regulation covered by these Articles:

3.2, 4.3, 4.6, 11.6, 25.3.2, 25.5.1, and 27 preamble.

The Interconnection Customer, the ISO, and the Participating TO shall have the right to make a unilateral filing with FERC to modify this LGIA pursuant to section 206 or any other applicable provision of the Federal Power Act and FERC's rules and regulations thereunder; provided that each Party shall have the right to protest any such filing by another Party and to participate fully in any proceeding before FERC in which such modifications may be considered. Nothing in this LGIA shall limit the rights of the Parties or of FERC under sections 205 or 206 of the Federal Power Act and FERC's rules and regulations thereunder, except to the extent that the Parties otherwise mutually agree as provided herein.

Issued by: Charles F. Robinson, Vice President and General Counsel

- **30.12 No Partnership**. This LGIA shall not be interpreted or construed to create an association, joint venture, agency relationship, or partnership among the Parties or to impose any partnership obligation or partnership liability upon any Party. No Party shall have any right, power or authority to enter into any agreement or undertaking for, or act on behalf of, or to act as or be an agent or representative of, or to otherwise bind, another Party.
- **30.13 Joint and Several Obligations**. Except as otherwise provided in this LGIA, the obligations of the ISO, the Participating TO, and the Interconnection Customer are several, and are neither joint nor joint and several.

Issued by: Charles F. Robinson, Vice President and General Counsel

IN WITNESS WHEREOF, the Parties have executed this LGIA in multiple originals, each of which shall constitute and be an original effective agreement among the Parties.

| [Insert name of Participating TO] | | | |
|---|------------------------|----------------------|--|
| Ву: | | | |
| Title: | | | |
| Date: | | | |
| Califorr | nia Independent System | Operator Corporation | |
| Ву: | | | |
| Title: | | | |
| Date: | | | |
| | | | |
| [Insert name of Interconnection Customer] | | | |
| Ву: | | | |
| Title: | | | |
| Date: | | | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Appendix H

Original Sheet No. 1255

Appendices to LGIA

Appendix A Interconnection Facilities, Network Upgrades and Distribution Upgrades

Appendix B Milestones

Appendix C Interconnection Details

Appendix D Security Arrangements Details

Appendix E Commercial Operation Date

Appendix F Addresses for Delivery of Notices and Billings

Appendix G Reliability Management System Agreement

Requirements of Generators Relying on New Technologies

Issued by: Charles F. Robinson, Vice President and General Counsel

Appendix A To LGIA

Interconnection Facilities, Network Upgrades and Distribution Upgrades

| 1. Interconnection Facilities: |
|---|
| (a) [insert Interconnection Customer's Interconnection Facilities]: |
| (b) [insert Participating TO's Interconnection Facilities]: |
| 2. Network Upgrades: |
| (a) [insert Stand Alone Network Upgrades]: |
| (b) [insert Other Network Upgrades]: |
| (i) [insert Participating TO's Reliability Network Upgrades] |
| (ii) [insert Participating TO's Delivery Network Upgrades] |
| 3. Distribution Upgrades: |

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1257

Appendix B To LGIA

Milestones

Issued by: Charles F. Robinson, Vice President and General Counsel Issued on: August 30, 2005 Effective: July 1, 2005 CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1258

Appendix C To LGIA

Interconnection Details

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1259

Appendix D To LGIA

Security Arrangements Details

Infrastructure security of ISO Controlled Grid equipment and operations and control hardware and software is essential to ensure day-to-day ISO Controlled Grid reliability and operational security. FERC will expect the ISO, all Participating TOs, market participants, and Interconnection Customers interconnected to the ISO Controlled Grid to comply with the recommendations offered by the President's Critical Infrastructure Protection Board and, eventually, best practice recommendations from the electric reliability authority. All public utilities will be expected to meet basic standards for system infrastructure and operational security, including physical, operational, and cyber-security practices.

The Interconnection Customer shall meet the requirements for security implemented pursuant to the ISO Tariff, including the ISO's standards for information security posted on the ISO's internet web site at the following internet address: http://www.caiso.com/pubinfo/info-security/index.html.

Issued by: Charles F. Robinson, Vice President and General Counsel

Appendix E To LGIA

Commercial Operation Date

| | This Appendix E is a part of the LGIA. | | |
|---|---|--|--|
| | [Date] | | |
| | [ISO Address] | | |
| | [Participating TO Address] | | |
| | Re: Electric Generating Unit | | |
| | Dear: | | |
| On [Date] [Interconnection Customer] has completed Trial Operation of Unit No This letter confirms that [Interconnection Customer] commenced Commercial Operation of Unit No at the Electric Generating Unit, effective as of [Date plus one day] . | | | |
| | Thank you. | | |
| | [Signature] | | |
| | [Interconnection Customer Representative] | | |

Issued by: Charles F. Robinson, Vice President and General Counsel

Appendix F To LGIA

Addresses for Delivery of Notices and Billings

| Notices: | | | | |
|--|------------------|--|--|--|
| ISO: | | | | |
| | To be supplied.] | | | |
| <u>Participati</u> | ing TO: | | | |
| דן | To be supplied.] | | | |
| Interconne | ection Customer: | | | |
| П | To be supplied.] | | | |
| Billings and Payments: | | | | |
| <u>Participati</u> | ing TO: | | | |
| דן | Fo be supplied.] | | | |
| Interconne | ection Customer: | | | |
| Т] | To be supplied.] | | | |
| ISO: | | | | |
| דן | To be supplied.] | | | |
| Alternative Forms of Delivery of Notices (telephone, facsimile or e-mail): | | | | |
| <u>ISO:</u> | | | | |
| דן | To be supplied.] | | | |
| <u>Participati</u> | ing TO: | | | |
| דן | Fo be supplied.] | | | |

Issued by: Charles F. Robinson, Vice President and General Counsel

CALIFORNIA INDEPENDENT SYSTEM OPERATOR CORPORATION FERC ELECTRIC TARIFF FIRST REPLACEMENT VOLUME NO. II

Original Sheet No. 1262

Interconnection Customer:

[To be supplied.]

Issued by: Charles F. Robinson, Vice President and General Counsel

Appendix G To LGIA

Reliability Management System Agreement

RELIABILITY MANAGEMENT SYSTEM AGREEMENT by and between [TRANSMISSION OPERATOR] and [GENERATOR]

| THIS RELIABILITY MA | NAGEMENT SYSTEM AC | GREEMENT (the "Agreement' |), is entered into this |
|---------------------|------------------------|---------------------------|-------------------------|
| day of | , 2002, by and between | | (the "Transmission |
| Operator") and | (th | ne "Generator"). | |

WHEREAS, there is a need to maintain the reliability of the interconnected electric systems encompassed by the WSCC in a restructured and competitive electric utility industry;

WHEREAS, with the transition of the electric industry to a more competitive structure, it is desirable to have a uniform set of electric system operating rules within the Western Interconnection, applicable in a fair, comparable and non-discriminatory manner, with which all market participants comply; and

WHEREAS, the members of the WSCC, including the Transmission Operator, have determined that a contractual Reliability Management System provides a reasonable, currently available means of maintaining such reliability.

NOW, THEREFORE, in consideration of the mutual agreements contained herein, and other good and valuable consideration, the receipt and sufficiency of which is hereby acknowledged, the Transmission Operator and the Generator agree as follows:

PURPOSE OF AGREEMENT

The purpose of this Agreement is to maintain the reliable operation of the Western Interconnection through the Generator's commitment to comply with certain reliability standards.

2. **DEFINITIONS**

In addition to terms defined in the beginning of this Agreement and in the Recitals hereto, for purposes of this Agreement the following terms shall have the meanings set forth beside them below.

Control Area means an electric system or systems, bounded by interconnection metering and telemetry, capable of controlling generation to maintain its interchange schedule with other Control Areas and contributing to frequency regulation of the Western Interconnection.

FERC means the Federal Energy Regulatory Commission or a successor agency.

Member means any party to the WSCC Agreement.

Party means either the Generator or the Transmission Operator and

Parties means both of the Generator and the Transmission Operator.

Reliability Management System or RMS means the contractual reliability management program

Issued by: Charles F. Robinson, Vice President and General Counsel

implemented through the WSCC Reliability Criteria Agreement, the WSCC RMS Agreement, this Agreement, and any similar contractual arrangement.

Western Interconnection means the area comprising those states and provinces, or portions thereof, in Western Canada, Northern Mexico and the Western United States in which Members of the WSCC operate synchronously connected transmission systems.

Working Day means Monday through Friday except for recognized legal holidays in the state in which any notice is received pursuant to Section 8.

WSCC means the Western Systems Coordinating Council or a successor entity.

WSCC Agreement means the Western Systems Coordinating Council Agreement dated March 20, 1967, as such may be amended from time to time.

WSCC Reliability Criteria Agreement means the Western Systems Coordinating Council Reliability Criteria Agreement dated June 18, 1999 among the WSCC and certain of its member transmission operators, as such may be amended from time to time.

WSCC RMS Agreement means an agreement between the WSCC and the Transmission Operator requiring the Transmission Operator to comply with the reliability criteria contained in the WSCC Reliability Criteria Agreement.

WSCC Staff means those employees of the WSCC, including personnel hired by the WSCC on a contract basis, designated as responsible for the administration of the RMS.

3. TERM AND TERMINATION

3.1 Term. This Agreement shall become effective [thirty (30) days after the date of issuance of a final FERC order accepting this Agreement for filing without requiring any changes to this Agreement unacceptable to either Party. Required changes to this Agreement shall be deemed unacceptable to a Party only if that Party provides notice to the other Party within fifteen (15) days of issuance of the applicable FERC order that such order is unacceptable].

[Note: if the interconnection agreement is not FERC jurisdictional, replace bracketed language with: [on the later of: (a) the date of execution; or (b) the effective date of the WSCC RMS Agreement.]]

- **3.2 Notice of Termination of WSCC RMS Agreement.** The Transmission Operator shall give the Generator notice of any notice of termination of the WSCC RMS Agreement by the WSCC or by the Transmission Operator within fifteen (15) days of receipt by the WSCC or the Transmission Operator of such notice of termination.
- 3.3 Termination by the Generator. The Generator may terminate this Agreement as follows:

 (a) following the termination of the WSCC RMS Agreement for any reason by the WSCC or by the
 Transmission Operator, provided such notice is provided within forty-five (45) days of the termination of the WSCC RMS Agreement;
- (b) following the effective date of an amendment to the requirements of the WSCC Reliability Criteria Agreement that adversely affects the Generator, provided notice of such termination is given within forty-five (45) days of the date of issuance of a FERC order accepting such amendment for filing, provided further that the forty-five (45) day period within which notice of termination is required may be extended by the Generator for an additional forty-five (45) days if the Generator gives written notice to the Transmission Operator of such requested extension within the initial forty-five (45) day period; or (c) for any reason on one year's written notice to the Transmission Operator and the WSCC.
- **3.4 Termination by the Transmission Operator.** The Transmission Operator may terminate this Agreement on thirty (30) days' written notice following the termination of the WSCC RMS Agreement for

Issued by: Charles F. Robinson, Vice President and General Counsel

any reason by the WSCC or by the Transmission Operator, provided such notice is provided within thirty (30) days of the termination of the WSCC RMS Agreement.

3.5 Mutual Agreement. This Agreement may be terminated at any time by the mutual agreement of the Transmission Operator and the Generator.

4. COMPLIANCE WITH AND AMENDMENT OF WSCC RELIABILITY CRITERIA

- **4.1 Compliance with Reliability Criteria.** The Generator agrees to comply with the requirements of the WSCC Reliability Criteria Agreement, including the applicable WSCC reliability criteria contained in Section IV of Annex A thereof, and, in the event of failure to comply, agrees to be subject to the sanctions applicable to such failure. Each and all of the provisions of the WSCC Reliability Criteria Agreement are hereby incorporated by reference into this Agreement as though set forth fully herein, and the Generator shall for all purposes be considered a Participant, and shall be entitled to all of the rights and privileges and be subject to all of the obligations of a Participant, under and in connection with the WSCC Reliability Criteria Agreement, including but not limited to the rights, privileges and obligations set forth in Sections 5, 6 and 10 of the WSCC Reliability Criteria Agreement.
- **4.2 Modifications to WSCC Reliability Criteria Agreement.** The Transmission Operator shall notify the Generator within fifteen (15) days of the receipt of notice from the WSCC of the initiation of any WSCC process to modify the WSCC Reliability Criteria Agreement. The WSCC RMS Agreement specifies that such process shall comply with the procedures, rules, and regulations then applicable to the WSCC for modifications to reliability criteria.
- **4.3 Notice of Modifications to WSCC Reliability Criteria Agreement.** If, following the process specified in Section 4.2, any modification to the WSCC Reliability Criteria Agreement is to take effect, the Transmission Operator shall provide notice to the Generator at least forty-five (45) days before such modification is scheduled to take effect.
- **4.4 Effective Date.** Any modification to the WSCC Reliability Criteria Agreement shall take effect on the date specified by FERC in an order accepting such modification for filing.
- **4.5 Transfer of Control or Sale of Generation Facilities.** In any sale or transfer of control of any generation facilities subject to this Agreement, the Generator shall as a condition of such sale or transfer require the acquiring party or transferee with respect to the transferred facilities either to assume the obligations of the Generator with respect to this Agreement or to enter into an agreement with the Control Area Operator in substantially the form of this Agreement.

5. SANCTIONS

- **5.1 Payment of Monetary Sanctions.** The Generator shall be responsible for payment directly to the WSCC of any monetary sanction assessed against the Generator pursuant to this Agreement and the WSCC Reliability Criteria Agreement. Any such payment shall be made pursuant to the procedures specified in the WSCC Reliability Criteria Agreement.
- **5.2 Publication.** The Generator consents to the release by the WSCC of information related to the Generator's compliance with this Agreement only in accordance with the WSCC Reliability Criteria Agreement.
- **5.3 Reserved Rights.** Nothing in the RMS or the WSCC Reliability Criteria Agreement shall affect the right of the Transmission Operator, subject to any necessary regulatory approval, to take such other measures to maintain reliability, including disconnection, which the Transmission Operator may otherwise be entitled to take.

6. THIRD PARTIES

Issued by: Charles F. Robinson, Vice President and General Counsel

Except for the rights and obligations between the WSCC and Generator specified in Sections 4 and 5, this Agreement creates contractual rights and obligations solely between the Parties. Nothing in this Agreement shall create, as between the Parties or with respect to the WSCC: (1) any obligation or liability whatsoever (other than as expressly provided in this Agreement), or (2) any duty or standard of care whatsoever. In addition, nothing in this Agreement shall create any duty, liability, or standard of care whatsoever as to any other party. Except for the rights, as a third-party beneficiary with respect to Sections 4 and 5, of the WSCC against Generator, no third party shall have any rights whatsoever with respect to enforcement of any provision of this Agreement. Transmission Operator and Generator expressly intend that the WSCC is a third-party beneficiary to this Agreement, and the WSCC shall have the right to seek to enforce against Generator any provisions of Sections 4 and 5, provided that specific performance shall be the sole remedy available to the WSCC pursuant to this Agreement, and Generator shall not be liable to the WSCC pursuant to this Agreement for damages of any kind whatsoever (other than the payment of sanctions to the WSCC, if so construed), whether direct, compensatory, special, indirect, consequential, or punitive.

7. REGULATORY APPROVALS

This Agreement shall be filed with FERC by the Transmission Operator under Section 205 of the Federal Power Act. In such filing, the Transmission Operator shall request that FERC accept this Agreement for filing without modification to become effective on the day after the date of a FERC order accepting this Agreement for filing. [This section shall be omitted for agreements not subject to FERC jurisdiction.]

Any notice, demand or request required or authorized by this Agreement to be given in writing to a Party

8. NOTICES

| ed) posta | age prepaid, faxed, or delivered by m | ry service, mailed by certified mail (return receipt utually agreed electronic means to such Party at the |
|------------|---------------------------------------|---|
| • | | |
| - | | |
| | | |
| | | |
| | | |
| | Fax: | |
| | | |
| <u>-</u> • | | |
| | | |
| | | |

The designation of such person and/or address may be changed at any time by either Party upon receipt by the other of written notice. Such a notice served by mail shall be effective upon receipt. Notice transmitted by facsimile shall be effective upon receipt if received prior to 5:00 p.m. on a Working Day, and if not received prior to 5:00 p.m. on a Working Day, receipt shall be effective on the next Working Day.

9. APPLICABILITY

Fax:

This Agreement (including all appendices hereto and, by reference, the WSCC Reliability Criteria Agreement) constitutes the entire understanding between the Parties hereto with respect to the subject matter hereof, supersedes any and all previous understandings between the Parties with respect to the subject matter hereof, and binds and inures to the benefit of the Parties and their successors.

10. AMENDMENT

No amendment of all or any part of this Agreement shall be valid unless it is reduced to writing and signed by both Parties hereto. The terms and conditions herein specified shall remain in effect throughout the term

Issued by: Charles F. Robinson, Vice President and General Counsel


| and shall not be subject to change through application to the FERC or other governmental body or authority, absent the agreement of the Parties. |
|--|
| 11. INTERPRETATION |
| Interpretation and performance of this Agreement shall be in accordance with, and shall be controlled by, the laws of the State of but without giving effect to the provisions thereof relating to conflicts of law. Article and section headings are for convenience only and shall not affect the interpretation of this Agreement. References to articles, sections and appendices are, unless the context otherwise requires, references to articles, sections and appendices of this Agreement. |
| 12. PROHIBITION ON ASSIGNMENT |
| This Agreement may not be assigned by either Party without the consent of the other Party, which consent shall not be unreasonably withheld; provided that the Generator may without the consent of the WSCC assign the obligations of the Generator pursuant to this Agreement to a transferee with respect to any obligations assumed by the transferee by virtue of Section 4.5 of this Agreement. |
| 13. SEVERABILITY |
| If one or more provisions herein shall be invalid, illegal or unenforceable in any respect, it shall be given effect to the extent permitted by applicable law, and such invalidity, illegality or unenforceability shall not affect the validity of the other provisions of this Agreement. |
| 14. COUNTERPARTS |
| This Agreement may be executed in counterparts and each shall have the same force and effect as an original. |
| IN WITNESS WHEREOF , the Transmission Operator and the Generator have each caused this Reliability Management System Agreement to be executed by their respective duly authorized officers as of the date first above written. |
| By: Name: Title: |
| By: Name: Title: |

Issued by: Charles F. Robinson, Vice President and General Counsel

Appendix H To LGIA

Requirements of Generators Relying on Newer Technologies

Issued by: Charles F. Robinson, Vice President and General Counsel

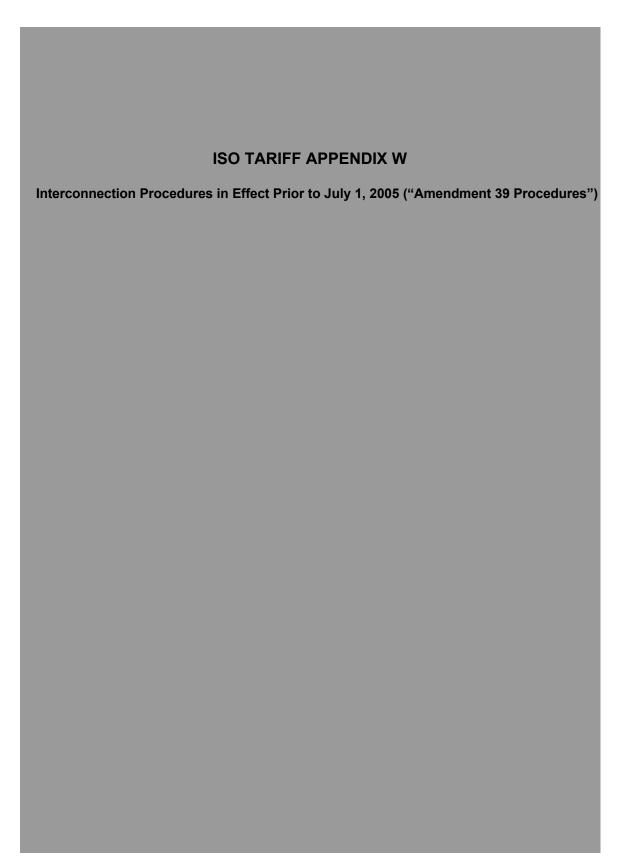

Issued by: Charles F. Robinson, Vice President and General Counsel

Interconnection Procedures in Effect Prior to July 1, 2005 ("Amendment 39 Procedures")

1 Applicability.

These Amendment 39 Procedures are applicable to Small Generating Facilities interconnecting to the ISO Controlled Grid and to Large Generating Facilities in accordance with Section 5.1 of the LGIP. The owner of a planned New Facility, or its designee, is referred to for purposes of this Appendix as a New Facility Operator.

2 Definitions.

2.1 Master Definitions Supplement.

Unless the context otherwise requires, any word or expression defined in the Master Definitions

Supplement to the ISO Tariff shall have the same meaning where used in this Appendix.

2.2 Special Definitions for this Appendix.

In this Appendix, the following words and expressions shall have the meanings set opposite them:

Completed Application

Date For purposes of this Appendix, the date on which a New Facility

Operator submits an Interconnection Application to the ISO that satisfies the requirements of the ISO Tariff and the TO Tariff of

the Interconnecting PTO.

Completed Interconnection

Application

An Interconnection Application that meets the information

requirements as specified by the ISO and posted on the ISO

Home Page.

Data Adequacy Requirement Any applicable minimum data requirements of the state agency

responsible for generation siting or of any Local Regulatory

Authority.

Delivery Upgrade The transmission facilities, other than Direct Assignment

Facilities and Reliability Upgrades, necessary to relieve

constraints on the ISO Controlled Grid and to ensure the delivery

of energy from a New Facility to Load.

Designated Contact Person The person designated by each Participating TO to coordinate

with the ISO on the processing and completion of all

Interconnection Applications.

Issued by: Charles F. Robinson, Vice President and General Counsel

Direct Assignment Facility

The transmission facilities necessary to physically and electrically interconnect a New Facility Operator to the ISO Controlled Grid at the point of interconnection.

Expedited Interconnection Agreement

A contract between a party which has submitted a Request for Expedited Interconnection Procedures and an Interconnection PTO under which the ISO and an Interconnecting PTO agree to process, on an expedited basis, the Interconnection Application of a New Facility Operator and which sets forth the terms, conditions, and cost responsibilities for such interconnection.

Good Faith Deposit

The deposit paid to the ISO by a New Facility Operator with submission of its Interconnection Application in accordance with Section 3.2 of this Appendix, in an amount equal to \$10,000, including any interest that accrues on the original amount, less any bank fees or other charges assessed on the escrow account. A New Facility Operator may satisfy its deposit obligation through any commercially available financial instrument determined to be satisfactory by the ISO.

Interconnecting PTO

For purposes of this Appendix, the Participating TO that will

supply the connection to the New Facility.

Interconnection Application

An application that requests interconnection of a New Facility to the ISO Controlled Grid and that meets the information requirements as specified by the ISO and posted on the ISO Home Page.

New Facility

A planned or Existing Generating Unit that requests, pursuant to this Appendix, to interconnect or modify its interconnection to the ISO Controlled Grid.

New Facility License

A license issued by a federal, state or Local Regulatory Authority that enables an entity to build and operate a Generating Unit. The owner of a planned New Facility, or its designee.

New Facility Operator Planning Procedures

Procedures governing the planning, expansion and reliable interconnection to the ISO Controlled Grid that the ISO may, from time to time, develop.

Reliability Upgrade

The transmission facilities, other than Direct Assignment Facilities, beyond the first point of interconnection necessary to interconnect a New Facility safely and reliably to the ISO Controlled Grid, which would not have been necessary but for the interconnection of a New Facility, including network upgrades necessary to remedy short circuit or stability problems resulting from the interconnection of a New Facility to the ISO Controlled Grid. Reliability Upgrades also include, consistent with WSCC practice, the facilities necessary to mitigate any adverse impact a New Facility's interconnection may have on a path's WSCC path

rating.

Request for Expedited

Issued by: Charles F. Robinson, Vice President and General Counsel

Interconnection Procedures A written request, submitted pursuant to Section 3.1.1 of this

Appendix, by which a New Facility Operator can request expedited processing of its Interconnection Application.

System Impact Study An engineering study conducted to determine whether a New

Facility Operator's request for interconnection to the ISO Controlled Grid would require new transmission additions,

upgrades or other mitigation measures.

3 Interconnection Application.

Unless the New Facility Operator has submitted a Completed Interconnection Application to the ISO prior to July 1, 2005, any New Facility Operators shall submit two copies of a Completed Interconnection Application to the ISO in the form specified by the ISO. The ISO will date stamp all copies of the Interconnection Application, retain one executed copy, and, within 1 Business Day, send the other copy to the Designated Contact Person of the Interconnecting PTO. Within 10 Business Days after the Interconnecting PTO receives an Interconnection Application, the ISO and the Interconnecting PTO shall determine whether the application is complete and the ISO will notify the New Facility Operator that its Interconnection Application is complete; or, in the event that the ISO, in consultation with the Interconnecting PTO, determines that the Interconnection Application is incomplete, the ISO will notify the New Facility Operator of the deficiencies or omissions in its application.

3.1 Expedited Procedures For New Facilities.

A New Facility Operator may submit a Request for Expedited Interconnection Procedures in accordance with Section 3.1.1 of this Appendix. The ISO will develop and post on the ISO Home Page the Planning Procedures applicable to such expedited processing of Interconnection Applications.

3.1.1 Request for Expedited Interconnection Procedures.

(a) If it elects to expedite processing of its Completed Interconnection Application, a New Facility Operator shall submit a Request for Expedited Interconnection Procedures within 10 Business Days after receiving a copy of the System Impact Study for the proposed

Issued by: Charles F. Robinson, Vice President and General Counsel

- interconnection. The request should be submitted in writing to the ISO and the Interconnecting PTO.
- (b) Within 10 Business Days after receiving a Request for Expedited Interconnection

 Procedures, the ISO and Interconnecting PTO shall provide to applicant the results of
 any studies required in addition to the System Impact Study, and shall tender an

 Expedited Interconnection Agreement that requires the applicant to compensate the
 Interconnecting PTO for all costs reasonably incurred pursuant to the terms of the ISO

 Tariff and the Interconnecting PTO's applicable TO Tariff for processing the Completed
 Interconnection Application and providing the requested interconnection.
- (c) Concurrent with the provision, by the ISO and the Interconnecting PTO, of the studies referenced in subsection b, above, the Interconnecting PTO and the ISO shall provide to applicant their best estimate of the cost of any needed Direct Assignment Facilities and Reliability Upgrades, Delivery Upgrades, if requested by the New Facility Operator, and other costs that may be incurred in processing the Interconnection Application and providing the requested interconnection, however, unless otherwise agreed by the ISO, and the Interconnecting PTO, and the applicant, such cost estimate shall not be binding and the New Facility Operator shall compensate the ISO and the Interconnecting PTO for all actual interconnection costs reasonably incurred pursuant to the provisions of this Appendix and the Interconnecting PTO's TO Tariff.
- (d) The New Facility Operator shall execute and return to the Interconnecting PTO, with a copy to the ISO, such Expedited Interconnection Agreement within 10 Business Days of its receipt or the New Facility Operator's Interconnection Application will be deemed withdrawn. In that event, the New Facility Operator shall reimburse the ISO and the Interconnecting PTO for all costs reasonably incurred in the processing of the Interconnection Application, including the Request for Expedited Interconnection.

Issued by: Charles F. Robinson, Vice President and General Counsel

3.2 Good Faith Deposit.

- (a) Each New Facility Operator that submits an Interconnection Application will on the date of submission also provide a Good Faith Deposit to the ISO. The ISO shall hold the Good Faith Deposit in trust for each applicant in a separate, interest-bearing account.
- (b) The ISO shall refund the Good Faith Deposit, with accrued Interest, in the event that:
 - (i) The ISO determines that the New Facility is not responsible for any interconnection costs, other than study costs; or
 - (ii) The applicant withdraws its Interconnection Application or its Interconnection Application is deemed withdrawn.

3.3 Posting of Interconnection Applications and Non-disclosure.

The ISO will maintain on its OASIS site an updated list of all pending Interconnection

Applications. As soon as practicable after the ISO receives a Completed Interconnection

Application, the ISO will post the nearest substation, the capacity (MW) of the New Facility and
the year the New Facility is proposed to begin operations. At the time it submits its

Interconnection Application, a New Facility Operator may request in writing that the ISO and
Interconnecting PTO not publicly disclose the identity of such New Facility Operator. Upon such
request, the ISO and Interconnecting PTO will not disclose the identity of the applicant while its
Interconnection Application is pending, unless disclosure is permitted under Section 20.3.1 of the
ISO Tariff or in the event that an applicant's identity becomes otherwise publicly known.

4 Interconnection.

4.1 Detailed Planning Procedures.

The provisions set forth in this Appendix shall govern the interconnection of New Facilities to the ISO Controlled Grid, including the costs of such interconnection. The ISO shall also maintain on the ISO Home Page detailed Planning Procedures and interconnection standards for all such interconnections.

Issued by: Charles F. Robinson, Vice President and General Counsel

4.2 Studies.

- (a) Except as provided in Section 4.2(d) of this Appendix, for each Completed

 Interconnection Application, the ISO will direct the Interconnecting PTO to perform the
 required System Impact Study and Facility Study, and any additional studies the ISO
 determines to be reasonably necessary.
- (b) The Interconnecting PTO will complete or cause to be completed all studies directed by the ISO within the timelines provided in this section. Any studies performed by the ISO or by a third party at the direction of the ISO shall also be completed within the timelines provided in this section.
- Each New Facility Operator shall pay the reasonable costs of all System Impact and Facility Studies performed by or at the direction of the ISO or the Interconnecting PTO, and any additional studies the ISO determines to be reasonably necessary in response to the Interconnection Application, including any iterative study costs required for other New Facility Operator's that have established a new queue position due to the New Facility Operator either withdrawing its Interconnection Application or because its queue position has been modified pursuant to the procedures in Section 4.4 of this Appendix. A New Facility Operator shall also pay the reasonable cost of Interconnecting PTO review of any System Impact Study or Facility Study that is performed by a New Facility Operator or its designee pursuant to subsection (d).
- (d) A New Facility Operator may perform its own System Impact Study and Facility Study, or contract with a third party to perform the System Impact Study and Facility Study, and shall so notify the ISO and the Interconnecting PTO of this election at the time it submits its Interconnection Application. Any such study or studies performed by a New Facility Operator or third party must be completed within the timelines identified in Sections 4.2.1 and 4.2.2 of this Appendix. To the extent that the ISO and Interconnecting PTO disagree on the adequacy of the New Facility Operator or third party-sponsored study, the ISO will determine the adequacy of the study, subject to the ISO's ADR Procedures. The ISO and Interconnecting PTO shall complete their review of the New Facility Operator's study

within 30 calendar days of receipt of the completed study. The results of any study or studies performed by a New Facility Operator or third party must be approved by both the ISO and the Interconnecting PTO.

4.2.1 System Impact Study Procedures.

Within 10 Business Days after receiving a Completed Interconnection Application by the Interconnecting PTO, the ISO and the Interconnecting PTO will determine, on a non-discriminatory basis, whether a System Impact Study is required. The ISO and the Interconnecting PTO will make such determination based on the ISO Grid Planning Criteria and the transmission assessment practices outlined in the ISO Planning Procedures posted on the ISO Home Page. The ISO and Interconnecting PTO will utilize, to the extent possible, existing transmission studies. The System Impact Study will identify whether any Direct Assignment Facilities and Reliability Upgrades are needed, as well as, if requested by the New Facility Operator, any Delivery Upgrades necessary to deliver a New Facility's full output over the ISO Controlled Grid. The System Impact Study will also identify any adverse impact on Encumbrances existing as of the Completed Application Date.

Interconnecting PTO shall within 20 Business Days of receipt of Completed Interconnection

Application, tender a System Impact Study Agreement that defines the scope, content,

assumptions and terms of reference for such study, the estimated time required to complete it,

and pursuant to which the applicant shall agree to reimburse the Interconnecting PTO for the

reasonable actual costs of performing the required study. The New Facility Operator shall

execute the System Impact Study Agreement and return it to the Interconnecting PTO within 10

Business Days, together with payment for the reasonable estimated cost, as provided by the

Interconnecting PTO, of the System Impact Study. Alternatively, a New Facility Operator can

request that the Interconnecting PTO proceed with the System Impact Study and abide by the

terms, conditions, and cost assignment of the System Impact Study Agreement as determined

Issued by: Charles F. Robinson, Vice President and General Counsel

through the ISO ADR Procedures, provided that such request is accompanied by payment for the reasonable estimated cost, as provided by the Interconnecting PTO, of the System Impact Study. If a New Facility Operator elects neither to execute the System Impact Study Agreement nor to rely upon the ISO ADR Procedures, such New Facility Operator's Completed Application will be deemed withdrawn. If the New Facility Operator's application is deemed withdrawn, the New Facility Operator will compensate the Interconnecting PTO for all reasonable costs incurred to that date in processing the Completed Interconnection Application.

The Interconnecting PTO will use due diligence to complete the System Impact Study within 60 calendar days of receipt of payment and the System Impact Study Agreement or initiation of the ISO ADR Procedures. If the Interconnecting PTO cannot complete the System Impact Study within 60 calendar days, the Interconnecting PTO will notify the New Facility Operator, in writing, of the reason why additional time is required to complete the required study and the estimated completion date.

4.2.2 Facility Study Procedures.

If a System Impact Study indicates that additions or upgrades to the ISO Controlled Grid are needed to satisfy a New Facility Operator's request for interconnection, the Interconnecting PTO shall, within 15 Business Days of the completion of the System Impact Study, tender to a New Facility Operator a Facility Study Agreement that defines the scope, content, assumptions and terms of reference for such study, the estimated time to complete the required study, and pursuant to which the applicant agrees to reimburse the Interconnecting PTO for the actual costs of performing the required Facility Study. The New Facility Operator shall execute the Facility Study Agreement and return it to the Interconnecting PTO within 10 Business Days, together with payment for the reasonable estimated cost, as provided by the Interconnecting PTO, of the Facility Study. Alternatively, a New Facility Operator may request that the Interconnecting PTO proceed with the Facility Study and abide by the terms, conditions, and cost assignment of the Facility Study Agreement ultimately determined through the ISO ADR Procedures, provided that

Issued by: Charles F. Robinson, Vice President and General Counsel

such request is accompanied by payment for the reasonable estimated cost, as provided by the Interconnecting PTO, of the Facility Study. If a New Facility Operator elects either to not execute the Facility Study Agreement or to rely upon the ISO ADR Procedures, such New Facility Operator's Completed Application will be deemed withdrawn. If the New Facility Operator's application is deemed withdrawn, the New Facility Operator will compensate the Interconnecting PTO for all reasonable costs incurred to that date in processing the Completed Application. The Interconnecting PTO will use due diligence to complete the Facility Study within 60 calendar days of receipt of payment and the Facility Study Agreement or initiation of the ISO ADR Procedures. If the Interconnecting PTO cannot complete the Facility Study within 60 calendar days, the Interconnecting PTO will notify the New Facility Operator, in writing, of the reason why additional time is required to complete the required study and the estimated completion date. A New Facility Operator shall be entitled to amend its Completed Interconnection Application once without losing its queue position. Such amendment shall occur on or before 10 Business Days following the Date the Interconnecting PTO tenders a Facility Study Agreement. Specifically, as an alternative to executing and returning a Facility Study Agreement, a New Facility Operator may submit an amendment to its Completed Interconnection Application to reflect a revised configuration for its New Facility. The amended Completed Interconnection Application shall be treated in accordance with Section 4.2.1 of this Appendix and the New Facility Operator's Completed Interconnection Application shall not be deemed withdrawn, and it shall maintain its exiting queue position, if (a) the amended Completed Interconnection Application is received by the Interconnecting PTO within 10 Business Days of the Interconnecting PTO's tender of a Facility Study Agreement; and (b) the New Facility Operator has not submitted a previous amendment to the Completed Interconnection Application. In the event a New Facility Operator amends its Completed Interconnection Application, it will be responsible for any additional study costs that result from that amendment, including costs associated with revisions to studies for other applicants holding later queue positions.

Issued by: Charles F. Robinson, Vice President and General Counsel

4.3 Execution of Interconnection Agreement.

Following completion of the Facilities Study, a New Facility Operator proposing to interconnect a Large Generating Facility shall continue the interconnection process in accordance with Section 11.2 of the LGIP. Within 10 Business Days of receipt of a completed Facility Study, a New Facility Operator proposing to interconnect a Small Generating Facility shall request the Interconnecting PTO to provide to such applicant an Interconnection Agreement. The Interconnecting PTO shall provide an Interconnection Agreement to an applicant within 30 Business Days of receipt of the request for an Interconnection Agreement. If the ISO and Interconnecting PTO determine, pursuant to Sections 4.2.1 and 4.2.2 of this Appendix, that either:

- (a) a New Facility Operator's Interconnection Application can be accommodated and that such New Facility Operator will not incur costs for Reliability Upgrades, the New Facility
 Operator shall execute the Interconnection Agreement within 10 Business Days of receipt of the Interconnection Agreement; or
- (b) a New Facility Operator's Interconnection Application will necessitate Reliability

 Upgrades, the New Facility Operator shall execute the Interconnection Agreement within

 30 Business Days of receipt of the Interconnection Agreement or, if a New Facility

 Operator and the Interconnecting PTO are unable to agree on the rates, terms and

 conditions of the Interconnection Agreement, the New Facility Operator may request that

 the Interconnecting PTO file an unexecuted Interconnection Agreement at FERC. If a

 New Facility Operator does request that the Interconnecting PTO file an unexecuted

 Interconnection Agreement at FERC, the New Facility Operator shall agree to abide by

 the rates, terms and conditions of such Interconnection Agreement ultimately determined

 by FERC to be just and reasonable.

4.4 Queuing.

(a) The ISO and Interconnecting PTO will process all Interconnection Applications based on the New Facility's Completed Application Date.

Issued by: Charles F. Robinson, Vice President and General Counsel

- (b) The queue position for each New Facility that has submitted an Interconnection

 Application will be established according to the Completed Application Date and the New

 Facility's compliance with the milestones set forth in Section 4.4.1 of this Appendix.
- (c) For any New Facility Operator that submitted a request to interconnect to a
 Interconnecting PTO prior to June 1, 2002 (the effective date of the Amendment 39
 Procedures), such New Facility Operator's position in the queue will be based on its
 Completed Application Date as that term was defined in the Interconnecting PTOs TO
 Tariff in effect at the time the New Facility Operator submitted a request to interconnect to
 the Interconnecting PTO.

4.4.1 Queuing Milestones.

(a) To maintain its queue position, each New Facility Operator must timely comply with the requirements of the ISO Tariff and the TO Tariff of the Interconnecting PTO and must, within 6 months of its Completed Application Date, satisfy all applicable Data Adequacy Requirements of state and local siting and other regulatory authorities. Any New Facility Operator not subject to state siting requirements must satisfy the information requirements set forth in 18 C.F.R. § 2.20. The ISO will permit a New Facility Operator to retain its queue position if such New Facility Operator requests an extension of the sixmonth period at least 5 Business Days prior to the expiration of such period. Such extension will be limited to one period of 30 Business Days and additional extensions shall not be granted. A New Facility Operator that does not maintain its queue position, but later satisfies the Data Adequacy Requirements, or the requirements of 18 C.F.R. § 2.20 if applicable, will be placed in a queue position comparable to that of other New Facility Operators that have satisfied the Data Adequacy Requirements, or the requirements of 18 C.F.R. § 2.20, as of the same date. At that time, the ISO and the Interconnecting PTO will determine whether a new System Impact Study must be performed based on the revised queue position of such New Facility Operator.

Issued by: Charles F. Robinson, Vice President and General Counsel

- (b) Upon satisfaction of the Data Adequacy Requirements, or the requirements of 18 C.F.R. § 2.20 if applicable, each New Facility Operator, in order to maintain its queue position, must obtain a New Facility License within 15 months after satisfying the Data Adequacy Requirements. A New Facility Operator that does not obtain a New Facility License within the allowed time and does not maintain its queue position, but later obtains a New Facility License, will be placed in a queue position comparable to other New Facility Operators that have satisfied comparable milestones as of that date.
- (c) Any New Facility whose New Facility License or building permit expires or is rescinded will not maintain its queue position.
- (d) A New Facility Operator that has submitted a dispute under Article 13 of the ISO Tariff regarding any part of this Appendix may request that the presiding judge, arbitrator, or mediator of the dispute suspend its obligation to meet milestones in order to maintain its queue position. In the event such a suspension is granted, the New Facility Operator must satisfy the missed milestones specified in this Section 4.4.1 of this Appendix within 30 calendar days of the date the decision on the dispute becomes final.

4.5 Coordination of Critical Protective Systems.

New Facility Operators shall coordinate with the ISO, Participating TOs and UDCs to ensure that a New Facility Operator's Critical Protective Systems, including relay systems, are installed and maintained in order to function on a coordinated and complementary basis with ISO Controlled Grid Critical Protective Systems and the protective systems of the Participating TOs and UDCs. The ISO and Participating TOs will make available all information necessary for a New Facility Operator to determine whether its Critical Protective Systems are compatible with those of the ISO, Participating TOs and UDCs. The ISO and New Facility Operators shall also coordinate with entities that own, operate or control facilities outside of the ISO Controlled Grid to ensure that a New Facility's Critical Protective Systems function on a coordinated and complementary basis with such entities Critical Protective Systems.

Issued by: Charles F. Robinson, Vice President and General Counsel

5 Cost Responsibility of New Facility Operators.

- (a) Each New Facility Operator shall pay the costs of required studies in accordance with Section 4.2 of this Appendix and the costs identified in this Section 5. The ISO and Interconnecting PTO will provide each New Facility Operator an estimate of its total cost responsibility under this Section. A New Facility Operator shall be responsible for the actual costs of all Direct Assignment Facilities and Reliability Upgrades necessitated by its Completed Interconnection Application. The Interconnecting PTO will provide each New Facility Operator a detailed record of the actual costs assessed to it under this Section. A New Facility Operator may request the Interconnecting PTO to provide any additional information reasonably necessary to audit the actual costs the New Facility Operator is assessed.
- (b) The ISO and Interconnecting PTO will process all Interconnection Applications, and determine the cost responsibility of each New Facility Operator based on the New Facility Operator's Completed Application Date or, if applicable, based on the queue position determined by the procedure described in Section 4.4.1(b) of this Appendix. The ISO and Interconnecting PTO will process simultaneously all interconnection requests with the same Completed Application Date.
- (c) Each New Facility Operator shall pay the costs of planning, installing, operating and maintaining the following facilities: (i) Direct Assignment Facilities, and, if applicable, (ii) Reliability Upgrades. In addition, each New Facility Operator shall implement all existing operating procedures necessary to safely and reliably connect the New Facility to the facilities of the Interconnecting PTO and to ensure the ISO Controlled Grid's conformance with the ISO Grid Planning Criteria, and shall bear all costs of implementing such operating procedures. The New Facility Operator shall be responsible for the costs of Reliability Upgrades only if the necessary facilities are not included in the ISO Controlled Grid Transmission Expansion Plan approved as of the New Facility Operator's Completed Application Date, or the date for the installation of a facility is advanced by the interconnection of the New Facility, in which case the New Facility Operator shall be

issued by. Charles F. Robinson, vice President and General Counsel

responsible only for the incremental costs associated with the earlier installation of the facility.

(d) Each New Facility Operator may, at its own discretion, sponsor, pursuant to Section 3.2 of the ISO Tariff, any Delivery Upgrades.

5.1 Maintenance of Encumbrances.

No New Facility shall adversely affect the ability of the Interconnecting PTO to honor its

Encumbrances existing as of the time a New Facility submits its Interconnection Application to the ISO. The Interconnecting PTO, in consultation with the ISO, shall identify any such adverse effect on its Encumbrances in the System Impact Study performed under Section 4.2.1 of this Appendix. To the extent the Interconnecting PTO determines that the connection of the New Facility will have an adverse effect on Encumbrances, the New Facility Operator shall mitigate such adverse effect.

5.2 Settlement of Interconnection Costs.

Payment for Direct Assignment Facilities and Reliability Upgrades shall be made by the New Facility Operator to the Interconnecting PTO pursuant to the terms of payment set forth in the Interconnection Agreement between the parties.

6 Energization.

Neither the ISO nor the Interconnecting PTO shall be obligated to energize, nor shall the New Facility Operator be entitled to have its interconnection to the ISO Controlled Grid energized, unless and until an Interconnection Agreement has been executed, or filed at FERC pursuant to Section 4.3 of this Appendix, and becomes effective and such New Facility Operator has demonstrated to the ISO's reasonable satisfaction that it has complied with all of the requirements of this Appendix.

Issued by: Charles F. Robinson, Vice President and General Counsel